



6 September 2017

Results for final Holes in May-July Walford Drill Program

Aeon Metals Limited

ABN 91 121 964 725

Level 7, 88 Pitt Street, Sydney,
NSW 2000, Australia

P.O. Box 8155, Gold Coast MC.
Qld 9726, Australia

P: +61 7 5574 3830

F: +61 7 5574 3568

W: aeonmetals.com.au

E: info@aeonmetals.com.au

ASX Code - AML

Shares on Issue: 400m


Share Price: \$0.15

Market Capitalisation: \$60m

Cash (30 June 2017*): \$1.9m

*Placement raised \$5.5m
11 Aug 2017

All mineral resources projects
located in Queensland:

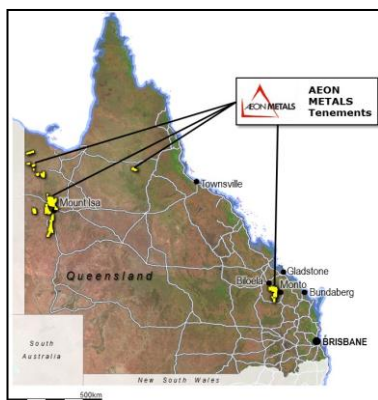

Aeon Metals Limited ("Aeon" or "the Company") is pleased to provide results from holes WFCR257, WFPD258, WFPD261 and WFPD262 drilled during July at its 100% owned Walford Creek Project in North West Queensland.

The drill hole locations for the holes completed to date are shown in Figure 1. These complete the assays for the first three months of 2017 drilling at Walford Creek. Drilling will resume during September.

The significant mineralisation close to the fault included;

WFPD258

19m @ 0.53% Cu, 0.14% Co, 5.44% Pb, 1.67% Zn and 54.68gt Ag from 147m to 166m;

Includes 10m @ 0.3% Cu, **0.14% Co, 10% Pb, 1.63% Zn and 69.15gt Ag** from 147m to 157m; and a 5m "lead zone" of 0.2% Cu, **0.18% Co, 18.39% Pb, 2.28% Zn and 92gt Ag** from 152m to 157m; and

6m @ 1.04% Cu, 0.11% Co, 0.34% Pb, 1.78% Zn and 30gt Ag from 157m to 163m

WFPD262

26m @ 0.39% Cu, 0.13% Co, 5.24% Pb, 2.9% Zn and 61.97gt Ag from 163m to 189m;

Includes **15m @ 0.12% Cu, 0.11% Co, 9.0% Pb, 4.58% Zn and 80.43gt Ag** 163m to 178m; and

6m @ 1.15% Cu, 0.16% Co, 0.11% Pb, 0.83% Zn 36.28gt Ag

Holes WFPD258 and WFPD262, which are on the same section within the Vardy Zone, both intersected the top of the Py3 and are not considered to have adequately tested the lower contact of the Py3 where higher copper grades are expected. Both holes exhibit typically higher lead and zinc ratios compared to copper mineralisation. This flanking mineralisation is associated with the "halo" effect around the higher grade copper core.

Hole WFPD261, which was drilled a further 1.5km west of holes WFPD258 and WFPD262, also intersected the Py3 higher than intended with the hole having lifted. This hole also exhibits typically higher lead and zinc mineralisation. The upfront hole to WFPD261 (on same section 1.5km west of WFPD258), hole WFCR257, intersected the Py1 with an intersect returning 22m @ 0.57% Cu and 0.12% Co from 26m. All the holes again show consistently high cobalt grades in all mineralised zones.

A snapshot of significant intercepts for the 2017 program to date include:

- WFDD226: 26m @ 1.02% Cu, 0.26% Co and 38gt Ag from 26m
 - Incl: 14m @ 1.42% Cu, 0.31% Co, 0.88% Zn and 37gt Ag from 35m
- WFDD230: 16m @ 1.37% Cu, 0.30% Co, 1.99% Zn and 21gt Ag from 77m
 - Incl: 7m @ 2.72% Cu, 0.37% Co, 1.72% Zn and 22gt Ag from 81m
- WFDD234: 6m @ 2.76% Cu, 0.32% Co and 24gt Ag from 91m
- WFDD236: 16m @ 2.10% Cu, 0.11% Co, 1.31% Pb, 0.86% Zn and 47gt Ag from 120m
 - Incl: 5m @ 5.12% Cu, 0.14% Co, 3.63% Pb, 0.86% Zn and 87gt Ag from 121m
- WFDD238: 27m @ 3.13% Cu, 0.25% Co, 1.34% Pb and 38gt Ag from 126m
 - Incl: 9m @ 6.85% Cu, 0.18% Co, 2.79% Pb and 50gt Ag from 135m
- WFDD240: 20m @ 4.5% Cu, 0.2% Co, and 36gt Ag from 35m
- WFR250: 5m @ 3.52% Cu, 0.12% Co, and 23gt Ag from 102m
- WFR259: 26m @ 2.43% Cu, 0.07% Co, and 28gt Ag from 22m
 - Incl: 12m @ 5.07% Cu, 0.10% Co, and 37gt Ag from 34m
 - And: 7m @ 7.66% Cu, 0.09% Co, and 49gt Ag from 34m

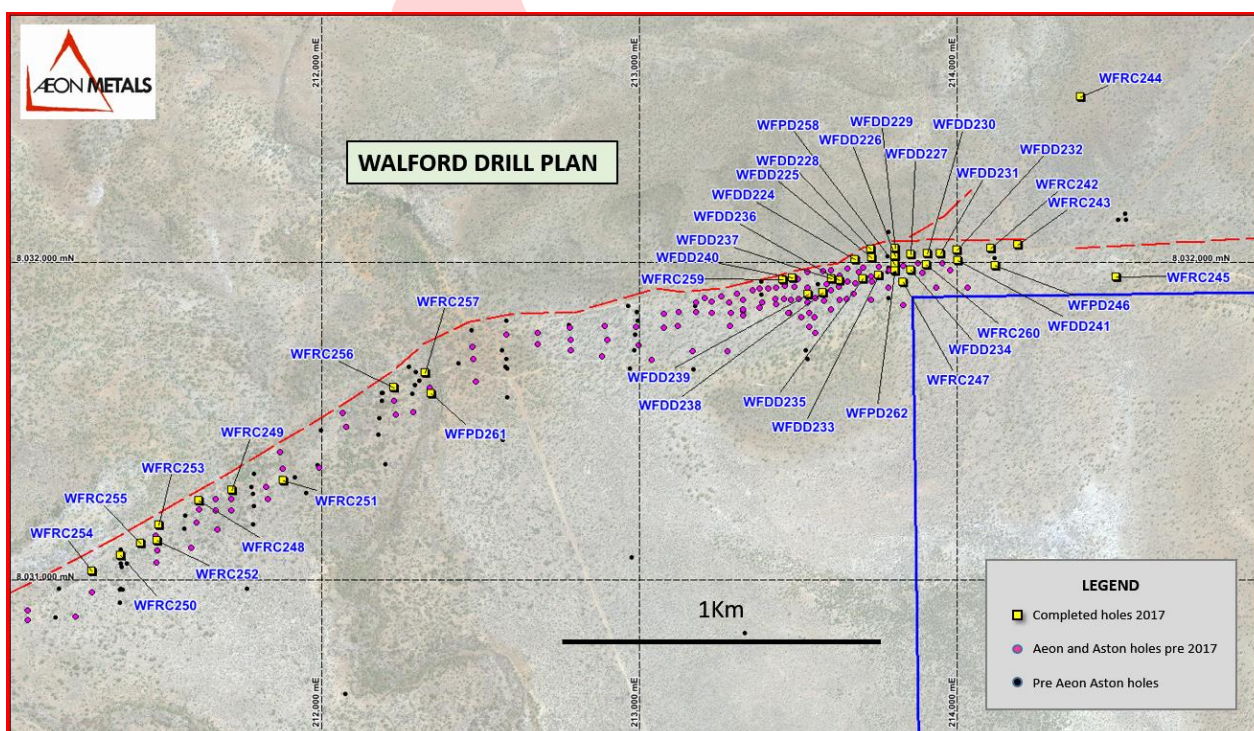


Figure 1: Plan of the Vardy Zone showing the location of recent holes in yellow

For more information, please contact:

Hamish Collins
Managing Director

info@aeonmetals.com.au
www.aeonmetals.com.au

APPENDIX 1 - COMPETENT PERSONS STATEMENT

The information in this report that relates to Aeon Metals Limited's exploration results is based on information compiled by Mr Dan Johnson who is a Member of the Australian Institute of Geoscientists and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the "JORC Code"). Mr Dan Johnson is a full-time employee of Aeon Metals Limited and consents to the inclusion in the presentation of the exploration results in the form and context in which they appear.

APPENDIX 2 – SIGNIFICANT DRILL RESULTS TABLE

Hole No.	Easting	Northing	AZI	Dips	Intersect		From	To	Cu	Co	Pb	Zn	Ag
			degrees	degrees	m		m	m	%	%	%	%	g/t
WFDD224	213680	8032006	355.00	-65.00	45.00		31.00	76.00	0.40	0.06	0.74	0.95	28.74
					Incl	11.00	62.00	73.00	0.42	0.14	0.79	3.08	35.00
WFDD225	213730	8032013	355.00	-72.50	67.00		40.00	107.00	0.40	0.20	0.32	1.92	20.30
					Incl	16.00	58.00	74.00	0.86	0.50	0.53	0.56	40.60
					Incl	36.00	71.00	107.00	0.36	0.14	0.30	3.50	14.82
WFDD226	213805	8032018	355.00	-69.00	12.00		54.00	66.00	0.01	0.06	1.19	2.21	25.80
					26.00		71.00	97.00	1.02	0.26	0.15	0.93	37.54
					incl	14.00	71.00	85.00	1.42	0.31	0.25	0.88	37.00
WFDD227	213855	8032023	355.00	-62.00	5.00		73.00	78.00	0.50	0.15	0.15	0.97	22.74
					NB		78.00	84.00	Cross fault and no core return				
					and	4.00	84.00	88.00	0.30	0.11	0.41	3.77	14.80
WFDD228	213727	8032044	355.00	-60.00	3.00		44.00	47.00	0.43	0.06	0.15	0.05	23.77
					and	5.00	63.00	68.00	0.12	0.02	0.12	2.29	28.85
WFDD229	213806	8032048	355.00	-70.00	26.00		36.00	62.00	0.44	0.13	0.22	1.46	30.24
					Incl	5.00	52.00	57.00	1.12	0.24	0.34	5.27	47.81
					and	2.00	66.00	68.00	1.73				
WFDD230	213903	8032025	355.00	-70.00	10.00		58.00	68.00	0.08	0.03	0.22	2.48	17.70
					and	2.00	73.00	75.00	0.01	0.07	0.27	2.70	15.00
					and	16.00	77.00	93.00	1.37	0.30	0.53	1.99	20.53
					incl	7.00	81.00	88.00	2.72	0.37	0.80	1.72	21.70

WFDD231	213949	8032026	355.00	-70.00	28.00		62.00	90.00	0.35	0.12	0.79	0.92	21.52
					incl	14.00	67.00	81.00	0.54	0.10	1.34	0.92	20.75
					and	9.00	90.00	99.00	0.05	0.13	0.50	1.50	9.45

WFDD232	214000	8032033	355.00	-70.00	12.00		85.00	97.00	0.40	0.05	0.14	0.34	19.89
					and	7.00	100.00	107.00	0.16	0.04	0.04	1.00	4.58

WFDD233	213753	8031957	355.00	-60.00	10.00		83.00	93.00	0.03	0.07	1.30	0.94	37.24
					NB		void of 5m from 93m with no sample return						
					and	8.00	98.00	106.00	0.39	0.09	0.04	0.39	5.10

WFDD234	213855	8031977	355.00	-60.00	6.00		91.00	97.00	2.76	0.32	0.06	0.35	23.60
					and	4.00	97.00	101.00	0.12	0.18	10.12	2.12	41.05
					and	4.00	122.00	126.00	0.69	0.16	0.20	1.14	14.70
					NB 4m void from 106m then 2m void from 116m and another 2m from 120m								

WFDD235	213703	8031951	355.00	-60.00	8.00		70.00	78.00	0.14	0.09	0.15	3.14	10.36
					and	11.00	78.00	89.00	0.66	0.27	0.06	0.29	25.40
					and	7.00	153.00	160.00	0.69	0.05	0.05	0.04	7.80

WFDD236	213631	8031942	355.00	-63.50	5.00		67.00	72.00	0.60	0.36	0.14	0.38	24.22
					NB 21m of no sample / void from 72m to 95m								
					and	16.00	120.00	136.00	2.10	0.11	1.31	0.86	46.65
					incl	5.00	121.00	126.00	5.12	0.14	3.63	0.86	87.33
					NB Mo is exceptionally high over this 16m interval. 0.12% Mo.								

WFDD237	213605	8031946	355.00	-60.00	20.00		30.00	50.00	0.40	0.07	2.53	0.17	19.00
					and	15.00	55.00	70.00	0.40	0.27	0.42	0.84	17.33
					and	18.00	70.00	88.00	0.01	0.24	0.01	2.20	1.00

WFDD238	213579	8031904	355.00	-60.00	4.00		31.00	35.00	0.50	0.03	0.05	0.03	9.79
					and	16.00	69.00	85.00	0.03	0.09	0.25	0.87	10.20
					and	27.00	126.00	153.00	3.13	0.25	1.34	0.18	38.36
					incl	9.00	135.00	143.00	6.85	0.18	2.79	0.27	50.38

WFDD239	213531	8031898	355.00	-60.00	6m		23.00	29.00	0.02	0.00	2.38	0.01	33.46
					and	4.00	30.00	34.00	2.79	0.17	0.07	0.02	22.26
					and	14.00	62.00	76.00	0.00	0.10	0.24	2.94	17.48
					and	12.00	81.00	93.00	0.32	0.25	0.28	0.75	20.67

WFDD240	213481	8031949	355.00	-60.00	20.00		35.00	55.00	4.45	0.20	0.50	0.15	35.85
					NB - Core loss from 43 - 45m and 50 - 51m								

WFDD241	214001	8032003	355.00	-60.00	14.00		112.00	126.00	0.45	0.31	0.17	1.02	26.60
					NB Loss core in void from 126 to 140m								
					then	9.00	140.00	149.00	0.05	0.09	0.30	0.91	13.03

WFRC242	214105	8032043	355.00	-60.00	6.00		94.00	100.00	0.09	0.00	0.05	1.97	23.50
---------	--------	---------	--------	--------	------	--	-------	--------	------	------	------	------	-------

WFRC243	214190	8032053	355.00	-60.00	No significant mineralisation in pre-collar								
---------	--------	---------	--------	--------	---	--	--	--	--	--	--	--	--

WFRC244	214400	8032525	299.00	-60.00	6.00		66.00	72.00	0.17	0.00	0.00	0.00	1.36
---------	--------	---------	--------	--------	------	--	-------	-------	------	------	------	------	------

WFRC245	214499	8031951	350.00	-75.00	No significant mineralisation								
---------	--------	---------	--------	--------	-------------------------------	--	--	--	--	--	--	--	--

WFPD246	214119	8031987	2.00	-72.00	No significant mineralisation in pre-collar								
---------	--------	---------	------	--------	---	--	--	--	--	--	--	--	--

WFPD247	213830	8031936	355.00	-60.00	No significant mineralisation in pre-collar. Hole deviated.								
---------	--------	---------	--------	--------	---	--	--	--	--	--	--	--	--

WFRC248	211615	8031250	5.00	-66.00	No significant mineralisation in pre-collar								
---------	--------	---------	------	--------	---	--	--	--	--	--	--	--	--

WFRC249	211718	8031281	357.00	-60.00	16.00		12.00	28.00	0.06	0.03	0.01	1.32	7.33
					and	15.00	52.00	67.00	0.27	0.04	0.47	0.18	8.64

WFRC250	211370	8031075	355.00	-63.00	34.00		82.00	116.00	0.69	0.06	0.10	1.14	10.26
					Incl	16.00	100.00	116.00	1.30	0.06	0.06	1.50	12.96
					Incl	5.00	102.00	107.00	3.52	0.12	0.07	3.79	22.70

WFRC251	211881	8031311	355.00	-73.00	4.00		62.00	66.00	0.03	0.24	1.14	8.95	16.47
---------	--------	---------	--------	--------	------	--	-------	-------	------	------	------	------	-------

WFRC252	211483	8031124	355.00	-62.00	16.00		12.00	28.00	0.06	0.03	0.01	1.32	7.33
					and	15.00	52.00	67.00	0.27	0.04	0.47	0.18	8.64

WFRC253	211492	8031172	358.00	-65.00	14.00		31.00	45.00	0.23	0.04	0.04	0.10	5.80
					Incl	5.00	38.00	43.00	0.37	0.06	0.03	0.16	8.68

WFRC254	211279	8031027	355.00	-72.00	5.00		60.00	65.00	0.31	0.08	0.06	0.14	26.93
					and	8.00	85.00	93.00	0.09	0.13	6.90	0.27	24.63
					Incl	5.00	87.00	92.00	0.10	0.15	10.00	0.38	31.92



WFRC255	211436	8031113	355.00	-61.00	13.00		44.00	57.00	0.48	0.07	0.48	1.08	10.54
					Incl	6.00	49.00	55.00	0.60	0.11	0.49	1.13	14.37

WFRC256	212228	8031606	355.00	-60.00	12.00		21.00	33.00	0.39	0.07	0.13	0.05	10.36
WFRC257	212330	8031649	357.00	-60.00	22.00		26.00	48.00	0.57	0.12	0.74	0.36	17.27
WFPD258	213806.2	8031990.2	4.00	-78.00	40.00		64.00	104.00	0.09	0.08	0.35	0.47	10.00
					Incl	15.00	88.00	103.00	0.20	0.10	0.35	0.47	10.00
					And	19.00	147.00	166.00	0.53	0.14	5.44	1.67	54.68
					Incl	10.00	147.00	157.00	0.30	0.14	10.00	1.63	69.15
					This Includes	5.00	152.00	157.00	0.20	0.18	18.39	2.28	92.00
					And	6.00	157.00	163.00	1.04	0.11	0.34	1.78	30.00
					NB 5m @ 0.29% Mo from 161m								
WFRC259	213453	8031945	355.00	-60.00	26.00		22.00	48.00	2.43	0.07	0.40	0.14	28.24
					Incl	12.00	34.00	46.00	5.07	0.10	0.50	0.16	37.25
					And	7.00	34.00	41.00	7.66	0.09	0.08	0.06	49.06
WFRC260	213904	8031992	0.00	-87.00	No significant results. Hole lifted and swung								
WFPD261	212347	8031585	355.00	-66.00	6.00		70.00	76.00	0.02	0.14	3.40	3.53	23.34
					And	14.00	159.00	173.00	0.00	0.03	0.38	2.91	27.21
					Then	13.00	173.00	EOH	0.64	0.12	0.08	0.09	13.37
					Incl	5.00	176.00	181	0.95	0.26	0.06	0.10	18.85
WFPD262	213804	8031972	7.00	-78.00	26.00		163.00	189.00	0.39	0.13	5.24	2.90	61.97
					Incl	15.00	163.00	178.00	0.12	0.11	9.00	4.58	80.43
					And	6.00	178.00	184.00	1.15	0.16	0.11	0.93	36.28

APPENDIX 3 – DRILL PROGRESS TABLE

hole_id	gda94_East	gda94_North	gda94_RL	Mag North	True North	dip	max_depth	RC (m)	DD (m)
WFDD224	213680	8032006	107	355	0	-65	78.30	0.00	78.30
WFDD225	213730	8032012	107	355	0	-72.5	109.80	0.00	109.80
WFDD226	213805	8032018	107	356	1	-70	110.95	0.00	110.95
WFDD227	213854	8032024	107	355	0	-65	105.50	0.00	105.50
WFDD228	213728	8032041	107	355	0	-65	81.50	0.00	81.50
WFDD229	213806	8032042	107	355	0	-70	84.70	0.00	84.70
WFDD230	213905	8032025	107	355	0	-70	102.60	0.00	102.60
WFDD231	213948	8032027	107	355	0	-70	102.50	0.00	102.50
WFDD232	214000	8032036	107	355	0	-70	115.20	0.00	115.20
WFDD233	213753	8031959	106	355	0	-60	150.30	0.00	150.30
WFDD234	213855	8031975	106	355	0	-60	151.70	0.00	151.70
WFDD235	213704	8031948	106	355	0	-60	165.00	0.00	165.00
WFDD236	213630	8031942	106	355	0	-63.5	141.10	0.00	141.10
WFDD237	213605	8031946	106	355	0	-60	117.20	0.00	117.20
WFDD238	213579	8031904	105	355	0	-60	161.20	0.00	161.20
WFDD239	213531	8031898	106	355	0	-60	156.40	0.00	156.40
WFDD240	213481	8031949	107	355	0	-60	67.40	0.00	67.40
WFDD241	214001	8032003	107	355	0	-67	158.00	0.00	158.00
WFRC242	214105	8032043	106	355	0	-60	100.00	100.00	0.00
WFRC243	214190	8032053	105	355	0	-60	78.00	78.00	0.00
WFRC244	214389	8032519	102	299	304	-60	80.00	80.00	0.00
WFRC245	214499	8031951	103	350	355	-75	180.00	180.00	0.00
WFPD246	214119	8031987	105	2	7	-72	158.80	96.00	62.80
WFRC247	213830	8031936	106	5	10	-66	52.00	52.00	0.00
WFRC248	211615	8031250	104	355	0	-60	60.00	60.00	0.00
WFRC249	211718	8031281	102	357	2	-60	80.00	80.00	0.00
WFRC250	211370	8031076	102	355	0	-63	132.00	132.00	0.00
WFRC251	211881	8031311	101	355	0	-73	214.00	214.00	0.00
WFRC252	211483	8031124	102	355	0	-62	120.00	120.00	0.00
WFRC253	211489	8031171	104	358	2	-65	57.00	57.00	0.00
WFRC254	211279	8031028	102	355	0	-72	120.00	120.00	0.00
WFRC255	211433	8031115	102	355	0	-61	99.00	99.00	0.00
WFRC256	212228	8031605	100	355	0	-60	51.00	51.00	0.00
WFRC257	212328	8031650	98	357	3	-60	60.00	60.00	0.00
WFPD258	213806.2	8031990.2	106	4	9	-78	169.60	132.00	37.60
WFRC259	213453	8031945	106	355	0	-60	50.00	50.00	0.00
WFRC260	213904	8031992	105	0	5	-87	76.00	76.00	0.00
WFPD261	212347	8031585	98	355	0	-66	186.00	149.00	37.00
WFPD262	213804	8031972	105	7	12	-78	204.40	152.30	52.10

APPENDIX 4 – CROSS SECTIONS

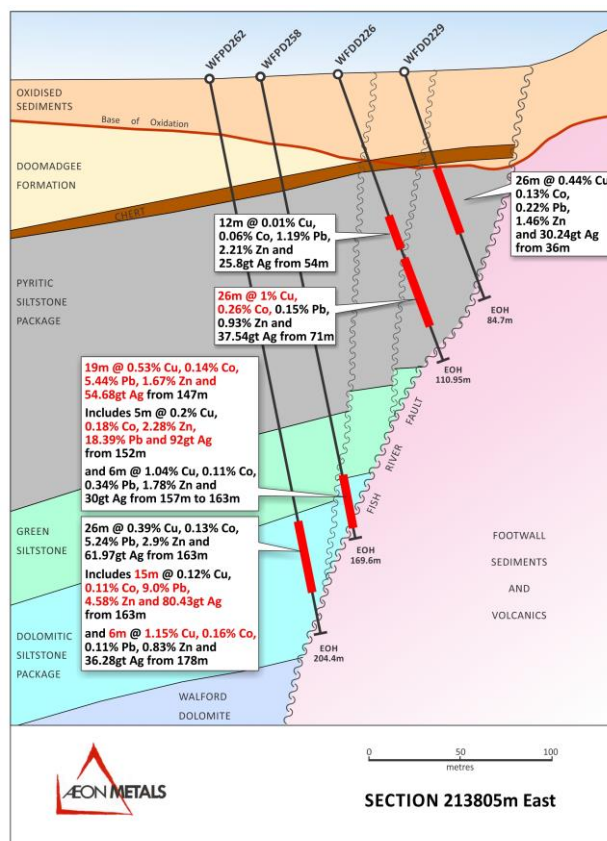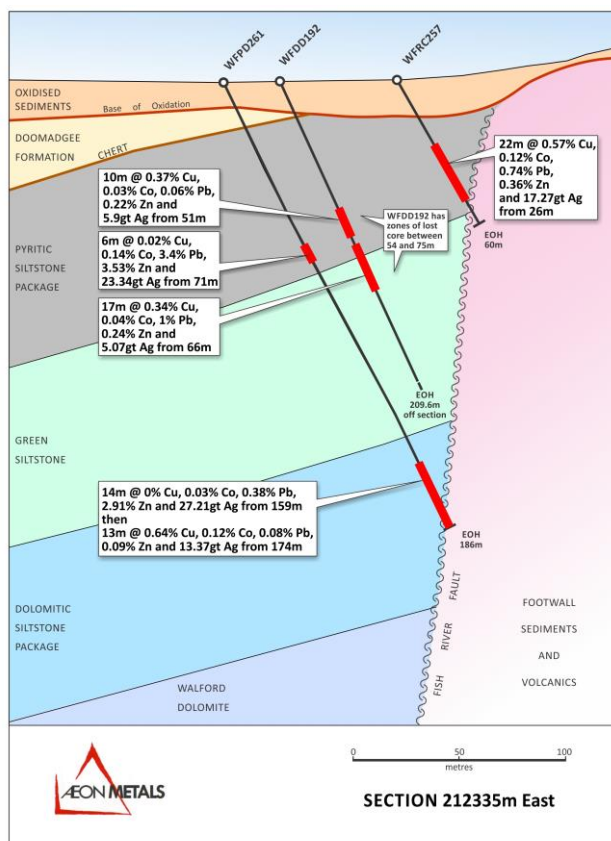

JORC Code, 2012 Edition – Table 1 Walford Creek

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- WMC: 1986-1994 completed diamond core and RC drilling on nominal 400 x 40m grid spacing. The holes were generally drilled vertically to appropriately target the stratabound Pb-Zn mineralisation. Sampling procedures were in line with industry standards of the day (as documented in historic reports); all RC drilling was sampled at 1m intervals and drill core was split/sawn into approximately 1m half-core samples. All samples were analysed in-house by Atomic Absorption Spectrometry. - Copper Strike: 2004-2005 RC drilling was completed to infill the existing grid by WMC. RC drilling was used to obtain continuous 1m samples. Dry samples were split at the rig and wet samples speared. Approximately 2kg samples were weighed, dried, crushed and pulverised at a commercial laboratory for analysis by 4 acid digest with an ICP finish. - Aston to Aeon: 2010-2017 infill and extension diamond drilling with some RC precollars; good quality predominantly HQ core was obtained from which 1m sawn half-core samples were collected and weighed, dried, crushed and pulverised at a commercial laboratory for analysis by four-acid digest with an ICP finish. Drill core sample recoveries were recorded in the database. All above grade (termed Ore Grade) were assayed as such via OG62 Four Acid Digest by ALS. Drill core sample recoveries were recorded in the database. 2016 saw metallurgical samples taken using quarter cut HQ core and limited PQ. - Aeon 2017: Genalysis Laboratory being used. Technique employs 4-acid digest with ICP finish and ore grade via four-acid digest (termed 4AH/OE by Intertek Genalysis). - Where RC sampling has been undertaken, mostly for pre-collars to diamond drill holes, Aeon has utilised double spear sampling of 1m bagged sample passed through a cyclone.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond	1986 to 1994 WMC: 45 Diamond holes 12,735m & 49 RC holes 3,678m; NQ & minor BQ Diamond drilling and RC, no mention of core orientation in any historic WMC report.

Criteria	JORC Code explanation	Commentary
	tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	• 2004 to 2005 Copper Strike: 30 Reverse Circulation ("RC") holes 3,162m; RC drilling bit type/size not reported by CSE. • 2010 to 2012 Aston Metals: 92 Diamond holes 14,929m; HQ Triple Tube Diamond drilling with some RC pre-collars. Core oriented, where possible, by Reflex ACT tool and structural data recorded in the database. • 2014 Aeon Metals Limited: 19 RC, RCDD and DD (Diamond) holes completed for 9021m. HQ Triple Tube Diamond drilling with some RC pre-collars. Core oriented, where possible, by Reflex ACT 111 tool and structural data recorded in the database. • 2016 Aeon Metals Limited; Full program was 28 holes of which 2 were RC only. Total metres were 4037.5 comprising 273.6m RC and 3763.5m DD. PQ and HQ Triple tube diamond drilling with some RC pre-collars. Core oriented, where possible, by Reflex ACT 111 tool and structural data recorded in the database. • 2017 drilling by Aeon; drilling in progress. To date, holes have been completed using HQ (triple tube) core drilling and 5 ½ inch reverse circulation.
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	• WMC: No known written record (however, any core loss intervals were recorded graphically in geological logs). • Copper Strike: No written record. Copper strike have noted some areas of poor sample recovery through mineralised zones due to high water pressure, but noted that grades were comparable to WMC diamond drilling and therefore assumed any bias based on drilling technique and / or sample type was low. • Aston and Aeon Metals: HQ Triple Tube drilling to improve recovery. Generally >90%; lower recoveries can in some cases be associated with higher mineral grades attributed to hydrothermal brecciation & dissolution in the Dolomite Unit rather than drilling or sampling practice. • 2014 recoveries are considered to be better than 2012 recoveries. • 2016 recoveries are considered the same or better than 2014. Shallow holes close to the fault generally have poorer recoveries. As with 2016, some difficulties experienced with shallow holes close to the fault which can lead to some zones having poor recovery but in general, 2017 considered the same as the successful 2016 drilling. • There was no obvious evidence of bias in the samples.
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support	• WMC: Detailed hard-copy lithological logging of all holes transcribed by AML into an Access Database with a full set of logging codes acquired from BHP Billiton. Core

Criteria	JORC Code explanation	Commentary
	appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	photographs were taken but could not be recovered from the data archives. A few core photographs were made available to AML as scans. - Copper Strike: Digital logging of all holes loaded into AML's Access database with a full set of logging codes acquired from Copper Strike. No chip tray photographs were made available. - Aston and Aeon: Detailed digital geological and geotechnical logging of all holes with a full set of logging codes transcribed into an Access database; full set of core photographs. - All logging has been converted to quantitative codes in the Access database. - All relevant intersections were logged.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- WMC: Split/sawn half core under geological control and no record for RC; 1m RC samples and half core samples of typically 1m, but as small as 0.25m sent for in-house lab assay. - Copper Strike: Dry RC samples were riffle split and wet samples speared; 1m samples (of approximately 2kg) sent to commercial laboratory with appropriate sample prep process. - Aston and Aeon: Company procedures for core handling documented in a flow sheet; sawn half core under geological control; 1m samples sent to commercial laboratory with appropriate sample prep. Company procedure for RC sample handling documented in flow-sheet; bulk 1m samples in most cases rotary split from rig with only some riffle split; sample dried, crushed and pulverised to appropriate levels; use of field duplicates and quarter core checks were completed and indicated comparable results with the original samples. - In 2016 PQ and HQ core were collected for metallurgical samples. Sawn half core was submitted for metallurgical testing, from mineralised intervals, with the remaining half core sawn and quarter section samples sent for multi-element analysis at ALS. - All sampling methods and sample sizes are deemed appropriate.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the	- WMC: In-house analysis by Atomic Absorption Spectrometry (digest recorded as PBKRS) as cited in annual reports of the day by WMC. The relevant QA/QC was not reported and the drill core is no longer available. - Copper Strike: Appropriate analytical method using a 4 acid digest with ICP finish with ore grade analysis for Cu, Pb, Zn & Ag. Assaying was carried out by ALS, an

Criteria	JORC Code explanation	Commentary
	analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	accredited laboratory. CSE did not make use of any standards or run duplicate samples for QA/QC. Aston metals drilled 4 HQ Triple Tube diamond core twin holes with comparable results. - Aston and Aeon pre-2017: analytical procedure documented as a flow-sheet; Appropriate analytical method using a 4 acid digest with ICP finish. Ore grade analysis for Cu, Pb, Zn & Ag by OG62 method. Assaying was carried out by ALS, an accredited laboratory. Extensive QA/QC programme with standards, blanks, laboratory duplicates & secondary lab checks. Acceptable outcomes. - Aeon 2017: analytical procedure documented as a flow-sheet; Appropriate analytical method using a 4-acid digest with ICP finish. Ore grade analysis, where appropriate, for Cu, Pb, Zn, Ag, S and As by 4AH/OE. Assaying was carried out by Intertek Genalysis, an accredited laboratory. Extensive QA/QC as above. - All assay methods for both Aston and Aeon were appropriate at the time of undertaking. - Aeon has continued to undertake QA/QC on core including undertaking check analysis.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- WMC: Hardcopy sampling and assay data has been compared with recent drilling work by Aston and Aeon. Aeon considers the data reliability to be reasonable. - Copper Strike: Aston twinned 4 CSE holes to assess grade repeatability and continuity; results are comparable. All samples were submitted to an accredited laboratory, ALS. 1 hole was removed from the database because the geological logging and assay results appeared significantly at odds with several surrounding holes. - Aston: Site visit to review core confirms mineral intercepts; Twinned holes (4) to test RC drilling by Copper Strike; results are comparable. Aeon have core handling procedures as flow-sheets. - Aeon: Site visit by H&SC to review core confirms mineral intercepts; Aeon using same core handling procedures, including data entry and logging, that are documented as flow-sheets; Database managed by H&SC stored off site.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used.	WMC: Survey pickup of collar locations by EDM in 1992 and tied to the datum grid point at drillhole WFDD1. The precision of pickups was $\pm 100\text{mm}$ with respect to the datum on average. Downhole survey method not recorded; database contains azimuth and dip readings every 30-50m.

Criteria	JORC Code explanation	Commentary
	Quality and adequacy of topographic control.	- Copper Strike: Drill hole location and orientation data determined by CSE staff. Collars were buried and therefore validation by subsequent Companies was not possible. Downhole survey methods were not recorded; database contains azimuth and dip readings based on collar and end of hole measurement. - Aston: DGPS on all AML holes in MGA94 Zone 54 grid projection by MH Lodewyk Surveyors, Mount Isa. AML also had WMC drill hole collar locations validated by DGPS with good accuracy. Down hole surveys were taken every 30m by REFLEX, EZI-SHOT. - A detailed Digital Elevation Model (DEM) was generated by David McInnes, consulting geophysicist, as part of the process of developing the 2010 3D geological model. The DEM was generated using a combination of data from the drillhole collars (DGPS), the WMC Gravity survey (with a 3cm accuracy), with variable data point spacing of 100x100m – 500x500m, and high-resolution satellite data with an estimated 80m accuracy. - Aeon: DGPS on all previous Aeon drill holes in MGA94 Zone 54 grid projection by MH Lodewyk Surveyors, Mount Isa in September 2014. 2016 holes have been picked up by DGPS by D Ericson at Diverse Surveyors, Mt Isa. Down hole surveys were generally taken every 30m by REFLEX (ACT 111) EZI-SHOT or as ground conditions permitted. - Aeon is yet to accurately locate the 2017 using a DGPS. This will be undertaken at the end of the current program.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- Drillhole section spacing is 25m to 50m in the eastern section of the deposit becoming 100m or greater in the west. On section spacing is approximately between 20m to 80m. 100m spacing is appropriate for geological continuity, 50m spacing allows for reasonable assessment of grade continuity. 25m by 20m can lead to measured status depending on continuity of both geology and grade. - Some holes have encroached closer than the nominal 25m by 20m due to hole deviation and also the necessity to relocate holes around geographical features and or vegetation. - Very limited sample compositing undertaken.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Drilling generally achieved a high angle of intercept with the stratabound mineralisation but local variation due to folding has been logged.

Criteria	JORC Code explanation	Commentary
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- Any mineralisation related directly to structures with the same strike and dip of the Fish River Fault, has been intersected at a moderate angle. - A broad alteration zone (with variable mineralisation) associated with both the stratabound mineral and the mineral proximal to the Fish River Fault has been intersected at reasonable angles. - Drilling orientations are considered appropriate with no obvious bias.
Sample security	The measures taken to ensure sample security.	- WMC: All assaying in-house. No documentation available on sample security. - Copper Strike: All assaying completed by ALS Townsville. No documentation available on sample security. - Aston and Aeon: RC chip samples in calico bags are sealed in polyweave bags. Drillcore is contained in lidded core trays, strapped down and transported by a dedicated truck to Mount Isa. The core is cut and sampled by company employees in the Mount Isa core yard and sent directly to ALS Mount Isa where assaying is completed. After analysis all samples are returned to Isa, stored in a lock up shed and digitally archived. Core is stored in Mount Isa in a lock up shed. Previously sections of massive sulphide were kept in secure cool storage. Aeon – recent core crush of -9mm has been kept in cryovac bags with a nitrogen flush prior to sealing. This is aimed at eliminating the requirement to use cold storage for the core. The remaining core is stacked on pallets and then plastic wrapped prior to storage in a covered shed out of the weather. Visual inspection of drill core continues to show that assay grades match mineral assay distribution. 2016 Metallurgical samples comprised sawn quarter/half core completed at an appropriate facility in Mt Isa by Aeon personnel. Core was then bagged and cryovac protected at ALS in Mt Isa prior to use in test work. - All drillcore in core trays is wrapped in plastic and strapped to pallets on site at Walford and before transport to Mt Isa by Aeon personnel in appropriate vehicles.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- WMC: Data transcribed from historic reports and subsequently validated by Aston with no material inconsistencies evident. - Copper Strike: Supplied digital database checked by Aston against hard copy with no material discrepancies found. - Aston: All data checked and validated prior to loading into the internal database by Aston geologists and external database managers. As part of the process of developing the geological model Aston reviewed all of the recent and historic data

Criteria	JORC Code explanation	Commentary
		and consider it suitable for the purposes of resource estimation. A QA/QC audit by ALS found no major discrepancies in the assay data. • Aeon – all data now being received has undergone the same validation as used previously by Aston. • A substantial QA/QC review has been completed by H&S Consultants as part of the resource estimate undertaken previously. • QA/QC work continues to be undertaken as previous with check analysis undertaken a different laboratory.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	• Walford Creek is located wholly within EPM 14220. The EPM is located 65km west-northwest of Doomadgee township and 340km north-northwest of Mount Isa. • Following a transfer of title (dated 12 March 2013) EPM 14220 is held 100% by Aeon Walford Creek Limited formerly Aston Metals (Qld) Limited and the previous Joint Venture Agreements no longer apply. The tenement currently consists of 41 sub-blocks. The tenement is a granted Exploration Permit for Minerals and no known impediments exist. • As it currently stands, no Native Title claim is in existence over EPM 14220, however AML continue to operate under the premises of the previous agreements negotiated with the Carpentaria Land Council Aboriginal Corporation "CLCAC" representing the Waanyi and Gangalidda-Garawa peoples and signed prior to commencement of exploration.

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- Numerous companies have explored within the tenement area, largely concentrating on the discovery of a significant stratabound lead-zinc system. - More recently, companies have been focused on targeting copper mineralisation in the hanging wall of the Fish River Fault. - All exploration is considered to have been completed to a reasonable standard by experienced companies in a professional manner. Most exploration work has been appropriate but there are minor issues on historic documentation. - Previous exploration of the Walford Creek Prospect is summarised below: 1984-1996 WMC Re-evaluation of the Walford Creek area resulting in a major exploration program targeting Pb-Zn mineralisation near the Fish River Fault: - Systematic grid-based mapping, rock chip and soil sampling. - Detailed Tempest EM and aeromagnetic survey; gravity survey, 600 line km of SIROTEM. 45 diamond and 49 percussion holes totalling approximately 16,500m of drilling on 400 and 800 m spaced drill hole fences. - Isolated higher grade Pb-Zn-Cu-Ag intersections but no coherent economic Pb-Zn resource. - Brief JV with MIMEX from 1995-1996. MIMEX completed CSAMT, EM and IP over 9 conceptual targets but no drilling. 2004-2006 Copper Strike Exploration program targeting copper mineralisation at the Walford Creek Prospect in and along the Fish River Fault: - A small RC drilling program was commenced in 2004 but curtailed prematurely due to the 2004-2005 wet season. - A significant RC drill program was completed during 2005. 30 holes were drilled for a total of 3,162m, of which 60.7m was diamond cored. - Estimation of an Inferred Mineral Resource for the Walford Creek

Criteria	JORC Code explanation	Commentary
		Project of 6.5 million tonnes at 0.6% Cu, 1.6% Pb, 2.1% Zn, 25 g/t Ag and 0.07% Co. 2010 to 2012 Aston Metals Limited Exploration undertaken by Aston followed on from the targeting approach adopted by Copper Strike in drilling along the Fish River Fault to test both the SEDEX lens and the associated copper/cobalt mineralisation close to the fault. Aston Metals drilled a total of 92 Diamond holes 14,929m; HQ Triple Tube Diamond drilling with some RC pre-collars. 2012 Indicated and Inferred Resources of 48.3 million tonnes at 0.39% Cu, 0.83% Pb, 0.88% Zn, 20.4 g/t Ag and 731 ppm Co.
Geology	Deposit type, geological setting and style of mineralisation.	- At the Walford Creek Prospect structurally controlled, vein/breccia hosted or replacement Cu $\pm$ Co mineralisation, with minor Pb-Zn-Ag and stratabound, diagenetic Pb-Zn-Ag $\pm$ Cu mineralisation, are hosted in dolomitic and argillaceous sediments of the Palaeoproterozoic Fickling Group, forming part of the Lawn Hill Platform stratigraphic sequence, along the east-west to east-northeast trending, steeply south-dipping Fish River Fault. - The mineralisation typically occurs as early diagenetic sphalerite-galena-(chalcopryrite) to late epigenetic chalcopryrite-(galena-sphalerite) associated with three stacked massive pyrite lenses and talus, hydrothermal and tectonic breccias in the hanging wall of the Fish River Fault. - Mineralisation shows affinities to both early sediment-hosted SEDEX-type and late Mississippi Valley-type mineralisation styles. - The wide diversity of mineralisation styles reflects multiple events in a long-lived re-activated structural setting that originated as a growth fault.

Criteria	JORC Code explanation	Commentary
		Further interpretation of the geological model is ongoing and views will reflect the geological teams assessment as both the database grows in size and as the results are interpreted.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- Exploration results have not previously been reported in the public domain as Aston Metals, the previous company, was privately listed. - Information on the pre-2016 drill holes is included in the 2015 Resource Estimate Report. Information pertaining to the completed 2017 drilling is contained in Table 2 in the body of the ASX release.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- Exploration results have not previously been reported in the public domain as Aston Metals, the previous company, was privately listed. - Aeon has not undertaken any cutting of grades as it currently believes that all the grades received are an accurate reflection of the sampled interval. - Aeon has maintained realistic intervals of dilution when stating mineralised intercepts, however further refinement of what are considered realistic mining widths will be understood following further resource calculations. - Aeon has not taken to stating significant intercepts as metal equivalents.
Relationship between mineralisation widths and	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there	- Exploration results have not previously been reported in the public domain as Aston Metals, the previous company, was privately listed. - Drill hole angle relative to mineralisation has been a compromise to accommodate the flat-lying stratabound massive sulphide bodies with associated replacement breccias and the steeper dipping epigenetic

Criteria	JORC Code explanation	Commentary
intercept lengths	should be a clear statement to this effect (eg 'down hole length, true width not known').	mineralisation proximal to the Fish River Fault. Generally the stratabound intercepts are close to true width whereas the epigenetic mineralisation intercepts are apparent widths.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	- Appropriate maps showing the nature and extent of the mineralisation are included in the 2013 Resource Estimation report by H&SC for all work prior to 2014. - Appropriate maps and sections have been provided for the 2016 and 2017 work to date. - Appropriate sections have been included for some of the significant intercepts recorded from the 2016 and 2017 drilling.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- Exploration results have not previously been reported in the public domain by Aston as the previous company was privately listed. - All results reported on by Aeon are considered to be accurate and reflective of the mineralised system being drill tested.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- Aeon believes that the results and data provided give a meaning and material reflection of the geological lithologies and structure being tested at Walford Creek. - Metallurgical test work both undertaken and continuing shows that acceptable levels of mineralisation for all the important elements can be satisfactorily extracted for Walford mineralisation. - It should also be noted that this metallurgical test work will be ongoing.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Aeon's future exploration will focus on upgrading and expanding upon the current Inferred and Indicated Resource Estimates at the Walford Creek Prospect, through further drilling within and immediately outside the resource area.

Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
Database integrity	- Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. - Data validation procedures used.	- All relevant data were entered into an Access database where various validation checks were performed including duplicate entries, sample overlap, unusual assay values and missing data. - Data linked to Surpac for wireframing, block model creation and resource reporting. - Visual reviews of data were conducted to confirm consistency in logging and drillhole trajectories. - Assessment of the data confirms that it is suitable for resource estimation.
Site visits	- Comment on any site visits undertaken by the Competent Person and the outcome of those visits. - If no site visits have been undertaken indicate why this is the case.	- Simon Tear of H&SC completed a site visit to the property and Mt Isa core handling facility during the May 2016 drilling. Visit included review of core for 6 holes. - Simon Tear H&SC visited in 2012 the project's core handling facility in Mt Isa and reviewed 5 diamond drillholes from the AML 2012 drilling.
Geological interpretation	- Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. - Nature of the data used and of any assumptions made. - The effect, if any, of alternative interpretations on Mineral Resource estimation. - The use of geology in guiding and controlling Mineral Resource estimation. - The factors affecting continuity both of grade and geology.	- The Walford Creek Deposit is characterised by several different mineralisation styles dependent on the host rock and stratigraphic position. - Primary base metal mineralisation is hosted in relatively flat lying sedimentary units. Sulphide mineralisation is dominant. The new resource estimates are primarily focussed on distinct, higher grade copper mineralisation related to specific stratigraphic hosts and proximity to the Fish River Fault - A detailed stratigraphic reconstruction has been completed noting minor structures as splays and parallel faults to the main Fish River Fault. - Some oxidation of mineralisation has occurred with possible supergene enrichment noted for the PY1 and DOL unit zones. - Mineralisation wireframes were designed on a nominal 0.5% Cu cut-off grade and geological criteria including host lithology and stratigraphical relationship, structural position, oxidation and geological sense.

Criteria	JORC Code explanation	Commentary
		• 3D wireframes and surfaces constructed include: new mineral zones for copper for the PY1 Unit, the Dolomite Unit and the PY3 Upper and Main Unit, Fish River Fault, Chert Marker & HW Chromite Marker, BOPO and BOCO. • Wireframe extrapolation is 25m beyond the last drillhole; termination of wireframes is generally due to a lack of copper grades. • The existing interpretation honours all the available data; an alternative interpretation is unlikely to have a significant impact on the resource estimates.
Dimensions	• The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.	• Mineralisation can be modelled for 1km of strike length, with a range of down dip widths of 40 to 60m. The mineral lenses are part of a 160m thick mineralised sequence. The individual mineral lodes have thicknesses ranging from 2m to 60m where the lodes coalesce. • The depths below surface to the top of the mineralisation vary for the different lodes but an approximate overall range is from 25m to 35m for the uppermost lode and 130 to 230 for the lowermost lode.
Estimation and modelling techniques	• The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. • The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data. • The assumptions made regarding recovery of by-products. • Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation). • In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. • Any assumptions behind modelling of selective mining units. • Any assumptions about correlation between variables. • Description of how the geological interpretation was used to control the resource estimates. • Discussion of basis for using or not using grade cutting or capping.	• Mineral wireframes and geological surfaces are based on interpretations completed on sections with strings snapped to drill holes. • Surpac mining software was used for the interpretation and block model reporting. The GS3M software was used for block grade interpolation. • Wireframes were used to control the composite selection and the loading of subsequently modelled data into the block model. • Geostatistics were performed for copper, lead, zinc, silver and cobalt within individual mineralised lenses. A set of estimated pyrite content values was created from the base metal, iron & sulphur assays. • Correlation between the main economic elements was weak indicating possible mineral zonation, which is not an uncommon feature with the type of mineralisation. • Drillhole spacing ranges along strike from 25 to 50m and 30-80m on section. • Parent block sizes were 10m in the X (east) direction, 7.5m in the Y (north) direction and 2.5m in the Z (RL) direction with no sub-blocking. • Ordinary Kriging estimation method was used. • 1,506 1m composites, for the 4 mineral units, were selected using the wireframes; residuals of <0.5m were discarded.

Criteria	JORC Code explanation	Commentary
	The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.	- No top cutting was applied; the coefficients of variation for the relevant composite datasets suggest that the data is not sufficiently skewed or unstructured to warrant top cutting. 6 estimation search passes were used for all mineral lodes with an increasing search radius and decreasing number of data points. - Search size: 30 by 20 by 5m (Measured), 60 by 40 by 10m (Indicated) to 120m by 120m by 20m (Inferred) with 12 minimum data decreasing to 6. An additional search comprised of 150m by 150m by 25m with a minimum number of 6 data (Inferred). - The first and second passes used an octant based search where at least 4 octants had to be estimated; the remaining passes used a 2 octant based search. - Variography was modest in all zones mainly due to a lack of drilling, particularly in the down dip direction in combination with localised thinness of some of the mineral zones. - Search ellipses were orientated to follow the strike, dip and plunge trend of the individual units. 1 spatial domain was used for the PY1 and DOL units whilst 2 search domains were used for the PY3 Main and Upper units. - Model validation has consisted of visual comparison of block grades and composite values and indicated a reasonable match. Comparison of summary statistics for block grades and composite values has indicated a small risk of overestimation of grade for certain elements for certain lodes usually in the Inferred category but with no consistent pattern. - There are relatively limited changes from the October 2016 H&SC global resource estimates for the Vardy Zone and this provides a good level of confidence in the resource estimates and their classification.
Moisture	Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.	Tonnages are estimated on a dry weight basis.
Cut-off parameters	The basis of the adopted cut-off grade(s) or quality parameters applied.	- Resource estimates have been reported at a 0% copper cut off within the relevant mineral wireframe. There is a limited amount of sub-grade material within the resource estimates (<10%) - The cut-off grade at which the resource is quoted reflects the intended bulk-mining approach.

Criteria	JORC Code explanation	Commentary
Mining factors or assumptions	Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.	- H&SC's understanding based on information supplied by Aeon is for an open pit mining scenario. - The proposed mining method will be a truck shovel operation for the upper mineralisation - Minimum mining dimensions are the parent block size of 10x7.5x2.5m. - The current assumptions for the mining dilution and recovery for the open pit mine are 5% dilution and 95% recovery - There is also the potential for an underground room and pillar operation to target the lower PY3 mineral zone
Metallurgical factors or assumptions	The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.	- Metallurgical testwork was in progress during compilation of resource estimates. - There is some evidence of metal zonation for Cu, Pb, Zn & Ag. The dominant minerals are chalcopyrite, galena & sphalerite for copper, lead and zinc respectively. - Mineralogical testwork has identified that a majority of the cobalt resides within distinctive types of pyrite and is not necessarily linked to copper grades. - Various metal recovery options are currently being investigated including simple sulphide concentrate generation via floatation, possible sulphide leach or roasting. - Metal recoveries are likely to be of industry norm. - The deposit type is similar to Mt Isa style.
Environmental factors or assumptions	Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	- Baseline studies by Aeon are currently in progress - The area contains large flat areas suitable for waste dumps and tailings facilities. - No large river systems pass through the area. - Water courses are generally restricted. - There are abundant carbonate rocks, the Walford Dolomite, in the vicinity to provide material for control of any acid mine drainage.

Criteria	JORC Code explanation	Commentary
Bulk density	- Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. - The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. - Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.	2,474 1m composites were generated from single 10cm pieces of core that had SG values determined using the “Archimedes Principle” on a dry weight basis. - Some localised vuggy material may have an overstated density due to samples not sealed in wax prior to measuring the weight in water. - Density was modelled using the Inverse Distance Squared modelling technique on the unconstrained composites extracted from the drillhole database. Search directions for the grade interpolation were consistent with the gently south dipping host stratigraphy.
Classification	- The basis for the classification of the Mineral Resources into varying confidence categories. - Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). - Whether the result appropriately reflects the Competent Person’s view of the deposit.	- Mineral resources have been classified on the estimation search pass category subject to assessment of other impacting factors such as drillhole spacing (variography), core handling and sampling procedures, QA/QC outcomes, density measurements, geological model and previous resource estimates. - A review of blocks classed as Measured by the initial search pass indicated a ‘spotted dog’ effect for all lodes. A more coherent picture is achieved using a 35m search (in the X direction) on an unconstrained set of composites for the complete deposit. - The classification appropriately reflects the Competent Person’s view of the deposit.
Audits or reviews	The results of any audits or reviews of Mineral Resource estimates.	An internal peer review of the model has been completed by H&SC.
Discussion of relative accuracy/ confidence	- Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. - The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.	- The Mineral Resources have been classified using a qualitative assessment of a number of factors including the complexity of mineralisation (including metal zonation), the drillhole spacing, QA/QC data, undocumented historical RC sampling methods, and missing cobalt grades from the historical drilling. - The Mineral Resource estimates are considered to be accurate globally, but there is some uncertainty in the local estimates due to the current drillhole spacing. - The geological understanding has been substantially improved with the Aeon drilling campaign - No mining of the deposit has taken place so no production data is available

Criteria	JORC Code explanation	Commentary
	These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.	for comparison.