

21 November, 2019

ASX Announcement

## CORE DRILLING PROGRAM UNDERWAY AT TONOPAH NORTH - IP SURVEY IDENTIFIES KEY STRUCTURES

### HIGHLIGHTS:

- TND-01 Completed at 152m testing shallow structural target - assay results pending
- TND-02 in progress – target depth 300m, results expected end December
- 3D Induced Polarisation survey highlights key structural and stratigraphic targets

Oakdale Resources Limited (ASX: OAR) (“Oakdale” or “the Company”) is pleased to provide an update on the diamond core drilling that is underway at the Tonopah North project in Nye County, Nevada and results of the 3D IP survey.

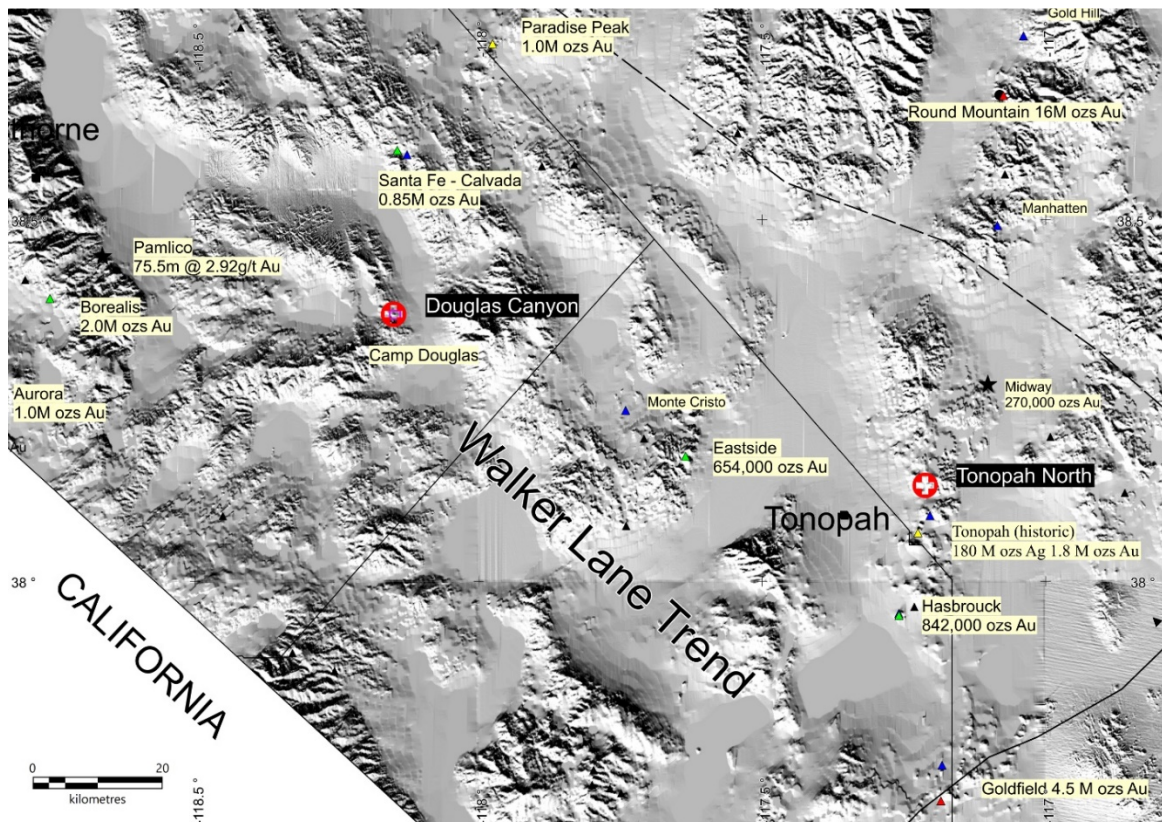


Figure 1. Location of the Tonopah Gold Project and other mines/prospects

The drill program currently involves two core holes (TND-01 and TND-02) for a total of 450m of drilling with

other holes to follow, depending on initial results.

### TND-01


TND-01 tested a shallow target associated with old workings and a stockwork style of mineralisation. The drill hole intersected several wide zones of intense fracturing and iron oxide deposition that correlate with the surface workings. The core samples are currently in the laboratory with results expected in December.

### TND-02

TND-02 is currently in progress testing a series of north-west striking splay faults which were the focus of prospectors in the early 20<sup>th</sup> century and from which the Company has reported highly anomalous gold samples (see ASX:OAR release June 27,2019). Oakdale is testing the concept that the steep to moderately dipping structures sampled at surface coalesce at depth into a stockwork system of epithermal veins.

### 3D Induced Polarisation Survey

To help in identifying and targeting key structures at depth Oakdale has completed a 3D Induced Polarisation survey (3D IP) which has supported the target concept plus identified several new and previously unknown structures of interest (figure 2).

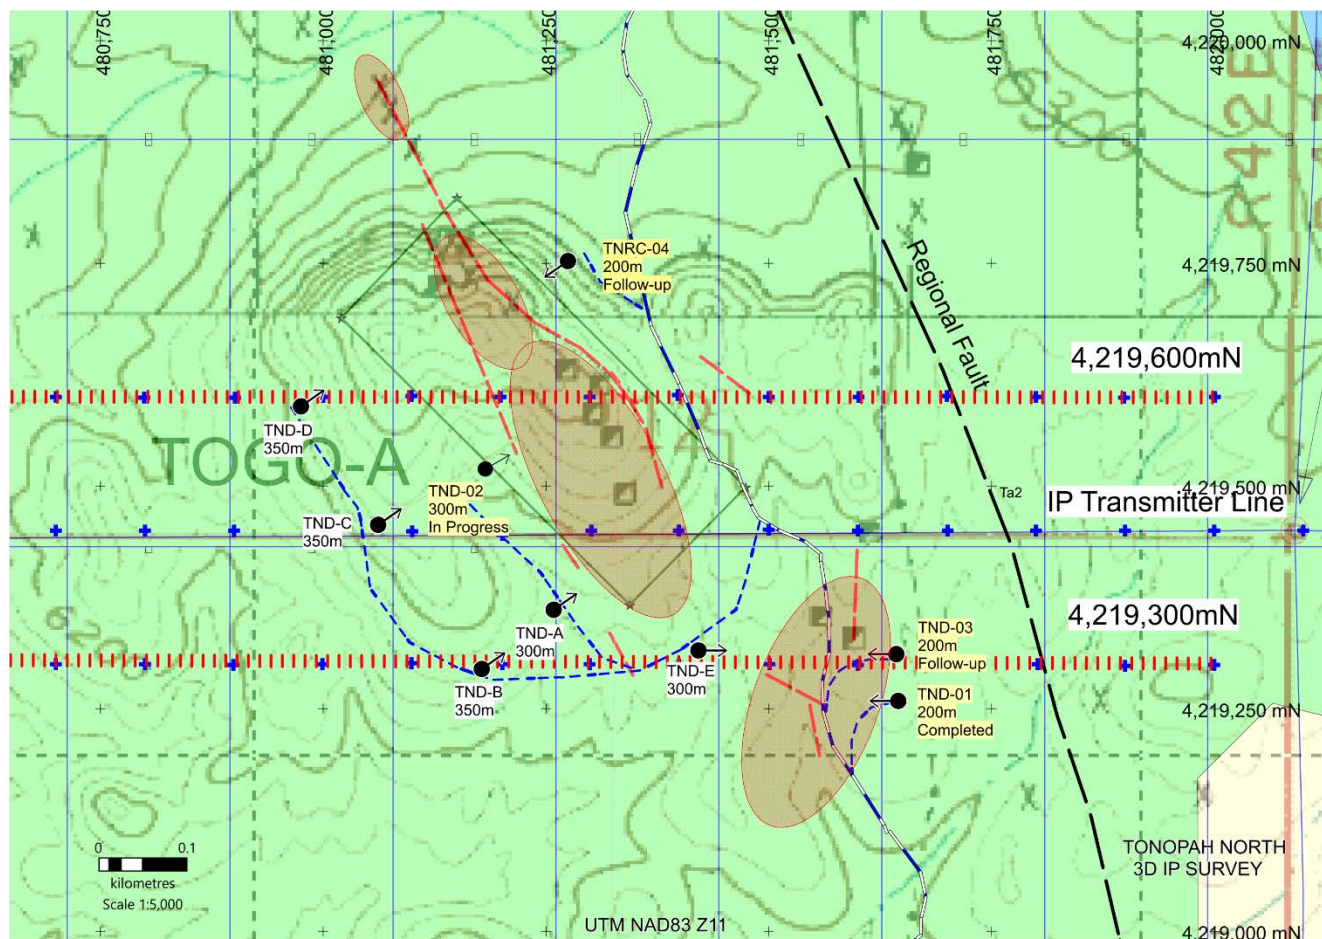


**Figure 2. 3D IP Survey Lines and Drill Holes**

The survey was carried out on two lines spaced 300m apart which coincide with the location of the current drill holes. The IP transmitter line was placed between these two lines with the current electrode located several kilometres away and the survey dipole spacing was set at 100m (pole-dipole survey). The survey data is of very good quality with very low signal to noise ratio (SNR) which has enabled the survey to “see” to much greater depth than expected.

IP surveys collect information on the chargeability of the rock (mVolts/Volt), which can be an indication of the presence of disseminated sulphides or other minerals such as graphite, and the resistivity of the rock (ohm-metres) which can be a measure of the degree of alteration or weathering of the rock or the presence of a high concentration of sulphides (conductive minerals).


Figures 3a and 3b below, show the 3D IP resistivity and chargeability survey results for 4,219,600mN, which is the line being targeted by TND-02 (in progress).

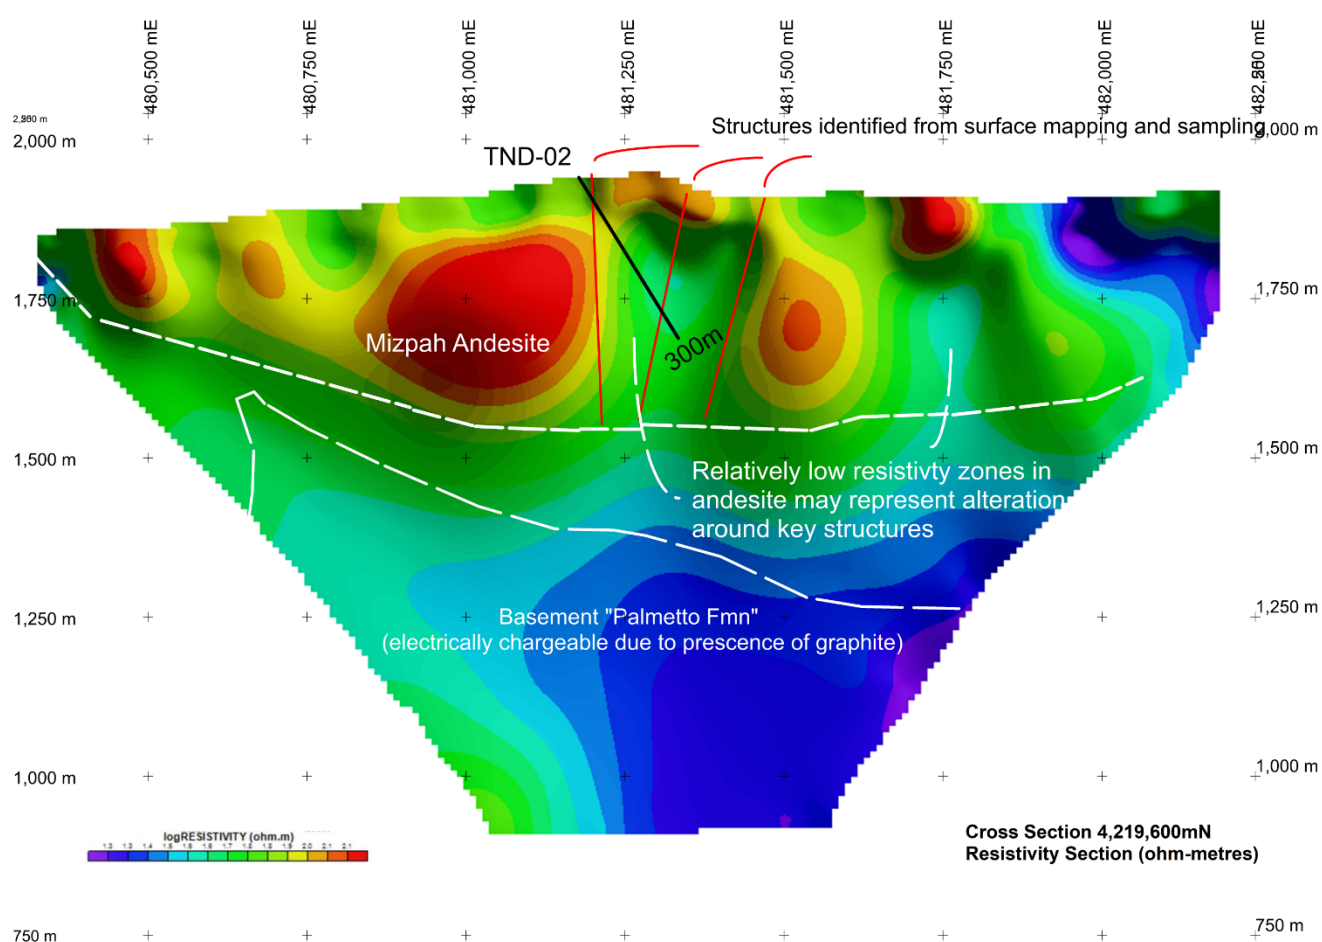

**Figure 3a - 3D IP Log-resistivity section showing structures targeted by TND-02**

The resistivity image shown above indicates a number of other potentially significant structures but these have not been shown at this time for clarity. The basement in this area is the Palmetto Formation, an Ordovician age metamorphic rock with significant graphite that is electrically chargeable (see fig 3b). A spatial relationship has been observed to exist between some gold deposits in the Tonopah Region and the contact with metamorphic basement, e.g. Midway Gold Deposit (Viva Gold Corp <https://vivagoldcorp.com/tonopah-gold-project>).



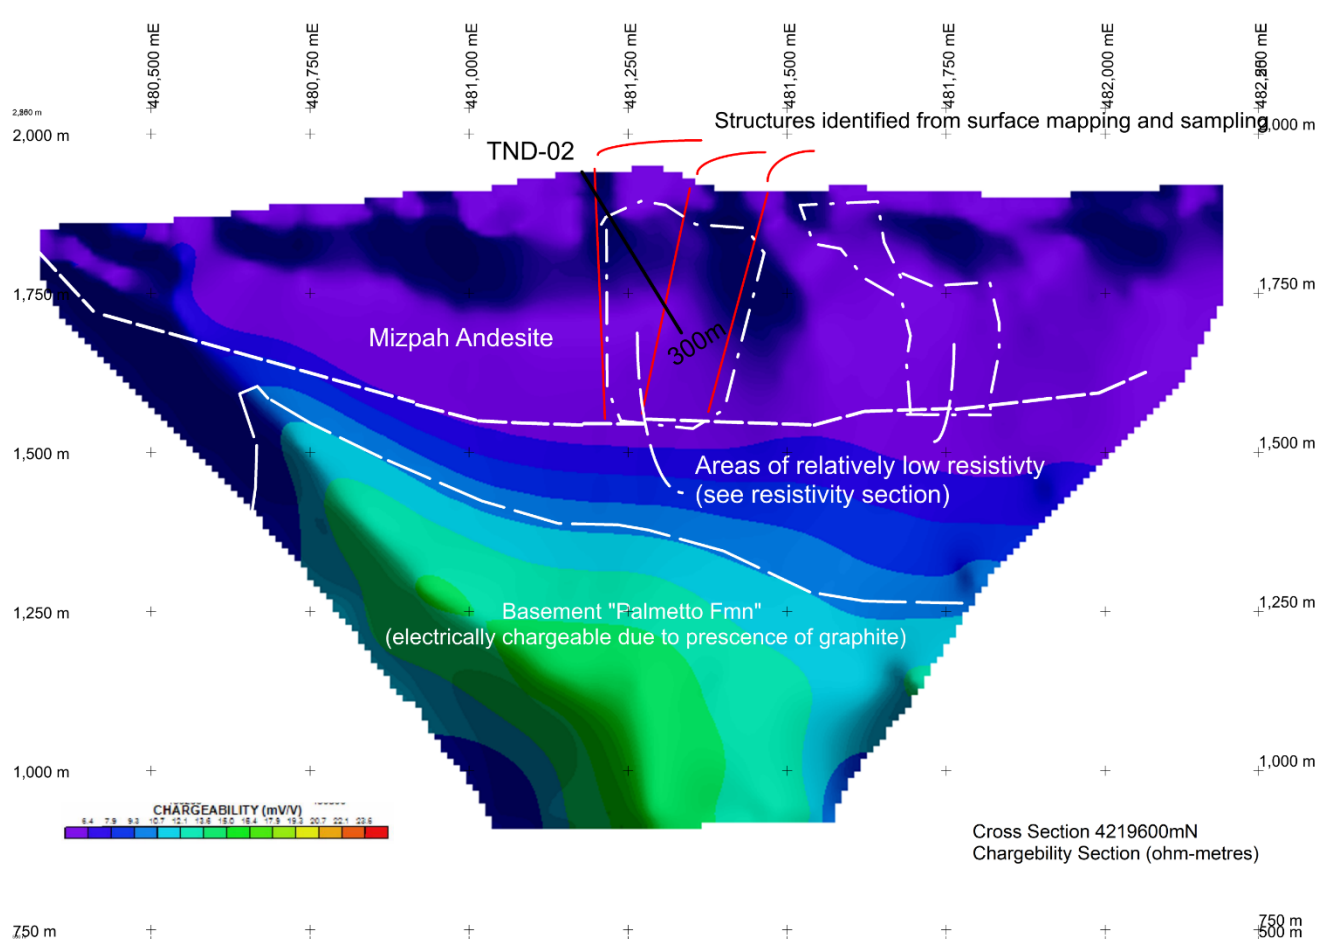

**Figure 3a. 3D IP Chargeability section showing basement and key structures from surface mapping and sampling**

The chargeability results identify the shallow structures and the metamorphic basement rocks. It is not known if the high-angle faults continue to the basement because the shallow chargeability response is swamped at depth by the highly chargeable basement rocks.

**Oakdale's Nevada Technical Manager Geoff Balfe said:** *"We are very excited about the results of the 3D IP survey and how it supports the location of the structures that we have identified from sampling. It has also identified a number of other structures of interest and seen deeper into the section than expected, identifying the position of the metamorphic basement rocks, which may be significant in the mineralising process. The current drilling is directed at a key area of structural deformation and alteration that may extend down to the basement".*

### **Tonopah North**

Tonopah North project is located 5 kilometres north of the historic silver and gold mining town of Tonopah. Figure 4. shows the major structures that have been mapped on the property and the gold sample results that are derived from sampling old mine and prospect pits that occur along the structures.

Two target areas are defined: The northern zone which is the target for TND-02 and TND-04 and the southern zone which is the target for TND-01 and TND-03. The southern zone is seen as a shallow stockwork target with potential for a bulk tonnage style of gold mineralisation. Whereas TND-02 and TND-04 are designed to test a combined structural-stratigraphic target at depth. The two target areas are interpreted to be the same structural corridor with an apparent separation due only to an area of poor outcrop.

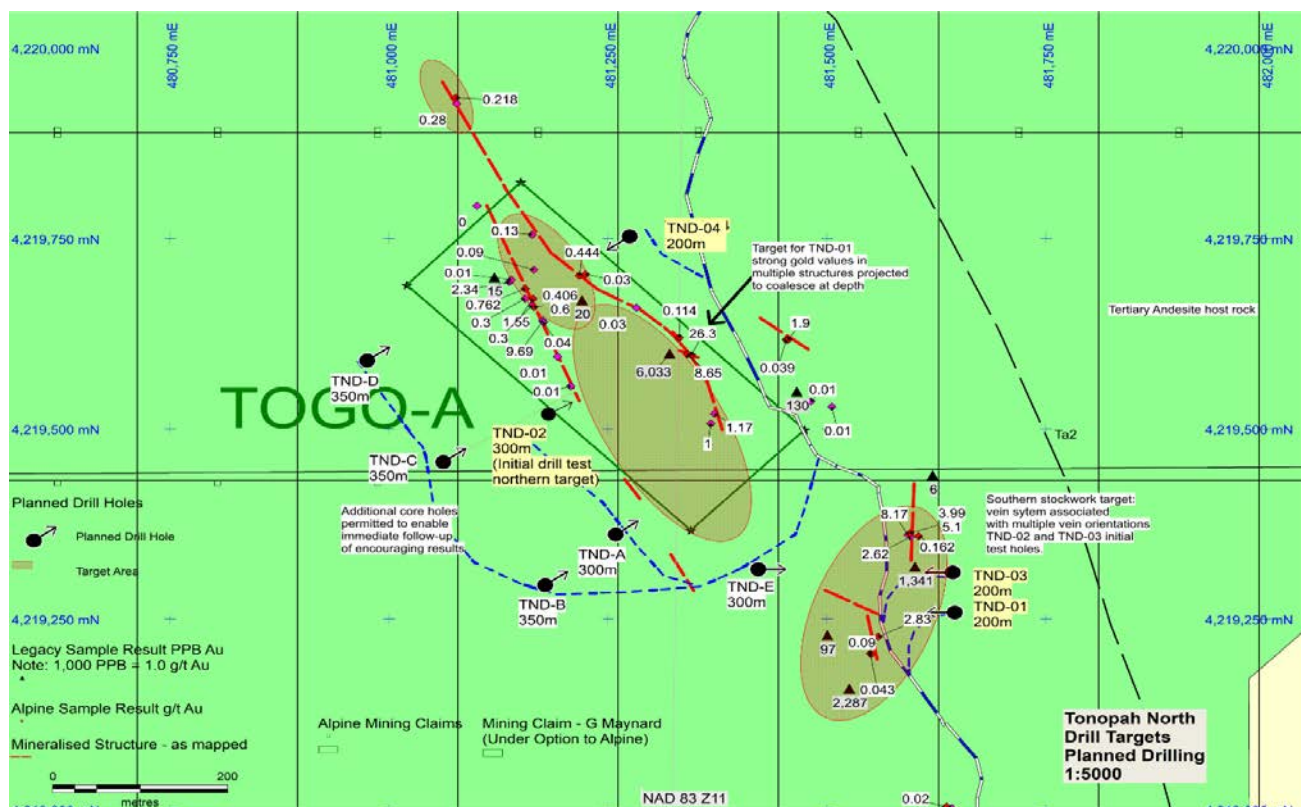


Figure 4. Tonopah North Drill Targets and Gold Sample Results (refer to ASX release 27 June 2019 for full table of results and JORC Table 1.)

It is expected that the current drill program (TND-02) will be completed in three weeks with initial assay results being received in December.

Additional drill holes have been permitted to enable immediate follow-up of encouraging results including the potential to start to scope out a resource.

**For further information please contact:**

Chris Gale  
Chairman  
Oakdale Resources Ltd.  
P: +61 8 6117 4797

Peter Taylor  
Investor Relations  
NWR Communications.  
P: +61 412 036 231

**About Oakdale Resources Limited**

**Oakdale Resources** is an ASX listed junior explorer and aspiring gold producer. Oakdale has recently signed an option agreement to 100% acquire Alpine Resources controls three gold exploration projects in the highly prospective gold province of Nevada, United States, also ranked the third best mining jurisdiction in the world. The three projects are in an area that hosts several multi-million ounce deposits. Oakdale will fund Alpine's exploration strategy to discover and define a gold resource. The Company, through its 100% owned Peruvian subsidiary Ozinca Peru SAC, is also the owner of a CIP Gold lixiviation plant in Southern Peru. The plant is strategically located in a highly mineralised area, with thousands of small gold miners in the immediate vicinity, all of whom are potential customers for an Ozinca toll processing business.

**Competent Person's Statement**

*The information in this Announcement for Oakdale Resources Limited was compiled by Mr. Geoff Balfe, a Competent Person, who is a member of the Australasian Institute of Mining and Metallurgy. Geoff Balfe is a director and a shareholder of Alpine Resources (USA) Pty Ltd. Geoff Balfe has sufficient experience, which is relevant to the styles of mineralisation and types of deposits under consideration and to the activity to which he is undertaking to qualify as a "Competent Person" as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves.' Geoff Balfe consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.*

# JORC Code, 2012 Edition – Table 1

## Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></li> <li><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></li> <li><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></li> <li><i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></li> </ul>	<ul style="list-style-type: none"> <li>Sampling has involved four separate methods: <ul style="list-style-type: none"> <li>Dump Sampling – a minimum of 1.0kg of rock chips is collected from mine dumps. In order for the sample to be representative at least 25 small rock fragments are composited. As the dumps typically contain a mix of unmineralized waste rock and mineralized quartz vein material the mineralized rock is sampled separately to waste rock.</li> <li>Channel Sampling – where outcrop is suitable, particularly in old workings, a chip-channel sample is taken across the outcrop. A minimum weight of 1.0kg is maintained and the length of the channel sample and sample description is noted.</li> <li>Grab Sampling – where outcrop is limited a 1.0kg rock sample is collected from the outcrop. This type of sampling may be highly selective.</li> <li>Float Sampling – where there is only float of rock particles then a 1.0kg sample is taken by compositing as many small chips as possible.</li> </ul> </li> <li>There is no evidence of coarse gold sampling problems on any of the properties sampled. Repeat assaying by the laboratory gave results within acceptable limits of original assay results.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></li> </ul>	<ul style="list-style-type: none"> <li>No drilling has been carried out</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></li> <li><i>Measures taken to maximise sample recovery and ensure</i></li> </ul>	<ul style="list-style-type: none"> <li>No drilling has been carried out</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>representative nature of the samples.</i></p> <ul style="list-style-type: none"> <li><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></li> </ul>	
Logging	<ul style="list-style-type: none"> <li><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></li> <li><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></li> <li><i>The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>All samples have been geologically logged</li> <li>Sampling is either by channel sampling, grab sampling, float sampling, or dump sampling</li> <li>Only channel sampling can be considered to be quantitative; the other methods are qualitative</li> <li>Some sample intervals have been photographed</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>Samples were crushed in a hammer mill to 70% passing -2mm followed by splitting off 250gm using a Boyd rotary splitter and pulverizing to better than 85% passing 75 microns</li> <li>In consultation with the laboratory it was determined to carry out a sample preparation and analytical procedure that is most appropriate for gold and associated base metals.</li> <li>An 0.5g sub-sample was then subjected to 2-acid digest and ICP-AES and ICP-MS analysis for a multi-element package of elements.</li> <li>A 30gm sub-sample was subjected to Fire-assay Fusion and ICP analysis.</li> <li>No duplicate sampling has been carried out. The laboratory regularly carries out repeat assays of high gold samples and agreement with original assays has been acceptable.</li> <li>The selected sample mass is considered appropriate for the grain size of the material being sampled.</li> </ul>
Quality of assay data and laboratory	<ul style="list-style-type: none"> <li><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li><i>For geophysical tools, spectrometers, handheld XRF instruments, etc,</i></li> </ul>	<ul style="list-style-type: none"> <li>Samples were submitted to an ISO certified laboratory for analysis of gold, silver and other metals by the ICP AES or MS technique.</li> <li>The analytical method and procedure were as recommended by the</li> </ul>



Criteria	JORC Code explanation	Commentary
tests	<p><i>the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <ul style="list-style-type: none"> <li>• <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	<p>laboratory for exploration.</p> <ul style="list-style-type: none"> <li>• As this is early stage exploration with a wide variation in sample results the Company has not inserted control samples in the regular stream of rock samples. This is considered appropriate for early stage exploration. The laboratory inserts a range of standard samples in the sample stream the results of which are reported to the Company.</li> <li>• The laboratory uses a series of control samples to calibrate the ICP AES machine.</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li>• <i>The use of twinned holes.</i></li> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Selected sample results which were considered to be significant were subjected to resampling by the Company. Resampling of outcrops or dump samples by different people can result in variation of results by up to +/- 50%.</li> <li>• Primary data is recorded on site and entered into the appropriate database.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> <li>• <i>Specification of the grid system used.</i></li> <li>• <i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples were located using a Garmin GPS 64S unit and are considered accurate to +/- 3m.</li> <li>• The grid system used is UTM NAD 27 Zone 11.</li> <li>• The project area is mountainous with topographic control provided by the GPS and government topographic maps at 1:24,000 scale.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>• As this is early stage exploration sample density is controlled by the frequency of outcrop and access to old workings.</li> <li>• The results as reported have not been averaged or composited except in the case of channel samples which may be composited over the length of the channel.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Sampling is preferentially across the strike or trend of mineralized outcrops</li> </ul>

Criteria	JORC Code explanation	Commentary
Sample security	<ul style="list-style-type: none"> <li><i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>At all times samples were in the custody and control of the project geologist until delivery to the laboratory where samples were held in a secure enclosure pending processing.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li><i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>None undertaken at this stage</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>Mining Claims have been staked and duly recorded with Mineral County (Tonopah North and Douglas County) and Pershing County (Lambarson Canyon) and filed with the Bureau of Land Management (BLM).</li> <li>The relevant claim numbers are either appended to this Table or contained elsewhere in this ASX release.</li> <li>BLM receipts for the filing of the Claims are in the possession of the Company. The claims have been staked by Alpine Metals LLC, a wholly owned subsidiary of Alpine Resources (USA) Pty Ltd.</li> <li>The Togo-A Claim located in the Tonopah North property is subject to an agreement between Alpine Metals LLC and a prospector which allows for acquisition of the claim by Alpine subject to completing certain expenditure within 5 years of the agreement date.</li> <li>All Mining Claims are valid</li> <li>In order to obtain permission to drill the Company must lodge Environmental Performance Bonds with the BLM.</li> <li>The Company is not aware of any impediments to obtaining a licence to operate, subject to carrying out appropriate environmental and clearance surveys.</li> </ul>
Exploration done by other	<ul style="list-style-type: none"> <li><i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>There is no record of gold exploration on any of the subject Mining</li> </ul>

Criteria	JORC Code explanation	Commentary
<i>parties</i>		<p>Claims. There are many prospecting pits and mine shafts on the properties but no records of production.</p> <ul style="list-style-type: none"> <li>The Tonopah North property was at one time held by Tonogold Resources, a Canadian company, which did not carry out any drilling. Sampling data collected by that company has been provided to Alpine and results are in good agreement with the results obtained by Alpine.</li> </ul>
<i>Geology</i>	<ul style="list-style-type: none"> <li><i>Deposit type, geological setting and style of mineralisation.</i></li> </ul>	<ul style="list-style-type: none"> <li>Tonopah North and Douglas Canyon are low-sulphidation epithermal gold-silver mineralized systems. They are structurally controlled vein style deposits.</li> <li>Lambarson Canyon is considered to be Carlin style gold mineralization due to its geochemical signature and sedimentary host rocks.</li> </ul>
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <li><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <li><i>easting and northing of the drill hole collar</i></li> <li><i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i></li> <li><i>dip and azimuth of the hole</i></li> <li><i>down hole length and interception depth</i></li> <li><i>hole length.</i></li> </ul> </li> <li><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></li> </ul>	<ul style="list-style-type: none"> <li>No drilling information</li> </ul>
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <li><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></li> <li><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of</i></li> </ul>	<ul style="list-style-type: none"> <li>No weighting or averaging techniques have been applied to the sample assay results.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>such aggregations should be shown in detail.</i></p> <ul style="list-style-type: none"> <li><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li> </ul>	
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> <li><i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>Channel samples have been collected they are at right angles to the strike or structural trend of the mineralization</li> </ul>
<i>Diagrams</i>	<ul style="list-style-type: none"> <li><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></li> </ul>	<ul style="list-style-type: none"> <li>The Company has released various maps, figures and sections showing the sample results and planned drill holes.</li> </ul>
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <li><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>All analytical results for gold have been reported. The results for other metals have been reported where they are considered to be of potential economic interest e.g. silver.</li> </ul>
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <li><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>The Company has recently completed a 3D Induced Polarisation survey over selected parts of the Tonopah North property. Alpine Metals LLC engaged the contractor to carry out an Offset Pole-Dipole survey. The survey consisted of one setup of two IP/Resistivity lines read to n=16 @ 100m dipole spacing. Receiver lines are 300 meters apart with central current transmit line. Equipment included one Iris Elrec Pro IP receiver and one GDD RX32 receiver and two GDD TXIV, 20Amp transmitters.</li> </ul>
<i>Further work</i>	<ul style="list-style-type: none"> <li><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> <li><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>Initial drill hole locations have been selected based on the preliminary sampling and geological mapping. It is intended to refine the drill hole locations with the benefit of geophysical surveys (resistivity) and the results of any further geochemical sampling. Additional geophysical surveys will be carried out as justified by results.</li> </ul>



## Section 3 Estimation and Reporting of Mineral Resources – None Undertaken