8 July 2020



THOR MINING PLC

Registered Numbers: United Kingdom 05276 414 Australia 121 117 673

Registered Office: 58 Galway Avenue MARLESTON, SA, 5035 Australia

Ph: +61 8 7324 1935 Fx: +61 8 8351 5169

Email: corporate@thormining.com

Website: <u>www.thormining.com</u>

Twitter @ThorMining

Enquiries: Mick Billing Executive Chairman Thor Mining PLC +61 8 7324 1935

Nominated Advisor Samantha Harrison Grant Thornton +44 (0) 20 7383 5100

AIM & ASX Listings: Shares: THR

Directors: Michael Billing Richard Bradey Mark Potter

Key Projects:

- Tungsten Molyhil NT Pilot Mountain USA
- Copper Kapunda SA Moonta SA

Company Announcements Office ASX Securities Limited, 20, Bridge Street, Sydney, N.S.W. 2000

US URANIUM / VANADIUM PROJECT VANADIUM FIELD SAMPLING RESULTS POSITIVE URANIUM RESULTS PENDING FROM SPECIALIST LAB

The directors of Thor Mining Plc ("Thor" or the "Company") (AIM, ASX: THR) are pleased to advise positive assay results from samples identified as having vanadium potential from field sampling in the Colorado mineral claims held by American Vanadium Pty Ltd (AVU).

Other samples identified as potentially uranium rich, are being assayed at a separate laboratory facility which is better equipped for samples of this nature.

AVU holds interests in uranium and vanadium focussed projects in Colorado and Utah in the United States of America (Figure 1). The Company announced on 1 June 2020 an option agreement to acquire AVU, subject to satisfaction of due diligence requirements.

Highlights:

- The eight initial assay results averaged 1.0% V₂O₅ and 0.043% U₃O₈.
- Two outcrop samples from the Rim Rock mine were 1.8% and 2.0% V₂O₅.
- Eight of the twenty-one field samples had radioactivity levels low enough for routine assay process to be completed.
- The remaining 13 samples have been transported to a specialist laboratory with facilities designed to handle higher radiation level material.

Mick Billing, Executive Chairman of Thor Mining, commented:

"We are very pleased with the calibre of the vanadium samples collected, and in particular the uranium content of several of these."

"Assays of the higher-level radioactive samples are eagerly awaited. These assay results are expected later in July."



Figure 1. Project Location Plan



8 July 2020

The field component of the due diligence program undertaken by the company's Colorado based team has included sampling of accessible mineralisation in multiple locations across the mining claim area (Figure 2). Mineralisation predominantly occurs in the Salt Wash geological unit (shaded orange) where most sample locations occur. A combination of in situ outcrop samples and historic mine dump samples were sampled.

Mineralisation varies between vanadium rich and uranium rich. Only assay results have been received from vanadium rich samples at this time as summarised in Table A.

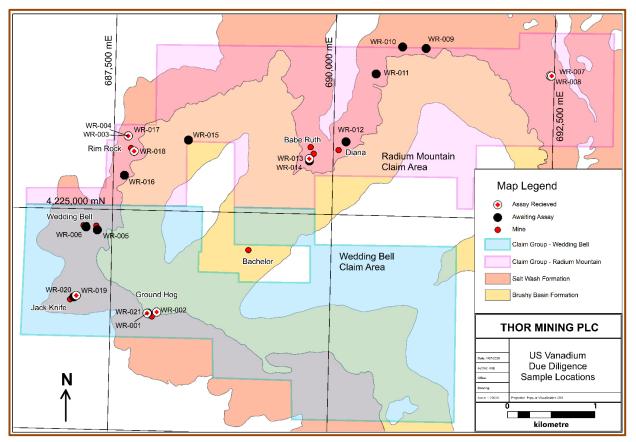


Figure 2: Sample location plan showing simplified geology and mining claim areas

Sampling was not conducted at the Vanadium King site in Utah as the mineralised Salt Wash formation does not outcrop in the project area and there has been no mining disturbance.



8 July 2020

Table A: Sample and assay summary

Prospect	Sample No.	Easting	Northing	Sample Type	% U₃O8	% V ₂ O ₅	Comments
			v	ANADIUM SAMPL	E RESULTS		
Ground Hog	WR-002	688030	4223849	Outcrop	0.061	0.965	chip sample from outcrop
Big Bull	WR-007	692453	4226633	Dump	0.099	0.648	dump sample
Big Bull	WR-008	692468	4226632	Outcrop	0.031	0.296	chip sample from outcrop
Babe Ruth	WR-013	689730	4225628	Outcrop	0.008	0.880	chip sample from outcrop
Rim Rock	WR-017	687660	4225839	Adit wall	0.112	1.792	chip sample from Vanadium rich wall exposure
Rim Rock	WR-018	687731	4225668	Outcrop	0.015	2.000	chip sample from Vanadium rich wall exposure
Jack Knife	WR-019	687108	4224016	Pit Wall	0.012	1.054	chip sample from Vanadium rich wall exposure
Ground Hog	WR-021	687921	4223833	Outcrop	>0.006	0.434	chip sample from Vanadium rich wall exposure
			URANI	UM SAMPLES – A\	WAITING AS	SAY	
Ground Hog	WR-001	687927	4223836	Outcrop			chip sample from outcrop
Rim Rock	WR-003	687660	4225839	Adit wall			chip sample from outcrop
Rim Rock	WR-004	687660	4225839	Grab			ore spillage
Wedding Bell	WR-005	687333	4224766	Grab			dump sample
Wedding Bell	WR-006	687202	4224797	Grab			loose sample from historic test pit
unnamed	WR-009	691031	4226911	Dump			dump sample
unnamed	WR-010	690763	4226921	Dump			dump sample
unnamed	WR-011	690468	4226608	Dump			dump sample
Diana Mine	WR-012	690142	4225830	Dump			dump sample
Babe Ruth	WR-014	689732	4225603	Dump			dump sample
unnamed	WR-015	688347	4225808	Grab			ore spillage
Rim Rock	WR-016	687627	4225392	Dump			dump sample
Jack Knife	WR-020	687081	4223998	Pit Wall			chip sample

PROJECT ACQUISITION

On June 1st 2020 the Company advised it had acquired an exclusive option to acquire 100% of the shares in American Vanadium Pty Ltd, a private Australian company, which in turn owns 100% each of the shares in Colorado company Standard Minerals INC (Standard), and Utah company Cisco Minerals INC (Cisco).

A processing plant which has historically taken ore from the region on a toll treatment basis is located near Blanding, within relatively close proximity to the claims held by these companies. Thor have not



8 July 2020

had contact with the operators of this plant to date, however this may represent a potential low cost entry into production.

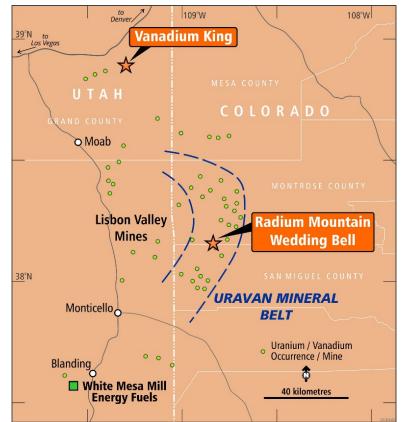


Figure 3. Area map showing project locations and nearby White Mesa processing plant

Colorado Claims

Standard holds 199 contiguous Bureau of Land Management (BLM) claims in south west Colorado, and within the Uravan Mineral Belt. The claims include the Wedding Bell and Radium Mountain groups of mines which are reported to have operated during the first world war and again in the second half of the 20th century (*USGS Professional paper 300^a*).

^a <u>https://pubs.er.usgs.gov/publication/pp300</u>



8 July 2020

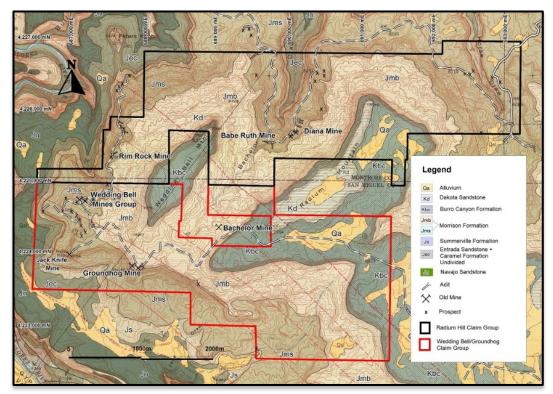


Figure 4: Map of Colorado Claims

The Uravan Mineral Belt and adjacent uranium-vanadium mining districts of the Colorado Plateau are reported to have produced, over the past 100 years, in excess of 85million lbs U3O8 and over 660 million lbs of V2O5² from the Salt Wash sandstone formation of the Plateau. The average production grades from the Uravan Mineral Belt from the 1940's to January 1979 are reported be 0.25% U3O8 and 1.29% V2O5 (Thamm. et al., 1981^b) Average vanadium to uranium ratios are reported to vary from 0.5 : 1 to 40 : 1.

^bwww.osti.gov/servlets/purl/6512174



8 July 2020



Figure 5: Historic Babe Ruth Mine within claim area

Utah Claims

Cisco holds 100 BLM claims in south east Utah approximately 40km north of the town of Moab. There is reporting of significant uranium and vanadium mineralised body(ies) from drilling activities by Hunt Oil, Mineral Division, in 1980 and 1981, reported by Terra Ventures (TSX-V: TAS) in a report dated May 21 2007.

https://www.thormining.com/sites/thormining/media/miscellaneous/terra-ventures-20070521.pdf

Thor Mining wishes to reiterate that the Hunt Oil estimate 1980 – 81 does not comply with either the JORC or NI 43-101 guidelines for mineral resource reporting and is therefore not a valid resource estimate. The Hunt Oil estimate does however provide substantial indication of widespread uranium - vanadium mineralisation in the Cisco mineral claims in a similar geological setting to multiple deposits elsewhere in the region including the previously mined Colorado mineral claims included in this acquisition.

The review team visited the site to assess access issues associated with potential drilling campaigns. The area has good local infrastructure and is at the northern margin of the historic uranium mining area of Thompson Yellow Cat mining district.



8 July 2020



Figure 6: Vanadium King (Utah) terrain

Available data to date of the Vanadium King (Utah) historical drilling suggest that the drilling programs focussed upon mineralisation in the Brushy Basin Member of the Jurassic Morrison Formation. Thor's local consultants have suggested that the deeper and normally higher grade Salt Wash Member may remain substantially untested. Historical mining of the nearby Thompson Creek group of mines have historically produced high grade ore from the Salt Wash Member – a likely focus for future work by Thor.

Authorised by Mick Billing, Chairman and Chief Executive officer

For further information, please contact:

THOR MINING PLC

Mick Billing, Executive Chairman +61 8 7324 1935

Competent Person's Report

The information in this report that relates to exploration results is based on information compiled by Richard Bradey, who holds a BSc in applied geology and an MSc in natural resource management and who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Bradey is an employee of Thor Mining PLC. He has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Richard Bradey consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Updates on the Company's activities are regularly posted on Thor's website <u>www.thormining.com</u>, which includes a facility to register to receive these updates by email, and on the Company's twitter page @ThorMining.

8 July 2020



About Thor Mining PLC

Thor Mining PLC (AIM, ASX: THR) is a resources company quoted on the AIM Market of the London Stock Exchange and on ASX in Australia.

Thor holds 100% of the advanced Molyhil tungsten project in the Northern Territory of Australia, for which an updated feasibility study in August 2018¹ suggested attractive returns.

Adjacent Molyhil, at Bonya, Thor holds a 40% interest in deposits of tungsten, copper, and vanadium, including Inferred Resource estimates for the White Violet and Samarkand tungsten deposits and the Bonya copper deposit².

Thor also holds 100% of the Pilot Mountain tungsten project in Nevada USA which has a JORC 2012 Indicated and Inferred Resources Estimate³ on 2 of the 4 known deposits. The US Department of the Interior has confirmed that tungsten, the primary resource mineral at Pilot Mountain, has been included in the final list of Critical Minerals 2018.

Thor holds a 25% interest Australian copper development company EnviroCopper Limited (with rights to increase its interest to 30%). EnviroCopper Limited holds:

- rights to earn up to a 75% interest in the mineral rights and claims over the resource⁴ on the portion of the historic Kapunda copper mine in South Australia considered recoverable by way of in situ recovery; and
- rights to earn up to 75% of the Moonta copper project, also in South Australia comprising the northern portion of exploration licence EL5984 and includes a resource estimate⁵ for several deposits considered recoverable by way of in situ recovery.

Thor also holds a production royalty entitlement from the Spring Hill Gold project⁶ of:

- A\$5.70 per ounce of gold produced from the Spring Hill tenements where the gold produced is sold for up to A\$1,500 per ounce; and
- A\$13.30 per ounce of gold produced from the Spring Hill tenements where the gold produced is sold for amounts over A\$1,500 per ounce.

<u>Notes</u>

¹ Refer ASX and AIM announcement of 23 August 2018

- ² Refer ASX and AIM announcements of 26 November 2018 and 29 January 2020
- ³ Refer AIM announcement of 13 December 2018 and ASX announcement of 14 December 2018
- ⁴ Refer AIM announcement of 10 February 2018 and ASX announcement of 12 February 2018

⁵ Refer ASX and AIM announcement of 15 August 2019

⁶ Refer AIM announcement of 26 February 2016 and ASX announcement of 29 February 2016

8 July 2020



1 JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 Samples comprised a combination of rock chips from in-situ exposures and grab samples from historic mine dumps. The samples are not considered representative but rather indicative. Mineralisation is characterised by the presence of yellow carnotite allowing sampling to be guided by visual mineral identification in addition to handheld scintillometer readings.
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	Not applicable
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	Not applicable
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Samples and source exposures were qualitatively logged.
Sub- sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	 Samples weighed between 1 and 2kg There was no screening or splitting and no QAQC The samples are considered adequate to provide indication of



8 July 2020

Criteria	JORC Code explanation	Commentary
	 Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	presence of mineralisation rather than to quantify it.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 The analytical technique comprised an initial four acid digest with ICP-AES determination. The laboratory technique is considered total. Internal laboratory control procedures involve duplicate assaying of randomly selected assay pulps as well as internal laboratory standards.
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 Sample results are consistent with field observations. No holes have been drilled or twinned. Primary data was recorded using field note books and GPS digital memory. V₂O₅ grades are reported – these are determined by multiplying the raw vanadium assays by 1.7852.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 A hand held GPS has been used to determine locations. The grid system is NAD83 zone 12. Topographic control is adequate.
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 Data spacing and location is random. It is not adequate for resource estimation. This data will not be used to estimate a resource. There has been no sample compositing
Orientation of data in relation to	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Not applicable.



8 July 2020

Criteria	JORC Code explanation	Commentary
geological structure	 If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	
Sample security	• The measures taken to ensure sample security.	 Samples remained in the custody of the supervising geologist from collection through to delivery to the assay laboratory
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	No audits undertaken.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 The sampled locations fall within the registered mining claims of US Vanadium Pty Ltd and subsidiaries. The tenements are in good standing and no known impediments exist.
Exploration done by other parties	 Acknowledgment and appraisal of exploration by other parties. 	 No other party's exploration data has been referenced.
Geology	• Deposit type, geological setting and style of mineralisation.	The geological setting comprises sandstone hosted uranium vanadium mineralisation.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	 Sample data is provided in the text as table 1.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. 	None used



8 July 2020

Criteria	JORC Code explanation	Commentary
	 Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	
Relationship between mineralisatio n widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	 Not applicable
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	 Figures and Tables provided in the text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	 All available results have been provided.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	 No other data to report
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale stepout drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	• While further work is likely to be planned, the results of this due diligence program provided no assistance to the targeting of future drilling.