

South Korean Operations Update

- **Dokcheon Project:** Maiden diamond drill program commenced
- **Aphae Project:** Drone magnetic survey commenced
- First orientation soil sampling commenced across mineralised structures at **Weolyu, Deokon, Daeam Valley, Dokcheon and Janghwal Projects**
- **Weolyu Project:** Two diamond drill holes completed, assays pending
- **Janghwal Project:** Peak assay of 8.04g/t gold returned from underground rock chip sampling in the recently discovered mine adit
- **Deokon Project:** Rock chip sampling being completed to the north of the 'Thorn' Zone, where further outcropping veins have been located
- **Geum Mar Project:** Reconnaissance rock chip sampling commenced

Southern Gold Limited (ASX: SAU) ("Southern Gold", the "Company"), a gold exploration company focused on the discovery of high-grade precious metal deposits in South Korea, is pleased to provide an update on its field activities. The local team is managing a combination of drilling, prospect mapping and sampling, geophysical surveying and soil sampling activities and making advances on 7 different project areas.

The current drilling programme is targeting new 'greenfield' epithermal vein systems that have never been drilled before at the Dokcheon Project. Another first for Southern Gold is the commencement of a drone-based magnetic survey at Aphae Project. The Korean team has also completed orientation soil sampling programmes across several projects to calibrate this exploration technique and for ongoing work scheduled for next year.

Southern Gold Managing Director, Mr Simon Mitchell:

"We are excited about the drill program at the new greenfield target area of Dokcheon and I really look forward to the results from here and at Weolyu over the coming months. We are pioneering the exploration work in South Korea with the Aphae drone magnetic survey, as relatively detailed magnetic data is usually the first data you have in more advanced exploration jurisdictions such as Australia. Our local South Korean geological team has also made great progress recently with the project field reconnaissance and this will set us in good stead for our drill target base next year."

"There are a lot of "firsts" in this update and a high level of field activity across a lot of projects as we close out the calendar year. As we move into winter, we will move the drilling and field activities to the coastal regions where the weather is more benign and look to restart in the mountain districts in early spring next year. This approach maintains exploration momentum and ensures there is news flow early next year."

Dokcheon Drilling

Construction of a suitable access track for a small track rig was completed and drilling commenced on the 6th November (**Photo 1**).



Photo 1 - Dokcheon DCDD001 drill pad (looking east)

The drill plan involves 3 holes for a designed 540m to test a 100m strike section (50m hole spacing), along with a deeper fourth hole as shown in **Figure 1**. The first hole is complete and the second has commenced.

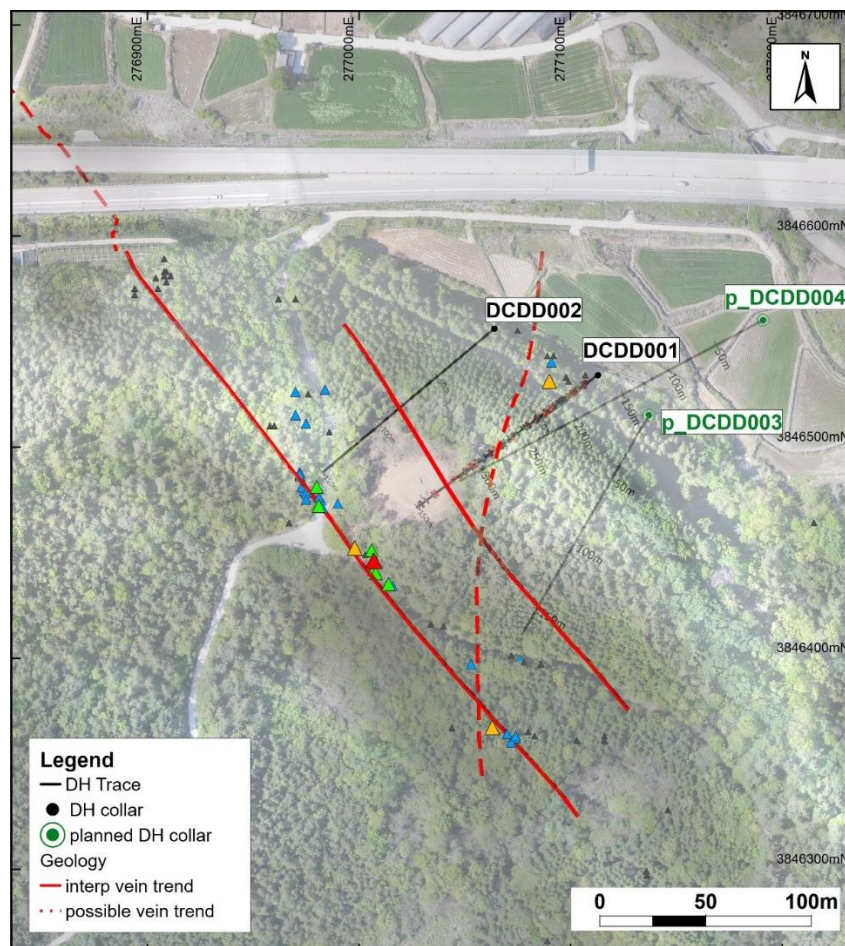


Figure 1 – Plan view of Dokcheon drill program

Weolyu Drilling

Two diamond drill holes for 670.86m have been completed to test the down plunge projection of the Surprise/Moonlight Vein trend and the projected Mystery Vein in its footwall. These holes (WUDD008 and WUDD009) targeted around the 200mRL level, about 110m vertically below the lowest level of sampled and accessible historical workings on the Surprise/Moonlight vein trend (**Figures 2 and 3**). Quartz \pm sulphide veins were intersected in both the Surprise and the Mystery target zones and assays are pending. The results will determine whether further drilling is required.

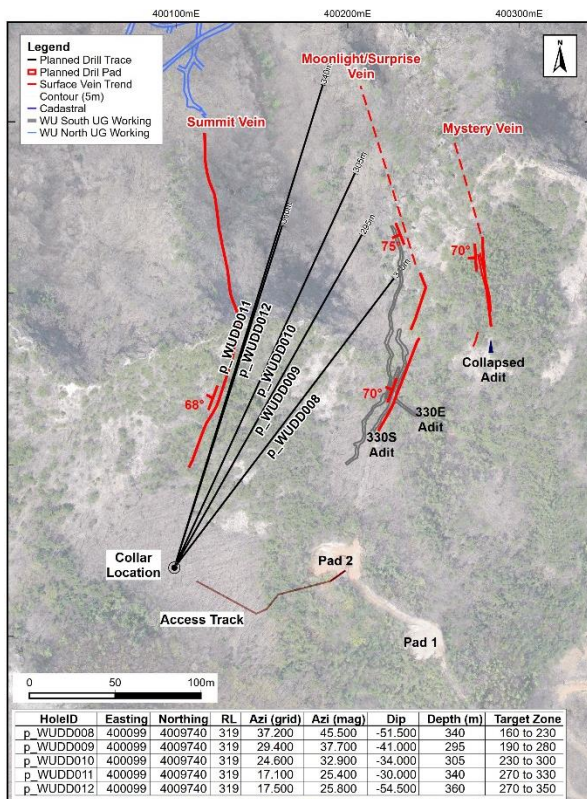


Figure 2 - Plan view of Weolyu Drill Plan

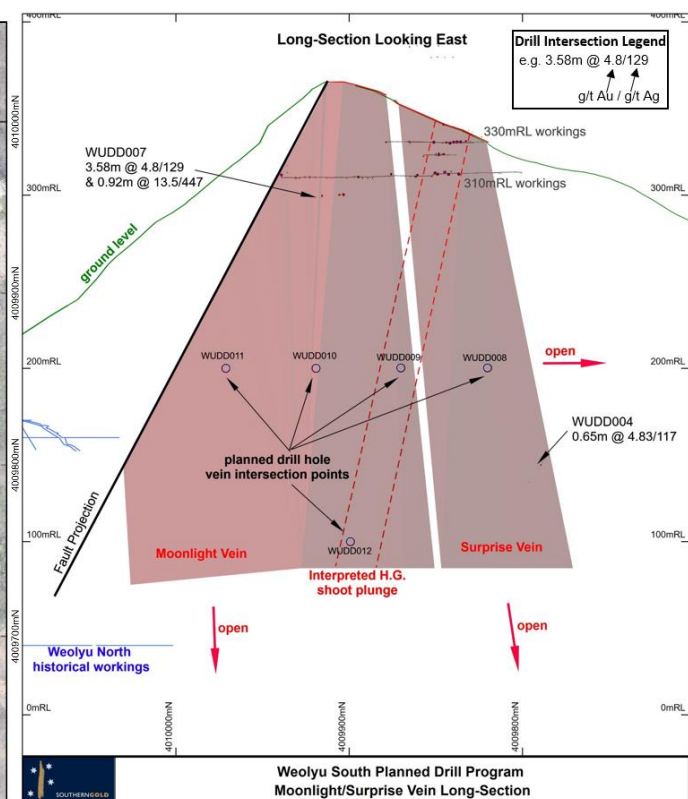


Figure 3 - Long-section view of Weolyu Drill Plan

Aphae

The recent drilling at Aphae has demonstrated a coherent demagnetised zone (magnetite destruction) around the mineralised system. Available country wide government magnetic data is far too coarse to be utilised (1-2km line spacing), so a drone magnetic survey of the project area was planned and has commenced. Southern Gold is using industry standard survey gear owned by KIGAM (Korean Institute of Geoscience and Mineral Resources) and the data will be processed by Southern Geoscience Consultants. The survey area is shown in **Figure 4** and the lines will be flown at 50m spacing, with continuous readings obtained from a high-quality MagArrow magnetometer.

This survey should be able to map any continuation and trends of the demagnetised zone shown in **Figure 5** and therefore the mineralised system, which will inform the Round 2 drilling. As far as Southern Gold is aware, this is the first time that a company has flown an aeromagnetic survey with a resolution less than 1km line spacing, for mineral exploration applications in the country.

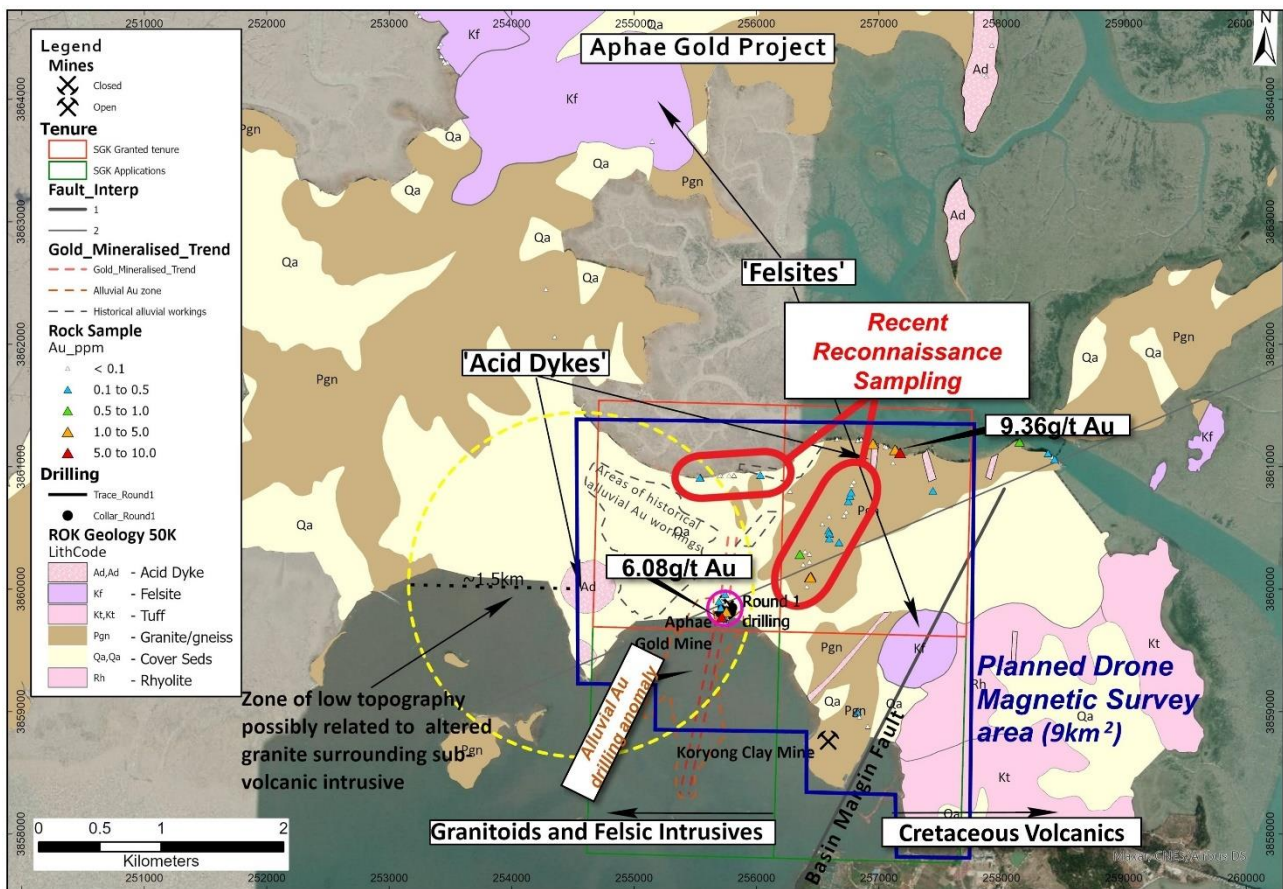


Figure 4 – Planned drone aeromagnetic survey area at Aphae over project geology, rock chips and alluvial gold zones



Photo 2 and 3 – Drone and magnetometer being set up (left) and in operation (right)

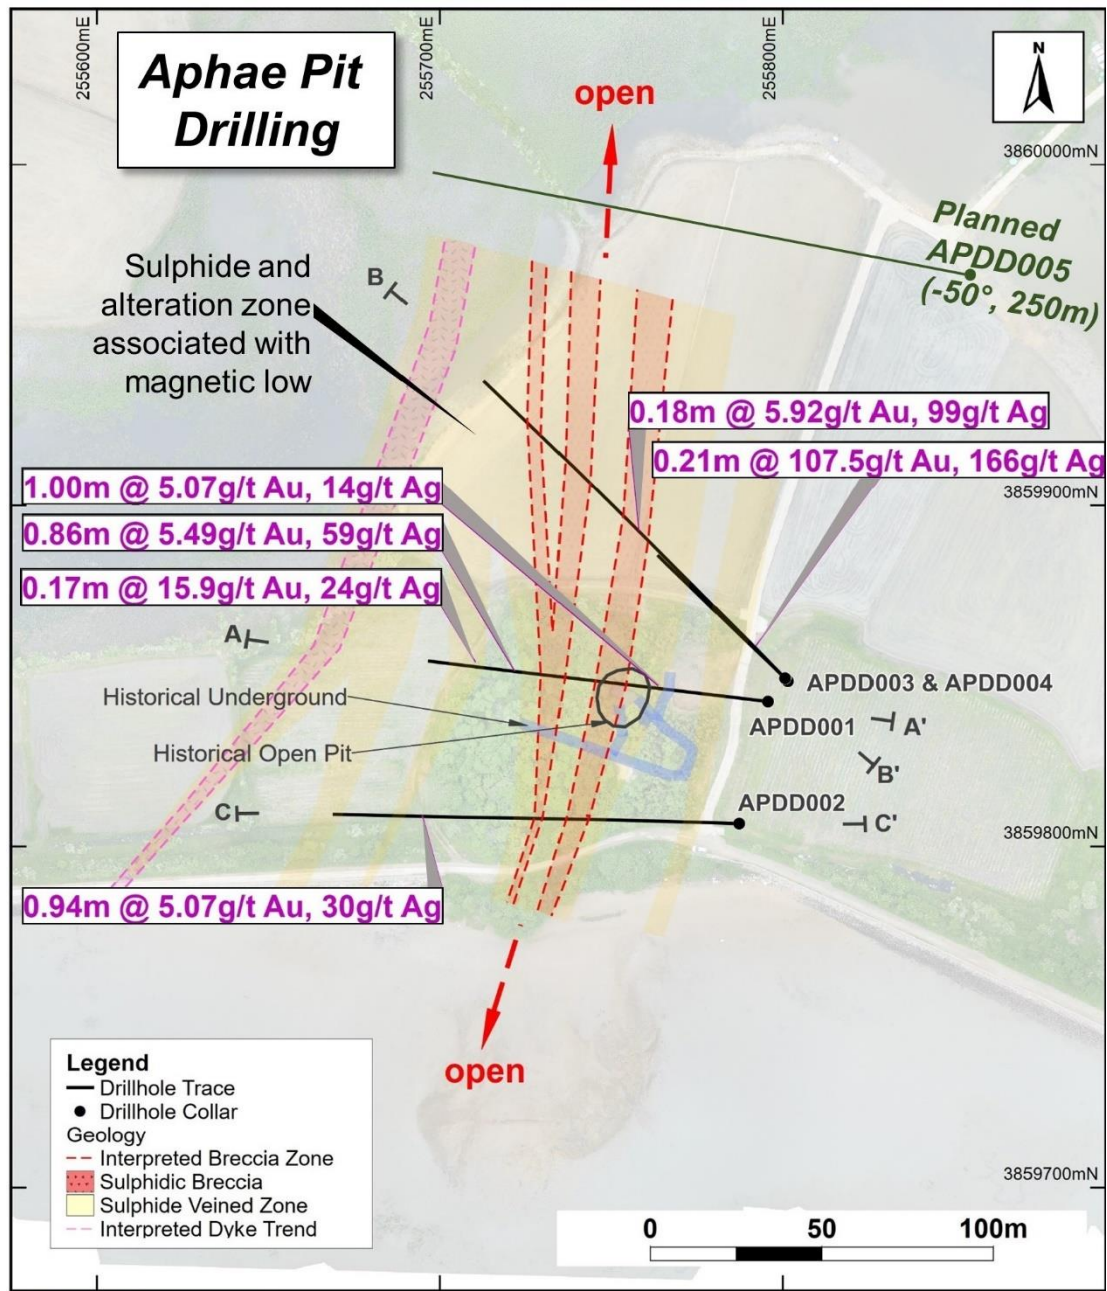


Figure 5 – Round 1 drilling at Aphae Pit with proposed next drill hole and location of magnetic low

Deokon

Reconnaissance traversing and sampling was conducted at Deokon and float and outcrop veined structures were located to the NNW of the Thorn Zone (**Figures 6 and 7**). This work extends the total known strike extent of the Golden Surprise Structural Corridor by 440m to 1.1km. The structure remains open to the north and south. Follow-up extensional (reconnaissance) and infill traversing and associated rock sampling, structural measurements and observations are being completed.

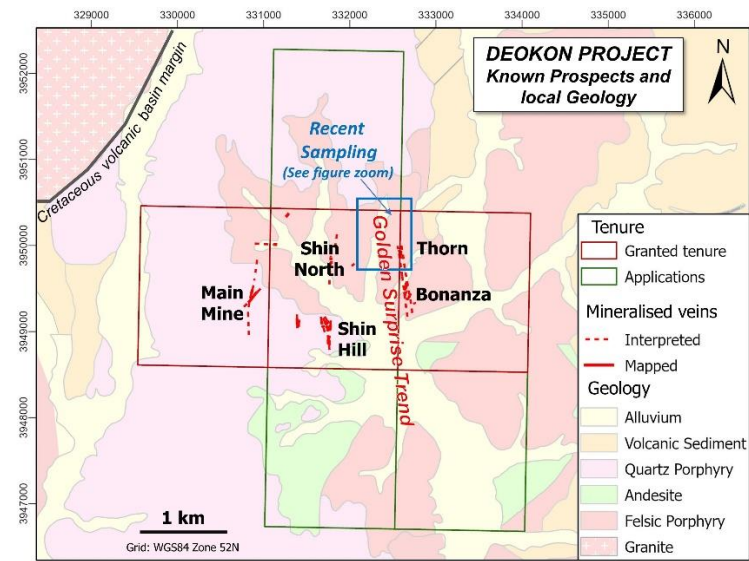


Figure 6 – Deokon Regional Context Map

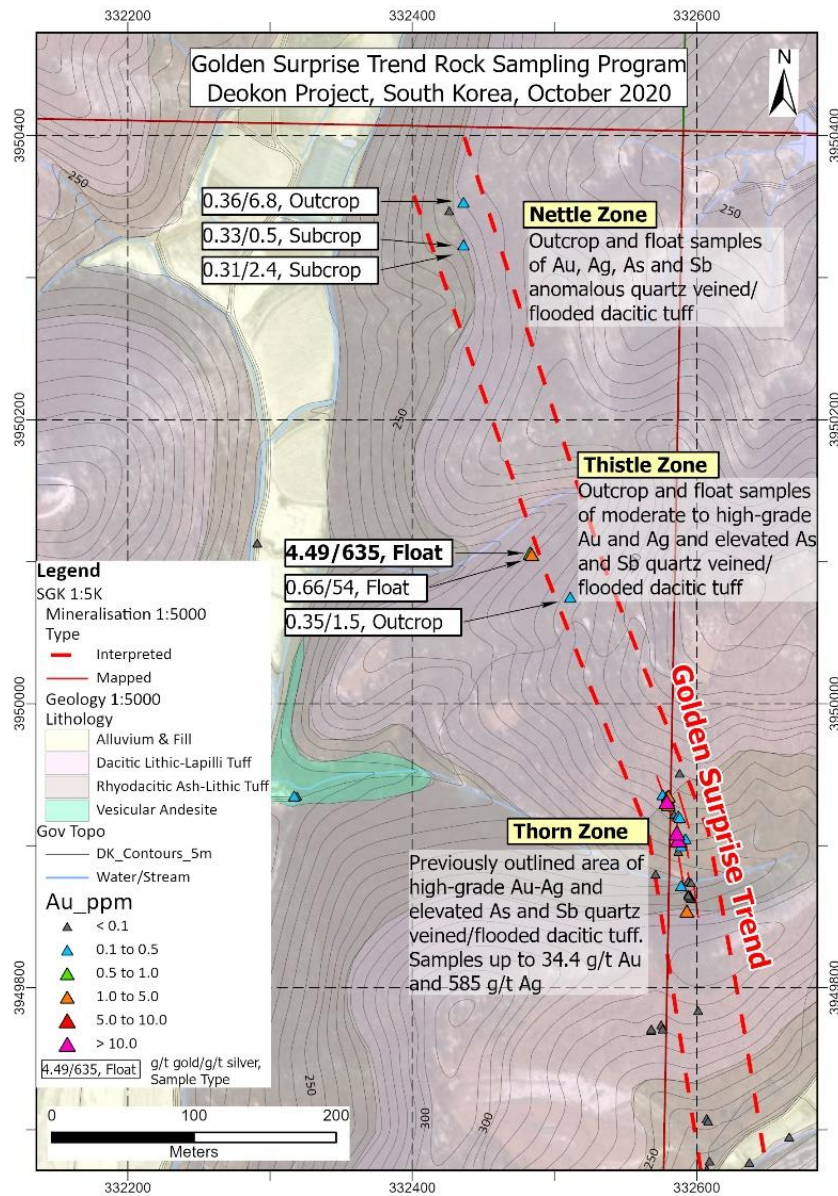


Figure 7 – Recent reconnaissance sampling extending the Golden Surprise Trend further north

Sample No	Sample Type	Au g/t	Ag g/t	As ppm	Sb ppm	Easting	Northing	Elevation
KRS206591	Float	4.49	635	3040	83	332484	3950105	260

Table 1 - Significant results (>2 g/t Au) from sampling at Deokon.



Photo 4 – Float at Thistle Zone, KRS206591.
4.49g/t gold, 635g/t silver, 3040ppm arsenic,
83ppm antimony, low (<30ppm) base metals.



Photo 5 – Outcrop from Nettle Zone, KRS206665.
0.36g/t gold, 6.8g/t silver, 1280ppm arsenic,
19ppm antimony, low (<20ppm) base metals.

Janghwal

A total of 20 samples were taken from at the Janghwal Project, with 13 from the historic small scale underground Jeonpung Mine (**Figure 8**). Peak assay results from the historical mine included 8.04g/t gold and 4.66g/t gold, complementing the previously reported grab sample of 6.7g/t gold. Anomalous bismuth (max 167ppm) is associated with high-grade gold results (**Table 2**). Mineralisation is hosted within biotite-rich gneiss in an ~70cm wide sericite-pyrite altered, meso-crystalline quartz \pm sulphide veined, limonite-hematite stained shear/fault zone.

Sample No	Sample Type	Au g/t	Ag g/t	As ppm	Bi ppm	Easting	Northing	Elevation
KRS206676	Outcrop	8.04	0.6	5	54	272290	3822754	6
KRS206677	Outcrop	4.66	0.6	11	167	272289	3822753	5
KRS206678	Outcrop	4.31	0.8	5	27	272288	3822752	5
KRS206680	Outcrop	2.40	0.05	4	7	272287	3822751	5

Table 2 - Significant results (>2 g/t Au) from sampling at Janghwal.

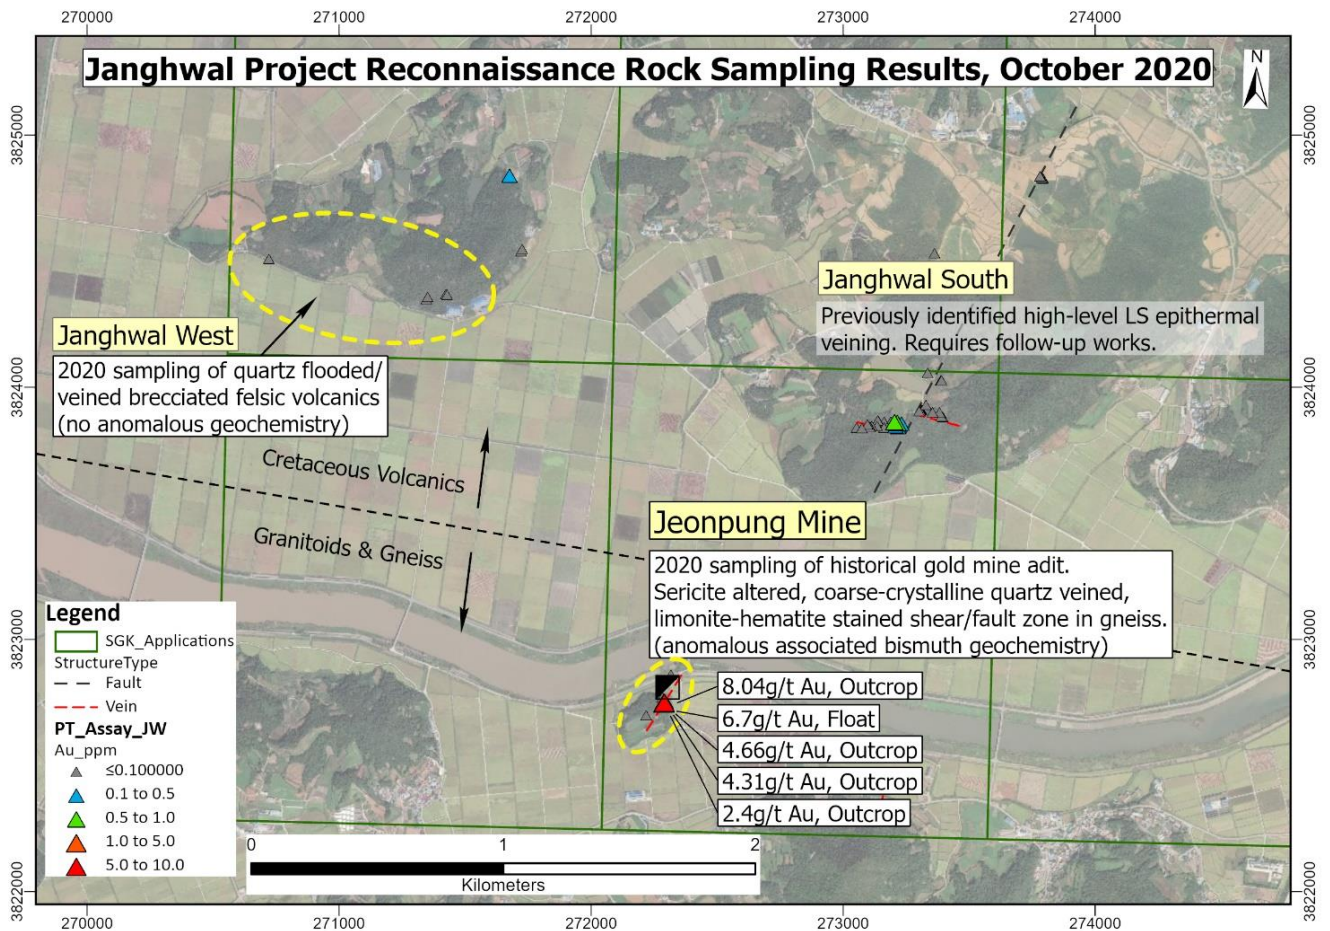


Figure 8 – Recent reconnaissance sampling at Janghwal



Photo 6 - Jeonpung Mine, Qtz-bt gneiss/schist hosted qtz vein with limonite-hematite oxidation, float. 6.7g/t Au, 1.6g/t Ag, 260ppm Bi, 273ppm Cu, 11ppm Pb, 146ppm W, 16ppm Zn. KRS206648.



Photo 7 - Jeonpung Mine, Qtz-bt gneiss/schist hosted qtz vein with limonite-hematite oxidation, outcrop. 4.66g/t Au, 0.6g/t Ag, 167ppm Bi, 52ppm Cu, 13ppm Pb, <10ppm W, 12ppm Zn. KRS206677.

Other activities

Reconnaissance sampling commenced at the Geum Mar Project to follow up the initial work earlier in the year. Orientation soil sample lines are also being completed across mineralised structures at Weolyu, Deokon, Daam, Dokcheon and Janghwal Projects to determine the best approach for

larger scale soil programs in the future that may assist drill targeting.

In addition, all regulatory compliance work is being completed on time and to the required standard amongst all the other exploration activities. Recent work was the rehabilitation of the drill sites at Shin Hill (Deokon Project) and Spider (Beopseongpo Project), which involved planting 128 and 562 trees respectively (**Photo 8 and 9**).



Photo 8 and 9 – Recent rehabilitation work at Spider, Beopseongpo

Next Stage of Drill Pipeline

The Dokcheon program is expected to be completed by mid-December. After the results of the drone magnetic survey are assessed the drill rig will move to the Aphae Project for a second follow up drill programme with further details to be announced shortly.

Authorised for release by Simon Mitchell, Managing Director of Southern Gold Limited.

Further Information:

Simon Mitchell

08 8368 8888

info@southerngold.com.au

Investor and Media Relations

Lexi O'Halloran

lexi@janemorganmanagement.com.au

Hole ID	Prospect	Easting	Northing	mASL	Dip	Grid Azi	Length (m)
DCDD001	Cheongyong	277107	3846530	63	-45	230	151.01
DCDD002	Cheongyong	277064	3846556	63	-45	230	drilling

Table 3 – Drill hole collar details at Dokcheon

Hole ID	Prospect	Easting	Northing	mASL	Dip	Grid Azi	Length (m)
WUDD008	Surprise-Mystery	400099	4009740	319	-51	37	340.06
WUDD009	Surprise-Mystery	400099	4009740	319	-44	30	330.80

Table 4 – Drill hole collar details at Weolyu

Related ASX Announcements

20180806 – ASX Tenements granted at Deokon, South Korea.
 20181002 – ASX High grade gold confirmed at Shin Adit, Deokon Project, South Korea.
 20190129 – ASX High grade gold-silver zones confirmed at Weolyu South Project, South Korea.
 20190403 – ASX 2019 South Korea Field Work Commences.
 20190527 – ASX Beopseongpo, Major Epithermal Target Defined.
 20190717 – ASX Deokon ‘Golden Surprise’ High Grade Au-Ag Discovery
 20190905 – ASX High-Grade Gold results Neungju Project
 20191029 – ASX Bonanza Drilling Commences
 20191210 – ASX Beopseongpo Drilling – Major Epithermal System Confirmed
 20200128 – ASX Deokon Scout Diamond Drilling Results
 20200128 – ASX Project Pipeline Extended From Project Generation Initiative
 20200316 – ASX Operations Update
 20200414 – ASX Two New Gold Mineralised Areas Confirmed: Geum-Mar and Daeam Valley
 20200525 – ASX Drilling Operations Update
 20200617 – ASX Drilling Operations Update – Mineralised Breccia at Aphae
 20200812 – ASX High Grade Gold and Silver confirmed at Aphae
 20200914 – ASX South Korean Operation Update
 20201029 – ASX September Quarterly Activities Report

Southern Gold Limited: Company Profile

Southern Gold Ltd is a successful gold explorer listed on the Australian Securities Exchange (ASX ticker "SAU"). Southern Gold owns 100% of a substantial portfolio of high-grade gold projects in South Korea that are largely greenfield epithermal gold-silver targets in the south-west of the country. Backed by a first-class technical team, including renowned geologist Douglas Kirwin, Southern Gold's aim is to find world-class epithermal gold-silver deposits in a jurisdiction that has seen very little modern exploration. Southern Gold also holds a 50% equity interest in a Joint Venture company operated by JV partner, London-listed Bluebird Merchant Ventures (BMV), that is looking to start gold production at the Kochang and Gubong projects. This JV interest is currently in a sale process.

Competent Person's Statements

The information in this report that relates to Exploration Results has been compiled under the supervision of Mr. Paul Wittwer (AIG, AusIMM). Mr Wittwer who is an employee of Southern Gold Limited and a Member of the Australian Institute of Geoscientists and the Australasian Institute of Mining and Metallurgy, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity he has undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for the Reporting of Mineral Resources and Ore Reserves. Mr Wittwer consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

Forward-looking statements

Some statements in this release regarding estimates or future events are forward looking statements. These may include, without limitation:

- Estimates of future cash flows, the sensitivity of cash flows to metal prices and foreign exchange rates;*
- Estimates of future metal production; and*
- Estimates of the resource base and statements regarding future exploration results.*

Such forward looking statements are based on a number of estimates and assumptions made by the Company and its consultants in light of experience, current conditions and expectations of future developments which the Company believes are appropriate in the current circumstances. Such statements are expressed in good faith and believed to have a reasonable basis. However, the estimates are subject to known and unknown risks and uncertainties that could cause actual results to differ materially from estimated results.

All reasonable efforts have been made to provide accurate information, but the Company does not undertake any obligation to release publicly any revisions to any "forward-looking statement" to reflect events or circumstances after the date of this presentation or ASX release, except as may be required under applicable laws. Recipients should make their own enquiries in relation to any investment decisions from a licensed investment advisor.

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	The nature of the samples and assay results in the body of this ASX Release that relate to new surface rock float samples not previously announced are within tenements Haenam 126-129, 138, 139, 148 and 149 at Janghwal under application by Southern Gold, the Aphae Project within granted tenements Muan 109 and 99 and tenements Muan 100 and 110 under application by Southern Gold, and the Deokon Project, within granted tenements Jeonju 60 & 70 held by Southern Gold. Surface reconnaissance rock chip sampling was taken based upon geological features relevant to the target style of mineralisation. Sample sites were chosen selectively to reflect geological features relevant to the target style of mineralisation.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Surface and underground reconnaissance rock chip samples are not considered representative and only used as an exploration tool to plan potential future representative sampling programs. Drill samples were geologically logged for lithology, mineralisation, alteration, veining, structure and also geotechnically logged. Sample intervals were chosen in order to separate different geological domains or features at appropriate boundaries and provide sufficient sample representivity, ranging from 0.1m to 1.4m in length.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report.</i>	Determination of mineralisation was achieved by geological logging of samples by an experienced SAU or consultant geologist or representative, with structural measurements taken where possible. Samples were geologically logged for lithology, mineralisation, alteration, veining, and structure. SAU mapping and rock sampling results has been used to inform the determination of mineralisation at an early stage of exploration.
	<i>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	Surface and underground reconnaissance rock chip samples are not considered representative and only used as an exploration tool to plan potential future representative sampling programs. HQ3 size (61.1mm diameter) Diamond drill core was obtained for logging and sampling.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i>	HQ3 triple tube Diamond drilling was completed to obtain drill core.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Core was measured and the recovery was calculated for each drill run.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Industry standard barrel configuration was utilized at all drill sites. No sample bias is expected where recoveries are good.

Criteria	JORC Code explanation	Commentary
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No sample bias is expected where recoveries are good. All samples reported have sufficient recovery unless otherwise stated. Where historical drilling may be reported in past reporting, it is not known if a relationship exists between sample recovery and grade, or if there is any bias present.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	No Mineral Resource estimation, mining studies or metallurgical studies have been conducted at this stage but samples have been logged with sufficient detail to use for this function.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i>	Geological logging was qualitative in nature. Structural logging was quantitative in nature. Slab photography of all surface reconnaissance rock samples was completed and core photography of all drill core was completed.
	<i>The total length and percentage of the relevant intersections logged.</i>	No surface sampling reported in this release refers to sample intervals. Sampling conducted is reconnaissance in nature. The entire drill core from all holes was logged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Sampling was completed by cutting the core in half 1cm to the right of the orientation line when viewed in the downhole direction and sampling the half without the orientation line. Only zones likely to have a chance of mineralization based on geological observation were sampled.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i>	Samples were taken dry. Rock chip and grab samples had representative slabs cut and all of the remaining offcuts of each sample were sent for assay.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	All samples were sent to SGS laboratory in South Korea for sample preparation. SGS is an ISO/IEC 17025:2005 certified laboratory. Samples were dried and crushed to 75% passing 2mm, split to 1,000g, then pulverised to 85% passing 150 microns. Pulp samples are then split using a micro-riffle splitter to produce 500g of pulp reject, 250g of pulp duplicate, and 250g of sample for shipment to Intertek Laboratories in Jakarta, Indonesia. The nature of the laboratory preparation techniques is considered 'industry standard' and appropriate.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	The crushing stage unit is a Rocklabs Smart Boyd-RSD Crusher capable of over 5kg primary sample in one load, with rotating sample divider (RSD) ensuring single pass crushing, producing representative coarse sample split sent to grinding, typically up to 1,000g. Coarse rejects are retained for each sample. The grinding stage unit is an Essa LM2 and utilises a large grinding bowl (1,600g) ensuring single pass grinding of the coarse split. The 1kg of pulp material is then split using a micro-riffle splitter to produce 500g of pulp reject, 250g of pulp duplicate, and 250g of sample for shipment to Intertek Laboratories in Jakarta, Indonesia. Pulp rejects are retained for each sample. These procedures are considered appropriate to maximise representivity of samples, for first pass exploration.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Given the nature of the reconnaissance rock sampling, no QAQC samples were considered appropriate for the reporting of early stage Exploration Results. No field core duplicates were taken, just splits in the sample preparation phase. Sampling is considered representative of the in-situ material.

Criteria	JORC Code explanation	Commentary
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample size is considered appropriate for the target style of mineralisation, the requirements for laboratory sample preparation and analyses, for early stage Exploration Results.
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<p>Pulps from drill core samples (typically 200 to 400g) prepared by SGS in South Korea are sent through registered airfreight (e.g. DHL) to Intertek Laboratories in Jakarta, Indonesia, for Au and multielement analysis. Intertek is an ISO/IEC 17025:2005 certified laboratory.</p> <p>Gold was analyzed on a 50g charge using fire assay fusion with an atomic absorption spectroscopy finish (Intertek method FA51/AA). Detection limit range is 0.01g/t to 50g/t Au. Samples returning a result above 50g/t Au were re-analysed to ore-grade using a 50g charge using fire assay fusion with a gravimetric finish (Intertek method FA50/GR200) with lower detection limit of 3g/t Au.</p> <p>A 35 multi-element suite was analyzed on a 0.5g pulp sample split using aqua regia digest with an inductively coupled plasma – optical emission spectroscopy (ICP-OES) finish (Intertek method AR005/OE01).</p> <p>Silver was analysed as part of the multi-element aqua-regia digest ICP-OES (method AR005/OE01), with an upper detection limit 200g/t Ag. Samples returning a result above 200g/t Ag were re-analysed to ore-grade using Four Acid Digestion and AAS (method 4AH2/AA) with a lower detection limit of 5g/t Ag.</p> <p>Copper, lead and zinc were analysed as part of the multi-element aqua-regia digest ICP-AES (method AR005/OE01), with an upper detection limit of 1%. Samples returning a result above 1% were re-analysed to ore-grade with Four Acid Digestion and OES (method 4AH2/OE201) with a lower detection limit of 2ppm.</p> <p>The nature of the laboratory assay sampling techniques is considered ‘industry standard’ and appropriate.</p> <p>For any historical KORES, where mentioned, drill core and underground channel samples, the nature, quality and appropriateness of the sample assaying procedures are unknown.</p>
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	Magnetic susceptibility measurements were completed on all drill core using a TERRA KT-10R V2 hand-held magnetic susceptibility meter. Scanning mode and full core mode were used.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	<p>For reconnaissance rock samples, lab duplicates analysis and standard analysis (laboratory checks) are investigated to check for potential errors. If a potential error is discovered, it is investigated, and the samples are potentially re-run with another laboratory.</p> <p>Drilling QAQC samples involved 1 blank and 1 certified ore-grade epithermal reference standard, as well as one pulp duplicate and one coarse split duplicate submitted per every 20 samples (i.e. 16 samples and 4 QAQC samples) selectively inserted in the sequence. These were reviewed to ensure testing was accurate. In addition, lab duplicates and lab standard analysis (laboratory checks) are investigated to check for potential errors. If a potential error is discovered, it is investigated and the samples are potentially re-run with another laboratory.</p>

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Assay data has been verified by the geologist in charge of the program and a second Southern Gold employee. Significant intersections/results in this ASX Release have been verified by the Competent Person. Where referenced, any historical KORES data cannot be independently verified.
	<i>The use of twinned holes.</i>	No twinned holes have been completed as part of this ASX Release, as the program is at an early stage.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Primary SAU data is recorded into digital spreadsheets or hand-written documents. All original hardcopy logs and sample reference sheets are kept for reference. Digital data entry is validated through the application of database validation rules and is also visually verified by the responsible geologist through GIS and other software. Any failures are sent back to the responsible geologist for correction and re-submission. Data is stored in a SQL database managed through an external consultant with proprietary software. The extracted database is backed up as part of the Company server backup protocol. Historical data exists as digital copy format of original Korean logs and transcripts but cannot be validated. It has been transcribed into SAU databases where applicable, and appropriately tagged as such.
	<i>Discuss any adjustment to assay data.</i>	No adjustments are made to the assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	SAU surface reconnaissance rock sample XYZ locations are determined with a handheld Garmin 64s GPS producing levels of accuracy +/- 3m. Drill collar XYZ locations are surveyed before hole closure with a DGPS producing levels of accuracy +/- 10mm.
	<i>Specification of the grid system used.</i>	The grid system used is Universal Transverse Mercator (WGS84), Zone 52 S (Northern Hemisphere).
	<i>Quality and adequacy of topographic control.</i>	South Korean Government 5m contour data is available and deemed suitable for topographic control on early stage exploration campaigns.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	SAU surface rock chip and grab sampling intervals were based on geological boundary and veining where possible. On occasion multiple intervals within a single vein have also been taken to identify internal variability. Holes were designed nominally at 50m spacing along strike and 50-100m down dip on section
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	No Mineral Resource or Ore Reserve have been estimated in this ASX Release.
	<i>Whether sample compositing has been applied.</i>	No sample compositing has been applied.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Rock chip and grab sampling has been conducted in a selective manner targeting mineralised structures. Given the early stage of exploration, chip and representative grab samples across veins are considered appropriate and unbiased at this stage of the project. Drill holes are generally designed to be as perpendicular as possible across targets. In cases where this was not possible, true widths have been stated.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The relationship between sampling orientation and the orientation of key mineralised structures in rock sampling is not considered to have introduced any material sample bias, as discussed above. No sample bias is expected in the drilling.

Criteria	JORC Code explanation	Commentary
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	<p>From the point of sample generation to laboratory, samples (and reject returns) are under the full security and Chain of Custody of the Company. This is done by the following procedures:</p> <p>Post on-site logging and processing, samples are transported to the Company's shed facilities under the direct supervision of a Company representative.</p> <p>Samples are further processed for dispatch by Company representatives under guidance of the Competent Person. Bagged samples are secured by ties and delivered by a Company representative to the sample preparation laboratory. The preparation laboratory sends pulp samples directly to the assay laboratory for analysis via registered courier (DHL). The samples are received at the assay laboratory by a laboratory representative. All rejects are returned under courier service and stored in the Company's secure lock-up long-term core storage facility.</p>
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No external or independent reviews have been undertaken. Southern Gold's sampling procedure conforms to industry standard practice and each assay program is reviewed internally for any discrepancies.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The granted tenements Yeongdong 66 and 67 at the Weolyu Project, Yeongam 116 at the Dokcheon Project, the Deokon granted tenements Jeonju 60, 70 and 80 and Aphae granted tenements Aphae 99 and 109 are held by Southern Gold Korea, a fully owned subsidiary of Southern Gold. No known material issues exist with third parties at this time. There are no native title interests in Korea. It is a generally accepted requirement that mineral title holders gain the consent of local landowners and residents before undertaking any major exploration activity, such as drilling.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i>	<p>Upon successful conversion to an Exploration Right, the holder has 3 years to submit Exploration Results and have an Extraction Plan authorised. An application can be made to extend this period by 1 year. The Extraction Plan is submitted to the Local Government and requires approvals from a number of stakeholders. The term of an Extraction Right is 20 years. This can be extended upon application, provided all statutory requirements have been met over the life of the mine. From the date the Extraction Plan is approved, the title holder has a 3-year period in which mine production must commence. During this 3-year period, the title holder must make a minimum level of investment on plant and mine infrastructure in the amount of KRW100 million (~AUD\$120,000) and meet certain minimum annual production levels, which are dependent on the commodity being mined.</p> <p>There are no known impediments to obtaining a license to operate.</p>
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The Deokon Project has historically had small scale mining and adits excavated by the Deokon Mining Company from 1958 to 1980. An unknown party held the license and sporadically operated the mine from 1997 to ~2010. Historical records are not extensive and considered unreliable. The Korean government agency KORES and its predecessor KMPC conducted diamond drilling at Deokon

Criteria	JORC Code explanation	Commentary
		<p>from 1977 to 1979 with a final round in 1982. 14 holes were drilled at the Main Adit and 2 holes at the Shin Adit. During 1981, the KMPC conducted a Self-Potential (SP) geophysical survey with original data no located. KMPC conducted an underground sampling program along the drives in 1983</p> <p>At the Aphae Project, two historical drill holes were drilled by KIGAM during 1980, but their locations cannot be confidently identified. One of the holes was recorded to intersect 7 g/t Au and 104 g/t Ag over a 0.5m interval. This intersect is inferred to be vertically below the historical workings. area to be initially mined during the early 1930's through to 1945 by the Japanese occupation period. 110kg of gold was reportedly produced from Aphae (KIGAM resources of Korea). Additionally, surrounding alluvial resources have also been exploited but production figures are unknown. Investigations by KORES (KORES Reports, 1970 & 1980) states that the hydrothermal breccia and vein hosted gold-silver mineralisation was found to outcrop for over 100m striking 010NE dipping at 80 degrees to the SE. It is reported that the width is around 30m and peak assays obtained are 8.9g/t Au and 155 g/t Ag from the base of the now flooded pit. Surrounding the Aphae mine is a global alluvial gold resource of 8,025 troy ounce of gold over 126,400 sq meters averaging 0.14gm/cubic meter. The Aphae gold mine is unlikely to be the sole source of this alluvial gold field.</p> <p>The Weolyu Project has historically had mining and adits excavated at the North Weolyu Mine, located in SAU's southern granted license (Yeongdong 67) and operated up to mid-1990's. Apart from small scale adits excavated by unknown parties and historical drilling by KORES and Asiatic Gold Ltd at Weolyu South, no other details of previous work in the vicinity is known to the best of our knowledge. A number of other small-scale historical workings were located in the Yeongdong District but production records have not been able to be located.</p> <p>The Janghwal Project has at least one small scale adit excavated by unknown parties but production records have not been able to be located. No other details of previous work in the vicinity is known to the best of our knowledge.</p> <p>Historical records in general are not extensive and considered unreliable. In the 1990's, Ivanhoe Mines conducted brief field reconnaissance in each area. No other details of previous work in the vicinity is known to the best of our knowledge.</p>
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	Exploration is targeting low- to high-sulphidation style epithermal precious metal (Au, Ag) mineralisation in Cretaceous volcanic rocks of the Korean Peninsula.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i>	A summary of significant results above 2g/t Au are summarized in the tables in the body of the text.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in meters) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>No information has been excluded from this release to the best of Southern Gold's knowledge.</p>
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	<p>No weighting averaging techniques, maximum and/or minimum grade truncations, or cut-off grades were used within this release for rock sampling. The results reported are reconnaissance rock samples and the above techniques do not apply to these early stage exploration samples.</p> <p>No drill assays were reported.</p>
	Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	All rock sample assay values reported are raw assays and none of the reported data has been cut or adjusted.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalent values have been reported in this ASX Release.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.	No mineralisation widths or intercepts are reported in this report as the sampling reported is early stage reconnaissance exploration grab sampling.
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	With regard to surface sampling it is not necessarily known what the relationship between mineralisation widths is as no drilling was undertaken.
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	No downhole widths for surface sampling have been reported in this release as the sampling reported is early stage reconnaissance exploration grab sampling.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate maps, sections, and tables for new results have been included in this ASX Release.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	<p>Not all sample assay data has been included in this report as it is not considered material beyond the representatively reported high and low grade results presented in the main body of this ASX Release. Gold results reported range from <0.01g/t to 8.04g/t Au.</p> <p>Previous information is also referenced in the company's ASX reports with details provided in this report.</p>

Criteria	JORC Code explanation	Commentary
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	To the best of our knowledge, no meaningful and material exploration data has been omitted from this ASX Release.
<i>Further work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	Further drilling, surface sampling and a drone magnetic survey is being planned at Aphae as well as further surface sampling at Deokon, Janghwal and Geum Mar.
	<i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Refer to the Figures and tables in the main body of this ASX Report that show where new drilling and sampling has been conducted.