

ASX Announcement 23 July 2019

# First Strong Drill Results Confirm Additional Hanging-wall Lodes Apollo Hill Gold Deposit

### **Highlights:**

- Significant hanging-wall intersections include:
  - 5m @ 5.39g/t Au from 96m within 16m @ 1.80g/t Au from 85m AHRC0164
  - 4m @ 3.34g/t Au from 50m AHRC0178
  - 14m @ 1.02g/t Au from 110m AHRC0176
- These intersections are centred 200m south of previous high grade hanging-wall intersections including 13m @ 5g/t Au from 74m (AHRC0136)<sup>b</sup>, effectively extending the strike potential of this style of mineralisation to 400m.
- Drilling remains open.
- Drilling is currently focussing around high grade intersections further north (ASX Announcements 16 April 2019, 29 April 2019 and 2 May 2019<sup>b</sup>).
- Importantly, intersections sit outside the current Mineral Resource of 20.7 million tonnes grading 1.0 g/t Au for 685,000 ounces of gold<sup>1</sup> and highlight the potential to increase the scale and quality of the resource.
- Assay remain pending for 37 holes and 4,250m of drilling and the program continues.



<sup>1</sup>Details of the Mineral Resource breakdown by category are presented in Table 1a (page 8 of this document) along with the associated Competent Persons statement and details of the original ASX report that this information was originally published in.



Saturn Metals Limited (ASX: STN) ("Saturn" or "the Company") is pleased to announce additional positive drill results from holes 1-17 of the planned 100-hole, 10,000m RC drilling campaign currently underway at its 100%-owned Apollo Hill Gold Project, near Leonora in the Western Australian goldfields.

Drilling and assays have outlined several hanging-wall splays some 200m south of previous higher-grade intersections. These results suggest the potential for hanging-wall mineralisation over a strike length of at least 400m. Drilling continues to the north and south, with assays pending for multiple holes.

Figure 1 illustrates results in geological cross-section for more complete context. Figure 2 shows results in plan view.

In addition, other significant results have been returned from resource drilling on the Apollo Hill main lode including:

- 10m @ 1.30g/t Au from 136m within 23m @ 0.73g/t Au from 123m AHRC0157;
- 9m @ 1.00g/t Au from 131m within 25m @ 0.69g/t Au from 123m AHRC0159;
- 40m @ 0.49g/t Au from 48m AHRC0175.

Table 1 below details all the significant results reported in this round of assays. Table 2 lists the reported hole details.

Saturn Managing Director Ian Bamborough said: "These results represent a strong start to our current drilling program. Drilling of these shallow hanging-wall zones is being undertaken at sufficient density to allow intersections to be included in our upcoming resource modelling exercise. Drilling continues and is currently focusing around higher grade intersections reported in our last program including 10m @ 5.78g/t Au from 46m in hole AHRC0127b. Assays remain pending for multiple holes and we look forward to reporting on our progress".

IAN BAMBOROUGH **Managing Director Saturn Metals Limited** 08 6424 8695

**Associate Director Media and Capital Partners** 0411 479 144

**LUKE FORRESTAL** 



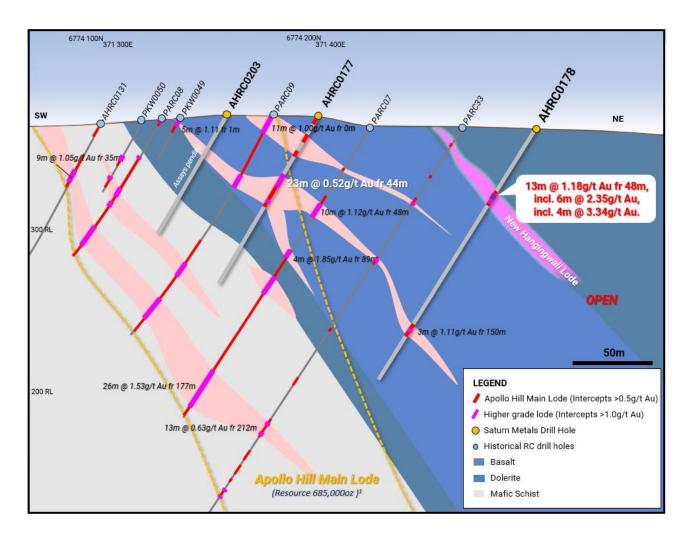


Figure 1 RC drill results – simplified geological cross-section highlighting the location of new material intersections in the hanging-wall to the main Apollo Hill resource zone. Grid GDA94Z51. b This document contains exploration results and historic exploration results as originally reported in fuller context in Saturn Metals Limited ASX Announcements (16 April 2019, 29 April 2019 and 2 May 2019b), Quarterly Reports and Prospectus, - as published on the Company's website. Saturn Metals Limited confirms that it is not aware of any new information or data that materially affects the information on results noted.



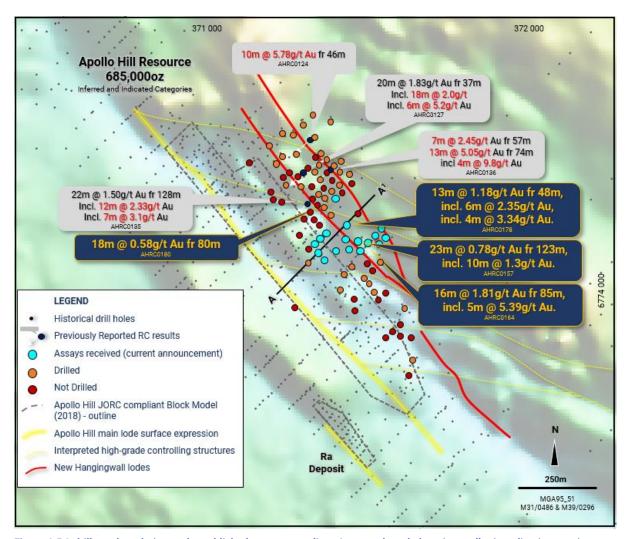


Figure 2 RC drill results relative to the published resource outline. Improved grade hanging-wall mineralisation continues to develop.

(1) (b) This document contains exploration results and historic exploration results as originally reported in fuller context in Saturn Metals Limited ASX Announcements (19 November 2018, 16 April 2019, 29 April 2019 and 2 May 2019), - as published on the Company's website. Saturn Metals Limited confirms that it is not aware of any new information or data that materially affects the information on results noted.



| AHRC0164 Inc. Inc. Inc. Inc. Inc. Inc. Inc. Inc.   | Hole #      | Down Hole Width (m) | Grade g/t Au | From (m) | Lode           |
|--|-------------|---------------------|--------------|----------|----------------|
| A  | AHRC0164    | 16                  | 1.81         |          | Hanging-wall   |
| AHRC0157   | Inc.        | 5                   |              |          |                |
| AHRC0157   |             |                     |              |          |                |
| Name   | ALIDO0157   |                     |              |          |                |
| Inc.   10  | AHRCU157    |                     |              |          | Main           |
| AHRC0178 Inc. 6 2.35 48 Hanging-wall Inc. 6 0.67 150 Inc. 6 0.67 150 Inc. 3 1.11 150 Inc. 12 0.86 146 Inc. 12 0.86 146 Inc. 10 1.00 146 Inc. 12 0.86 146 Inc. 10 1.00 146 Inc. 10 1.00 146 Inc. 10 1.00 146 Inc. 10 1.00 Inc. 12 Inc. 10 1.00 Inc. 13 Inc. 10 Inc. 12 Inc. 13 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 14 Inc. 15 Inc. 13 Inc. 14 Inc. 13 Inc. 14 Inc. 13 Inc. 14 Inc. 15 Inc. 15 Inc. 16 Inc. 13 Inc. 16 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 14 Inc. 12 Inc. 13 Inc. 14 Inc. 12 Inc. 11 Inc. Inc. 11 Inc. 11 Inc. Inc. 11 Inc. Inc. 11 Inc. 11 Inc. Inc. 11  | Inc         |                     |              |          |                |
| AHRC0178   | IIIC.       |                     |              |          |                |
| Inc.   4   3.34   50     Inc.   6   0.67   150     Inc.   3   1.11   150     Inc.   3   1.11   150     33   0.47   146     Inc.   12   0.36   146     Inc.   10   1.00   146     Inc.   10   1.00   176     And   3   1.00   176     Inc.   9   1.00   131     Inc.   9   1.00   131     Inc.   18   0.97   70     Inc.   18   0.97   70     Inc.   18   0.97   70     Inc.   13   0.96   120     Inc.   14   1.26   70     Inc.   13   0.95   61     Inc.   14   1.26   70     Inc.   14   1.26   70     Inc.   14   1.26   70     Inc.   14   1.26   70     Inc.   14   1.27   116     Inc.   6   0.95   26   Main     Inc.   6   0.95   26   Main     Inc.   6   0.95   26   Main     Inc.   6   0.95   38   Hanging-wall     Inc.   11   0.97   64     Inc.   18   0.58   80   Hanging-wall     Inc.   5   1.43   9.44     Inc.   5   0.56   0   Main     Inc.   6   1.51   116     Inc.   6   0.95   38   Hanging-wall     Inc.   5   0.56   0   Main     Inc.   6   1.00   44     Inc.   7   1.03   39     Inc.   6   1.00   44     Inc.   7   1.03   39     Inc.   6   1.00   44     Inc.   7   1.03   39     Inc.   7   1.03   39     Inc.   6   1.00   44     Inc.   7   1.03   39     Inc.   7   1.03   39     Inc.   6   1.00   44     Inc.   7   1.00   44     Inc.   7   1.00   44     Inc.   6   1.00   44     Inc.   7   1.00   44     Inc.   10      | AHRC0178    |                     |              |          | Hanging-wall   |
| Inc.   3   | Inc.        |                     |              |          |                |
| Inc.   3   | Inc.        |                     |              |          |                |
| AHRC0171   |             |                     |              |          |                |
| 10   |             |                     |              |          | Honging well   |
| Inc.   12  | AHRCUITI    |                     |              |          | Hallyllig-wall |
| Inc.   10   1.00   146   And   3   1.00   176   And   1.00   1.23   Main   Inc.   9   1.00   131   And   1.11   20   And   40   40   44   40   40   44   40   40   44   40   And   40   44   40   And   4   | Inc.        |                     |              |          |                |
| AHRC0175  Inc.  9  1.00  131  AHRC0175  7  0.28  0  40  1.11  20  40  40  0.49  48  Inc.  18  0.97  70  18  26  0.56  107  Inc.  13  0.96  108  Inc.  13  0.96  109  Inc.  4  28  0.69  0  Hanging-wall  Inc.  6  2.5  18  Inc.  4  1.26  70  Inc.  4  1.26  70  Inc.  4  1.26  AHRC0179  6  0  AHRC0180  Inc.  11  0.97  64  11  0.97  64  11  0.97  64  AHRC0180  Inc.  7  1.03  39  Inc.  AHRC0177  5  0.95  0.95  0.95  0.95  0.95  0.96  0.95  0.96  0.96  0.96  0.97  0.96  0.97  0.96  AHRC0180  Inc.  AHRC0180  Inc.  AHRC0181  Inc.  AHRC0183  Inc.  AHRC0184  Inc.  AHRC0185  Inc.  AHRC0186  Inc.  AHRC0187  Inc.  AHRC0187  Inc.  AHRC0188  AHRC0188  AHRC0189  Inc.   |             |                     |              |          |                |
| Inc.   9   | And         |                     | 1.00         |          |                |
| AHRC0175  7  |             |                     |              |          | Main           |
| A  |             |                     |              |          | м:             |
| Inc.   18   0.97   70   70   16   16   17   128   17   128   18   18   17   18   18   18   18   1  | AHRC01/5    |                     |              |          | Main           |
| Inc.   18  |             |                     |              |          |                |
| Inc.   S   | Inc         |                     |              | 70       |                |
| S  |             |                     |              |          |                |
| Inc.   13  |             |                     |              |          |                |
| Inc.   |             |                     |              |          |                |
| AHRC0176 Inc.    10  |             |                     |              |          |                |
| Inc.   6   |             |                     |              |          |                |
| Inc.   13   0.55   61  |             |                     |              |          | Hanging-waii   |
| Inc.   | IIIC.       |                     |              |          |                |
| 14   | Inc.        |                     |              |          |                |
| AHRC0179    Columb   |             |                     |              |          |                |
| Color  |             |                     |              |          |                |
| Inc.   11  | AHRC0179    |                     |              |          | Main           |
| AHRC0180  AHRC0180  AHRC0181  AHRC0181  Inc.  7  1.03  28  0.44  71  Inc.  5  1.43  AHRC0177  5  0.50  23  23  0.52  44  1.00  AHRC0158  Inc.  6  1.00  AHRC0158  20  0.23  85  1  0.64  AHRC0160  AHRC0160  AHRC0161  AHRC0161  AHRC0161  AHRC0162  7  0.50  0.87  AHRC0162  AHRC0162  7  0.50  87  1  0.81  AHRC0188  AHRC0160  AHRC |             |                     |              |          |                |
| AHRC0180     18     0.58     80     Hanging-wall       4     1.18     112     128       AHRC0181     9     0.95     38     Hanging-wall       1nc.     7     1.03     39       28     0.44     71     71       Inc.     5     1.43     94       AHRC0177     5     0.56     0     Main       5     0.50     23     23       23     0.52     44     44       20     0.23     85       1     0.64     117       AHRC0158     2     0.96     65     Main       AHRC0160     2     0.87     24     Hanging-wall       AHRC0161     2     2.29     11     Hanging-wall       AHRC0162     1     0.91     59     Hanging-wall       7     0.50     87       1     0.81     118   | inc.        |                     |              |          |                |
| AHRC0181   | AHRC0180    |                     |              |          | Hanging-wall   |
| AHRC0181 9 0.95 38 Hanging-wall  Inc. 7 1.03 39  28 0.44 71  Inc. 5 1.43 94  AHRC0177 5 0.56 0  AHRC0177 5 0.50 23  23 0.52 44  Inc. 6 1.00 44  20 0.23 85  1 0.64 117  AHRC0158 2 0.96 65  AHRC0160 2 0.87 24 Hanging-wall  AHRC0161 2 2.29 11 Hanging-wall  AHRC0162 1 0.91 59  AHRC0162 7 0.50 87  AHRC0160 7 0.50 87  1 0.81 118   | 71111100100 |                     |              |          | agga           |
| Inc. 7 1.03 39   |             |                     |              |          |                |
| 10c.   28   0.44   71   71   71   71   72   73   74   75   0.56   0   74   75   75   0.56   0   75   75   75   75   75   75   75   | AHRC0181    |                     |              |          | Hanging-wall   |
| Name   | Inc.        |                     |              |          |                |
| AHRC0177  5 0.56 0  5 0.70 14  5 0.50 23  23 0.52 44  1nc. 6 1.00 44  20 0.23 85  1 0.64 117  AHRC0158 2 0.96 65  AHRC0160 2 0.87 24 Hanging-wall  AHRC0161 2 2.29 11 Hanging-wall  AHRC0162 1 0.91 59 Hanging-wall  AHRC0162 7 0.50 87  1 0.81 118  |             |                     |              |          |                |
| S  |             |                     |              |          | Main           |
| S  | ATINGU1//   |                     |              |          | iviaiii        |
| 10c.   Color   |             |                     |              |          |                |
| 20   0.23   85     1   0.64   117  |             | 23                  | 0.52         | 44       |                |
| 1  | Inc.        |                     |              |          |                |
| AHRC0158         2         0.96         65         Main           AHRC0160         2         0.87         24         Hanging-wall           AHRC0161         2         2.29         11         Hanging-wall           AHRC0162         1         0.91         59         Hanging-wall           7         0.50         87           1         0.81         118   |             |                     | 0.23         | 85       |                |
| AHRC0160         2         0.87         24         Hanging-wall           AHRC0161         2         2.29         11         Hanging-wall           AHRC0162         1         0.91         59         Hanging-wall           7         0.50         87           1         0.81         118   | AUDC0150    |                     |              |          | Main           |
| AHRC0161         2         2.29         11         Hanging-wall           AHRC0162         1         0.91         59         Hanging-wall           7         0.50         87           1         0.81         118   | AHRC0160    |                     | 0.90         |          |                |
| AHRC0162 1 0.91 59 Hanging-wall 7 0.50 87 1 0.81 118   |             | 2                   |              |          |                |
| 7 0.50 87<br>1 0.81 118  | AHRC0162    |                     | 0.91         | 59       | Hanging-wall   |
|  |             |                     |              |          |                |
|  |             |                     |              |          |                |
| AHRC0163 10 0.52 14 Hanging-wall   | AHRC0163    |                     | 0.52         | 14       | Hanging-wall   |
| 2 0.97 39<br>7 0.69 73   |             |                     |              |          |                |
| 1 0.83 97  |             |                     | 0.09         | 97       |                |
| AHRC0173 4 1.00 58 Main  | AHRC0173    |                     |              |          | Main           |
| 20 0.37 75   |             |                     | 0.37         | 75       |                |
| 18 0.42 102  |             | 18                  | 0.42         | 102      |                |
| Inc. 9 0.73 111  | Inc.        |                     | 0.73         | 111      |                |

Table 1 - Significant drill results.



| Hole #   | Easting GDA94_Z51 | Northing GDA94_Z51 | RL (m) | Dip° | Azi° | Depth (m) |
|----------|-------------------|--------------------|--------|------|------|-----------|
| AHRC0157 | 371525            | 6774246            | 356    | -60  | 225  | 170       |
| AHRC0158 | 371492            | 6774217            | 356    | -60  | 225  | 145       |
| AHRC0159 | 371528            | 6774208            | 354    | -60  | 225  | 148       |
| AHRC0160 | 371615            | 6774261            | 353    | -60  | 225  | 60        |
| AHRC0161 | 371592            | 6774237            | 353    | -60  | 225  | 48        |
| AHRC0162 | 371602            | 6774291            | 352    | -60  | 225  | 123       |
| AHRC0163 | 371582            | 6774267            | 352    | -60  | 225  | 116       |
| AHRC0164 | 371557            | 6774237            | 354    | -60  | 225  | 164       |
| AHRC0171 | 371482            | 6774248            | 357    | -60  | 225  | 179       |
| AHRC0173 | 371450            | 6774212            | 358    | -60  | 225  | 155       |
| AHRC0175 | 371410            | 6774179            | 362    | -60  | 225  | 137       |
| AHRC0176 | 371411            | 6774267            | 364    | -60  | 225  | 128       |
| AHRC0177 | 371393            | 6774207            | 363    | -60  | 225  | 119       |
| AHRC0178 | 371486            | 6774297            | 357    | -60  | 225  | 180       |
| AHRC0179 | 371379            | 6774232            | 368    | -50  | 225  | 130       |
| AHRC0180 | 371449            | 6774387            | 363    | -60  | 225  | 152       |
| AHRC0181 | 371416            | 6774269            | 366    | -65  | 227  | 124       |

Table 2. Completed RC holes – reported hole details.



Apollo Hill is located ~60km south-east of Leonora in the heart of WA's goldfields region (Figure 3). The Project is surrounded by excellent infrastructure and several significant gold deposits and operations.

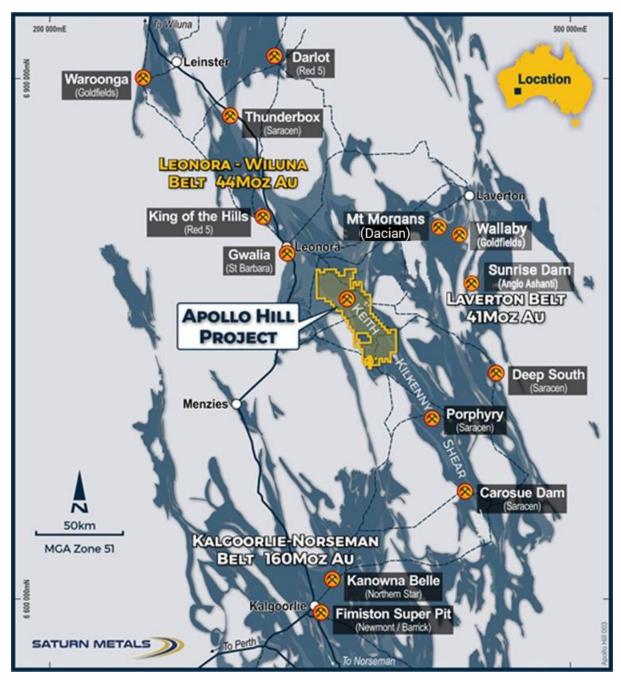


Figure 3 Apollo Hill location, Saturn Metals' tenements and surrounding gold deposits, gold endowment and infrastructure.



#### **Competent Persons Statement Resource**

<sup>1</sup>The information for the Mineral Resource included in this report is extracted from the report entitled (Apollo Hill Gold Resource Jumps 36% to 685,000oz) created on 19 November 2018 and is available to view on the Saturn Metals Limited website. Saturn Metals Limited confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources or Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. Saturn Metals Ltd confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

| # 🙃                           | ā               |                     | Measured |                     |                     | Indicated |                     |                     | Inferred |                     |                     | MII Total |                     |
|-------------------------------|-----------------|---------------------|----------|---------------------|---------------------|-----------|---------------------|---------------------|----------|---------------------|---------------------|-----------|---------------------|
| Lower cut-of<br>grade (Au g/t | Oxidation State | Tonnes<br>(Mtonnes) | Au (g/t) | Au metal<br>(K ozs) | Tonnes<br>(Mtonnes) | Au (g/t)  | Au metal<br>(K ozs) | Tonnes<br>(Mtonnes) | Au (g/t) | Au metal<br>(K ozs) | Tonnes<br>(Mtonnes) | Au (g/t)  | Au metal<br>(K ozs) |
|                               | Oxide           | 0                   | 0        | 0                   | 0.1                 | 0.9       | 4                   | 0.4                 | 0.9      | 12                  | 0.6                 | 0.9       | 17                  |
| 0.5                           | Transitional    | 0                   | 0        | 0                   | 1.1                 | 1.0       | 37                  | 1.2                 | 0.9      | 36                  | 2.3                 | 1.0       | 73                  |
| 0.5                           | Fresh           | 0                   | 0        | 0                   | 2.1                 | 1.1       | 75                  | 15.8                | 1.0      | 520                 | 17.9                | 1.0       | 595                 |
|                               | Total           | 0                   | 0        | 0                   | 3.3                 | 1.1       | 116                 | 17.4                | 1.0      | 569                 | 20.7                | 1.0       | 685                 |

The models are reported above nominal RLs (190 mRL - approximately 180 metres below surface (mbs) for Apollo Hill northwest, 210 mRL approximately 150mbs for Apollo Hill southeast and 260 mRL, 90mbs for Ra deposit) and nominal 0.5 g/t Au lower cut-off grade for all material types. Classification is according to JORC Code Mineral Resource categories. Totals may vary due to rounded figures.

Table 1a November 2018 Apollo Hill Mineral Resource.

#### **Competent Persons Statement Exploration**

The information in this report that relates to exploration targets and exploration results is based on information compiled by Ian Bamborough, a Competent Person who is a Member of The Australian Institute of Geoscientists. Ian Bamborough is a fulltime employee and Director of the Company, in addition to being a shareholder in the Company. Ian Bamborough has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ian Bamborough consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

<sup>b</sup>This document contains exploration results and historic exploration results as originally reported in fuller context in Saturn Metals Limited ASX Announcements, Quarterly Reports and Prospectus - as published on the Company's website. Saturn Metals Limited confirms that it is not aware of any new information or data that materially affects the information on results noted. Announcement dates to refer to include but are not limited to 19 November 2018, 16 April 2019, 29 April 2019 and 2 May 2019.



# JORC Code, 2012 Edition - Table 1 - Apollo Hill Exploration Area

## **Section 1 Sampling Techniques and Data**

(Criteria in this section apply to the Apollo Hill and Ra exploration area and all succeeding sections.)

| Criteria  | JORC Code explanation   | Commentary   |
|---|---|--|
| Sampling<br>techniques                                  | <ul> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul> | <ul> <li>Measures taken to ensure the representivity RC sampling include close supervision by geologists, use of appropriate sub-sampling methods, routine cleaning of splitters and cyclones, and RC rigs with sufficient capacity to provide generally dry, reasonable recovery samples. Information available to demonstrate sample representivity includes RC sample weights, sample recovery, sample consistency, field duplicates, standards and blanks.</li> <li>RC holes were sampled over 1m intervals by cone-splitting. RC samples were analysed by ALS in Kalgoorlie. At Kalgoorlie samples were oven dried and crushed to 90% passing 2mm, and pulverised to 95% passing 106 microns, with analysis by 50g fire assay.</li> </ul> |
| Drilling<br>techniques                                  | Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).   | Reverse Circulation (RC)     RC drilling used generally 5.5 " face- sampling bits.   |
| Drill sample<br>recovery                                | <ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>  | <ul> <li>Sample recovery was visually estimated by volume for each 1m bulk sample bag, and recorded digitally in the sample database. Very little variation was observed.</li> <li>Measures taken to maximise recovery for RC drilling included use of face sampling bits and drilling rigs of sufficient capacity to provide generally dry, high recovery samples. RC sample weights indicate an average recovery of 85-95% and were dry.</li> <li>The cone splitter was regularly cleaned with compressed air at the completion of each rod.</li> </ul>  |
| Logging   | <ul> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>  | <ul> <li>Drill holes were geologically logged by industry standard methods, including lithology, alteration, mineralisation and weathering.</li> <li>RC Chip trays were photographed.</li> <li>The logging is qualitative in nature and of sufficient detail to support the current interpretation.</li> </ul>   |
| Sub-sampling<br>techniques and<br>sample<br>preparation | <ul> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in-situ material</li> </ul>   | <ul> <li>RC holes were sampled over 1m intervals by cone-splitting. RC sampling was closely supervised by field geologists and included appropriate sampling methods, routine cleaning of splitters and cyclones, and rigs with sufficient capacity to provide generally dry, high recovery RC samples. Sample representivity monitoring included weighing RC samples and field duplicates.</li> <li>Assay samples were crushed to 90% passing 2mm, and pulverised to 95% passing 75 microns, with fire assay of 50g sub-samples. Assay quality monitoring included</li> </ul>   |



| Criteria   | JORC Code explanation  | Commentary   |  |  |  |
|--|--|--|--|--|--|
|  | collected, including for instance results for field duplicate/second-half sampling.  • Whether sample sizes are appropriate to the grain size of the material being sampled.   | reference standards and inter-laboratory checks assays.  Duplicate and blank samples were collected every 20 samples.  Certified reference material samples were submitted to the laboratory every 100 samples.  The project is at an early stage of evaluation and the suitability of sub-sampling methods and sub- sample sizes for all sampling groups has not been comprehensively established. The available data suggests that sampling procedures provide sufficiently representative sub-samples for the current interpretation. |  |  |  |
| Quality of assay<br>data and<br>laboratory tests                 | <ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul> | <ul> <li>Sampling included field duplicates, blind reference standards, field blanks and interlaboratory checks confirm assay precision and accuracy with sufficient confidence for the current results.</li> <li>Samples were submitted to ALS Laboratories in Kalgoorlie, where they were prepared, processed and analysed via fire assay.</li> </ul>  |  |  |  |
| Verification of<br>sampling and<br>assaying                      | <ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>  | <ul> <li>No independent geologists were engaged to verify results. Saturn Metals project geologists were supervised by the company's Exploration Manager. No adjustments were made to any assays of data.</li> <li>Logs were recorded by field geologists on hard copy sampling sheets which were entered into spreadsheets for merging into a central SQL database.</li> <li>Laboratory assay files were merged directly into the database. The project geologists routinely validate data when loading into the database.</li> </ul>   |  |  |  |
| Location of data points  | <ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>  | <ul> <li>Collars are surveyed by hand held GPS, utilising GDA94, Zone 51.</li> <li>All RC holes were down-hole surveyed, by Gyro.</li> <li>A topographic triangulation was generated from drill hole collar surveys.</li> </ul>  |  |  |  |
| Data spacing and distribution                                    | <ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>   | <ul> <li>Apollo Hill mineralisation has been tested by generally 30m spaced traverses of southwesterly inclined drill holes towards 225°. Across strike spacing is variable. The upper approximately 50m has been generally tested by 20-30m spaced holes, with deeper drilling ranging from locally 20m to commonly greater than 60m spacing.</li> <li>The data spacing is sufficient to establish geological and grade and continuity.</li> </ul>  |  |  |  |
| Orientation of<br>data in relation to<br>geological<br>structure | <ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>   | <ul> <li>Mineralised zones dip at an average of around 50° to the northeast. Detailed orientations of all short-scale mineralised features have not yet been confidently established. The majority of the drill holes were inclined at around 60° to the southwest. All hole details for reported results are noted in Table 2 of this announcement.</li> </ul>  |  |  |  |
| Sample security  | The measures taken to ensure sample security.  | Apollo Hill is in an isolated area, with little access by general public. Saturn's field sampling was supervised by Saturn geologists. Sub-samples selected for assaying were collected in heavy- duty polywoven plastic bags which were immediately sealed. These bags were delivered to the assay laboratory by independent couriers, Saturn employees or contractors.   |  |  |  |



| Criteria          | JORC Code explanation   | Commentary  |
|-------------------|---|---|
|                   |   | <ul> <li>Results of field duplicates, blanks and reference material, and the general consistency of results between sampling phases provide confidence in the general reliability of the drilling data.</li> </ul>  |
| Audits or reviews | The results of any audits or reviews of sampling techniques and data. | The competent person independently reviewed Saturn's sample quality information and database validity. These reviews included consistency checks within and between database tables and comparison of assay entries with original source records for Saturn's drilling. These reviews showed no material discrepancies. The competent person considers that the Apollo Hill drilling data has been sufficiently verified to provide an adequate basis for the current reporting of exploration results. |

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section.)

| Criteria                                      | JORC Code explanation  | Commentary  |
|---|--|---|
| Mineral tenement<br>and land tenure<br>status | <ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul> | <ul> <li>The results are from the Saturn Metals Limited's Apollo Hill Project which lies within Exploration Licence E39/1198, M31/486 and M39/296. These tenements are whollyowned by Saturn Metals Limited. These tenements, along with certain other tenure, are the subject of a 5% gross over-riding royalty (payable to HHM) on Apollo Hill gold production exceeding 1 million ounces. M39/296 is the subject of a \$1/t royalty (payable to a group of parties) on any production.</li> <li>The tenements are in good standing and no known impediments exist.</li> </ul>  |
| Exploration done by other parties             | Acknowledgment and appraisal of exploration by other parties.  | <ul> <li>Aircore, RC and diamond drilling by previous tenement holders provides around 82% of<br/>the estimation dataset. The data is primarily from RC and diamond drilling by Battle<br/>Mountain (33%), Apex Minerals (18%), Fimiston Mining (13%), Hampton Hill (12%).<br/>Homestake and MPI holes provide 5% and 1%, respectively.</li> </ul>  |
| Geology                                       | Deposit type, geological setting and style of mineralisation.  | <ul> <li>The Apollo Hill project comprises two deposits: The main Apollo Hill deposit in the northwest of the project area, and the smaller Ra Deposit in the south. Gold mineralisation is associated with quartz veins and carbonate-pyrite alteration along a steeply north-east dipping contact between felsic rocks to the west, and mafic dominated rocks to the east. The combined mineralised zones extend over a strike length of approximately 1.4km and have been intersected by drilling to approximately 350m depth.</li> <li>The depth of complete oxidation averages around 4m with depth to fresh rock averaging around 21m.</li> </ul> |
| Drill hole<br>Information                     | A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:     easting and northing of the drill hole collar     elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar     dip and azimuth of the hole     down hole length and interception depth   | <ul> <li>All relevant information material to the understanding of exploration results has been included within the body of the announcement or as appendices.</li> <li>No information has been excluded.</li> </ul>  |



| Criteria   | JORC Code explanation   | Commentary  |
|--|---|---|
|  | <ul> <li>hole length.</li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>   |   |
| Data aggregation<br>methods  | <ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul> | <ul> <li>No top-cuts have been applied.</li> <li>No metal equivalent values are used for reporting exploration results.</li> </ul>  |
| Relationship<br>between<br>mineralisation<br>widths and<br>intercept lengths | <ul> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>   | True widths are generally estimated to be about 60% of the down-hole width.   |
| Diagrams   | Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.   | See diagrams included.  |
| Balanced<br>reporting  | Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.   | All results are reported.   |
| Other substantive exploration data   | Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.   | See release details.  |
| Further work   | <ul> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>   | <ul> <li>Although not yet planned in detail, it is anticipated that further work will include infill, step out and twin-hole drilling. This work will be designed to improve confidence in, and test potential extensions to the current resource estimates.</li> </ul> |