

17 November 2021

# First drill assays received for Webbs Consol Silver Project

# **Highlights**

- Drill hole WCS006 intersection assays return 23.8 metres grading 135 g/t silver and 7.32% zinc (105.6m to 129.4m)<sup>1,2,3</sup>. See Table 1
- Follow-up Drill hole WCS007 intersects 24.1m of sulphide mineralisation containing an estimated 15% sphalerite (122.9m to 147.0m), with associated silver mineralisation also anticipated, proving down-dip continuity
- Drilling is testing additional Webbs Consol Silver Project targets before moving focus to Uralla Gold and Trough Gully Copper projects

Lode Resources Ltd (ASX: LDR or 'Lode' or 'the Company') is pleased to report first drill assays from the Main Shaft Prospect at the Webbs Consol Silver Project in NSW<sup>1,2,3</sup>. See Table 1.

Table 1: Webbs Consol Silver Project - **Drill hole WCSoo6 intercept assays** (Main Shaft Prospect)

Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00288	105.60	106.00	0.40	61.5	50.20	0.13
D00292	106.00	107.00	1.00	104.0	4.61	0.96
D00294	107.00	108.00	1.00	334.0	5.55	1.50
D00297	108.00	109.00	1.00	317.0	8.44	1.51
D00299	109.00	110.00	1.00	485.0	2.64	2.45
D00302	110.00	111.00	1.00	47.7	4.24	0.71
D00304	111.00	112.00	1.00	95.4	4.44	0.94
D00306	112.00	113.00	1.00	300.0	4.75	2.52
D00308	113.00	114.00	1.00	112.0	14.85	0.80
D00311	114.00	115.00	1.00	144.0	5.56	1.03
D00313	115.00	116.00	1.00	61.3	4.82	0.49
D00315	116.00	117.00	1.00	172.0	6.70	0.80
D00317	117.00	118.00	1.00	70.1	8.37	0.38
D00319	118.00	119.00	1.00	79.5	5.75	0.45
D00322	119.00	120.00	1.00	77.0	5.39	0.47
D00324	120.00	121.00	1.00	127.0	7.17	0.66
D00326	121.00	122.00	1.00	56.9	6.73	0.36
D00328	122.00	123.00	1.00	109.0	6.40	0.47
D00330	123.00	124.00	1.00	138.0	7.82	0.59
D00332	124.00	125.00	1.00	57.9	5.66	0.31
D00334	125.00	126.00	1.00	65.4	8.07	0.27
D00336	126.00	127.00	1.00	101.0	6.28	0.57
D00338	127.00	128.00	1.00	83.7	7.36	0.74
D00340	128.00	129.00	1.00	30.6	6.83	0.24
D00343	129.00	129.40	0.40	48.3	14.20	0.41
Intercept	105.60	129.40	23.80	135.0	7.32	0.82



# Webbs Consol Silver Project<sup>1,2,3</sup> - Main Shaft Prospect Drill Intercepts

Drill hole WCS006 has intersected 23.8 metre down-hole at an average grade of 135.0 g/t silver and 7.32% zinc (105.6m to 129.4m) at the Webbs Consol Silver Project's Main Shaft Prospect. Estimated true width is 12.2 metres. This is located within a broader 27.5 metre down-hole interval at an average grade of 118.1g/t silver and 6.52% zinc (104.6m to 132.1m). Estimated true width is 14.2 metres. See Table 1.

Follow-up Drill hole WCS007 has intersected 24.1 metre down-hole of sulphide mineralisation containing an estimated 15% sphalerite ((Zn,Fe)S) and 1% galena (PbS) (122.9m to 147.0m) proving down dip continuity of Webbs Consol Main Shaft prospect mineralisation. See Photo 1, Figure 1 and Table 2. Estimated true width is 10.4 metres. Significant silver mineralisation is also anticipated in assays.


Photo 1: Drill hole WCSoo7 NQ core showing 24.1 metre mineralised intercept (Main Shaft Prospect)



Drill hole WCS007: 24.1 metre intercept (122.9 metres to 147.0 metres) containing an estimated 15% sphalerite ((Zn,Fe)S) and 1% galena (PbS). Significant silver mineralisation is also anticipated to be shown in assays.



Figure 2: Cross Section of Webbs Consol Main Shaft Prospect with drill holes WCSoo6 & WCSoo7 mineralised intercepts. Historic reports state that the Webbs Consol mineralised structure strikes 190° and dips 70-75° east above 60m depth.

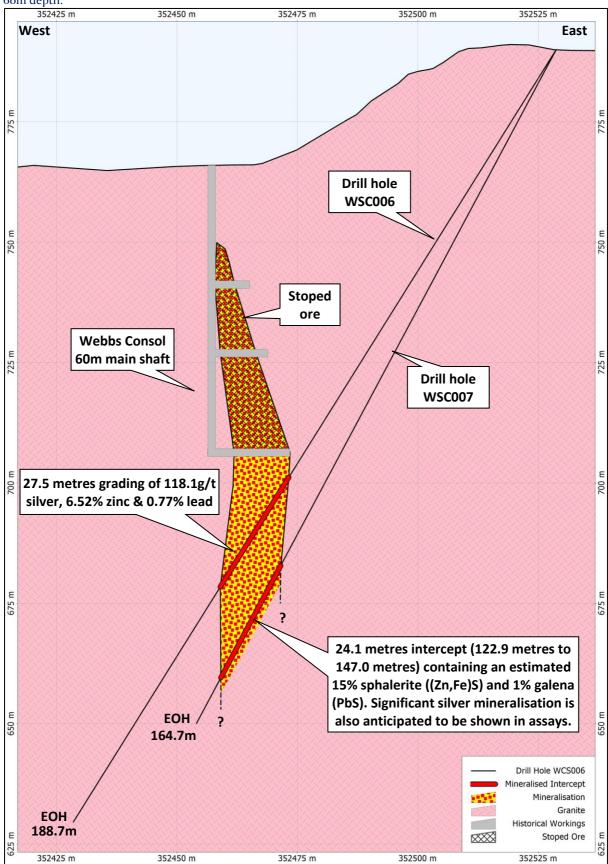

<sup>&</sup>lt;sup>1</sup>LDR Prospectus 14 April 2021 & LDR Supplementary Prospectus 6 May 2021

<sup>&</sup>lt;sup>2</sup>LDR announcement 15 September 2021 titled "Drilling Commences at Webbs Consol Silver Project"

<sup>&</sup>lt;sup>3</sup>LDR announcement 19 October 2021 titled "Significant sulphides intersected at Webbs Consol"



The first phase diamond drilling programme at the Webbs Consol Silver Project is designed to test high grade silver mineralisation sampled at surface and extensions of mineralisation mapped in underground workings at a variety of prospects at the Webbs Consol Silver Project. See Figure 2.

Drill Target - Webbs Consol North Ag & Pb in grab samples Highly anomalous soils Sample = Potential extension Ag g/t Pb % R157 149 1.88 5.21 **Webbs Consol North** R163 5.63 WC11 82 4.47 28702 69 R166 65 6.56 WC2 54 0.85 28707 2.80 WCS004& WCS001, R161 47 0.61 WCS005 WCS002 28708 39 1.30 28703 34 0.35 & WQS003 32 WC10 1.84 R164 28 2.55 R160 25 0.40 WC6 R162 20 1.59 28709 19 1.27 Drill Target - Lucky Lucy R167 0.98 Ag & Pb in grab samples Sample Ag g/t Pb % 28715 272 0.09 R173 130 0.02 0.20 R169 70 WC18 60 0.22 **Lucky Lucy** 28717 37 0.85 R174 34 0.05 R172 33 0.03 R171 27 0.55 28713 21 0.12 19 0.04 28714 28716 18 0.11 Rock Chip Ag g/t <10 10...20 20...30 30...40 40...50 Webbs Consol 50...60 60...70 **Main Shaft** 70...80 >80 Drill Target - Webbs Consol Central Soil Pb ppm Ag, Pb & Zn in grab samples WCS006 <25 Zn % Pb % Ag g/t WCS007 25...50 R176 2230 7.34 50...75 R177 289 18.65 0.9 75...100 99 0.1 6.92 100...125 R178 94 3.36 3.6 125...150 R180 64 0.20 0.0 150...175 R181 2.34 3.8 175...200 R179 0.80 0.5 >200 Drill Holes Workings **Webbs Consol Central** Structure Veining Dvke Webbs Consol Leucogranite Emmaville Volcanics 0 500 m GDA94 Zone 56 352000 m 352500 m 353000 m

Figure 2: Webbs Consol Silver Project - Rock chip/grab sampling and drill hole positions<sup>1,2,3</sup>



Table 2: Geological log for drill hole WCS007 (Main Shaft Prospect)									
Hole ID	Easting	Northing	Dip	Azimuth	From	То	Observations		
	GDA	94 Z56		Grid	(m)	(m)			
WCS007	352607	6737624	-55	148.5	0.00	1.10	Core Loss		
					1.10	16.00	Weakly weathered coarse grained porphyritic granite with moderate pervasive sericitic alteration.		
					16.00	56.40	Fresh coarse grained porphyritic granite with weak pervasive sericitic alteration.		
					56.40	56.85	Coarse grained porphyritic granite with strong pervasive sericitic & chlorite alteration, 1% blebby sphalerite and galena.		
					56.85	96.40	Fresh coarse grained porphyritic granite.		
					96.40	122.90	Fresh coarse grained porphyritic granite with weak pervasive sericitic alteration.		
					122.90	124.00	Coarse grained porphyritic granite with strong pervasive sericitic & chlorite alteration, trace blebby sphalerite and galena.		
					124.00	125.05	Fresh coarse grained porphyritic granite with weak pervasive sericitic alteration.		
					125.05	147.05	Coarse grained porphyritic granite with Intense pervasive sericitic & chlorite alteration, 15% blebby sphalerite, 1% blebby galena and arsenopyrite.		
					147.05	164.70	Fresh coarse grained porphyritic granite with weak pervasive sericitic alteration.		





### **Webbs Consol North**

Drill holes WCSoo1 to WCSoo5 have intersected multiple sulphides zones at the Webbs Consol North Prospect where mineralisation was previously sampled at surface. Drill holes WCSoo1, WCSoo2 & WCSoo5 intersected wide zones of anomalous silver, zinc and lead mineralisation whereas drill holes WCSoo3 and WCSoo4 intersected zones of low-grade silver, zinc and lead mineralisation (See Tables 3 & 4). In combination these drill holes have demonstrated the continuity of Webbs Consol mineral system 2km north of the Webbs Consol Main Shaft prospect. Follow-up geophysics and soil geochemistry may be implemented at a later date to help detect stronger accumulations of mineralisation at depth and/or along strike so as to refine targeting of future drilling.

Table 3: Webbs Consol Silver Project – Drill hole WCSoo3 intercept assays (Webbs Consol North Prospect)

Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00102	9.40	10.00	0.60	31.8	0.55	0.91
D00103	10.00	10.70	0.70	14.7	0.54	0.49
D00104	10.70	11.00	0.30	62.5	0.37	1.19
D00105	11.00	12.00	1.00	14.6	0.60	0.38
D00106	12.00	12.50	0.50	4.5	0.33	0.45
D00107	12.50	13.10	0.60	2.4	0.10	0.13
D00108	13.10	13.80	0.70	1.1	0.06	0.04
D00109	13.80	14.20	0.40	1.3	0.05	0.04
D00110	14.20	14.85	0.65	3.4	0.07	0.06
D00111	14.85	15.50	0.65	13.2	1.52	0.49
D00112	15.50	15.80	0.30	11.9	0.23	0.19
D00113	15.80	16.80	1.00	17.7	0.31	0.75
D00116	16.80	17.80	1.00	89.4	0.24	1.98
D00119	17.80	18.60	0.80	3.0	0.02	0.11
D00122	18.60	19.15	0.55	14.5	0.60	0.33
D00124	19.15	19.50	0.35	7.7	0.51	0.50
Intercept	9.40	19.50	10.10	20.0	0.38	0.55

Table 4: Webbs Consol Silver Project - Drill hole WCSoo4 intercept assays (Webbs Consol North Prospect)

Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00146	24.00	24.40	0.40	5.3	0.31	0.30
D00147	24.40	25.40	1.00	45.4	1.86	0.70
D00148	25.40	26.00	0.60	92.1	0.21	1.53
D00149	26.00	27.00	1.00	161.0	1.36	2.52
D00150	27.00	28.00	1.00	35.0	1.44	0.54
D00151	28.00	28.20	0.20	51.2	1.15	0.73
D00153	28.20	29.40	1.20	2.0	0.08	0.06
D00155	29.40	30.00	0.60	85.3	1.74	1.65
D00156	30.00	30.90	0.90	42.0	0.47	0.77
D00157	30.90	31.40	0.50	1.0	0.05	0.03
D00158	31.40	32.10	0.70	12.4	0.94	0.74
Intercept	24.00	32.10	8.10	50.6	0.91	0.89



# **Webbs Consol Silver Project Overview**

Located 16km west-south-west of Emmaville, Webbs Consol was discovered in 1890 with intermittent mining up to the mid-1950s. The Webbs Consol Silver Project (EL8933) contains several small, but high grade, silver-lead-zinc-gold deposits hosted by the Webbs Consol Leucogranite which has intruded the Late Permian Emmaville Volcanics and undifferentiated Early Permian sediments.

Several mine shafts were worked for the high-grade galena and silver content only with high-grade zinc mineralisation discarded. Mineral concertation was via basic Chilean milling techniques and sluicing. Some subsequent rough floatation of galena was carried out with no attempt to recover sphalerite.

Ore mineralogy includes galena, sphalerite, marmatite, arsenopyrite, pyrite, chalcopyrite, minor bismuth and gold. Chief minerals generally disseminated but also high grade "bungs" where emplacement is a combination of fracture infilling and country rock replacement. Gangue mineralogy includes quartz, chlorite and sericite with quartz occurring as veins and granular relicts.

Historical sampling shows potential for high grade silver and zinc mineralisation at Webbs Consol. It was reported that 12 samples taken from the lowest level of the main Webbs Consol shaft ("205' Level" or 6om depth) averaged 210g/t silver, 22.6% zinc and 2.74% lead. Epithermal style mineralisation occurs in 'en échelon' vertical pipe like bodies at the intersection of main north-south shear and secondary northeast-southwest fractures. No leaching or secondary enrichment has been identified.

Figure 3: Webbs Consol Main Shaft oblique view


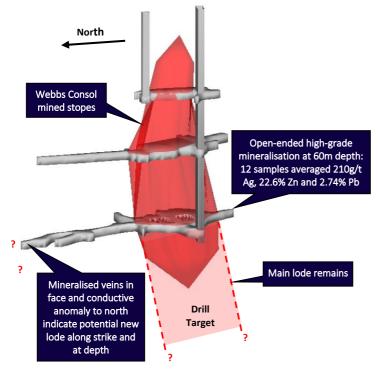


Photo 4: Webbs Consol Main Shaft Specimen showing coarse galena mineralisation





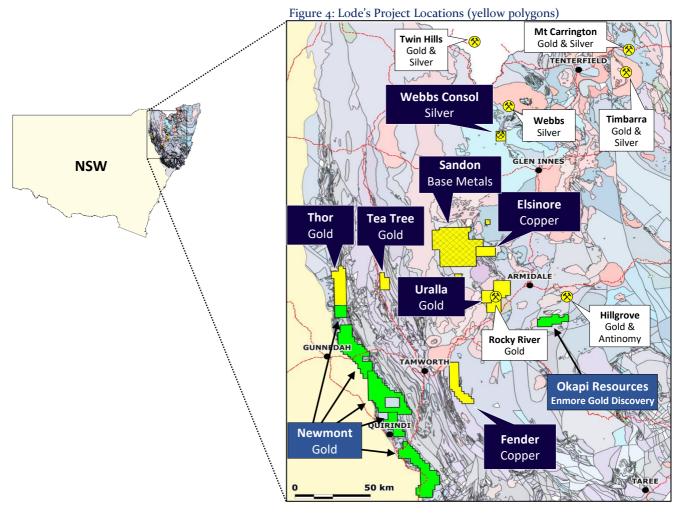

# This announcement has been approved and authorised by Lode Resource Ltd's Managing Director, Ted Leschke.

#### **Competent Person's Statement**

The information in this Report that relates to Exploration Results is based on information compiled by Mr Mitchell Tarrant, who is a Member of the Australian Institute of Geoscientists. Mr Tarrant, who is the Project Manager for Lode Resources, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Tarrant consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

# For further information, please contact: Investor Enquiries

Ted Leschke
Managing Director
Ted@loderesources.com

#### About Lode Resources

Lode Resources is an ASX-listed explorer focused on the highly prospective but under-explored New England Fold Belt in north eastern NSW. The Company has assembled a portfolio of brownfield precious and base metal assets characterised by demonstrated high grade mineralisation and/or potential for large mineral occurrences. For more information on Lode Resources and to subscribe for our regular updates, please visit our website at www.loderesources.com



# JORC Code, 2012 Edition - Table 1.

# **Section 1 Sampling Techniques and Data**

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broadmeaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul> <li>Diamond drilling techniques were used to obtain samples.</li> <li>NQ2 core was logged and sample intervals assigned based on the geology.</li> <li>The core to be sampled was sawn in half and bagged according to sample intervals. Intervals range from 0.2m to 1.2m</li> <li>Blanks and standards were inserted at &gt;5% where appropriate.</li> <li>Samples were sampled by a qualified geologist.</li> <li>Samples were sent to ALS in Brisbane.</li> <li>Sample preparation comprised drying (DRY-21), weighed, crushing (CRU-31) and pulverised (PUL-32), refer to ALS codes.</li> <li>The assay methods used were ME-ICP61 and Au-AA25 (refer to ALS assay codes). ME-ICP61 (25g) is a four-acid digestion with ICP-AES finish. Au-AA25 (30g) is a fire assay method.</li> </ul>
Drilling techniques	<ul> <li>Drill type (eg core, reverse circulation, openhole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (egcore diameter, triple or standard tube, depth of diamond tails, facesampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul> <li>All drilling is Diamond drilling (core), NQ2 in size.</li> <li>Core was collected using a standard tube.</li> <li>Core is orientated every run (3m) using the truecoreMT UPIX system.</li> </ul>
Drill sample recovery	<ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whethersample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul> <li>Core recoveries are measured using standard industry best practice.</li> <li>Core loss is recorded in the logging.</li> <li>Core recovery in the surface lithologies is poor.</li> <li>Core recovery in fresh rock is excellent with &gt;99% recovered from 12m downhole depth.</li> </ul>
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	<ul> <li>Holes are logged to a level of detail that would support mineral resource estimation.</li> <li>Qualitative logging includes lithology, alteration, texture, colour and structures.</li> <li>Quantitative logging includes sulphide and gangue mineral percentages.</li> <li>All drill core was photographed wet and dry.</li> <li>All drill holes have been logged in full.</li> </ul>



Sub- sampling techniques and sample preparation	<ul> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> <li>The nature, quality and appropriateness of the</li> </ul>	<ul> <li>Core was prepared using standard industry best practice.</li> <li>The core was sawn in half using a diamond core saw and half core was sent to ALS Brisbane for assay.</li> <li>No duplicate sampling has been conducted.</li> <li>Samples intervals ranged from 0.2m to 1.2m. The average sample size was 1m in length. The sample size is considered appropriate for the material being sampled.</li> <li>Samples were stored in a secure location and</li> </ul>
assay data and laboratory tests	<ul> <li>assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	transported to the ALS laboratory in Brisbane QLD via a certified courier. Sample preparation comprised drying (DRY-21), weighed, crushing (CRU-31) and pulverised (PUL-32).  The assay methods used were ME-ICP61 and Au-AA25 (refer to ALS assay codes). ME-ICP61 (25g) is a four-acid digestion with ICP-AES finish. Au-AA25 (30g) is a fire assay method.  Certified standards and blanks were inserted at a rate of >5% at the appropriate locations. These are checked when assay results are received to make sure they fall within the accepted limits.  The assay methods employed are considered appropriate for near total digestion.
Verification of sampling and assaying  Location of	<ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys),</li> </ul>	<ul> <li>Laboratory results have been reviewed by the Exploration Manager.</li> <li>Significant intersections are reviewed by the Exploration Manager and Managing Director.</li> <li>No twin holes were drilled.</li> <li>Commercial laboratory certificates are supplied by ALS.</li> <li>The certified standards and blanks are checked.</li> <li>Drill hole collar locations were picked up using a RTK GPS (+- 0.025m).</li> </ul>
Data spacing and distribution	<ul> <li>trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological</li> </ul>	<ul> <li>Grid system used is GDA94 UTM zone 56</li> <li>Down hole surveys are conducted with a digital magnetic multi-shot camera at 30m intervals.</li> <li>The holes drilled were for exploration purposes and were not drilled on a grid pattern.</li> <li>Drill hole spacing is considered appropriate for exploration purposes.</li> </ul>



	<ul> <li>and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul> <li>The data spacing, distribution and geological understanding is not currently sufficient for the estimation of mineral resource estimation.</li> <li>No sample compositing has been applied.</li> </ul>
Orientation of data in relation to geological structure	<ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul> <li>Drill holes are orientated perpendicular to the perceived strike where possible.</li> <li>The orientation of drilling relative to key mineralised structures is not considered likely to introduce sampling bias.</li> <li>The orientation of sampling is considered appropriate for the current geological interpretation of the mineral style.</li> <li>The WCS006 and WCS007 drill hole intersects the Webbs Consol mineralised structure at approximately 70° laterally.</li> <li>The exact orientation of the mineralisation intersected in holes WCS001-WCS005 is not known at this time.</li> </ul>
Sample security	The measures taken to ensure sample security.	Samples have been overseen by the Project     Manager during transport from site to the assay     laboratories.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews have been carried out at this point.



### **Section 2 Reporting of Exploration Results**

(Criteria listed in the preceding section also apply to this section.)

Criteria		JORC Code	explana	ation		Co	mme	ntary			
Mineral tea andland te status	enure	agreem third partner native t wildern environ The sec time oo known licence	ents of arties services solutions. Citle interessolutions of amenta urity of frepolimped to oper	owners r materia uch as jo overridi erests, h r nation I settings the tenu rting alc iments to rate in th	ore held at the ong with an obtaining and area.	<ul> <li>EL8933 is 100% held by Lode Resources Ltd.</li> <li>Native title does not exist over EL8933</li> <li>All leases/tenements are in good standing</li> </ul>				s Ltd.	
Exploration otherpartic	-		_	ent and other pa	appraisal of arties.	•	Hist	oric rock and	d soil samp	oling (Figure	1)
Geology		-		geologica alisation.	al setting and	d •	Eng base min	land Orogen e metal occu	(NEO). EL8 rrences. Tl likely intr	3933 hosts n ne Webbs Co usion related	onsol d and hosted
Drill hole II	<ul> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes, including, easting and northing, elevation or RL, dip and azimuth, down hole length, interception depth and hole length.</li> <li>If the exclusion of this information is justified the Competent Person should clearly explain why this is the case.</li> <li>See row below.  The exact orientation of the mine intersected in holes WCS001-WCS at this time.</li> <li>Only drill assays from meaningful intercepts are tabulated below. A intercept is generally determined consecutive assays grading &gt;1g/t, and/or &gt;0.1% Pb.</li> </ul>				01-WCS005 i ningful mine elow. A mea rmined as be	is not known ralised ningful eing a series of					
Hole ID	Easting	Northing	RL	Dip	Azimuth	EOH [	Depth	Intercept	depth	Width	TW
	GDA94 Z56	GDA94 Z56			(Grid)	(m)		From (m)	to (m)	(m)	(m)
WCS001	352604	6737624	780	-55	148.5		158.7	82	85	3	Unknown
WCS002	352605	6737624	780	-55	181		140.7	114.2	124.2	10	Unknown
WCS003	352600	6737590	780	-50	166		35.2	14.85	18.6	3.75	Unknown



WCS004	352681	6737810	760	-55	129	219	24	32.1	8.1	Unknown
WCS005	352757	6737768	770	-55	269	71.5	47.3	55	7.7	Unknown
WCS006	352519	6736346	780	-60	303	188.7	104.6	132.1	27.5	14.2
WCS007	352519	6736346	780	-64	303	164.7	122.9	147	24.1	10.4

#### Drill hole WCSoo1 intercept assays (Webbs Consol North Prospect)

Sample	From	To	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00016	26.90	27.20	0.30	2.0	0.22	0.03
D00017	27.20	28.00	0.80	1.5	0.32	0.02
D00018	28.00	29.00	1.00	0.8	0.41	0.01
D00019	29.00	29.40	0.40	0.0	0.06	0.01
D00020	29.40	29.90	0.50	6.5	0.09	0.09
D00022	29.90	30.10	0.20	8.0	0.31	0.01
D00023	30.10	30.60	0.50	4.7	0.10	0.08
Intercept	26.90	30.60	3.70	2.3	0.24	0.03

Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00037	77.00	78.00	1.00	1.0	0.03	0.02
D00038	78.00	79.00	1.00	0.7	0.03	0.01
D00039	79.00	80.00	1.00	1.8	0.03	0.03
D00040	80.00	81.00	1.00	1.4	0.03	0.03
D00041	81.00	82.00	1.00	0.0	0.03	0.02
D00042	82.00	82.85	0.85	1.0	0.23	0.14
D00043	82.85	83.70	0.85	4.0	0.07	0.15
D00045	83.70	83.95	0.25	4.6	0.31	0.41
D00046	83.95	84.25	0.30	1.4	0.22	0.14
D00048	84.25	84.80	0.55	2.4	0.32	0.43
D00050	84.80	85.30	0.50	3.6	0.41	0.43
D00051	85.30	86.00	0.70	0.5	0.06	0.05
D00052	86.00	86.55	0.55	0.9	0.09	0.07
D00053	86.55	87.00	0.45	1.8	0.31	0.34
D00056	87.00	88.00	1.00	0.9	0.10	0.12
Intercept	77.00	88.00	11.00	1.5	0.11	0.12

#### Drill hole WCS002 intercept assays (Webbs Consol North Prospect)

Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00080	114.20	115.20	1.00	2.0	0.19	0.25
D00081	115.20	115.60	0.40	1.5	0.15	0.09
D00082	115.60	116.00	0.40	2.7	0.26	0.32
D00083	116.00	117.00	1.00	3.9	0.40	0.47
D00084	117.00	118.00	1.00	2.4	0.29	0.31
D00085	118.00	119.00	1.00	2.8	0.38	0.43
D00086	119.00	120.00	1.00	0.0	0.06	0.01
D00087	120.00	121.10	1.10	0.5	0.07	0.02
D00090	121.10	122.00	0.90	3.5	0.38	0.45
D00091	122.00	122.60	0.60	2.4	0.35	0.38
D00092	122.60	123.00	0.40	3.1	0.13	0.12
D00093	123.00	124.20	1.20	4.6	0.27	0.42
Intercept	114.20	124.20	10.00	2.5	0.25	0.28

#### Drill hole WCS003 intercept assays (Webbs Consol North Prospect)

Sample	From	To	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00102	9.40	10.00	0.60	31.8	0.55	0.91
D00103	10.00	10.70	0.70	14.7	0.54	0.49
D00104	10.70	11.00	0.30	62.5	0.37	1.19
D00105	11.00	12.00	1.00	14.6	0.60	0.38



D00106	12.00	12.50	0.50	4.5	0.33	0.45
D00107	12.50	13.10	0.60	2.4	0.10	0.13
D00108	13.10	13.80	0.70	1.1	0.06	0.04
D00109	13.80	14.20	0.40	1.3	0.05	0.04
D00110	14.20	14.85	0.65	3.4	0.07	0.06
D00111	14.85	15.50	0.65	13.2	1.52	0.49
D00112	15.50	15.80	0.30	11.9	0.23	0.19
D00113	15.80	16.80	1.00	17.7	0.31	0.75
D00116	16.80	17.80	1.00	89.4	0.24	1.98
D00119	17.80	18.60	0.80	3.0	0.02	0.11
D00122	18.60	19.15	0.55	14.5	0.60	0.33
D00124	19.15	19.50	0.35	7.7	0.51	0.50
Intercept	9.40	19.50	10.10	20.0	0.38	0.55
Drill hole WC	CS004 inte	ercept assa	ys (Webbs (	Consol No	rth Prosp	ect)
Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00146	24.00	24.40	0.40	5.3	0.31	0.30
D00147	24.40	25.40	1.00	45.4	1.86	0.70
D00148	25.40	26.00	0.60	92.1	0.21	1.53
D00149	26.00	27.00	1.00	161.0	1.36	2.52
D00150	27.00	28.00	1.00	35.0	1.44	0.54
D00151	28.00	28.20	0.20	51.2	1.15	0.73
D00153	28.20	29.40	1.20	2.0	0.08	0.06
D00155	29.40	30.00	0.60	85.3	1.74	1.65
D00156	30.00	30.90	0.90	42.0	0.47	0.77
D00157	30.90	31.40	0.50	1.0	0.05	0.03
D00158	31.40	32.10	0.70	12.4	0.94	0.74
Intercept	24.00	32.10	8.10	50.6	0.91	0.89
Drill hole WC	CS005 inte	ercept assa	ys (Webbs (	Consol No	rth Prospe	ect)
Sample	From	То	Interval	Ag	Zn	Pb
No.	m	m	m	g/t	%	%
D00221	1.80	2.40	0.60	6.9	0.63	0.35
D00222	2.40	3.00		4.7	0.37	0.23
D00223		5.00	0.60	4.7	0.57	
D00224	5.00		0.60 0.85	4.7 1.7		0.20
	3.00 3.85	3.85	0.85	1.7	0.25	0.20 1.01
D00227	3.85	3.85 4.05	0.85 0.20	1.7 10.9	0.25 0.96	1.01
D00227	3.85 4.05	3.85 4.05 4.60	0.85 0.20 0.55	1.7 10.9 3.7	0.25 0.96 0.35	1.01 0.32
Intercept	3.85	3.85 4.05	0.85 0.20	1.7 10.9	0.25 0.96	1.01
Intercept	3.85 4.05 1.80	3.85 4.05 4.60 4.60	0.85 0.20 0.55 2.80	1.7 10.9 3.7 4.5	0.25 0.96 0.35 0.43	1.01 0.32 0.32
Intercept Sample	3.85 4.05 1.80 From	3.85 4.05 4.60 4.60	0.85 0.20 0.55 2.80	1.7 10.9 3.7 4.5	0.25 0.96 0.35 0.43	1.01 0.32 0.32
Sample No.	3.85 4.05 1.80 From m	3.85 4.05 4.60 4.60 To	0.85 0.20 0.55 2.80	1.7 10.9 3.7 4.5	0.25 0.96 0.35 0.43	1.01 0.32 0.32 Pb %
Sample No. D00237	3.85 4.05 1.80 From m 47.30	3.85 4.05 4.60 4.60 To m 48.00	0.85 0.20 0.55 2.80 Interval m 0.70	1.7 10.9 3.7 4.5 Ag g/t 11.7	0.25 0.96 0.35 0.43 Zn % 0.50	1.01 0.32 0.32 Pb %
Sample No. D00237 D00238	3.85 4.05 1.80 From m 47.30 48.00	3.85 4.05 4.60 4.60 To m 48.00 49.00	0.85 0.20 0.55 2.80 Interval m 0.70 1.00	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2	0.25 0.96 0.35 0.43 Zn % 0.50 0.40	1.01 0.32 0.32 Pb % 0.52 0.21
Sample No. D00237 D00238 D00239	3.85 4.05 1.80 From m 47.30 48.00 49.00	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43	1.01 0.32 0.32 Pb % 0.52 0.21 0.40
Sample No. D00237 D00238 D00239 D00240	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22
Sample No. D00237 D00238 D00239 D00240 D00243	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22 0.64
Sample No. D00237 D00238 D00239 D00240 D00243 D00245	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.30	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22 0.64 1.64
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248	3.85 4.05 1.80 From m 47.30 48.00 49.60 50.20 50.80 51.10	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.30 0.90	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04	Pb % 0.52 0.40 0.64 1.64 0.01
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.30 0.90 1.00	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01	Pb % 0.52 0.40 0.64 1.64 0.01 0.00
Sample No.  D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253	3.85 4.05 1.80 From m 47.30 48.00 49.60 50.20 50.80 51.10	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.30 0.90	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04	Pb % 0.52 0.40 0.64 1.64 0.01
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.30 0.90 1.00	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01	Pb % 0.52 0.40 0.64 1.64 0.01 0.00
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.90 1.00 0.90	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22 0.64 1.64 0.01 0.00 0.04
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.60 0.30 0.90 1.00 0.90 0.50	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22 0.64 1.64 0.01 0.00 0.04 0.14
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255 D00258	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.90 0.50 0.60	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22 0.64 1.64 0.01 0.00 0.04 0.14 0.21
Sample No.  D00237 D00238 D00239 D00240 D00243 D00245 D00245 D00251 D00253 D00255 D00258 D00260	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00	3.85 4.05 4.60 4.60 To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00 56.10	0.85 0.20 0.55 2.80 Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.50 0.60 1.10	1.7 10.9 3.7 4.5 Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7 0.5	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29 0.04	1.01 0.32 0.32 Pb % 0.52 0.21 0.40 0.22 0.64 1.64 0.01 0.00 0.04 0.14 0.21 0.02
Sample No. D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255 D00258 D00260 D100261 Intercept	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.90 54.40 55.00 56.10 47.30	3.85 4.05 4.60 4.60  To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00 56.10 56.60	0.85 0.20 0.55 2.80  Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.90 0.50 0.60 1.10 0.50 9.30	1.7 10.9 3.7 4.5  Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7 0.5 4.1	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29 0.04 0.41 0.36	Pb % 0.52 0.21 0.40 0.02 0.64 1.64 0.01 0.00 0.04 0.14 0.21 0.02 0.47
Sample No.  D00237 D00238 D00239 D00240 D00243 D00245 D00245 D00251 D00253 D00255 D00258 D00260 D00261 Intercept Drill hole WC	3.85 4.05 1.80 From m 47.30 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00 56.10 47.30	3.85 4.05 4.60 4.60  To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.90 54.40 55.00 56.60 56.60 ercept assa	0.85 0.20 0.55 2.80  Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.90 0.50 0.60 1.10 0.50 9.30  ys (Webbs (	1.7 10.9 3.7 4.5  Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7 0.5 4.1 10.0  Consol Ma	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29 0.04 0.41 0.36 din Shaft P	Pb % 0.52 0.40 0.00 0.00 0.04 0.14 0.01 0.02 0.47 0.25
Sample No.  D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255 D00258 D00260 D00261 Intercept  Drill hole WC Sample	3.85 4.05 1.80 From m 47.30 48.00 49.60 50.20 50.80 51.10 52.00 53.90 54.40 55.00 56.10 47.30	3.85 4.05 4.60 4.60  To m 48.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00 56.60 56.60 ercept assa	0.85 0.20 0.55 2.80  Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.90 0.50 0.60 1.10 0.50 9.30  ys (Webbs 0 Interval	1.7 10.9 3.7 4.5  Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7 0.5 4.1 10.0  Consol Ma	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29 0.04 0.41 0.36 din Shaft P	Pb % 0.52 0.40 0.00 0.04 0.14 0.01 0.02 0.47 0.25 Prospect)
Sample No.  D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255 D00258 D00260 D00261 Intercept  Drill hole WC Sample No.	3.85 4.05 1.80  From m 47.30 48.00 49.60 50.20 50.80 51.10 52.00 53.90 54.40 55.00 56.10 47.30  CSoo6 interm m	3.85 4.05 4.60 4.60  To m 48.00 49.00 49.60 50.20 50.80 51.10 52.00 53.90 54.40 55.00 56.60 56.60  Percept assa	0.85 0.20 0.55 2.80  Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.90 0.50 0.60 1.10 0.50 9.30  ys (Webbs 0 Interval m	1.7 10.9 3.7 4.5  Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7 0.5 4.1 10.0  Consol Ma Ag g/t	0.25 0.96 0.35 0.43  Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29 0.04 0.41 0.36  din Shaft F Zn %	Pb % 0.52 0.21 0.40 0.02 0.64 1.64 0.01 0.00 0.04 0.14 0.21 0.02 0.47 0.25 Prospect) Pb %
Sample No.  D00237 D00238 D00239 D00240 D00243 D00245 D00248 D00251 D00253 D00255 D00258 D00260 D00261 Intercept  Drill hole WC Sample	3.85 4.05 1.80 From m 47.30 48.00 49.60 50.20 50.80 51.10 52.00 53.90 54.40 55.00 56.10 47.30	3.85 4.05 4.60 4.60  To m 48.00 49.60 50.20 50.80 51.10 52.00 53.00 53.90 54.40 55.00 56.60 56.60 ercept assa	0.85 0.20 0.55 2.80  Interval m 0.70 1.00 0.60 0.60 0.30 0.90 1.00 0.90 0.50 0.60 1.10 0.50 9.30  ys (Webbs 0 Interval	1.7 10.9 3.7 4.5  Ag g/t 11.7 10.2 9.4 7.7 28.8 70.8 2.9 1.5 6.0 16.3 9.7 0.5 4.1 10.0  Consol Ma	0.25 0.96 0.35 0.43 Zn % 0.50 0.40 0.43 0.55 0.33 2.21 0.04 0.01 0.02 1.28 0.29 0.04 0.41 0.36 din Shaft P	Pb % 0.52 0.40 0.00 0.04 0.14 0.01 0.02 0.47 0.25 Prospect)



ASX I	1/ Noven	nber 2	J21					RESOURCES LTD
D00288	105.60	106.0	0.40	61.5	50.20	0.13		
D00288	105.00	107.0		104.0	4.61	0.15		
D00292	100.00	108.0		334.0	5.55	1.50		
D00297	108.00	109.0		317.0	8.44	1.51		
D00299	109.00	110.00		485.0	2.64	2.45		
D00302	110.00	111.0		47.7	4.24	0.71		
D00304	111.00	112.0		95.4	4.44	0.94		
D00306	112.00	113.00	1.00	300.0	4.75	2.52		
D00308	113.00	114.0	1.00	112.0	14.85	0.80		
D00311	114.00	115.0	1.00	144.0	5.56	1.03		
D00313	115.00	116.0	1.00	61.3	4.82	0.49		
D00315	116.00	117.0	1.00	172.0	6.70	0.80		
D00317	117.00	118.0		70.1	8.37	0.38		
D00319	118.00	119.0		79.5	5.75	0.45		
D00322	119.00	120.00		77.0	5.39	0.47		
D00324	120.00	121.00		127.0	7.17	0.66		
D00326 D00328	121.00 122.00	122.00 123.00		56.9 109.0	6.73 6.40	0.36 0.47		
D00328	123.00	124.0		138.0	7.82	0.47		
D00330	124.00	125.0		57.9	5.66	0.33		
D00334	125.00	126.0		65.4	8.07	0.27		
D00336	126.00	127.0		101.0	6.28	0.57		
D00338	127.00	128.0		83.7	7.36	0.74		
D00340	128.00	129.0	1.00	30.6	6.83	0.24		
D00343	129.00	129.4	0.40	48.3	14.20	0.41		
D00345	129.40	130.0		14.0	2.42	0.25		
D00347	130.00	131.0		10.7	2.04	0.09		
D00349	131.00	132.10		6.3	0.83	0.65		
Intercept	104.60	132.1		118.1	6.52	0.77		
	gregation		-	_	-	n Results,	•	All stated average grades are length weighted.
methods			_	_		techniques,	•	No grade capping has been applied.
						num grade g of high	•	No equivalent formula has been used.
						grades are		
			usually		_	should be		
			stated.	Widterio	ii aiia	Siloula DC		
			• Where	aggre	nate	intercepts		
						hs of high-		
			•		_	lengths of		
			_		_	procedure		
			_		-	n should be		
						examples of		
						d be shown		
			in detai		2 2 3 410			
					ns user	d for any		
				-		alent values		
			should be cl	_	-			
Relations	ship betw	reen				particularly	•	The reported historic strike and dip of the Webbs
	sation wi				-	porting of		Consol mineralised lode is; Strike 190°, dip 70-75°
and inte	rcept leng	gths	-	tion Resu	-	. •		east.
	_					neralisation	•	The WCS006 and WCS007 drill hole intersects the
			_	-		ole angle is		Webbs Consol mineralised structure at
				its n				approximately 70° laterally (20° off perpendicular).
			reporte	d.			•	The orientation of the mineralisation intersected in
					and onl	y the down		holes WCS001-WCS005 is not known at this time.
						rted, there		
			should	be a clea	r statem	nent to this		
				eg 'down	hole len	gth, true		
			width not kr	nown').				



Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plans and sections.	Refer to plans and sections within report
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported.	All meaningful and material data is reported.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).	Diamond drilling is ongoing.