

GOLDEN CROSS RESOURCES LTD

ABN 65 063 075 178

301/66 Berry Street NORTH SYDNEY Phone (02) 9922 1266

5 January 2022

Copper Hill Tenement Planned Geochemistry Surface Sampling Completed

The Company (ASX:GCR) has completed infill and extension surface sampling over part of the Copper Hill tenement Exploration Licence 6391, north of Molong, NSW.

The infill / extension sampling of surface soils is designed to extend coverage based on a MGA grid [MGA z55 GDA94] over areas of Copper Hill and surrounds that are potential future infrastructure sites [waste rock stack and tailings storage area, in previous draft site layouts].

Land Access

Landholders that were contacted for access arrangements to undertake geophysical work are the same for some of the geochemical sampling work. Accordingly both activities have been discussed with landholders as part of the access arrangements, noting areas under cultivation / crop, or where no vehicle access is requested.

Sampling was undertaken on a first pass spacing of 200 x 200 metres and covered 36 sites as shown in **Figure 1**. Rain events limited access to sites, and the work was disrupted by the Molong Flood at the end of November, and sporadic outbreaks of Covid cases in the Central West Region leading to localised lockdowns. Wet surface conditions persisted into early December 2021 rendering further sampling medium unsuitable for site collection.

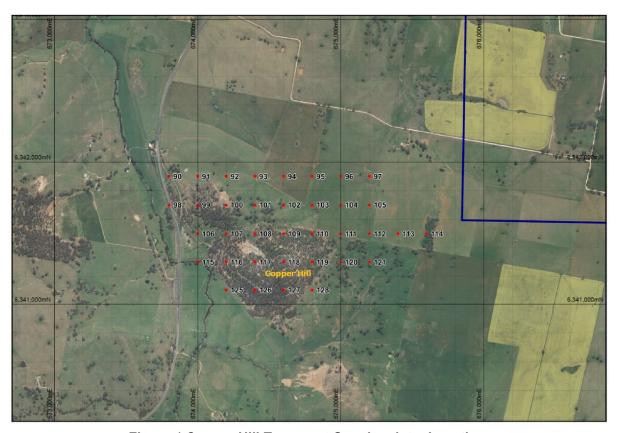


Figure 1 Copper Hill Tenement Geochemistry Locations

The currently available data and samples are to be interpreted in more detail and further processing and evaluation are to be planned in the next stage of work.

This announcement has been reviewed and authorised for release by the GCR Board.

The information in this report that relates to Exploration Results is based on information from previous reports, compiled by Mr Bret Ferris, who is a Member of the Australasian Institute of Geoscientsts. (AIG). Mr Ferris is a consultant to Golden Cross Resources Limited, and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Ferris consents to the inclusion in this report of the matters based on that information in the form and context in which it appears.

JORC Compliance Statement Surface Geochemical Sampling: Soil Sections 1 and 2 of Table 1, JORC Code, 2012 Edition

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random cl specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as do gamma sondes, or handheld XRF instruments, etc). These e should not be taken as limiting the broad meaning of samp Include reference to measures taken to ensure sample repra and the appropriate calibration of any measurement tools of systems used. 	of approximately 25cm using shovel & mattock and sieved in the field to -2mm, producing a sample of ~100-200grams in kraft paper packets for lab submission. Site characteristics were noted in field sample books
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, blast, auger, Bangka, sonic, etc) and details (eg core diame or standard tube, depth of diamond tails, face-sampling bit type, whether core is oriented and if so, by what method, e 	ter, triple or other
Drill sample recovery	 Method of recording and assessing core and chip sample reand results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and and whether sample bias may have occurred due to prefere loss/gain of fine/coarse material. 	d grade
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support approp Mineral Resource estimation, mining studies and metallurg studies. Whether logging is qualitative or quantitative in nature. Co costean, channel, etc) photography. The total length and percentage of the relevant intersection logged. 	riate noted in field sample books. iral ore (or
Sub- sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or a taken. If non-core, whether riffled, tube sampled, rotary split, etc of whether sampled wet or dry. For all sample types, the nature, quality and appropriatenessample preparation technique. Quality control procedures adopted for all sub-sampling stamaximise representivity of samples. Measures taken to ensure that the sampling is representation in situ material collected, including for instance results for fully duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	and ss of the ages to ive of the field
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying an laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instrum	procedures - Assays undertaken after pulversing whole sample to >90% passing 75 microns • Aqua Regia digest and analysis by ALS method ME-ICP41 (33 elements, low detection levels). Gold assays by 50g Fire Assay, ALS method Au-AA26. Analyses greater than 1% by method OG62 • No instrumental analyses undertaken.
	etc, the parameters used in determining the analysis includinstrument make and model, reading times, calibrations fac	ing

Criteria	JORC Code explanation Co	ommentary
	 applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 All samples analysed by Australian Laboratory Services. Preparation at the Brisbane laboratory and analysis at Orange Standard internal checks, matching checks with other ALS labs and annual 'round robin' comparisons with competitor labs. Acceptable levels of accuracy and precision have been established
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	f • N/A for soils samples
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 Sample sites are located by handheld GPS. MGA grid system; zone 55, using GDA94 datum.
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	
Orientation of data in relation to geological structure	 Whether sample compositing has been applied. Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	mineralisation related to multi-phase intrusives and mineralisation disseminated and veined within various phases of porphyry intrusions and in veins and breccias within the adjacent country rock. • N/A.
Sample security	The measures taken to ensure sample security.	 No specific measures. The ALS Laboratory is 40 km from Copper Hill and GCR personnel prepared and transported all samples, which were receipted at lab.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 No audits have been carried out specifically on the sampling techniques.

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. 	The Copper Hill – Molong Project is held 100% by GCR under EL6391 (33 units, 95 square kilometres).
	 The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	EL6391 is current to 10 th March 2025.
Exploration done by other parties	 Acknowledgment and appraisal of exploration by other parties. 	 Since 1960's Anaconda, Amax Australia, Le Nickel, BHP, and a series of Joint Ventures between Metallic Resources and Homestake, Cyprus Minerals, MIM and Newcrest.
Geology	Deposit type, geological setting and style of mineralisation.	 Porphyry-style; tonalite-dacite multi-phase intrusions into andesitic island-arc volcanics with copper-gold in disseminations, sheeted veins, multidirectional stockworks, breccias and adjacent

Criteria	JORC Code explanation	Commentary
		exoskarns
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: 	• N/A
	o easting and northing of the drill hole collar	
	 elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 	
	o dip and azimuth of the hole	
	o down hole length and interception depth	
	o hole length.	
	 If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. 	• N/A
	 Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. 	1
	 The assumptions used for any reporting of metal equivalent values should be clearly stated. 	
Relationship between	 These relationships are particularly important in the reporting of Exploration Results. 	• N/A.
mineralisation widths and intercept	 If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	
lengths	 If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	g further interpretation
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	t •
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	The sites of previous sampling are shown in Figure 1. :
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). 	 Future sampling may include infill, and further extensions of open geochemical zones, and parts of EL6391 where surface geochemistry may be useful in targeting.
	 Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	