

3 June 2009

Drilling Update

Bald Hill #1 well confirms northern extension of Tilbrook target coal seams

WestSide Corporation Ltd (ASX code WCL) advises that its Bald Hill #1 core well in ATP 688P in the northern Bowen Basin has confirmed the northern extension of the target coal seams in the Bald Hill area. These are the same coal seams as in the Tilbrook field which is 8 km south of the Bald Hill well with additional Fort Cooper Coal Measures. The Bald Hill well shows net coal in excess of 8 metres.

ATP 688P coal seam gas drilling program

WestSide is currently conducting a five-well program in ATP 688P in the northern Bowen Basin. The program includes two exploration wells (Tilbrook #8a and #8b), two core holes (Mount Saint Martin #1 and Bald Hill #1) and a horizontal chevron-style dual-lateral well (Tilbrook #L8a and #L8b) being completed into one existing vertical well (Tilbrook #8).

Latest activity – Bald Hill #1

The Bald Hill core well is designed to test the northern extensions of the Tilbrook field in the Moranbah Coal Measures and has a target depth of 400m. The well has been appraised by coring (subsequent desorption of the coal cores will determine gas saturation and composition), Drill Stem Tests (DST) (to assess permeability) and logging (to confirm depth and thickness of coal seams).

The rig has been released from Bald Hill #1 well. Three DST tests have been completed and 34 coal canisters have been taken for testing from a number of coal seams. It will be several weeks before accurate gas content data can be confirmed from the desorption process.

The well intersected net coal in excess of 8 metres including the gassy Fort Cooper Coal measures which adds an additional target seam in the area.

The well will be suspended as a future test well.

The rig will mobilise to WestSide's Paranui CSG pilot in ATP 769P to commence the Paranui #10 core well in mid-June.

Latest activity – Tilbrook #L8b

The well is currently drilling ahead laterally in the target coal seam at a total depth of 1,366 m and is expected to intersect the vertical well in the next day. Expected final TD is around 1,400 m. A liner well be run and the well will be completed before mobilising to the second lateral Tilbrook #L8a.

Lucas Mitchell is the drilling contractor for both wells.

ATP 688P is jointly held by WestSide (50%) and QGC (50%).

The program status is as set out on the following page:

ATP 688P coal seam gas drilling program

Well	Well Type	Spud Date	Finish Date	Current Status
Tilbrook # 8a	Exploration	16 April 2009	25 April	DST completed following gas shows. P&A as planned.
Tilbrook # 8b	Exploration	26 April 2009	2 May	DST completed following gas shows. P&A as planned.
Mount Saint Martin #1	Exploration Core hole	3 May 2009	20 May	In excess of 9m of net coal measured. DST's completed. Well suspended. Analysis and desorption continues.
Bald Hill #1	Exploration Core hole	21 May 2009	3 June	In excess of 8m of net coal measured. DST's completed. Well suspended. Analysis and desorption continues.
Tilbrook #8	Lateral L8b	21 May 2009	Expected early June	Drilling ahead at 1,366 m (lateral)
	Lateral L8a	Expected early June 2009	Expected mid June	Site prepared, awaiting completion of TL8b.

About WestSide Corporation Ltd

WestSide Corporation Limited is listed on ASX (ASX code: WCL) and has interests in coal seam gas (CSG) projects in Queensland and Indonesia. WestSide has a 50% interest in ATP 688P and ATP 769P with QGC holding the other 50%.

WestSide is currently operating an appraisal program in ATP 769P (Paranui) and ATP 688P (Tilbrook, Mount Saint Martin and Bald Hill) sites in Queensland's Bowen Basin, and is also assessing the CSG potential of certain coal deposits in Indonesia through its relationship with PT Bumi Resources TBK, one of Indonesia's largest coal miners.

WestSide plans to release regular drilling reports through ASX for the duration of this drilling program. These reports will also be available on WestSide's website: www.westsidecorporation.com.

For further information contact:


WestSide Corporation Ltd

Angus Karoll
Chairman and Acting CEO
07 3020 0900

Media

Anna O'Gorman
Principal Consultant - Three Plus
07 3503 5700
0423 463 548

ATP 688P area of operations

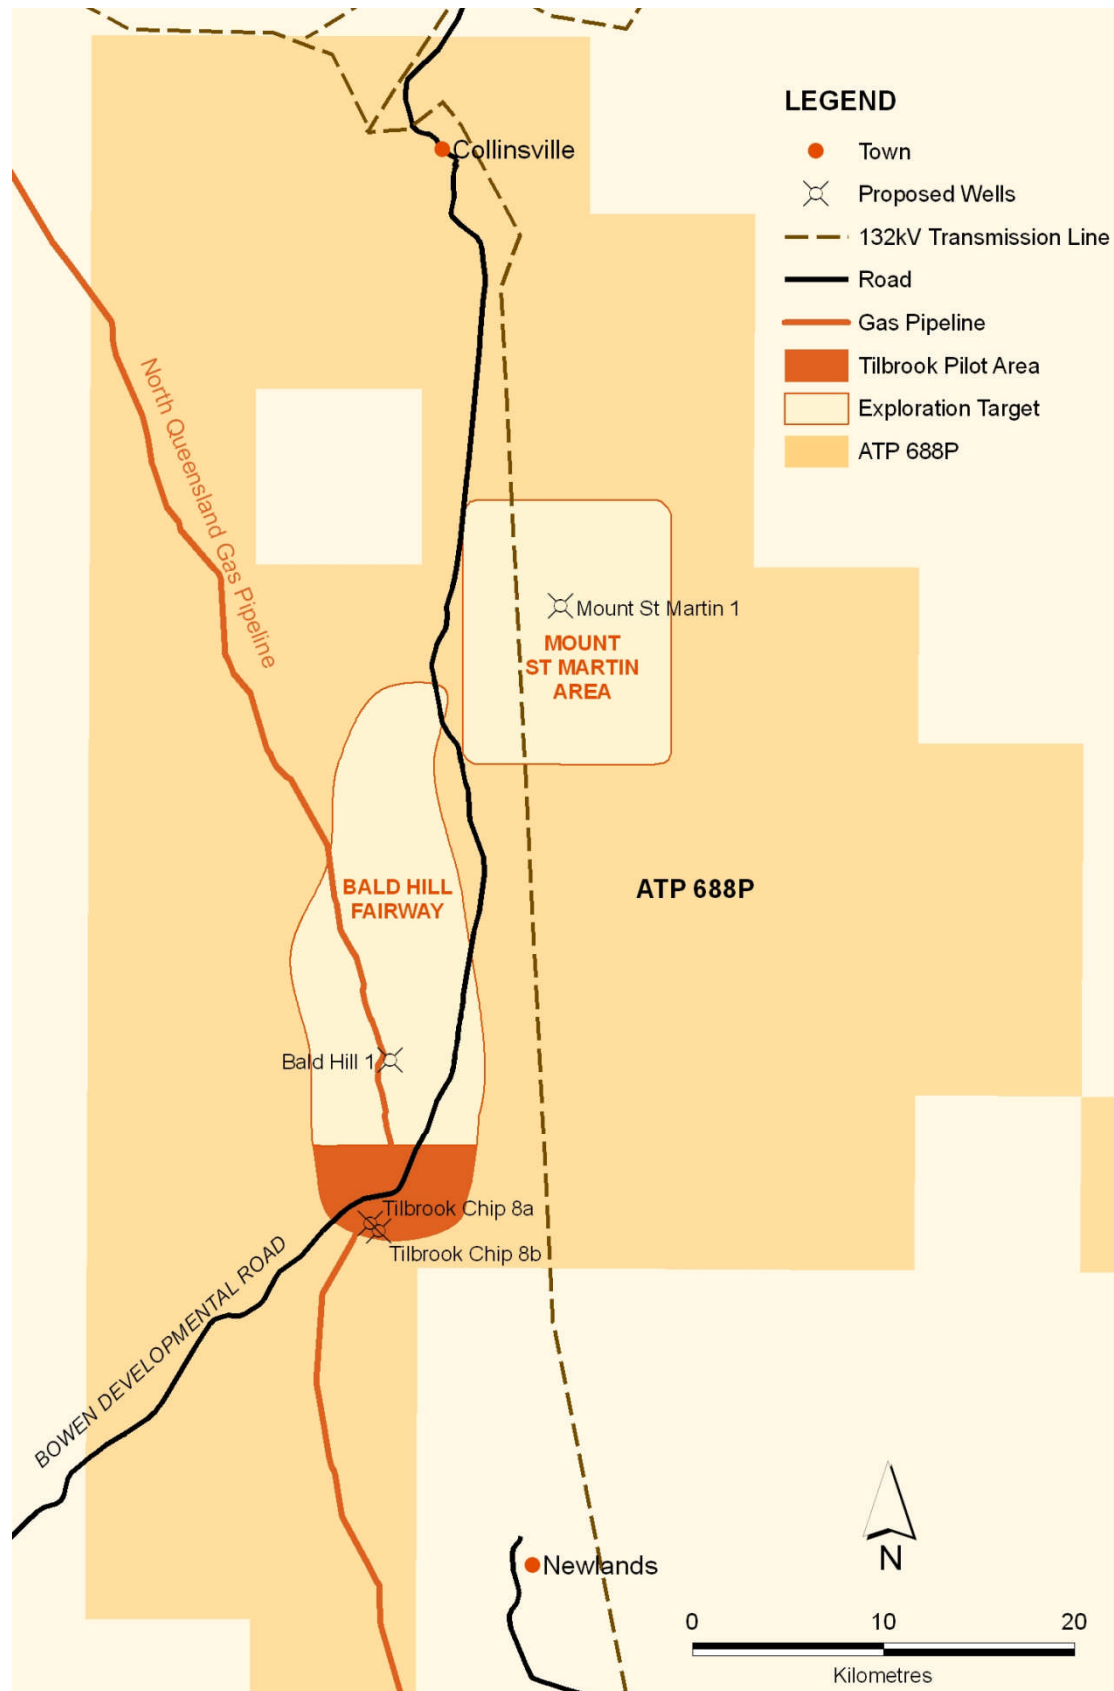

Tilbrook CSG Pilot Area

