

BOARD & MANAGEMENT

Glenn Davis - Chair
Michael Schwarz - MD
Gary Ferris - NED
Jarek Kopias - Co Sec

CAPITAL STRUCTURE

Ordinary Shares
Issued 122.2M

Options
Issued 3.0M

Performance rights
Issued 0.2M

CONTACT

Address:
Level 3, 170 Greenhill Rd
PARKSIDE SA 5063

Email:
info@itechminerals.com.au

Website:
www.itechminerals.com.au

Telephone:
+61 2 5850 0000



Location:
Eyre Peninsula Project,
South Australia

Contact:
Michael Schwarz
Managing Director
E: mschwarz@itechminerals.com.au
Ph: +61 2 5850 0000
W: www.itechminerals.com.au


DRILLING DOUBLES STRIKE LENGTH OF THE SUGARLOAF GRAPHITE PROSPECT

SUMMARY

- The strike (length) of drilled graphite mineralisation at the Sugarloaf Graphite Prospect has doubled from 2km to over 4km
- An additional 2.3km of graphite mineralisation has been drilled across the southern end of the prospect with visual graphite intersections up to 60m thick
- This confirms the southern extent of the exploration target
- 17 holes were drilled for a total of 1,594m with final assay results expected in the next 4-6 weeks
- High quality samples of graphite mineralisation have been obtained for metallurgical research
- Drilling at Sugarloaf is now complete, and the drill rig will now move 20km north, to the Lacroma Graphite Prospect, where over 10,000m of drilling is planned

"iTech is pleased to announce that drilling at the Sugarloaf Graphite Prospect in South Australia has doubled the length of graphite mineralisation from ~2km to over 4km. The drilling program has succeeded in testing the extent of graphite mineralisation and obtaining further samples for metallurgical research. The combined program will be one of the largest single programs undertaken to explore for graphite on the Eyre Peninsula in recent years."

- Managing Director Mike Schwarz

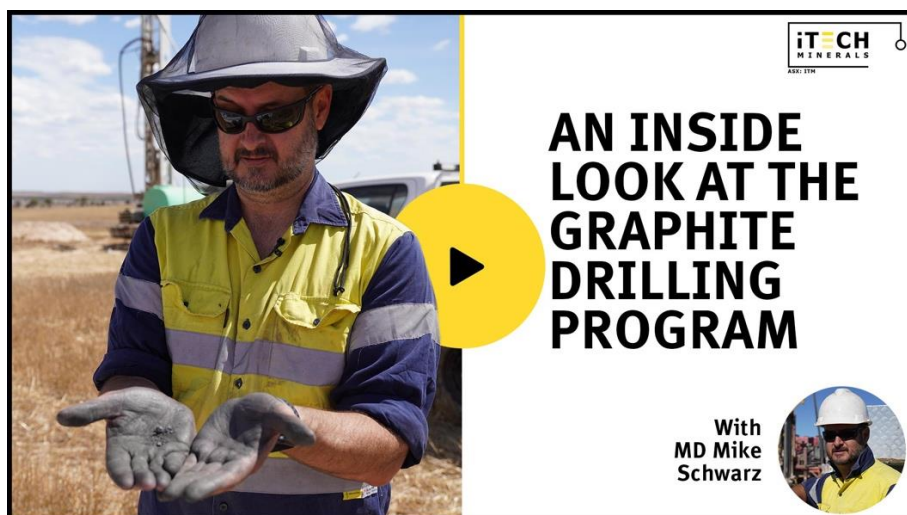

[WATCH: MD Mike Schwarz takes a closer look at the Sugarloaf Drilling Program](#)

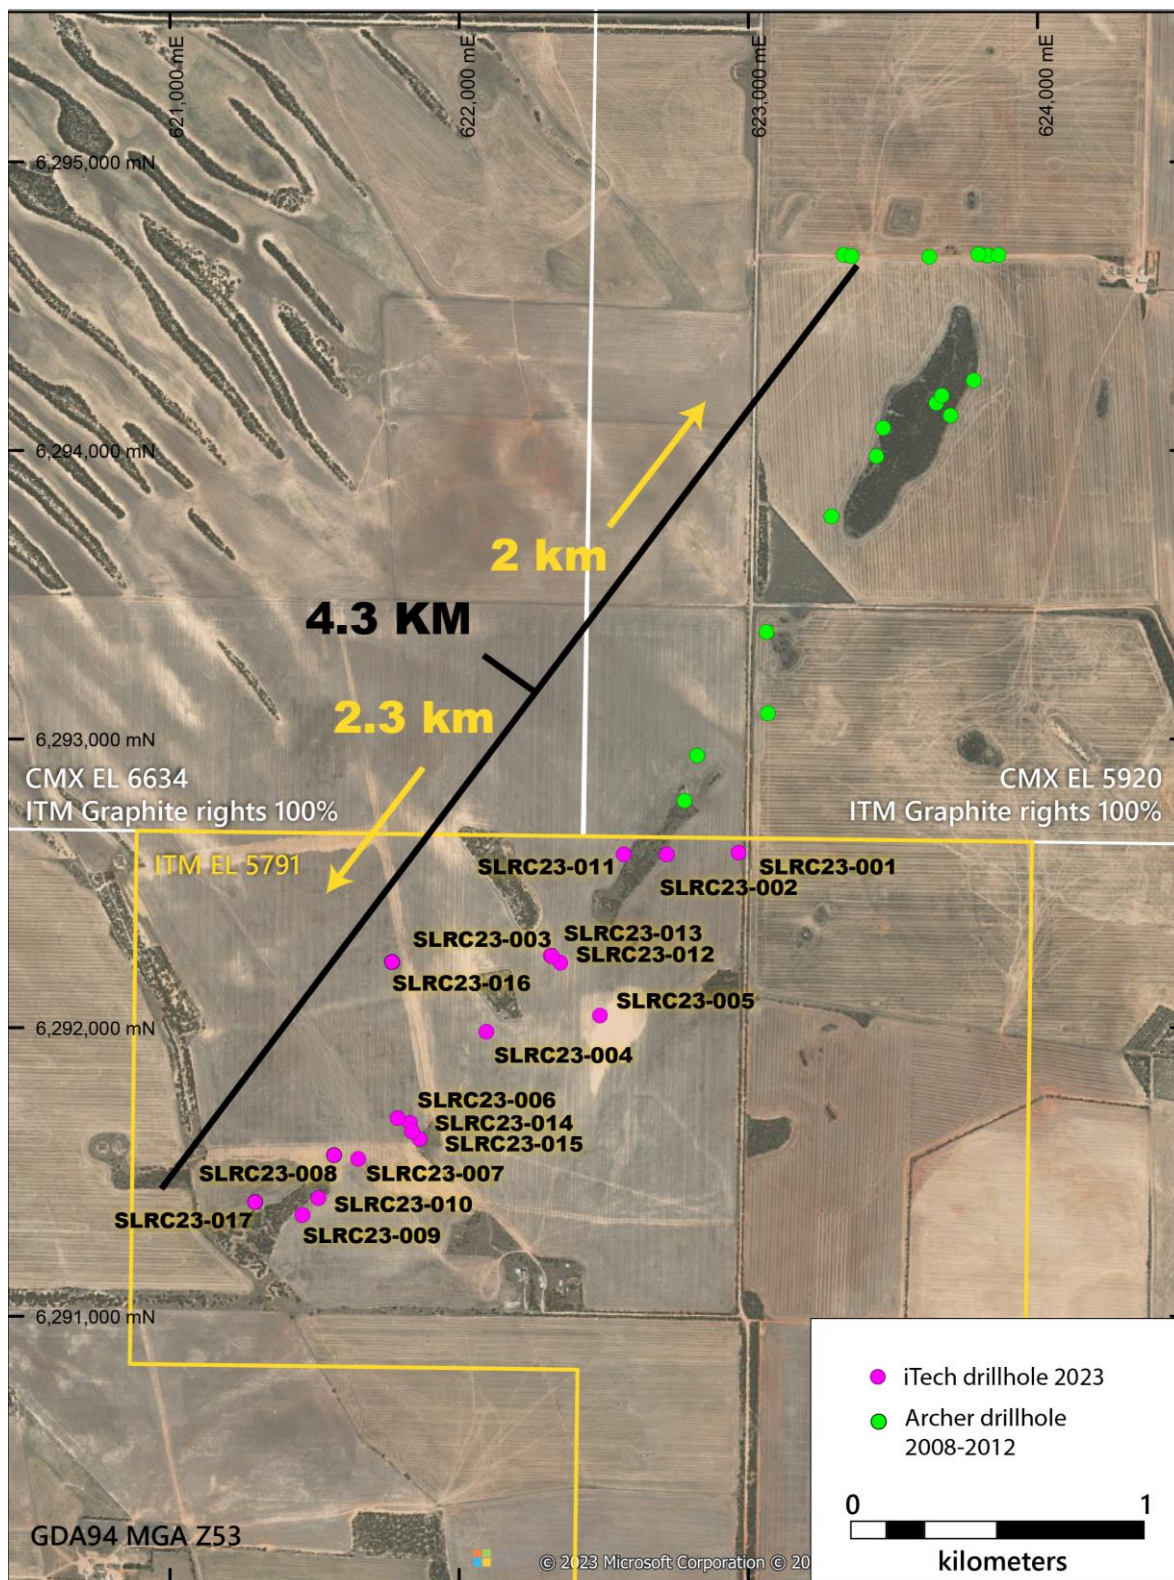


Figure 1. Drill collar plan of the Sugarloaf Graphite Prospect showing historical graphite drilling undertaken by Archer Materials (ASX: AXE) over the northern part of the prospect, between 2008-2012, and the recently completed drilling by iTech Minerals, in the southern half.

Drill Program

The reverse circulation (RC) drill program consisted of 17 drill holes designed to test the southern extent of a 4.5km electromagnetic anomaly at the Sugarloaf Graphite Prospect. The northern 2km area had been drill tested by Archer Materials Ltd between 2008 and 2012. The current round of drilling by iTech, has confirmed the full 4.5km extent of the Electromagnetic (EM) anomaly is caused by graphite mineralisation. The visual estimates of mineralisation indicate that the drilling intersected multiple intervals of graphite mineralisation over the additional 2.3km of strike in the southern half of the prospect.

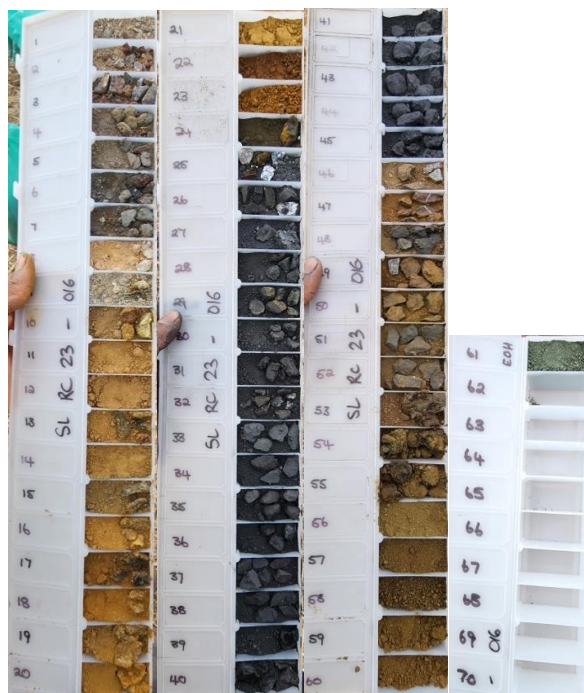


Figure 2. Chip tray photographs from hole SLRC23-016. The image shows a 37m interval of graphite mineralisation from 23m to 60m downhole. True thickness in unknown.



Figure 3. Chip tray photographs from hole SLRC23-013. The image shows a 60m interval of graphite mineralisation from 6m to 66m downhole. True thickness in unknown.

Hole ID	From (m)	To (m)	Interval (m)	Visual Graphite (%)	Hole ID	From (m)	To (m)	Interval (m)	Visual Graphite (%)
SLRC23-001	7	36	29	1-5	SLRC23-009	1	12	11	1-5
	43	67	24	1-5		23	25	2	1-5
		Total	53			47	52	5	1-5
SLRC23-002	15	20	5	1-5		Total	18		
	38	45	7	1-5	SLRC23-010	5	30	25	1-5
	48	52	4	1-5		42	49	7	1-5
	63	67	4	1-5		49	52	3	5-10
		Total	20			52	58	6	1-5
SLRC23-003	5	7	2	1-5		79	84	5	1-5
	24	29	5	1-5		Total	46		
	31	34	3	1-5	SLRC23-011	6	21	15	1-5
		Total	10			21	29	8	5-10
SLRC23-004	79	83	4	5-10		29	45	16	1-5
	83	86	3	1-5		45	52	7	5-10
	90	98	8	1-5		52	56	4	1-5
		Total	15			67	90	23	1-5
SLRC23-005	67	70	3	1-5		90	95	5	5-10
		Total	3			95	106	11	1-5
SLRC23-006	33	35	2	1-5		106	114	8	5-10
	48	50	2	1-5		Total	97		
	68	70	2	1-5	SLRC23-012	0	24	24	1-5
	76	103	27	5-10		54	77	23	1-5
	112	114	2	1-5		96	107	11	1-5
	114	126	12	5-10		Total	58		
	126	130	4	1-5	SLRC23-013	6	47	41	1-5
	130	132	2	5-10		47	66	19	5-10
		Total	53			Total	60		
SLRC23-007	13	15	2	1-5	SLRC23-014	72	118	46	1-5
	15	19	4	5-10		Total	46		
	28	37	9	5-10	SLRC23-015	2	36	34	1-5
	37	40	3	1-5		40	43	3	1-5
	40	51	11	5-10		56	61	5	1-5
	51	53	2	1-5		Total	42		
		Total	31		SLRC23-016	3	7	4	1-5
SLRC23-008	2	7	5	1-5		23	45	22	5-10
	82	84	2	1-5		45	60	15	1-5
	102	118	16	1-5		Total	41		
	118	121	3	5-10	SLRC23-017	2	35	33	1-5
		Total	21			73	86	13	1-5
						Total	46		

Table 1. Significant graphite intervals from the Sugarloaf reverse circulation drilling program.

*Reference to visual estimates of graphite mineralisation in this report should not be considered a substitute for laboratory analysis for Total Graphitic Carbon (TGC). Laboratory assays are pending and are estimated to be available in approximately four to six weeks. True thickness of the reported intersections is unknown. The intercepts listed contain material with visually estimated graphite however, due to the microcrystalline nature of the graphite mineralisation, the visual estimates may not correlate well with laboratory assays. For this reason, the visual estimations of grade are deliberately conservative. The intercepts listed are for lengths greater than 2 m and may contain internal dilution (material less than 5% visually estimated graphite) to a maximum of 1m in a 6m length.

Investors should be aware that the potential quantity and grade of the Exploration Target reported are conceptual in nature, there has been insufficient exploration to estimate a Mineral Resource and it is uncertain if further exploration will result in the estimation of a Mineral Resource.

An Exploration Target at Sugarloaf of **158-264 Mt @ 7-12 % TGC** was determined from drilling and a conductivity anomaly measuring 4.5km by 1.3km and was reported to the ASX on 19 September 2022.

This drilling program has been successful in collecting representative samples of the full extent of graphite mineralisation from the 4.5km long EM conductor at Sugarloaf. While samples from Sugarloaf have undergone preliminary metallurgical test work, the work is preliminary in nature and is **not** aimed at producing a battery grade spherical product. The was to determine if the graphite at

Sugarloaf had the right properties to be able to produce battery anode material (ASX release on 16 December 2022, Sugarloaf Graphite Metallurgy update). This work was successful, and it has been confirmed that Sugarloaf consists of a fine crystalline flake graphite. Now that sufficient representative samples have been obtained from drilling, further metallurgical research is being planned to determine what kind of processing will be required to produce a fine flake concentrate with suitable grade and recoveries. If that can be achieved, the research will progress to the spheronisation and purification stages.

The drill rig will now move to Lacroma, where graphite has been previously drilled and is assumed to be the source of a 12km long conductivity anomaly. Most of the drilling will focus on the northern 6km of the Lacroma drill target with a 10,000m drill program planned targeting areas where metallurgy has confirmed graphite mineralisation can produce a high-quality concentrate.

The combined program is expected to take up to 10 weeks to complete with assay results released progressively as drilling progresses.

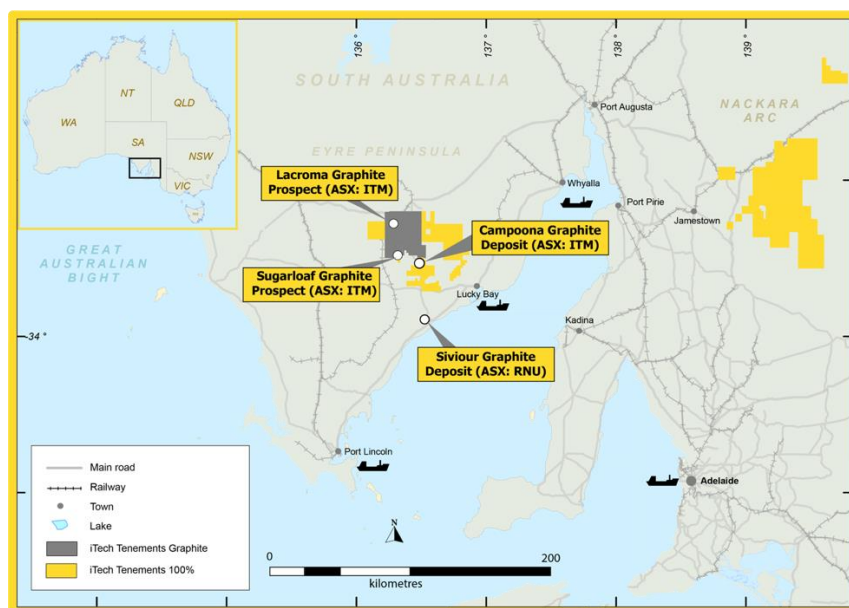


Figure 4. Location of iTech's Graphite Deposits and Prospects – Eyre Peninsula, South Australia

For further information please contact the authorising officer Michael Schwarz:

iTech Minerals
Michael Schwarz, FAusIMM, AIG
Managing Director
E: mschwarz@itechminerals.com.au
Ph: +61 2 5850 0000
W: www.itechminerals.com.au

ABOUT iTECH MINERALS LTD

iTech Minerals Ltd is a newly listed mineral exploration company exploring for and developing battery materials and critical minerals within its 100% owned Australian projects. The company is exploring for graphite, kaolinite-halloysite, regolith hosted clay rare earth element mineralisation and developing the Campoona Graphite Project in South Australia. The Company also has extensive exploration tenure prospective for Cu-Au porphyry mineralisation, IOCG mineralisation and gold mineralisation in South Australia and tin, tungsten, and polymetallic Cobar style mineralisation in New South Wales.

GLOSSARY

AEM = Airborne Electromagnetic

EM = Electromagnetic

TGC = Total Graphitic Carbon

COMPETENT PERSON STATEMENT

The information which relates to exploration results is based on and fairly represents information and supporting documentation compiled by Michael Schwarz. Mr Schwarz has sufficient experience, which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking, to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (the JORC Code). Mr Schwarz is a full-time employee of iTech Minerals Ltd and is a member of the Australian Institute of Geoscientists and the Australian Institute of Mining and Metallurgy. Mr Schwarz consents to the inclusion of the information in this report in the form and context in which it appears.

This announcement contains results that have previously released as "Sugarloaf Graphite Exploration Target, Eyre Peninsula" on 19 September 2022 and "Lacroma Graphite Drill Target on Eyre Peninsula" on 4 October 2022, "Sugarloaf Graphite Exploration Target" on 19 September 2022, "200km of Graphite Potential at Eyre Peninsula Projects" on 26 October 2022, and "Sugarloaf Graphite Metallurgy update" on 16 December 2022. iTech confirms that the Company is not aware of any new information or data that materially affects the information included in the announcement and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not changed.

JORC 2012 EDITION - TABLE 1
Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling Techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> All samples were collected through a cyclone and splitter into plastic bags and pre-numbered calico bags at 1 m intervals, which have been sent for chemical analyses. Composite intervals were created for intervals where no visual graphite was observed. Composite samples are typically comprised of 4 single metre intervals and weigh roughly 1-2 kg for initial research. All samples were sent to the Intertek laboratory in Adelaide for preparation and forwarded to Perth for analyses. All samples are crushed using LM2 mill to -4 mm and pulverised to nominal 85% passing -75 µm. Analyses were performed on a sub sample of this pulverised sample. The Competent Person has referenced publicly sourced information through the report and considers that sampling was commensurate with industry standards current at the time of drilling and is appropriate for the indication of the presence of mineralisation.
Drilling Techniques	<ul style="list-style-type: none"> Drill type (e.g., core, reverse circulation, open hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.). 	<ul style="list-style-type: none"> Lehamnn Drilling used a Reverse Circulation drill rig mounted on an 8-wheel truck with support equipment. Reverse Circulation (RC) drilling uses an 140mm face sampling hammer bit and is a form of drilling where the sample is collected at the face and returned inside the inner tube. The drill cuttings are removed by the injection of compressed air into the hole via the annular area between the inner tube and the drill rod. The Competent Person has inspected the drilling program and considers that drilling techniques was commensurate with industry standards current at the time of drilling and is appropriate for the indication of the presence of mineralisation.
Drill Sample Recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample 	<ul style="list-style-type: none"> No assessment of recoveries was documented. All efforts were made to ensure the sample was representative. No relationship is believed to exist, but

Criteria	JORC Code Explanation	Commentary
	<p>recovery and ensure representative nature of the samples.</p> <ul style="list-style-type: none"> Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p>no work has been done to confirm this.</p>
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All samples were geologically logged to include details such as colour, grain size, lithology and graphite content on a single metre interval. Collars were located using a handheld GPS, a licenced surveyor will locate all holes with a DGPS. The holes were logged in both a qualitative and quantitative fashion relative to graphite content.
Sub-Sampling Techniques and Sample Preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all cores taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality, and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> All RC samples are split using a 3-tier riffle splitter mounted under the cyclone, RC samples are drilled dry, less than 10% of the sample were returned to the surface wet. A full profile of the bag contents was subsampled to ensure representivity via the splitter. Composite intervals were created for intervals where graphite was not visually observed. Composite intervals are typically about 4m in length. Composite samples weigh roughly 1-2 kg for initial research. Sample size is deemed appropriate to be representative of the grainsize. All samples were sent to Intertek laboratory in Adelaide for preparation and forwarded to Perth for graphite and multi-element analyses. QAQC (duplicates, blanks and standards) are submitted at a frequency of 10%. All samples are crushed using LM2 mill to -4 mm and pulverised to nominal 85% passing -75 µm.
Quality of Assay Data and Laboratory Tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations 	<ul style="list-style-type: none"> No assays are being reported in this release. Reference to visual estimates of graphite mineralisation in this report should not be considered a substitute for laboratory analysis for Total Graphitic Carbon (TGC). Laboratory assays are pending and are estimated to be available in approximately four to six weeks. The intercepts listed contain material with

Criteria	JORC Code Explanation	Commentary																																																																																																
	<p>factors applied and their derivation, etc.</p> <ul style="list-style-type: none"> Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<p>visually estimated graphite however, due to the microcrystalline nature of the graphite mineralisation, the visual estimates may not correlate well with laboratory assays. For this reason, the visual estimations of grade are deliberately conservative.</p> <ul style="list-style-type: none"> Visual estimates of graphite content were correlated against samples with assays in similar drill holes in the northern part of the prospect. Certified standards were used in the assessment of the analyses. Analyses will be by Intertek Perth using their 4A/MS48 technique for multi-elements and C72/CSA for graphite. NOTE: Four acid digestions are able to dissolve most minerals; however, although the term “near-total” is used, depending on the sample matrix, not all elements are quantitatively extracted. Detection Limits are as follows <table> <tr> <th>Element</th><th>Unit</th><th>DL</th></tr> <tr><td>Ag</td><td>ppm</td><td>0.01</td></tr> <tr><td>Al</td><td>%</td><td>0.01</td></tr> <tr><td>As</td><td>ppm</td><td>0.2</td></tr> <tr><td>Ba</td><td>ppm</td><td>10</td></tr> <tr><td>Be</td><td>ppm</td><td>0.05</td></tr> <tr><td>Bi</td><td>ppm</td><td>0.01</td></tr> <tr><td>C</td><td>%</td><td>0.1</td></tr> <tr><td>Ca</td><td>%</td><td>0.01</td></tr> <tr><td>Cd</td><td>ppm</td><td>0.02</td></tr> <tr><td>Ce</td><td>ppm</td><td>0.01</td></tr> <tr><td>Co</td><td>ppm</td><td>0.1</td></tr> <tr><td>Cr</td><td>ppm</td><td>1</td></tr> <tr><td>Cs</td><td>ppm</td><td>0.05</td></tr> <tr><td>Cu</td><td>ppm</td><td>0.2</td></tr> <tr><td>Fe</td><td>%</td><td>0.01</td></tr> <tr><td>Ga</td><td>ppm</td><td>0.05</td></tr> <tr><td>Ge</td><td>ppm</td><td>0.05</td></tr> <tr><td>Hf</td><td>ppm</td><td>0.1</td></tr> <tr><td>In</td><td>ppm</td><td>0.005</td></tr> <tr><td>K</td><td>%</td><td>0.01</td></tr> <tr><td>La</td><td>ppm</td><td>0.5</td></tr> <tr><td>Li</td><td>ppm</td><td>0.2</td></tr> <tr><td>Mg</td><td>%</td><td>0.01</td></tr> <tr><td>Mn</td><td>ppm</td><td>5</td></tr> <tr><td>Mo</td><td>ppm</td><td>0.05</td></tr> <tr><td>Na</td><td>%</td><td>0.01</td></tr> <tr><td>Nb</td><td>ppm</td><td>0.1</td></tr> <tr><td>Ni</td><td>ppm</td><td>0.2</td></tr> <tr><td>P</td><td>ppm</td><td>10</td></tr> <tr><td>Pb</td><td>ppm</td><td>0.5</td></tr> <tr><td>Rb</td><td>ppm</td><td>0.1</td></tr> </table>	Element	Unit	DL	Ag	ppm	0.01	Al	%	0.01	As	ppm	0.2	Ba	ppm	10	Be	ppm	0.05	Bi	ppm	0.01	C	%	0.1	Ca	%	0.01	Cd	ppm	0.02	Ce	ppm	0.01	Co	ppm	0.1	Cr	ppm	1	Cs	ppm	0.05	Cu	ppm	0.2	Fe	%	0.01	Ga	ppm	0.05	Ge	ppm	0.05	Hf	ppm	0.1	In	ppm	0.005	K	%	0.01	La	ppm	0.5	Li	ppm	0.2	Mg	%	0.01	Mn	ppm	5	Mo	ppm	0.05	Na	%	0.01	Nb	ppm	0.1	Ni	ppm	0.2	P	ppm	10	Pb	ppm	0.5	Rb	ppm	0.1
Element	Unit	DL																																																																																																
Ag	ppm	0.01																																																																																																
Al	%	0.01																																																																																																
As	ppm	0.2																																																																																																
Ba	ppm	10																																																																																																
Be	ppm	0.05																																																																																																
Bi	ppm	0.01																																																																																																
C	%	0.1																																																																																																
Ca	%	0.01																																																																																																
Cd	ppm	0.02																																																																																																
Ce	ppm	0.01																																																																																																
Co	ppm	0.1																																																																																																
Cr	ppm	1																																																																																																
Cs	ppm	0.05																																																																																																
Cu	ppm	0.2																																																																																																
Fe	%	0.01																																																																																																
Ga	ppm	0.05																																																																																																
Ge	ppm	0.05																																																																																																
Hf	ppm	0.1																																																																																																
In	ppm	0.005																																																																																																
K	%	0.01																																																																																																
La	ppm	0.5																																																																																																
Li	ppm	0.2																																																																																																
Mg	%	0.01																																																																																																
Mn	ppm	5																																																																																																
Mo	ppm	0.05																																																																																																
Na	%	0.01																																																																																																
Nb	ppm	0.1																																																																																																
Ni	ppm	0.2																																																																																																
P	ppm	10																																																																																																
Pb	ppm	0.5																																																																																																
Rb	ppm	0.1																																																																																																

Criteria	JORC Code Explanation	Commentary																																																																																										
		<table border="1"> <tr><td>Re</td><td>ppm</td><td>0.002</td></tr> <tr><td>S</td><td>%</td><td>0.01</td></tr> <tr><td>Sb</td><td>ppm</td><td>0.05</td></tr> <tr><td>Sc</td><td>ppm</td><td>0.1</td></tr> <tr><td>Se</td><td>ppm</td><td>1</td></tr> <tr><td>Sn</td><td>ppm</td><td>0.2</td></tr> <tr><td>Sr</td><td>ppm</td><td>0.2</td></tr> <tr><td>Ta</td><td>ppm</td><td>0.05</td></tr> <tr><td>Te</td><td>ppm</td><td>0.05</td></tr> <tr><td>Th</td><td>ppm</td><td>0.2</td></tr> <tr><td>Ti</td><td>%</td><td>0.005</td></tr> <tr><td>Tl</td><td>ppm</td><td>0.02</td></tr> <tr><td>U</td><td>ppm</td><td>0.1</td></tr> <tr><td>V</td><td>ppm</td><td>1</td></tr> <tr><td>W</td><td>ppm</td><td>0.1</td></tr> <tr><td>Y</td><td>ppm</td><td>0.1</td></tr> <tr><td>Zn</td><td>ppm</td><td>2</td></tr> <tr><td>Zr</td><td>ppm</td><td>0.5</td></tr> <tr><td>Dy</td><td>ppm</td><td>0.05</td></tr> <tr><td>Er</td><td>ppm</td><td>0.03</td></tr> <tr><td>Eu</td><td>ppm</td><td>0.03</td></tr> <tr><td>Gd</td><td>ppm</td><td>0.05</td></tr> <tr><td>Ho</td><td>ppm</td><td>0.01</td></tr> <tr><td>Lu</td><td>ppm</td><td>0.01</td></tr> <tr><td>Nd</td><td>ppm</td><td>0.1</td></tr> <tr><td>Pr</td><td>ppm</td><td>0.03</td></tr> <tr><td>Sm</td><td>ppm</td><td>0.03</td></tr> <tr><td>Tb</td><td>ppm</td><td>0.01</td></tr> <tr><td>Tm</td><td>ppm</td><td>0.01</td></tr> <tr><td>Yb</td><td>ppm</td><td>0.03</td></tr> </table> <ul style="list-style-type: none"> The laboratory uses their own certified standards during analyses. 	Re	ppm	0.002	S	%	0.01	Sb	ppm	0.05	Sc	ppm	0.1	Se	ppm	1	Sn	ppm	0.2	Sr	ppm	0.2	Ta	ppm	0.05	Te	ppm	0.05	Th	ppm	0.2	Ti	%	0.005	Tl	ppm	0.02	U	ppm	0.1	V	ppm	1	W	ppm	0.1	Y	ppm	0.1	Zn	ppm	2	Zr	ppm	0.5	Dy	ppm	0.05	Er	ppm	0.03	Eu	ppm	0.03	Gd	ppm	0.05	Ho	ppm	0.01	Lu	ppm	0.01	Nd	ppm	0.1	Pr	ppm	0.03	Sm	ppm	0.03	Tb	ppm	0.01	Tm	ppm	0.01	Yb	ppm	0.03
Re	ppm	0.002																																																																																										
S	%	0.01																																																																																										
Sb	ppm	0.05																																																																																										
Sc	ppm	0.1																																																																																										
Se	ppm	1																																																																																										
Sn	ppm	0.2																																																																																										
Sr	ppm	0.2																																																																																										
Ta	ppm	0.05																																																																																										
Te	ppm	0.05																																																																																										
Th	ppm	0.2																																																																																										
Ti	%	0.005																																																																																										
Tl	ppm	0.02																																																																																										
U	ppm	0.1																																																																																										
V	ppm	1																																																																																										
W	ppm	0.1																																																																																										
Y	ppm	0.1																																																																																										
Zn	ppm	2																																																																																										
Zr	ppm	0.5																																																																																										
Dy	ppm	0.05																																																																																										
Er	ppm	0.03																																																																																										
Eu	ppm	0.03																																																																																										
Gd	ppm	0.05																																																																																										
Ho	ppm	0.01																																																																																										
Lu	ppm	0.01																																																																																										
Nd	ppm	0.1																																																																																										
Pr	ppm	0.03																																																																																										
Sm	ppm	0.03																																																																																										
Tb	ppm	0.01																																																																																										
Tm	ppm	0.01																																																																																										
Yb	ppm	0.03																																																																																										
Verification of Sampling and Assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> No verification of sampling, no use of twinned holes Data is exploratory in nature and is compiled into excel spreadsheets. No adjustments will be made to any assay data. No assays are being reported in this release. 																																																																																										
Location of Data Points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> The location of drill hole collar was undertaken using a hand-held GPS which has an accuracy of +/- 5m using UTM MGA94 Zone 53. The quality and adequacy is appropriate for this level of exploration. No downhole surveys have been undertaken. 																																																																																										

Criteria	JORC Code Explanation	Commentary
Data Spacing and Distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> There is no pattern to the sampling and the spacing is defined by access for the drill rig, geological parameters, and land surface. The primary purpose of the drilling was to recover graphite material for metallurgical research. Data spacing and distribution are sufficient to establish a degree of geological and grade continuity for future drill planning, but not for resource reporting. Compositing of intervals without graphite has occurred for the purpose of assaying.
Orientation of Data in Relation to Geological Structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> It is unknown whether the drill holes have interested the mineralisation in a perpendicular manner. The purpose of the holes was to recover graphite for metallurgical research. Additional drilling on a regular pattern is required to better understand the sub-surface geology and structure. It is unknown if no bias has been introduced a sampling bias.
Sample Security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> All samples have been in the custody of iTech employees or their contractors and stored on private property with no access from the public. Best practices were undertaken at the time All residual sample material and pulps are stored securely
Audits or Reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> None undertaken.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code Explanation	Commentary
Mineral Tenement and Land Tenure Status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Tenement status confirmed on SARIG. All work being reported is from EL 5791 (owned by Sa Exploration Pty Ltd) a wholly owned subsidiary of iTech Minerals Ltd. The tenements are in good standing with no known impediments.
Exploration Done by Other Parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Relevant previous exploration has been undertaken by Shell Company of Australia Pty Ltd, Lincoln Minerals Ltd and Archer Materials Ltd
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The tenements are within the Gawler Craton, South Australia. iTech is exploring for graphite at the Sugarloaf Project. The Sugarloaf Graphite Project occurs within the Hutchison Group sequence on the eastern Eyre Peninsula in South Australia. High-grade regional metamorphism to upper amphibolite and lower granulite facies has produced graphitic schist units.
Drillhole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> Easting and northing of the drill hole collar Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar Dip and azimuth of the hole Downhole length and interception depth Hole length If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does 	<ul style="list-style-type: none"> See Appendix 1 for drill hole information.

Criteria	JORC Code Explanation	Commentary
	not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data Aggregation Methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> No assays are being reported in this release. The visual graphite intercepts listed are for lengths greater than 2 m and may contain internal dilution (material less than 5% visually estimated graphite) to a maximum of 1 m in a 6 m length.
Relationship Between Mineralisation Widths and Intercept Lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g., 'downhole length, true width not known'). 	<ul style="list-style-type: none"> All drilling is random in orientation, as such relationships between widths and true intercept lengths are unknown. Any intervals being reported are downhole lengths, the true widths of mineralisation are unknown. No assays are being reported in this release.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> See main body of report
Balanced Reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All other relevant data has been reported. The reporting is considered to be balanced.
Other Substantive Exploration Data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Drilling was primarily to collect graphite along strike for metallurgical research. All relevant exploration data. has been included in this report.
Further Work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or 	<ul style="list-style-type: none"> Sugarloaf is considered not tested and ore additional

Criteria	JORC Code Explanation	Commentary
	<p>depth extensions or large-scale step-out drilling).</p> <ul style="list-style-type: none"> Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<p>holes are foreseeably required to progress to a resource.</p> <ul style="list-style-type: none"> Additional metallurgical work is required on samples collected to determine if an economical product can be made, this will determine if additional drilling will be required at Sugarloaf. Additional geophysical work may be required to assist in understanding the sub surface behaviour of the graphite mineralisation ie magnetics and electro-magnetics at closer spacings to create higher resolution images.

Appendix 1.

Drill hole collars – Sugarloaf Graphite Prospect

UTM MGA94 Zone 53

Hole ID	Easting (m)	Northing (m)	Dip (deg)	Azimuth (deg)	RL (m)	Depth (m)
SLRC23-001	622966	6292606	-90	0	267	121
SLRC23-002	622718	6292600	-90	67	271	65
SLRC23-003	622317	6292250	-90	0	248	67
SLRC23-004	622094	6291986	-60	90	248	103
SLRC23-005	622487	6292042	-90	0	309	109
SLRC23-006	621830	6291670	-60	130	273	132
SLRC23-007	621651	6291545	-90	0	273	91
SLRC23-008	621567	6291558	-90	0	277	121
SLRC23-009	621458	6291351	-60	130	256	55
SLRC23-010	621513	6292409	-60	130	264	88
SLRC23-011	622569	6292600	-60	130	301	133
SLRC23-012	622350	6292225	-60	130	300	30
SLRC23-013	622330	6292248	-60	130	278	82
SLRC23-014	621827	6291646	-60	130	252	118
SLRC23-015	621888	6291630	-60	130	266	121
SLRC23-016	621763	6292237	-60	130	217	61
SLRC23-017	621365	6291410	-60	130	198	97