

FOR RELEASE: 15 JUNE 2023

ASX:
MNS

OTCQX:
MNSEF

FSE:
U1P

iM3NY Batteries Receive Certification

- Batteries produced by iM3NY have officially received UN/DOT38.3 certification
- UN38.3 certification is an internationally recognised standard established by the United Nations for the transportation of lithium-ion cells
- iM3NY cells are now permitted to be transported within the United States and internationally
- All seven tests were completed successfully with all cells used in the testing process compliant

Magnis Energy Technologies Ltd (“Magnis”, or the “Company”) (ASX: MNS; OTCQX: MNSEF; FSE: U1P) is pleased to announce lithium-ion batteries produced at the iM3NY Battery Plant have received UN38.3 certification. Magnis is the major shareholder of iM3NY.

All cells were compliant with the various tests undertaken and **certification can only be achieved if all cells are one hundred percent compliant.**

Regulated industries such as energy (lithium-ion battery cells), pharmaceutical, specialty chemicals and similar critical-use sectors require certification. iM3NY cells having complied with UN38.3/US DOT is a significant milestone. After receipt of the official certification, iM3NY cells are now permitted to be transported by land, sea and air both locally and internationally.

UN/DOT 38.3 Transportation Testing Overview

Lithium cells are classified as dangerous goods and can pose a safety risk if not tested and packaged in accordance with the transport regulations. UN/DOT 38.3 testing helps ensure the safety of lithium ion or lithium metal cells during shipping.

The transport of lithium cells is subject to national and international regulations as detailed by the UN (United Nations) in the U.N. Manual of Tests and Criteria, Sub-section 38.3 (UN 38.3, UN International Air Transport Association (IATA), and the United States DOT (Department of Transportation) which defines shipping regulations for the U.S. under 49 CFR, Sections 100 – 185. UN/DOT 38.3 details environmental, mechanical, and electrical requirements for all lithium-ion cells and batteries. Manufacturers of lithium batteries and products using lithium cells must demonstrate compliance in the design, manufacturing, and distribution of their products.

UN38.3 Certification Process

The UN38.3 certification process involves a series of tests that are designed to simulate the conditions that the cells may be exposed to during transportation. These tests include:

T1. Altitude Simulation: Low pressure testing that simulates unpressurised airplane cargo area at 15,000-meter altitude. After storing cells at 11.6kPa for >6 hours, these criteria shall be met: no mass loss, leaking, venting, disassembly, rupture or fire, and voltage within 10% of pre-test voltage.

T2. Thermal Cycling: The test covers changes in temperature extremes from -40C to +75C. Cells are stored for 6 hours at -40C (12 hours for large cells/batteries), then 6 hours at +75C (12 hours for large cells/batteries), for a total of 10 cycles. T2 tests the cell seal integrity and internal connections.

T3. Vibration: Test simulates vibration during transportation. The test is a Sine Sweep: 7Hz – 200Hz – 7Hz in 15 Minutes; 12 Sweeps (3 hours); 3 mutually perpendicular axes.

T4. Shock: Test robustness of cell under cumulative shock during transportation. Test is a Half-Sine pulse: 50g/11ms for large cells/batteries; 3 pulses per direction; 6 directions (+/-z, +/-x, +/-y).

T5. External Short Circuit: This test simulates an external short circuit to the terminals of the cell or battery. At temperature of +57C, apply short circuit (<0.1ohm) across terminals. Maintain at least an hour after sample temperature returns to +57 +/-4°C. Pass criteria are: Case temperature does not exceed +170°C and no disassembly, rupture, or fire within 6 hours of test. Fuse, current limiting circuit, and venting mechanism activation are allowable.

T6. Impact: This test simulates mechanical abuse from impact or crush.

T8. Forced Discharge: A sample is forced discharged at ambient temperature at an initial current equal to the maximum discharge current specified by the manufacturer and for a calculated time interval.

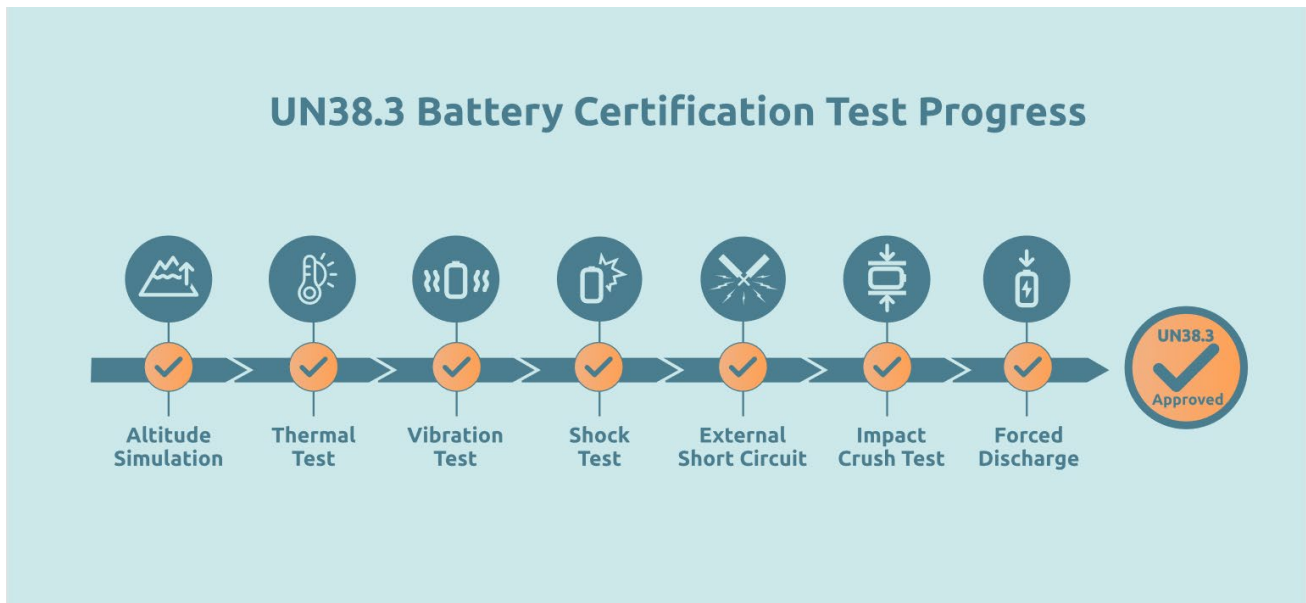


Figure 1: UN38.3 Battery Certification Process

Magnis Managing Director (USA) Hoshi Daruwalla commented: “Today’s news is significant as our batteries have met the strict safety requirements developed by the United Nations for transportation.”

“Magnis is grateful to our informed and loyal shareholders who appreciate the steps needed in the commercialisation journey of lithium-ion cell manufacturing.”

About Magnis

Magnis Energy Technologies Ltd (ASX: MNS; OTCQX: MNSEF; FSE: U1P) is a vertically integrated lithium-ion battery technology and materials company in the Lithium-ion battery supply chain. The company's US based subsidiary Imperium3 New York, Inc ("iM3NY") operates a Gigawatt scale Lithium-ion battery manufacturing plant in Endicott, New York. Magnis together with their US based technology partner, C4V LLC has produced high-performance active anode materials for lithium-ion batteries utilising Magnis' high purity graphite feedstock from their Nachu Graphite project in Tanzania. The company's vision is to enable, support and accelerate the mass adoption of Electric Mobility and Renewable Energy Storage critical for the green energy transition.

This announcement has been authorised for release by the Board of Magnis Energy Technologies Ltd (ACN 115 111 763).

FOR FURTHER INFORMATION

Frank Poullas

Executive Chairman

P: +61 2 8397 9888

E: info@magnis.com.au

Suite 11.01, 1 Castlereagh Street,
Sydney NSW 2000

Media: Sam Spurr

Niche Marketing Group

P: +61 2 8585 4322

E: sam@nichegroup.com.au

Unit 10, 10-12 George St
Leichhardt NSW 2040

TWITTER | twitter.com/magnisenergytec

LINKEDIN | linkedin.com/company/magnis-energy-technologies-ltd

WEBSITE | magnis.com.au

MEDIA ENQUIRIES | media@magnis.com.au

INVESTOR RELATIONS ENQUIRIES | info@magnis.com.au