

29 July 2024

ASX Market Announcement

RESULTS OF DRILLING FOR RARE EARTHS AT PARRAKIE IN SOUTH AUSTRALIA

In the second phase drilling program conducted in June 2024 at Parrakie EL 6795 in South Australia the Total Rare Earth Elements ("TREO") assay results received from the laboratory are very encouraging. See **Figures 1 and 2** for location of the tenement.

The significant drill intersections are as follows:

24PKAC052: 1m @ **1,253.9 ppm** TREO from 12m, in clayey sand above Gambier Limestone

24PKAC068: 1m @ **1,156.8 ppm** TREO from 17m, in clayey sand above Gambier Limestone

24PKAC094: 1m @ **1,015.2 ppm** TREO from 12m, in Karoonda Surface ferricrete above Gambier Limestone

24PKAC071: 1m @ **1,019.4 ppm** TREO from 19m, in clayey sand above Gambier Limestone

24PKAC079: 1m @ **912.6 ppm** TREO from 9m, in sand

24PKAC054: 1m @ **847.3 ppm** TREO from 19m, in clayey sand

High grade of 4,400 ppm Zirconium (Zr) is identified in an intersection of an interval between 13 m and 14 m in hole 24PKAC061.

55 vertical holes were drilled for a total of 1,200 m at an average depth of 12 m/hole in the northwest corner of the tenement (**Figure 3**). All holes intersected the target Loxton/Parilla Sands and every drilled meter has been scanned by pXRF with 80 drill intervals submitted to ALS Laboratory in Adelaide for the full REE suite using method ME-MS81.

The Chief Geologist commented: *"The results from this Phase 2 drilling in the NW corner of the Parrakie tenement is exciting. We see potential for the area to host significant ionic clay REE mineralisation and we are looking forward to a Phase 3 drilling."*

*The Company now has a strategic land position with the recently granted Wilkawatt tenement in the south and the under application Peake tenement adjacent to the west of Parrakie (**Figure 2**).*

We are currently finalising PEPRs (Government Approval for Drilling Operations) for drilling in the other tenements namely Kingston, Mt Rough and Wolseley."

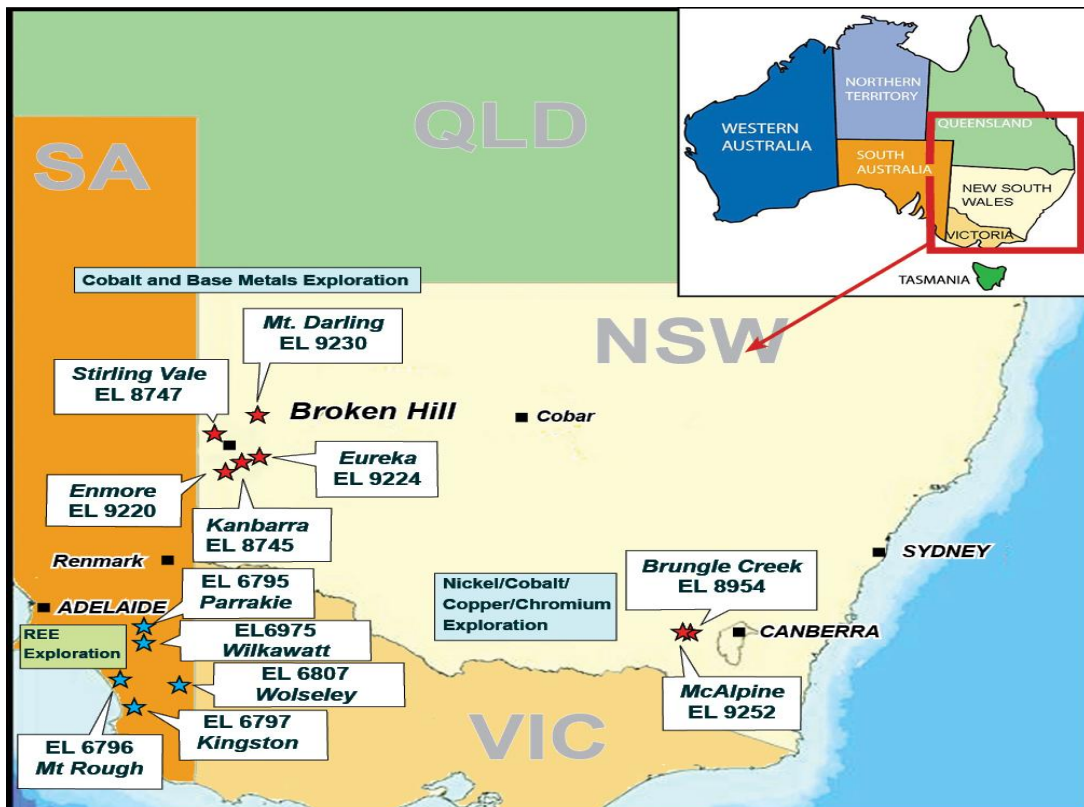


Figure 1: Location of granted licences in NSW and SA

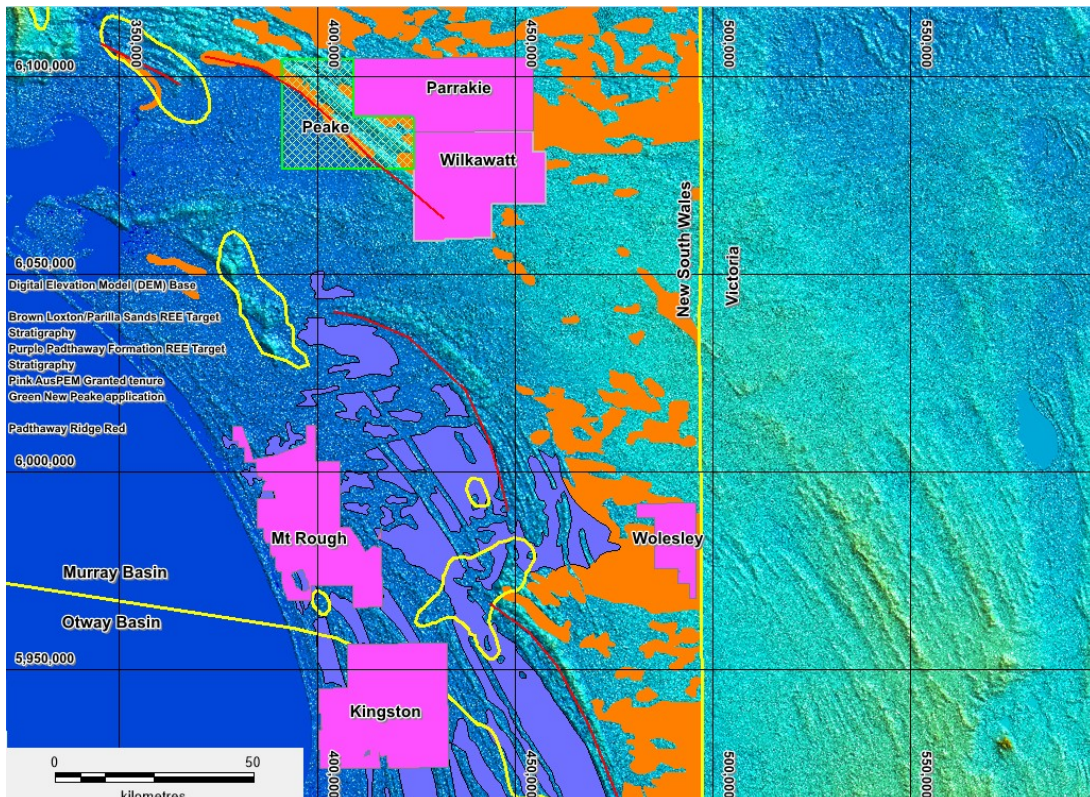


Figure 2: Granted tenements Parrakie, Wilkawatt, Woleseley, Mt Rough and Kingston (pink) and under application Peake in relation to the target REE Loxton/Parilla Sands (brown) in SA

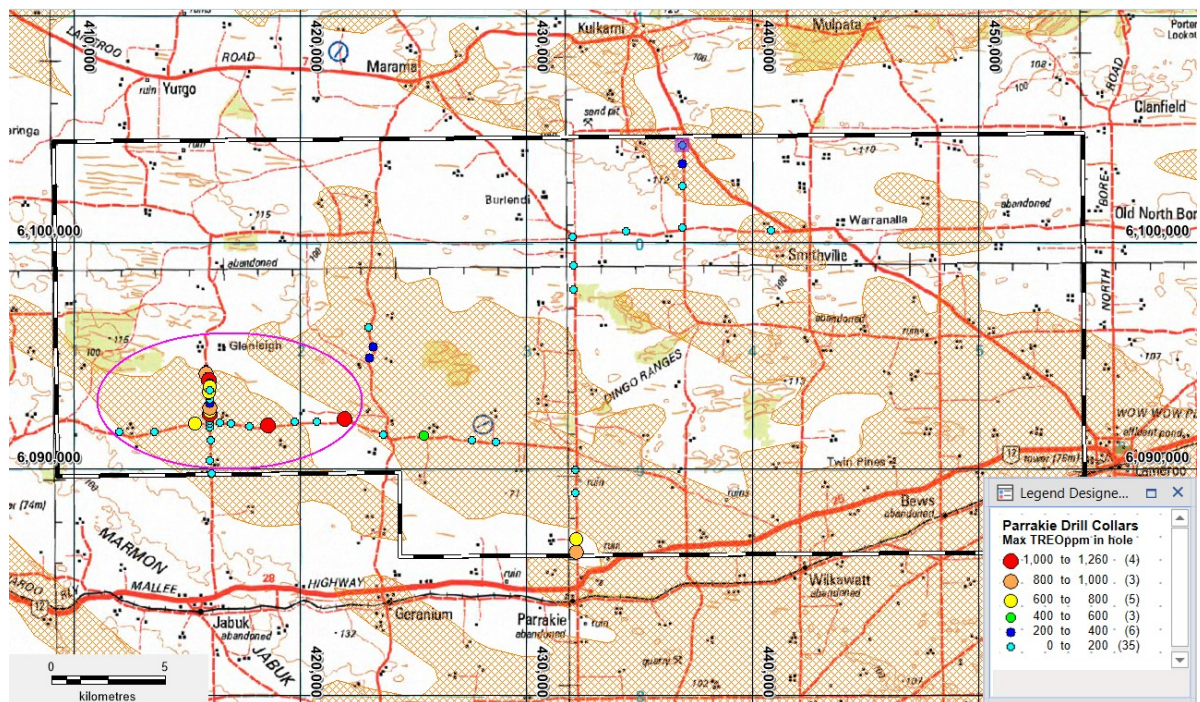


Figure 3: Completed Aircore Drill traverses shown in green targeting the NW corner of the Parrakie licence.

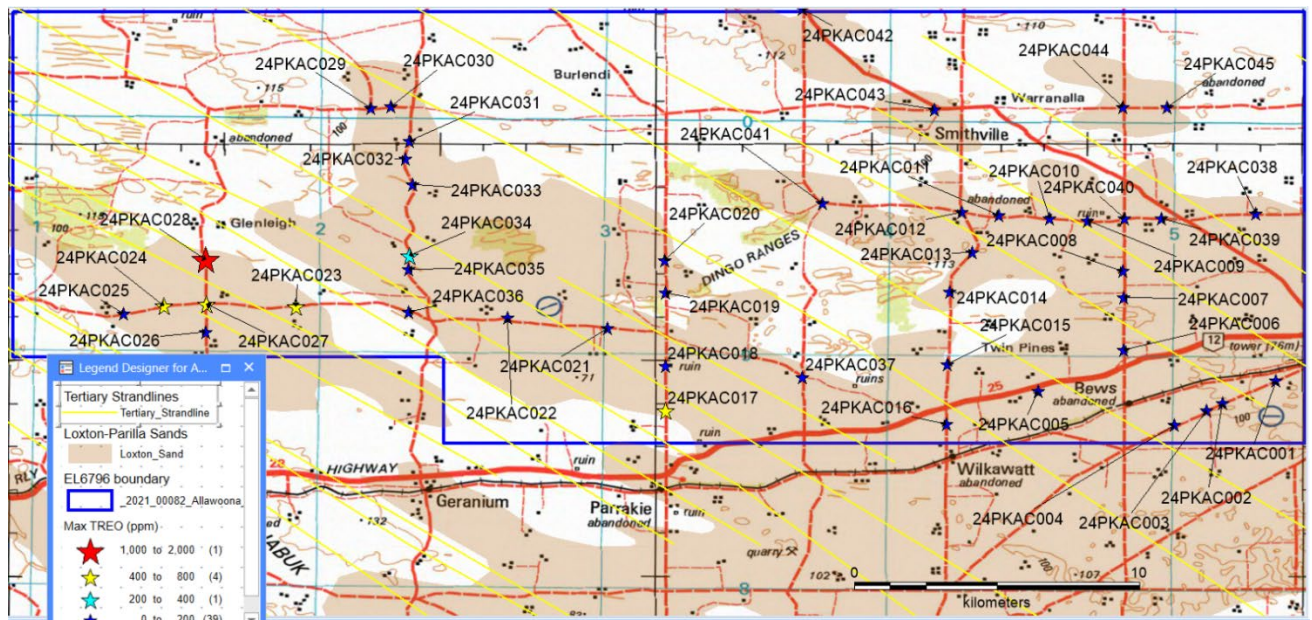


Figure 4: Parrakie Drilling (stars) showing the broad nature of the initial drilling program within the Loxton / Parilla Sands and maximum ppm TREO in each drill hole



Parrakie Aircore Drilling Operations June 2024

Background

In the initial drilling phase in February 2024 there were very encouraging Total Rare Earth Elements (“TREO”) assay results with significant drill intersections as follows (see *ASX Announcement of 21st March 2024*):

24PKAC028: 1m @ **1,032.36 ppm** TREO from 13m, in orangey-brown Ironstone-rich fossiliferous Consolidated Sand

24PKAC034: 1m @ **369.84 ppm** TREO & 4,130ppm Zr from 8m, in brown Gravelly Sand

24PKAC027: 1m @ **630.70 ppm** TREO from 14m, in dark brown Gravelly Sand

24PKAC017: 1m @ **519.15 ppm** TREO from 19m, in greyish-yellow Sand

24PKAC023: 1m @ **429.27 ppm** TREO from 9m, in brown Clayey Sand

An intersection of an interval returned an interesting high grade of 0.413% Zirconium (Zr) and 369 ppm TREO between 8 m and 9 m down hole.

Competent Person Statement

The information in the report above that relates to Exploration Results, Exploration Targets and Mineral Resources is based on information compiled by Mr Mark Derriman, who is the Company's Consultant Geologist and a member of The Australian Institute of Geoscientists (1566). Mr Mark Derriman has sufficient experience that is relevant to the style of mineralization and type of deposit under consideration and to the activities which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Exploration Targets, Mineral Resources and Ore Reserves. Mr Mark Derriman consents to the inclusion in this report of matters based on his information in the form and context in which it appears.

Forward-Looking Statement

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could," "plan," "estimate," "expect", "intend", "may", "potential", "should" and similar expressions are forward-looking statements. Although Ausmon Resources Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Authorised by:

Eric Sam Yue
Executive Director/Secretary
T: 02 9264 6988

E: office@ausmonresources.com.au

JORC Code, 2012 Edition – Table 1 Parrakie Phase 2 (EL 6795) Drilling Results Received

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> 3kg samples were collected in prenumbered calico bags for every meter. The drilling was completed on the 26th June 2024 The samples were sent to the ALS Geochemical Laboratory in Adelaide A hand-held Garmin GPS unit was used to record the drill collars as MGA 2020 Zone 54 OREAS standards 465 and 21f and a blank were inserted into the sample sequence every 30th sample. Duplicate samples were also collected every 50th sample
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Forty(55) vertical aircore holes were completed for 1200m. Drilled by GPS Drilling Drilling along district council verges Holes were not oriented
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> A 3kg split was collected for every meter in a pre-numbered calico bag, the remainder of the meter interval was put back down the hole as part of the rehabilitation. There was little contamination, and the holes were dry The visual estimation was that the recovery was very good. Every effort was made by the drillers to maximise recovery. A representative sample of every meter was collected in pre numbered plastic chip trays All chip trays and rehabilitation were photographed

Criteria	JORC Code explanation	Commentary
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> The drill holes were logged by an experienced geological contractor employed by Perth Based Consultancy Speccy Science(SS) The detail of the logging is appropriate for the early stage of exploration. Every meter was logged individually
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> All of the sample was collected and placed in prenumbered calico bags. The meter samples were scanned initially with the Companies Evident Vanta pXRF and based on the pXRF readings and detailed logging 80 samples (each sample being a meter of drilling) were selected to be sent to ALS for full multi element geochemical analyses This is appropriate for the early level of exploration and appropriate for the material being sampled.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> All samples were placed into pre numbered polywoven bags and sent to ALS in Adelaide for method ME-MS81 using a 0.1g sample The analyses were by a lithium borate fusion and IPP-MS analyses that provides the most quantitative analytical approach for a broad suite of trace elements. 2kg of the sample was split and dry crushed < 75 microns (Prep 2,3) Drill Samples (Lower Limit of Detection/Upper Limit of Detection) – Ba(0.5/10000), Ce(0.1/10000), Cr(5/10000), Cs(0.01/10000), Dy(0.05/1000), Er(0.02/1000), EU(0.02/1000), Ga(0.1/1000), Gd(0.05/1000), Hf(0.05/1000), Ho(0.01/1000), La(0.1/10000), Lu(0.01/1000), Nb(0.1/2500), Nd(0.1/10000), Pr(0.02/1000), Rb(0.2/10000), Sc(0.5/500), Sm(0.03/1000), Sn(0.5/10000), Sr(0.1/10000), Ta(0.01/1000), Tb(0.01/1000), Th(0.05/1000), Ti(0.01/10%), Tm(0.01/1000), U(0.05/1000), V(5/10000), W(0.5/10000), Y(0.1/10000), Yb(0.03/1000) and Zr(1/10000)(A table is included in the announcement showing all

JORC Code, 2012 Edition – Table 1 Parrakie Phase 2 (EL 6795) Drilling Results Received

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> 3kg samples were collected in prenumbered calico bags for every meter. The drilling was completed on the 26th June 2024 The samples were sent to the ALS Geochemical Laboratory in Adelaide A hand-held Garmin GPS unit was used to record the drill collars as MGA 2020 Zone 54 OREAS standards 465 and 21f and a blank were inserted into the sample sequence every 30th sample. Duplicate samples were also collected every 50th sample
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Forty(55) vertical aircore holes were completed for 1200m. Drilled by GPS Drilling Drilling along district council verges Holes were not oriented
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> A 3kg split was collected for every meter in a pre-numbered calico bag, the remainder of the meter interval was put back down the hole as part of the rehabilitation. There was little contamination, and the holes were dry The visual estimation was that the recovery was very good. Every effort was made by the drillers to maximise recovery. A representative sample of every meter was collected in pre numbered plastic chip trays All chip trays and rehabilitation were photographed

Criteria	JORC Code explanation	Commentary
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> The drill holes were logged by an experienced geological contractor employed by Perth Based Consultancy Speccy Science(SS) The detail of the logging is appropriate for the early stage of exploration. Every meter was logged individually
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> All of the sample was collected and placed in prenumbered calico bags. The meter samples were scanned initially with the Companies Evident Vanta pXRF and based on the pXRF readings and detailed logging 80 samples (each sample being a meter of drilling) were selected to be sent to ALS for full multi element geochemical analyses This is appropriate for the early level of exploration and appropriate for the material being sampled.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> All samples were placed into pre numbered polywoven bags and sent to ALS in Adelaide for method ME-MS81 using a 0.1g sample The analyses were by a lithium borate fusion and IPP-MS analyses that provides the most quantitative analytical approach for a broad suite of trace elements. 2kg of the sample was split and dry crushed < 75 microns (Prep 2,3) Drill Samples (Lower Limit of Detection/Upper Limit of Detection) – Ba(0.5/10000), Ce(0.1/10000), Cr(5/10000), Cs(0.01/10000), Dy(0.05/1000), Er(0.02/1000), EU(0.02/1000), Ga(0.1/1000), Gd(0.05/1000), Hf(0.05/1000), Ho(0.01/1000), La(0.1/10000), Lu(0.01/1000), Nb(0.1/2500), Nd(0.1/10000), Pr(0.02/1000), Rb(0.2/10000), Sc(0.5/500), Sm(0.03/1000), Sn(0.5/10000), Sr(0.1/10000), Ta(0.01/1000), Tb(0.01/1000), Th(0.05/1000), Ti(0.01/10%), Tm(0.01/1000), U(0.05/1000), V(5/10000), W(0.5/10000), Y(0.1/10000), Yb(0.03/1000) and Zr(1/10000)(A table is included in the announcement showing all

Criteria	JORC Code explanation	Commentary
		<p>geochemical results). The detection limits are in brackets are ppm unless indicated</p> <ul style="list-style-type: none"> • Evident Vanta • The following elements were analyzed by the pXRF Cu, Pb, Zn, As, Sb, Bi, Hg, P, S, Cl, K, Ca, Ti, V, Cr, Mn, Fe, Co, Ni, Rb, Sr, Y, Zr, Mo, Cd, Sn, W, Th, U, Te, Nb, Sc, Pr, Nd, Ce, La. (These results are not included in the report.
Verification of sampling and assaying	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> • Sample sites were chosen by the Speccy Science Principal Geologist and verified by the site geologist. • All primary data, data entry procedures, data verification and electronic data storage is per Ausmon procedures. • All drill collars was based on hand-held GPS sample locations. • Appropriate sampling techniques were used based on discussions with ALS laboratory
Location of data points	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • All drill collars were initially surveyed using a hand-held GPS accurate to 3 meters. • The grid system used in MGA 2020 Zone 54.with the drill collars located in the field with a hand-held GPS using the MGA 2020 Zone 54datum. • There is little height variation across the area of drilling
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Drill spacing is appropriate for this stage of Exploration. • Sample spacing was designed to allow appropriate anomaly definition for this early stage of exploration.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • Drill traverses were designed along road verges with available sites for an aircore drilling operation targeting the flat lying Loxton Parilla Sands to an average depth of 17m and maximum depth of 40m.

Criteria	JORC Code explanation	Commentary
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> All samples were secured by field geologist and delivered to the laboratory after the sampling program was completed by the AUSSAM Senior Geologist
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> The sampling technique was reviewed onsite by Speccy Science and the site geologist.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Drilling completed in EL 6795 (Parrakie), in South Australia, Australia The tenements are owned by AusPEM, a subsidiary of Ausmon Resources Limited. The tenements are located in South Australia approximately 300km east of Adelaide Lameroo and Pinaroo are the nearest town There are no JVs and Royalties There are no Native Title claimants The tenements are located in the Limestone Coast Inspectorate
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Churchill explored for diatomite bearing siltstone in the top of the Parilla sand in the central portion of the licence. Agricola Minerals for diatomite deposits near the town of Germanium bearing siltstone in the top of the Parilla sand in the central portion of the licence following the work of Churchill who didn't measure absorbencies – no diatomite indicated.. Iluka Resources explored for heavy minerals across the tenement with rutile and zircon not being abundant.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none">
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 	<ul style="list-style-type: none"> All drill collar information is included in a Table in the announcement

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> ● <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> ● <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> ● <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> ● <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> ● The sample results were reported a single meter assays and there was no sample aggregation
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> ● <i>These relationships are particularly important in the reporting of Exploration Results.</i> ● <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> ● <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> ● The mineralisation is located in the Murray Basin and the target is the flat or near flat lying Loxton/Perilla sands. ● the sampling is appropriate for this level of exploration
<i>Diagrams</i>	<ul style="list-style-type: none"> ● <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> ● A table showing the drill collar locations in relation to EL 6795, is included in the announcement.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> ● <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> ● All exploration results for the multi elements are included a tables in the announcement
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> ● <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> ● There is no other relevant information to add

Criteria	JORC Code explanation	Commentary
<i>Further work</i>	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Infill and extension drilling along the road verges ahead of more closely spaced drilling within freehold land parcels adjacent to the road drilling sited within EL 6795.

TenementName	TenementNo	HoleID	SampleID	DepthFrom	DepthTo	Ce_ppm	Cs_ppm	Dy_ppm	Er_ppm	Eu_ppm	Gd_ppm	Ho_ppm	La_ppm	Nd_ppm	Pr_ppm	Sc_ppm	Sm_ppm	Tb_ppm	Th_ppm	Tm_ppm	U_ppm	Y_ppm	Yb_ppm	Zr_ppm
Parrakie	EL6795	24PKAC049	PKAC0149	1	2	43.6	3.29	3.28	2.2	0.88	3.7	0.73	17.6	19.4	4.89	11.7	4.63	0.53	8.85	0.29	1.47	16.2	1.94	129
Parrakie	EL6795	24PKAC049	PKAC0150	7	8	8.5	1.9	0.73	0.52	0.19	0.62	0.16	5.1	3.3	0.97	7.9	0.72	0.12	7.79	0.09	1.22	3.9	0.65	69
Parrakie	EL6795	24PKAC052	PKAC0151	12	13	407	1.7	26.1	13.4	8.75	32.9	4.9	145.5	198	49.4	6	42.4	4.91	6.78	1.82	2.7	108	10.65	160
Parrakie	EL6795	24PKAC053	PKAC0152	19	20	151.5	1.91	14.8	7.46	4.98	20.4	2.81	83.8	109.5	26.2	8.2	21.7	2.87	8.22	0.9	1.36	58.6	5.66	162
Parrakie	EL6795	24PKAC054	PKAC0153	4	5	21.2	3.55	1.85	1.26	0.42	1.7	0.35	12.5	9.5	2.71	14.8	1.96	0.29	12.35	0.15	3.48	8.7	1.15	133
Parrakie	EL6795	24PKAC054	PKAC0154	19	20	199	2.59	20.5	9.54	7.79	27.4	3.71	122	166.5	41.6	9.3	35.9	4	11.35	1.39	1.27	57.8	9.1	308
Parrakie	EL6795	24PKAC055	PKAC0155	5	6	31	5.37	2.51	1.74	0.65	2.49	0.53	17.5	14	4.27	17.8	3	0.42	13.7	0.24	2.47	12.8	1.64	161
Parrakie	EL6795	24PKAC055	PKAC0156	19	20	67.1	2.02	4.39	3.39	0.47	3.82	1.02	26	23	6.27	8.3	4.23	0.62	17.05	0.51	2.79	27.4	3.37	1170
Parrakie	EL6795	24PKAC056	PKAC0157	1	2	35.9	2.48	2.78	1.49	0.81	3.06	0.52	17	18.8	4.71	7.2	3.82	0.44	6.88	0.22	0.84	13	1.54	124
Parrakie	EL6795	24PKAC056	PKAC0158	7	8	16.4	4.07	1.23	0.99	0.25	1.2	0.32	10.2	7.3	2.07	14.8	1.6	0.2	10.2	0.12	1.03	7.7	1.09	131
Parrakie	EL6795	24PKAC058	PKAC0159	17	18	266	2.25	10.15	4.63	4.47	14.5	1.76	79.4	107	27.2	7.6	21.2	2.07	7.94	0.58	1.35	36.3	4.05	191
Parrakie	EL6795	24PKAC059	PKAC0161	17	18	93.2	2.62	6.83	4.09	1.79	6.85	1.5	17.5	27.4	6.75	10.8	8.15	1.2	12.1	0.57	1.26	30.4	3.79	186
Parrakie	EL6795	24PKAC060	PKAC0162	2	3	23.4	3.9	1.64	1.19	0.42	1.89	0.39	12.8	10.2	2.95	12.4	2.13	0.29	9.93	0.15	1.02	9.7	1.21	171
Parrakie	EL6795	24PKAC060	PKAC0163	8	9	18.5	2.54	1.23	0.74	0.36	1.41	0.29	9.1	8.2	2.02	10.4	1.72	0.22	10.05	0.11	0.9	6.2	0.84	100
Parrakie	EL6795	24PKAC060	PKAC0164	12	13	27.7	1.86	3.22	2.73	0.3	2.4	0.78	13.2	11.6	3.08	5.2	2.68	0.45	8.21	0.41	2.03	21.7	2.53	875
Parrakie	EL6795	24PKAC060	PKAC0165	14	15	27.4	2.41	2.57	1.95	0.38	2.02	0.67	13.9	10.8	3.04	8.7	2.41	0.38	8.82	0.31	1.81	16.4	2.28	685
Parrakie	EL6795	24PKAC061	PKAC0166	11	12	37.2	1.9	2.67	2.03	0.35	2.02	0.59	14.4	12.1	3.35	6.7	2.54	0.4	10.45	0.31	1.75	15.8	2.02	642
Parrakie	EL6795	24PKAC061	PKAC0167	12	13	111.5	1.92	5.77	4.7	0.47	4.65	1.41	28.9	25.1	7.11	8	5.63	0.8	18.9	0.75	3.68	38.6	5.07	1890
Parrakie	EL6795	24PKAC061	PKAC0168	13	14	164	2.1	11.05	8.98	0.87	9.44	2.76	64.4	57.1	15.7	11.1	10.9	1.66	38.1	1.44	7.26	74.9	9.85	4440
Parrakie	EL6795	24PKAC061	PKAC0169	14	15	347	2.12	6.5	4.81	1.3	6.22	1.5	27.1	28.9	7.67	8.4	6.79	1.09	13.2	0.69	2.35	45.3	4.1	736
Parrakie	EL6795	24PKAC061	PKAC0170	16	17	105	1.97	8.11	4.24	2.63	10.95	1.5	52.3	63.5	15.95	8.3	12.85	1.55	10.95	0.57	1.29	34.3	3.33	367
Parrakie	EL6795	24PKAC062	PKAC0171	14	15	31.4	1.18	2.54	1.41	0.62	2.7	0.51	13.6	15.5	3.84	4.2	2.85	0.41	6.24	0.21	0.62	12	1.16	148
Parrakie	EL6795	24PKAC062	PKAC0172	38	39	11.6	0.19	0.57	0.34	0.16	0.66	0.11	3.4	3.3	0.75	0.8	0.47	0.09	1.2	0.04	0.3	4.7	0.27	15
Parrakie	EL6795	24PKAC063	PKAC0173	0	1	19.2	1.82	1.78	0.85	0.56	2.13	0.4	17.6	14.2	3.62	5.9	2.57	0.28	5.21	0.12	0.54	10.5	0.92	86
Parrakie	EL6795	24PKAC063	PKAC0174	4	5	21.5	4.28	1.63	1.14	0.43	1.48	0.4	13.2	9.7	2.89	14.8	1.92	0.27	16.95	0.17	2.74	8.7	1.14	135
Parrakie	EL6795	24PKAC063	PKAC0175	7	8	13.4	3.06	1.37	0.88	0.35	1.15	0.32	8.1	6.9	1.68	10.5	1.06	0.23	12.55	0.14	1.13	7.3	0.87	119
Parrakie	EL6795	24PKAC063	PKAC0176	12	13	8.8	0.81	0.66	0.4	0.13	0.55	0.15	4.5	2.6	0.85	2.7	0.56	0.11	2.86	0.06	0.54	3.8	0.39	47
Parrakie	EL6795	24PKAC064	PKAC0177	19	20	37.3	2.6	2.13	1.36	0.79	2.59	0.51	15	16.3	4.23	6.2	3.51	0.44	6.65	0.17	1.05	11.2	1.18	84
Parrakie	EL6795	24PKAC065	PKAC0178	14	15	109	1.54	13	6.75	3.91	16.5	2.75	61.7	80.6	19.7	5.4	17.4	2.49	6.3	0.96	1.07	73.8	5.18	115
Parrakie	EL6795	24PKAC066	PKAC0179	17	18	42.3	1.2	3.97	2.93	1	3.99	1.01	18	20.5	5.26	3.9	4.28	0.69	5.13	0.45	0.7	46.2	2.34	152
Parrakie	EL6795	24PKAC068	PKAC0180	13	14	44.1	2.5	3.63	2.74	0.37	2.84	0.83	16.8	14.4	3.99	10.8	2.85	0.52	13.6	0.45	2.33	22.6	2.95	926
Parrakie	EL6795	24PKAC068	PKAC0181	14	15	39	2.81	3.41	2.6	0.49	2.67	0.75	16.5	14.8	3.91	11	3.29	0.5	12.8	0.4	1.95	19.8	2.48	639
Parrakie	EL6795	24PKAC068	PKAC0182	17	18	373	2.32	25.3	11.5	9	30.6	4.53	133.5	185.5	46.9	9.3	39.5	4.52	9.18	1.6	1.44	92.7	9.58	132
Parrakie	EL6795	24PKAC071	PKAC0183	3	4	16.8	3.36	1.3	0.91	0.32	1.29	0.29	10.2	6.4	1.9	12.2	14.2	0.2	12.1	0.17	2.05	6.9	0.78	124
Parrakie	EL6795	24PKAC071	PKAC0184	25	26	376	1.51	17.35	8.14	5.17	22.9	3.18	119	138.5	33.7	5.5	27.9	3.1	10.3	1.13	8.62	91.9	7.43	521
Parrakie	EL6795	24PKAC071	PKAC0185	36	37	61.8	3.57	4.01	1.8	1.26	4.85	0.75	25.9	28.2	7.23	10.3	5.56	0.68	8.72	0.3	2.21	17.5	1.72	126
Parrakie	EL6795	24PKAC071	PKAC0186	39	40	49.6	2.48	3.62	1.6	1.02	3.98	0.55	20.6	22.6	5.83	8.2	4.89	0.65	8.34	0.25	2.02	14.1	1.42	122
Parrakie	EL6795	24PKAC073	PKAC0187	5	6	17.5	1.8	1.72	1.2	0.44	1.58	0.36	8	7.8	2.13	9.4	2.03	0.21	10.1	0.17	1.39	7	1.18	75
Parrakie	EL6795	24PKAC073	PKAC0188	18	19	98.6	1.58	6.22	3.23	1.74	8.09	1.19	37.5	45.7	11.5	6.9	9.97	1.11	9.07	0.49	2.36	33.6	3.02	547
Parrakie	EL6795	24PKAC073	PKAC0189	19	20	120.5	1.5	12.25	7.32	2.13	11.3	2.45	45.6	51.9	12.8	7.7	12.05	1.81	15.95	1.09	4.03	76.9	7.09	1675
Parrakie	EL6795	24PKAC074	PKAC0191	8	9	14	1.02	2.04	1.18	0.32	1.7	0.37	6	7.5	1.82	5.9	2.29	0.28	4.54	0.16	0.79	8	1.04	82
Parrakie	EL6795	24PKAC074	PKAC0192	9	10	24.6	0.91	2.79	1.54	0.72	2.92	0.5	9.5	14.7	3.62	4.7	4.11	0.47	4.62	0.21	1.15	9.2	1.48	113
Parrakie	EL6795	24PKAC075	PKAC0193	8	9	10.1	2.37	0.89	0.5	0.16	0.76	0.2	6.7	3.8	1.17	7.4	0.92	0.12	4.07	0.09	0.75	5.3	0.61	76
Parrakie	EL6795	24PKAC076	PKAC0194	16	17	43.8	1.68	3.72	2.06	0.62	3.24	0.77	18.9	19.2	5.24	9.1	3.97	0.55	9.44	0.38	4.13	20.3	2.67	574
Parrakie	EL6795	24PKAC076	PKAC0195	17	18	65.7	2.38	7.54	5.35	0.61	5.25	1.68	31.4	28.6	7.71	8.7	5.74	1.08	17.35	0.83	5.52	47.9	6.03	1870
Parrakie	EL6795	24PKAC076	PKAC0196	18	19	86	1.92	8.18	5.28	0.77	6.06	1.78	34.7	32.7	8.64	9	6.91	1.07	19.35	0.95	6.65	51.5	6.48	2190
Parrakie	EL6795	24PKAC077	PKAC0197	15	16	90.8	1.96	6.26	3.31	1.02	6.36	1.2	47.4	45.5	11.6	6.9	9.21	1.01	19.05	0.57	3.75	33.6	3.56	873
Parrakie	EL6795	24PKAC077	PKAC0198	16	17	81.5	1.82	6.08	3.63	0.78	6.43	1.32	42	38.6	10.9	8.6	7.41	0.93	20.5	0.61	4.03	37.6	4.03	1325
Parrakie	EL6795	24PKAC078	PKAC0199	9	10	20.3	2.64	1.66	0.94	0.25	1.24	0.31	12.2	8.3	2.4	10.6	1.54	0.2	8.37	0.16	1.95	8.8	1.1	173
Parrakie	EL6795	24PKAC079	PKAC0200	1	2	17.1	2.83	1.36	0.81	0.25	1.28	0.3	9.7	6.8	2.03	9.4	1.22	0.2	9.22	0.12	0.95	7.2	1.01	152
Parrakie	EL6795	24PKAC079	PKAC0201	24	25	455	1.87	5.17	3.16	1.04	4.93	0.99	36.8	41	11.05	8.9	7.46	0.79	11.25	0.49	5.75	27.5	3.37	735
Parrakie	EL6795	24PKAC079	PKAC0202	25	26	291	1.89	20.9	10.85	5.62	22.9	3.92	106.5	133.5	33.1	7.7	25.8	3.32	8.27	1.69	6.4	91.8	10.2	399
Parrakie	EL6795	24PKAC080	PKAC0203	17	18	187.5	1.68	2.82	1.45	1.28	4.07	0.51	41.5	42.4	11.9	5.9	7.25	0.6	5.42	0.19	4.06	16	1.19	107
Parrakie	EL6795	24PKAC080	PKAC0204	18	19	153	1.6	7.58	2.65	3.76	11.85	1.19	115	124.5	34.6	6.3	24.1	1.45	10.05	0.45	6.08	28.8	2.63	702
Parrakie																								

TenementName	TenementNo	HoleID	DrillType	TotalDepth	Easting	Northing	Grid	Dip	Azim_UTM
Parrakie	EL6795	24PKAC046	AC	20	416065.62	6089798.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC047	AC	20	415996.62	6090392.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC048	AC	20	416022.621	6091265.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC049	AC	20	415985.621	6091842.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC050	AC	20	415979.621	6092004.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC051	AC	20	416002.621	6092158.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC052	AC	20	415979.621	6092407.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC053	AC	20	415978.621	6092565.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC054	AC	20	415975.621	6092730.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC055	AC	20	415974.621	6092923.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC056	AC	20	415973.621	6093076.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC057	AC	20	415972.621	6093261.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC058	AC	20	415968.621	6093422.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC059	AC	20	415965.621	6093591.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC060	AC	20	415981.621	6093708.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC061	AC	20	415955.621	6093862.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC062	AC	40	415881.621	6094033.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC063	AC	24	415842.621	6094284.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC064	AC	27	415821.621	6094421.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC065	AC	21	415841.621	6094154.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC066	AC	20	416929.621	6092010.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC067	AC	20	417750.621	6091900.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC068	AC	20	418583.621	6091941.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC069	AC	20	419736.621	6092083.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC070	AC	40	420745.621	6092090.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC071	AC	40	421941.621	6092210.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC072	AC	20	423681.621	6091528.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC073	AC	20	425468.621	6091467.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC074	AC	20	427591.621	6091267.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC075	AC	20	428642.621	6091204.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC076	AC	20	423036.621	6094913.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC077	AC	20	423216.621	6095416.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC078	AC	20	423006.621	6096261.498	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC079	AC	27	432193.62	6086346.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC080	AC	27	432193.62	6086895.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC081	AC	20	432152.62	6088969.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC082	AC	20	432166.62	6089977.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC083	AC	27	432070.622	6097943.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC084	AC	27	432072.622	6098977.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC085	AC	20	432049.622	6100280.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC086	AC	20	434384.622	6100500.497	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC087	AC	20	436901.622	6100679.496	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC088	AC	20	436899.622	6102522.496	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC089	AC	20	436894.622	6103495.496	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC090	AC	20	436891.622	6104298.496	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC091	AC	20	440789.622	6100558.496	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC092	AC	14	415842.621	6094209.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC093	AC	18	415884.621	6094082.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC094	AC	20	415950.621	6093952.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC095	AC	20	415979.621	6093833.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC096	AC	18	415989.621	6093635.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC097	AC	18	415986.621	6093490.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC098	AC	18	416458.621	6092045.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC099	AC	18	415324.621	6092034.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC100	AC	18	413544.621	6091666.499	MGA2020_54	-90	0
Parrakie	EL6795	24PKAC101	AC	18	411977.621	6091656.5	MGA2020_54	-90	0