



## **Strong Widths and Grades Keep Coming with Infill Drilling on the Starter Zone**

Maronan Metals is pleased to report more wide intercepts of ore-grade silver with lead mineralisation within the Starter Zone including a high-grade footwall interval. Results significantly add to the resource confidence.

### **HIGHLIGHTS**

---

- **MRN24003** intersected:
  - 17.1 metres at 3.6% lead, 103g/t silver (202 g/t Silver Equivalent), including
    - **7.11 metres at 5.4% lead, 197g/t silver (343g/t Silver Equivalent).**
- **MRN24003W1** effectively twinned 5 metres from MRN24003 shows excellent consistency intersecting:
  - 15.37 metres at 3.7% lead, 105g/t silver (207 g/t Silver Equivalent), including
    - **6.37 metres at 5.0% lead, 199g/t silver (333 g/t Silver Equivalent).**
- **MRN24004** intersected:
  - 15.85 metres at 4.1% lead, 111g/t silver (224 g/t Silver Equivalent)\*, including
    - **4.12 metres at 6.1% lead, 268g/t silver (429 g/t Silver Equivalent).**
- Results confirm the strong continuity and steep plunge control to the silver-lead mineralisation. The twinned hole shows good short-range repeatability of grade and width which is essential for successful mine development.
- The wide intervals of mineralisation in these and surrounding holes occurs as the soft, bedded carbonate-lead sulphide ore type which, together with its steep geometry, offers significant comminution, processing and potentially bulk mining cost advantages.
- The 2024 drill program is progressing very well with a record monthly drill total of 1,808 metres achieved in August. Further assay results are pending.

**Maronan Metals Ltd** (ASX: MMA) (Maronan or the Company) is an Australian mineral explorer focused on realising the growth potential of the advanced Maronan Silver-Lead and Copper-Gold deposit in the Cloncurry region of Northwest Queensland. The Maronan Project is one of Australia's largest and highest-grade, undeveloped silver resources located just 90km north of the giant Cannington Silver-Lead-Zinc Mine.

**Maronan Metals Managing Director Richard Carlton commented:**

"We are delighted to confirm consistent wide intervals and high-grade assay results within the Starter Zone, which reinforces our expectations that Maronan has the potential to become a highly successful mining operation due to its favourable ore geometry and grade.

With each new drill hole, our confidence in the project continues to grow."

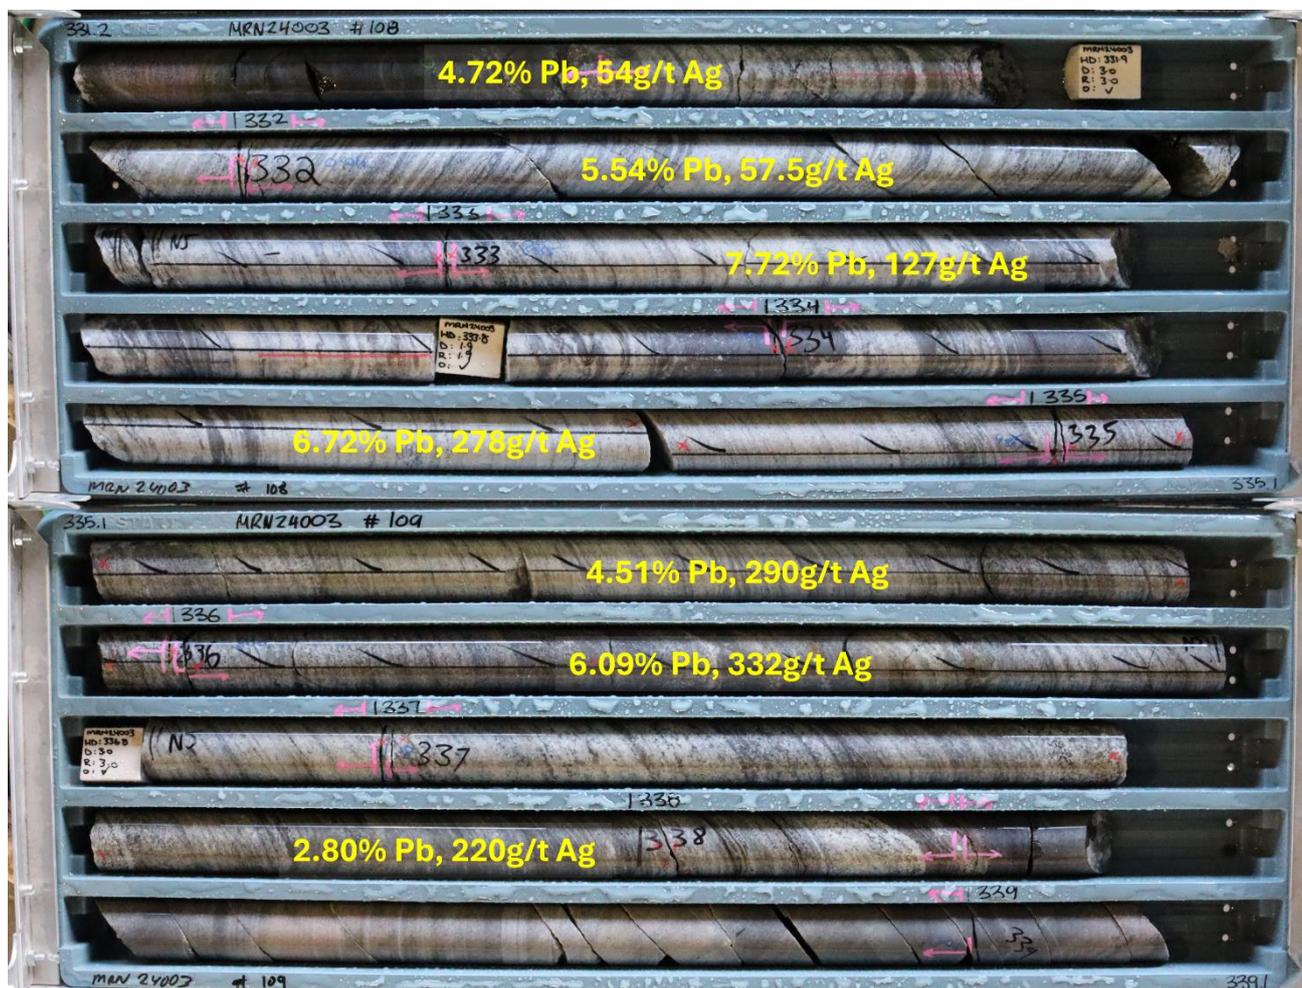


Figure 1: Eastern Horizon MRN24003 showing strong silver with lead mineralisation in the **soft carbonate-lead sulphide ore type**.

## DISCUSSION OF RESULTS

Drill holes **MRN24003, MRN24003W1 and MRN24004** are part of a fan of drill holes designed at closer drill spacing (about 30 metres) to understand the shorter-range grade and thickness variability of the bedded sulphide mineralisation at Maronan (Figure 1). Understanding this variability will assist in optimising on-going drill spacing and feed into resource estimation search distance parameters.

### MRN24003

This hole intersected a broad intercept of ore-grade silver with lead mineralisation (Table 1) including a good width of very high-grade silver and lead at the footwall:

- 17.1 metres at 3.6% lead, 103g/t silver (202 g/t Silver Equivalent), including
  - **7.11 metres at 5.4% lead, 197g/t silver (343g/t Silver Equivalent)**

The bedded carbonate-lead sulphide ore type in MRN24003 shows strong continuity of thickness and grade between holes including the enriched footwall zone (Figure 3). Results confirm the steep plunge control of the thickened zones (Figure 2) further supporting the 2024 resource model.

### MRN24003W1

Due to drilling related core-loss within the copper mineralisation, a wedged re-drill was completed off MRN24003 and extended through the main silver-lead mineralisation. MRN24003W1 stayed within about 5 metres of MRN24003, effectively providing a useful twin-hole to check the short-range grade variability at Maronan.

Significant silver-lead intercepts include:

- 15.37 metres at 3.7% lead, 105g/t silver (207 g/t Silver Equivalent), including
  - **6.37 metres at 5.0% lead, 199g/t silver (333g/t Silver Equivalent).**

The consistency in width and grade of mineralisation between MRN24003 and MRN24003W1 shows good short-range repeatability which is essential for successful mine development.

Copper mineralisation encountered in MRN24003W1 returned a potentially mineable intercept of:

- **16.0 metres at 0.34% copper, 0.44g/t gold.**

### MRN24004

Drill hole MRN24004 was drilled approximately 30 metres south of MRN24003/3W1 (Figure 2) and also intersected a wide intercept of ore-grade silver with lead mineralisation including a high-grade footwall interval (Table 1 and Figure 4).

MRN24004 is one of a number of holes selected for geotechnical rock property strength testing and was extended well into the footwall to test rock competence of possible decline access development. Assay results released in this hole exclude the geotechnical sample sites.

Significant lead and silver results at hand include:

- 15.85 metres at 4.1% lead, 111g/t silver \* (224 g/t Silver Equivalent) including:
  - 2.5 metres at 6.8% lead, 156g/t silver (314 g/t Silver Equivalent), &
  - **4.12 metres at 6.1% lead, 268g/t silver (400 g/t Silver Equivalent).**

\*Two geotechnical samples occur within the 15.85 metre interval that await assaying (Table 1). These intervals were assumed to have 0% lead and 0g/t silver for the above intercept calculation.

A potentially mineable zone of secondary leached copper mineralisation with chalcocite, native copper and supergene gold was also intersected in MRN24004. This interval was also subject to geotechnical sampling however, significant copper and gold results at hand include:

- **11 metres at 0.46% copper, 2.22 g/t gold \*\* including**
  - 1.6 metres at 0.55% copper, 37g/t gold.
- **8.1 metres at 0.52% copper, 2.95g/t gold, including**
  - 1.0 metre at 0.72% copper, 19.8g/t gold, and
  - 2.18 metres at 1.01% copper, 0.86g/t gold.

\*\*A single geotechnical sample was collected within the 11 metre interval that awaits assaying (Table 1). This interval was assumed to have 0% copper and 0g/t gold in the above intercept calculation.

Complete assay results and intercepts from MRN24004 will be reported for a second time once the geotechnical studies have been completed and assays on the geotechnical sample intervals have been returned.

### Mineability

It is important to note that early mining studies by Red Metal Limited in 2016 showed an underground mining cut-off grade of only 3.1% lead could be possible at Maronan due to simple metallurgy and low grinding cost estimates for the carbonate-lead sulphide ore type (refer Red Metal ASX: RDM release dated 8 March 2016).

The wide intervals of mineralisation in these and surrounding holes occur as the soft carbonate-lead sulphide ore type (Figure 1) which, together with its steep geometry, offers significant comminution, processing and potentially bulk mining cost advantages.

### Ongoing Drill Program

The 2024 drill program is progressing very well (Table 2) with a record monthly drill total of 1808 metres achieved in August.

Drill holes MRN24002 to MRN24007 (Table 2, Figure 2) focus on thicker intervals of Eastern Horizon mineralisation within the East 30 and East 40 panels. Step-out holes MRN24008 to MRN24009 target the under drilled, shallow extensions to the East 10 horizon.

Drill holes MRN24010, MRN24010W1, MRN23022W1 and MRN24011 test for higher grade lead mineralisation on the Western Horizon.

MRN24011 is currently in progress (Table 2, Figure 2) and further assay results are pending.

In conjunction with the drilling, samples have been collected for geotechnical rock strength analysis and metallurgical variability testing.

Table 1: Summary of assay results from MRN24003, MRN24003W1 and MRN24004 using a lower cut-off grade of 1 weight percentage for lead, and 0.2 weight percentage for copper

Hole Number	From (m)	Down-hole Intercept (m)	Estimated True Width (m)	Lead wt%	Silver g/t	Zinc wt%	Copper wt%	Gold g/t	Mineralised Horizons
MRN24003	168.4	0.85	0.7		8		1.25	0.68	Po-Cpy breccia
MRN24003	174	0.9	0.8		11		1.52	0.53	Po-Cpy Breccia
MRN24003	205.37	12.63	10.7		4		0.2	0.69	
includes	217	1	0.9		1		0.09	5.21	
MRN24003	230.3	3.1	2.6	0.2	10		0.44	0.13	Weathered West Horizon
MRN24003	241.85	10.85	9.2		4		0.24	0.26	Weathered Cu zone
MRN24003	252.9	4.1	3.		2		0.26	0.28	Weathered Cu zone
MRN24003	274.7	2	1.7	2.2	62				
MRN24003	280.85	0.85	0.7	1.2	33				
<b>MRN24003</b>	<b>321.13</b>	<b>17.1</b>	<b>14.5</b>	<b>3.6</b>	<b>109</b>				<b>Eastern Horizon</b>
<b>includes</b>	<b>331.12</b>	<b>7.11</b>	<b>6.0</b>	<b>5.4</b>	<b>197</b>				<b>High grade footwall zone</b>
MRN24003	344.23	2.77	2.4	1.7	53			0.12	
MRN24003	365	2	1.7	2.0	50				
MRN24003W1	221.46	0.36	0.3		3		0.97	0.2	
MRN24003W1	230	2.12	1.8	0.3	16		0.68	0.07	
MRN24003W1	242.25	26.3	13.9		4		0.34	0.43	Weathered Cu zone
<b>MRN24003W1</b>	<b>321</b>	<b>15.37</b>	<b>13.1</b>	<b>3.7</b>	<b>105</b>				<b>Eastern Horizon</b>
<b>includes</b>	<b>330</b>	<b>6.37</b>	<b>5.4</b>	<b>5.0</b>	<b>199</b>				<b>High grade footwall zone</b>
MRN24003W1	342.33	2.67	2.3	2.7	80			0.08	
MRN24004	180.5	0.5	0.4			3.1			Sphalerite vein
MRN24004	193	0.5	0.4			1.1			Sphalerite vein
MRN24004	211	1	0.9		5		0.75		
MRN24004	237	11	9.9		3		0.46	2.22	* Geotechnical sample intervals pending assays
MRN24004	238.6	1.3							Geotechnical sample – assay pending
MRN24004	239.9	8.1	7.3		8		0.52	2.95	Weathered copper zone
Includes	243	1	0.9		10		0.72	19.8	
Includes	245.82	2.18	2.0	0.2	8		1.01	0.86	
MRN24004	263	1	0.9	5.6	43				
MRN24004	323.65	15.85	14.3	4.1	111				* Geotechnical sample intervals pending assays
MRN24004	329.42	0.8							Geotechnical sample – assay pending
MRN24004	332	2.5	2.3	6.8	156			0.11	Eastern Horizon

Hole Number	From (m)	Down-hole Intercept (m)	Estimated True Width (m)	Lead wt%	Silver g/t	Zinc wt%	Copper wt%	Gold g/t	Mineralised Horizons
MRN24004	334.5	0.88							Geotechnical sample – assay pending
MRN24004	335.38	4.12	3.7	6.1	268			0.08	Eastern Horizon
MRN24004	364.35	1.2	1.1	3.9	113			0.08	

Note - the equivalent calculation in Table 1 takes into account the preliminary metallurgical results that highlighted simple processing routes to achieve recoveries of 95% for the lead and 93% for the silver (refer to Red Metal ASX announcement dated 29 July 2015). Zinc values have not been used in the lead equivalent calculation due to the lack of metallurgical test work on the zinc-bearing ore types. A Lead price of USD\$2000/t and a silver price of USD\$20/oz have been assumed in these calculations

Table 2: Summary of drilling completed since 1 January 2024

Drill Hole	East	North	RL	Dip	Azimuth	Hole Depth	Target	Assay Results
MRN24001	491381	7670412	211.6	-55	69.5	13.7	Abandoned – stuck rods	Not Assayed
MRN24002	491377	7670414	211.6	-55	69.3	306.9	East Horizon	Reported 6/8/2024
<b>MRN24003</b>	491288	7670447	212.3	-57.5	75.1	414.8	East Horizon	<b>This Report</b>
<b>MRN24003W1</b>	491288	7670447	212.3	-57.5	75.1	360.9	East Horizon	<b>This Report</b>
<b>MRN24004</b>	491286	7670447	212.2	-60	85	594.4	East Horizon	<b>This Report</b>
MRN24005	491290	7670445	212.3	-58	95	468	East Horizon	At Lab
MRN24006	491252	7670452	212	-60	85	449.1	East Horizon	At Lab
MRN24007	491254	7670490	212.6	-67	85	504.8	East Horizon	Logging
MRN24008	491557	7670366	210.1	-60	90.1	231.7	East Horizon	At Lab
MRN24009	491420	7670301	210.6	-60	81.6	375.6	East Horizon	At Lab
MRN24010	491126	7670280	212.4	-65	78.6	674.3	West Horizon	Logging
MRN24010W1	491126	7670280	212.4	-65	78.6	627.7	West Horizon	Logging
MRN23022W1	490945	7670319	212.9	-66	80.5	651.3	West Horizon	Logging
MRN24011	491021	7670325	212.8	-62	82		West Horizon	In Progress

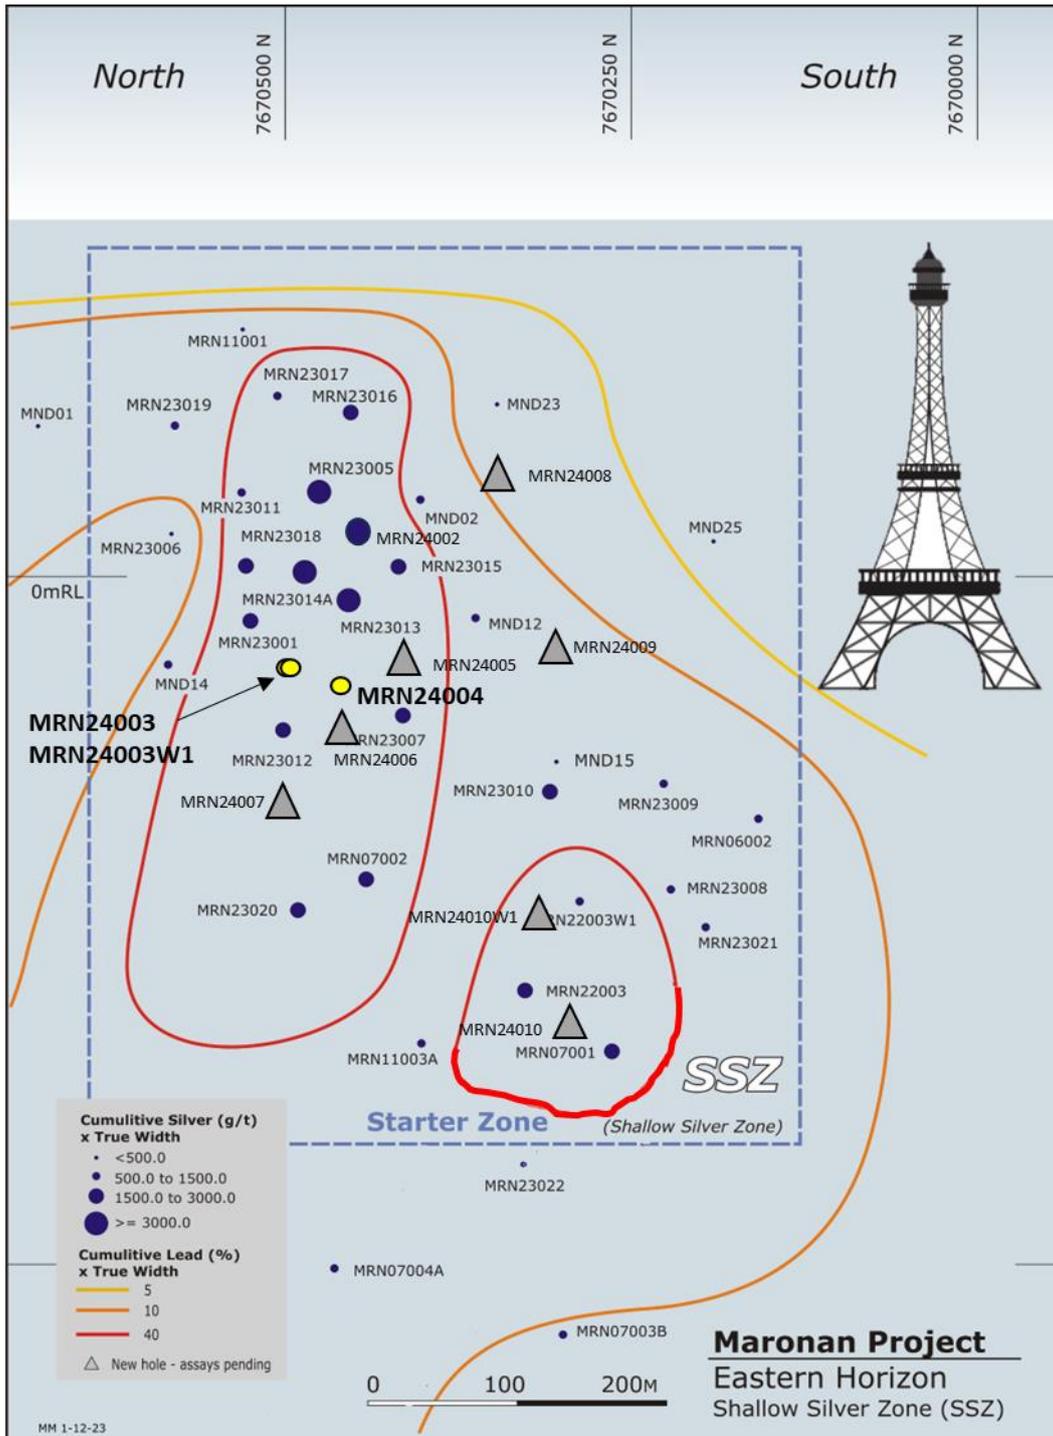


Figure 2: Eastern Horizon long section showing MRN24003, MRN24003W1 and MRN24004 highlighting strong geological and grade continuity of the silver rich Eastern Horizon and its steep plunge. Drill holes completed in 2024 that are awaiting assay results are shown as grey triangles

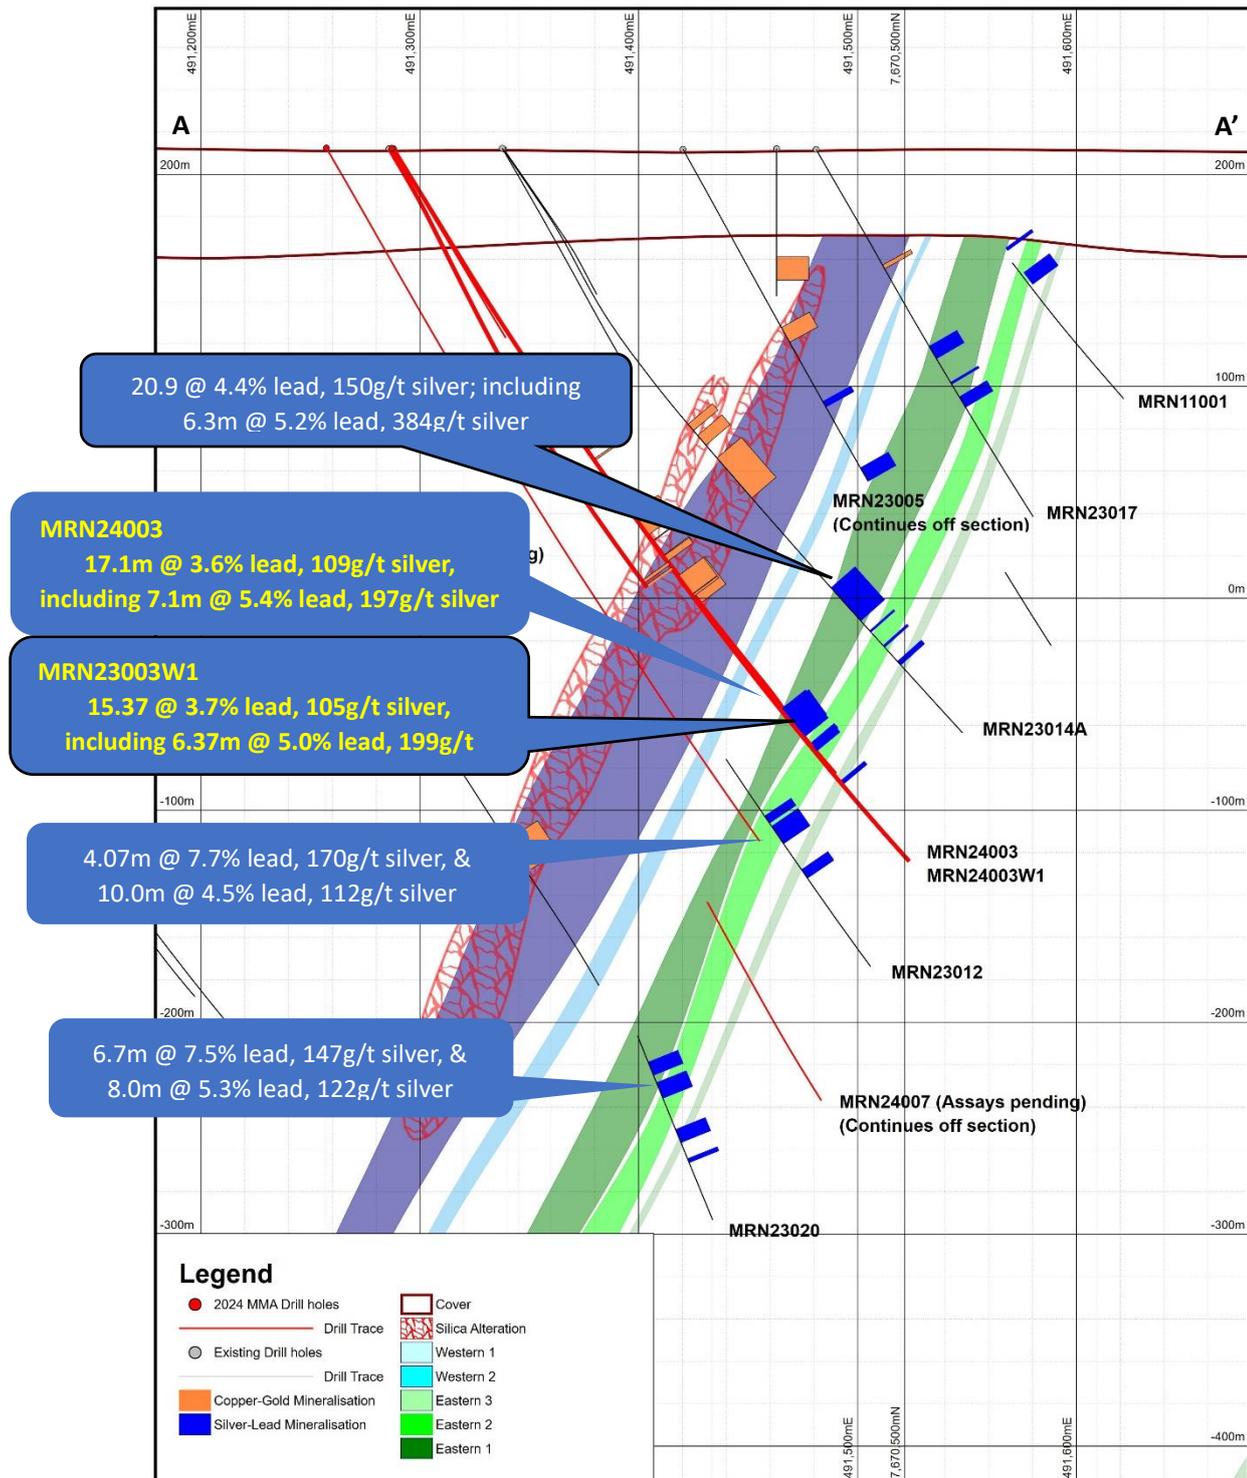


Figure 3: Working cross section showing MRN24003 and MRN24003W1 and highlighting strong geological and grade continuity of the Eastern Horizon within the shallow Starter Zone. Refer to Figure 5 for location of this Cross Section (A – A')

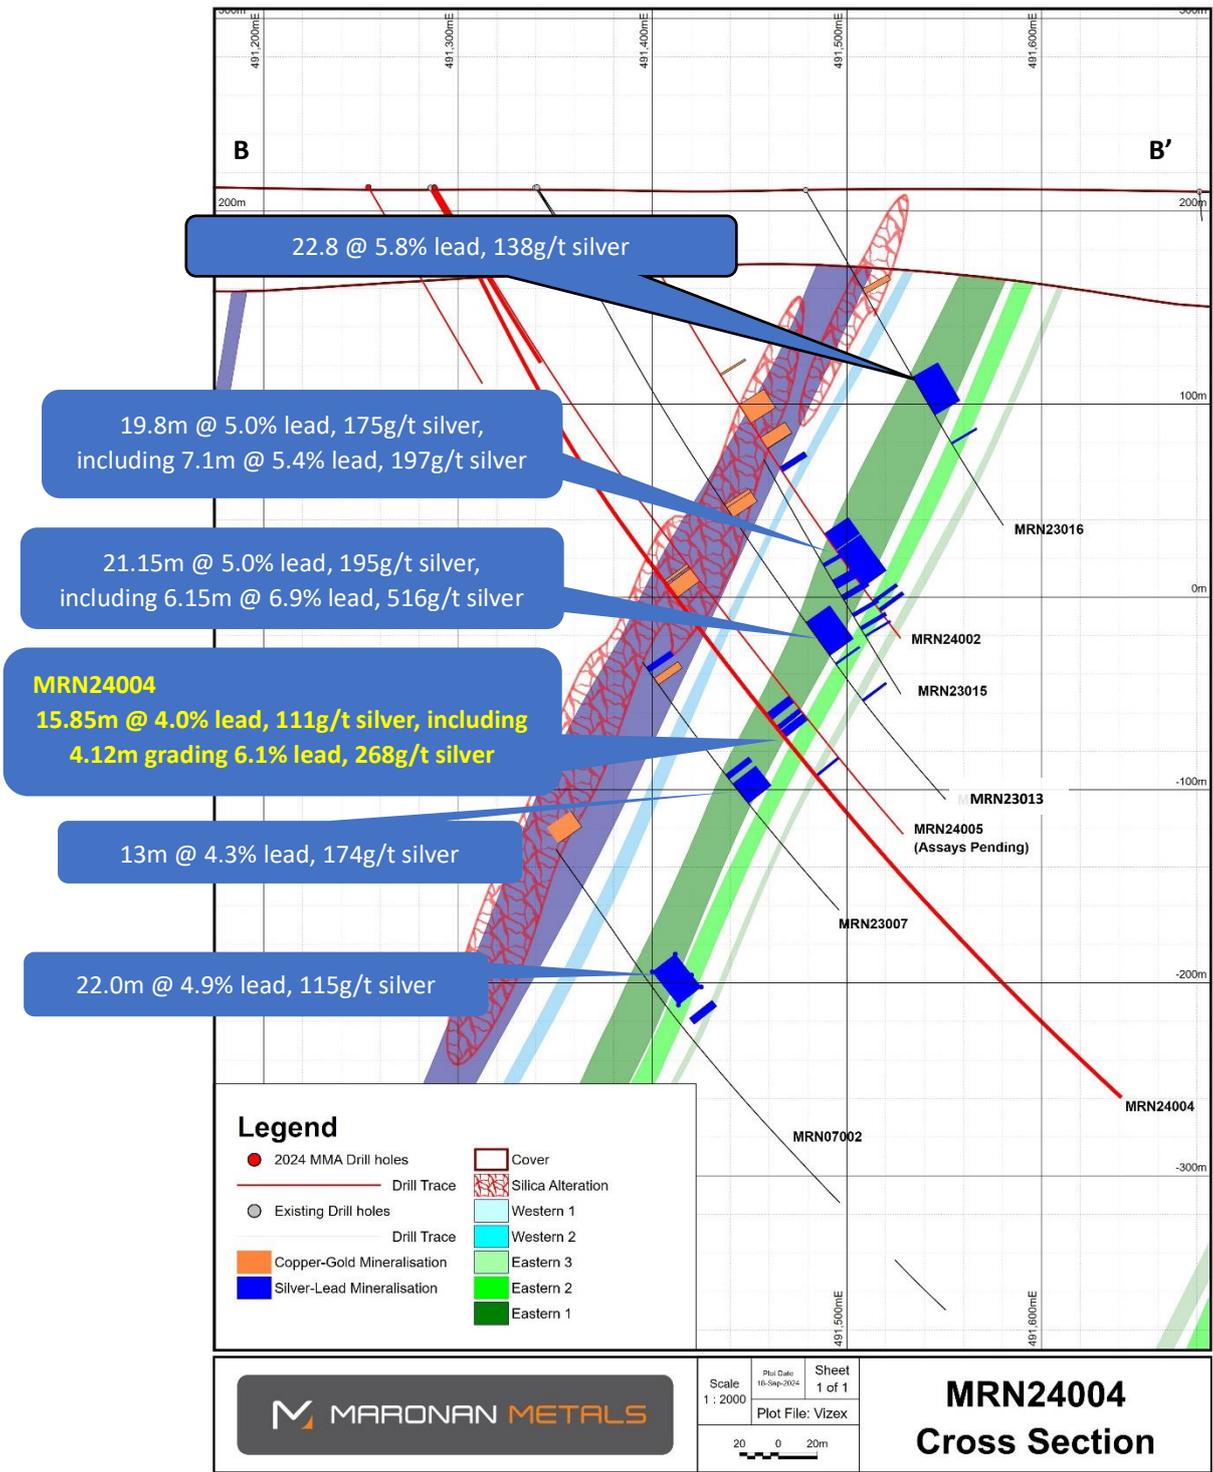


Figure 4: Working cross section showing MRN24004 highlighting strong geological and grade continuity of the Eastern Horizon within the shallow Starter Zone. Refer to Figure 5 for location of this Cross Section (B – B')

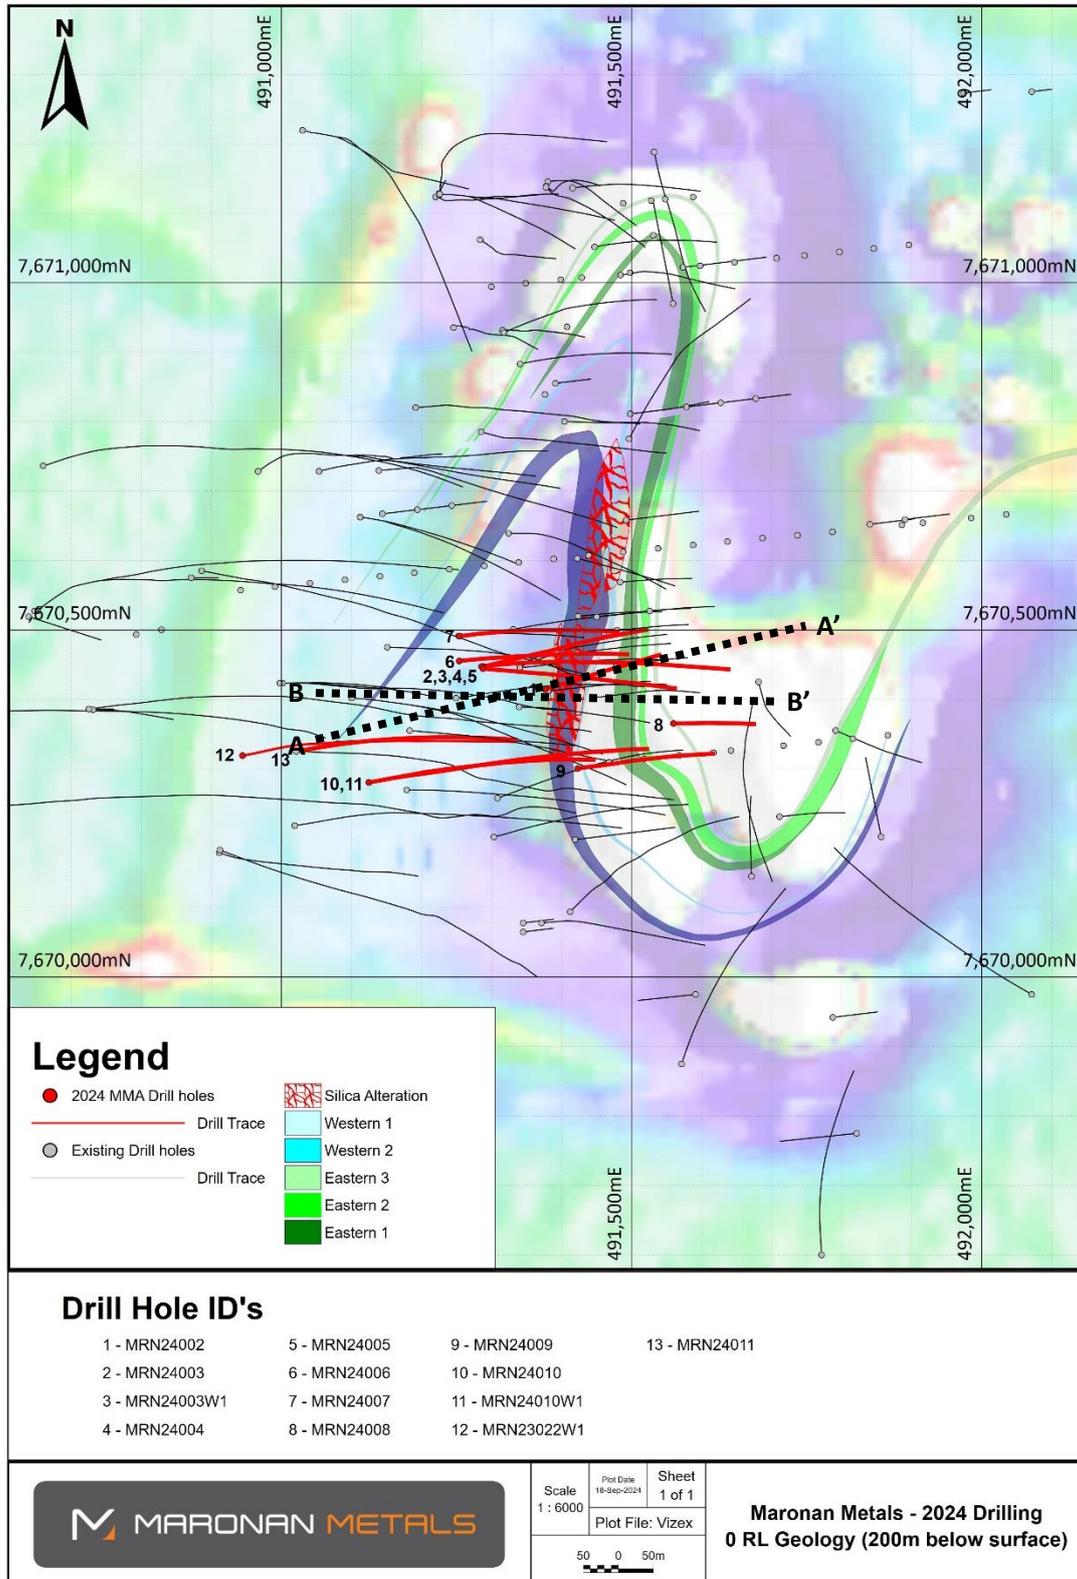


Figure 5: Plan view of 2024 drilling completed and in progress at the Maronian Project with respect to key geological horizons. Section A – A' defines the cross section for MRN24003 and MRN24003W1 which is Figure 3 in this report. Section B – B' defines the cross section for MRN24004 which is Figure 4 in this report.

This announcement was authorised by the Board of Maronan Metals Limited.

For further information on the Company, please visit: [maronanmetals.com.au](http://maronanmetals.com.au)

## CONTACT

### Richard Carlton

Managing Director

+61 402 298 029

[richard.carlton@maronanmetals.com.au](mailto:richard.carlton@maronanmetals.com.au)


### Ian Gebbie

Company Secretary

+61 431 272 148

[ian.gebbie@maronanmetals.com.au](mailto:ian.gebbie@maronanmetals.com.au)

**Maronan Metals Limited (ASX:MMA)** is an Australian mineral explorer focused on realising the growth potential of the advanced Maronan copper-gold and silver-lead deposit in the Cloncurry region of northwest Queensland - one of Australia's most productive mineral provinces.

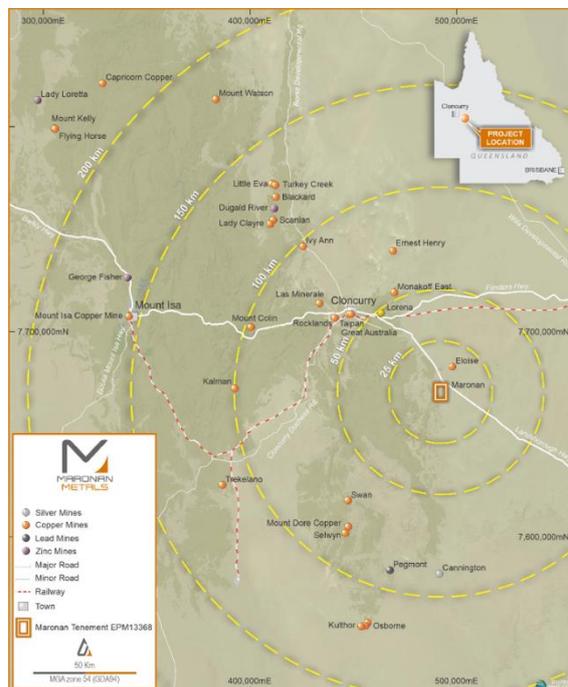

As at 2024, the Maronan project contains JORC 2012 compliant Inferred and Indicated Resources of:

- 32.1 Mt @ 6.1% lead with 107 g/t silver (using >3% lead cut-off grade) including
  - 2.1 Mt @ 5.3% lead with 155 g/t silver (using >3% lead cut-off grade) Indicated Resource,
- 32.5 Mt @ 0.84% copper with 0.61 g/t gold and 7 g/t silver (using >0.4% copper cut-off grade),
- 1.8 Mt @ 1.24 g/t gold (using >1.0 g/t gold cut-off grade).

ASX:MMA 12 March 2024, "Updated Resource Estimate Fuels Ideas of Early Development Potential of the Shallow Starter Zone".

Work to date has reinforced our understanding of the deposit's geometry and significant size potential while metal and grade variations allow considerable flexibility and optionality in how the resources can be appraised.

## COMPETENT PERSONS STATEMENT

---

The information in this report that relates to Exploration Results is based on and fairly represents information and supporting documentation compiled by Mr Andrew Barker, who is a member (#6299) of the Australian Institute of Geoscientists (AIG). Mr Barker is the Exploration Manager of the Company. Mr Barker has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (the JORC Code). Mr Barker consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The Mineral Resource Estimate in this announcement for the Maronan project was initially reported in the Company's ASX release dated 12 March 2024, titled "Updated Resource Estimate Fuels Ideas of Early Development Potential of the Shallow Starter Zone". Maronan Metals confirms that no new information or data materially affects the information included in the original announcement. For the estimates of Mineral Resources, all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the original market announcements.

### Silver Equivalent Calculation

Silver Equivalent was calculated using the formula:  $AgEq = ((Ag \text{ (ppm)} * Agrec * Agprice) + (Pb \text{ (\%)} * Pbrec * Pbprice)) / Agprice$

- Ag (ppm) is the assay grade in parts per million of silver
- Ag price is the value of 1g/t silver based on a price assumption of \$USD20/ounce). In this instance the value of \$0.643
- Ag rec is the estimated silver recovery from metallurgical testwork at Maronan of 93%.
- Pb (%) is the weight percent assay grade for Lead
- Pb price is the value of 1% Lead based on a price assumption of \$USD2000/tonne). In this instance the value of \$20
- Pb rec is the estimated silver recovery from metallurgical testwork at Maronan of 95%
- The formula calculates the value of metal for Silver and Lead and divides by the value of 1g/t silver to calculate the silver Equivalent value
- This Silver Equivalent calculation does not take into account any assumptions about payability, treatment costs or refining cost. Zinc is not included in the Silver Equivalent calculation as no metallurgical testwork on zinc containing material has been conducted at this point in time, and the distribution of zinc is poorly constrained

## APPENDIX 1. JORC CODE, 2012 EDITION – TABLE 1 REPORT TEMPLATE

### 1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Sampling has been half-core sampling of diamond drill core. Core has been cut using an automatic corewise core saw.</li> <li>Samples have been submitted for assay analysis with ALS Global at the Mt Isa Laboratory. Samples are crushed and pulverized to 85% passing 75um. Samples are then assayed using the Au-AA25 (30g fire assay) completed at ALS Townsville and ME-MS61 assay methods (48 element ICP-MS suite) completed at ALS Brisbane. For samples that return over-limit assays from the ME-MS61 assays, samples are re-assayed using the OG62 method.</li> <li>Maronian Metals has included standard and blank samples to monitor laboratory performance at a rate of approximately 1:25 samples. In addition to this, ALS has also included addition standard and blank materials to monitor the performance of the laboratory.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>MRN24003 – Diamond Drilling. PQ3: 0 – 55.1m; HQ3: 55.1 – 281.7m; NQ2: 281.7 – 414.8m</li> <li>MRN24003W1 - Diamond Drilling. NQ3: 215.3 – 360.6m;</li> <li>MRN24004 - Diamond Drilling. PQ3: 0 – 70.7m; HQ3: 70.7 – 383.4m; NQ2: 383.4 – 594.4m</li> <li>HQ and NQ drill core was oriented using the Reflex ACT3 digital orientation tool</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to</li> </ul>	<ul style="list-style-type: none"> <li>Drill core recovery is recorded for each drilling run. The length of the run and the length of recovered drill core is recorded on core blocks completed for each core run. This is converted into a recovery percentage per drill run during drill core logging.</li> <li>Where poor ground is expected – triple tube drilling techniques are used to maximise drill core recovery.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> <li>• Overall – drill recoveries are very good. There is some core loss drilling through the transported cover sequence.</li> <li>• In MRN24003 – an interval of drilling related core loss occurred within the copper zone. As a result, upon completing MRN24003, a wedge daughter was completed to re-drill the section through the copper zone to ensure appropriate sample coverage</li> <li>• It is not known at this point in time whether there is a relationship between sample recovery and grade, or whether sample bias has occurred due to preferential loss or gain of material.</li> </ul>
<p>Logging</p>	<ul style="list-style-type: none"> <li>• <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></li> <li>• <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></li> <li>• <i>The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drill core has been logged for lithology, alteration and mineralisation and geotechnical RQD has been recorded. Specific Gravity measurements have been taken using the Archimedes Method (Dry Weight/(Dry Weight – Wet Weight). Magnetic Susceptibility readings have been collected using a K10 Magnetic Susceptibility machine.</li> <li>• Logging of lithology and alteration is qualitative. Logging is sulphide mineralisation considered to be semi-quantitative in nature.</li> <li>• All drill core has been photographed</li> <li>• The total length (100%) of recovered drill core for each drill hole has been logged.</li> </ul>
<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> <li>• <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li>• <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li>• <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li>• <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li>• <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li>• <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drill core was cut in half using an automatic core saw. Drill core was cut slightly off the orientation line, with sampling of the half core that did not have the orientation line.</li> <li>• A subset of samples in MRN24003 between 321.13 – 338.23m downhole, and between 363 – 367m were sampled by Quarter core so that half core samples for these intervals could be taken for metallurgical testwork.</li> <li>• The sampling method utilized is considered appropriate for the styles of mineralisation at the Maronan project.</li> <li>• Certified Standards were inserted at a rate of 1:25 samples. Two different sets of standards are utilized, one for the lead, silver, zinc mineralisation (OREAS 135B; OREAS 136; OREAS 315; OREAS 317) and one for the copper, gold mineralisation (OREAS 520; OREAS 521; OREAS 522; OREAS 523; OREAS 601C)</li> <li>• Blanks were inserted at a rate of 1:25 samples. Additional blanks were used in the copper zone if native copper was observed</li> </ul>

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>No duplicate second-half drill core samples have been submitted.</li> <li>No specific grain size analysis has been completed on the Maronan project, however sampling methods utilized are consistent with those used by other mining and exploration projects targeting similar styles of mineralisation in the Mt Isa Belt.</li> <li>Samples were assayed by Au-AA25 (30g fire assay) technique for gold and the ME-MS61 method for Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn and Zr. For over limit samples of Ag, Cu, Pb, Zn, P and MN samples are assayed by the ore grade OG-62 method. ME-MS61 is considered a "near total" digest method, with only the most resistive minerals (eg Zircons) only partly dissolved. Au-AA25 is considered a total assay method for gold.</li> <li>The methods of assaying utilized are considered appropriate for the style of mineralisation targeted</li> <li>Standard and Blank samples were inserted at a rate of 1:25 samples each.</li> <li>The standards used displayed acceptable levels of accuracy and precision. Any QAQC failures are recorded in Maronan Metals QAQC action register and follow up actions are recorded.</li> <li>One gold standard for MRN24003 failed QAQC. Investigation with the lab indicated an issue with the flux for this sample resulting in a low gold assay. A re-assay of this standard and surrounding samples was completed with the re-assay results passing QAQC.</li> <li>Blank samples submitted were within acceptable limits.</li> <li>No duplicates at the sampling stage were submitted.</li> <li>The standards used displayed acceptable levels of accuracy and precision.</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>Assay results reported in this release have been compiled by Exploration Manager Andrew Barker, and reviewed by Mr Rob Rutherford and Mr Richard Carlton.</li> <li>Logging is completed by two contract senior exploration geologists working for Maronan Metals, and is reviewed by Maronan Metals exploration manager.</li> <li>MRN24003 and MRN24003W1 reported in this announcement can be considered as a twinned pair of holes. There is strong</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>correlation between the two drill holes</p> <ul style="list-style-type: none"> <li>Logging is saved into a logging template excel spreadsheet. Upon completion of logging, this data is uploaded into Maronan Metals Geobank Database. The Geobank Database is housed on an SQL server. A copy of the logging spreadsheet is saved on the Maronan Metals server.</li> <li>Assays results are loaded into Maronan Metals Geobank Database. QAQC is checked on import, and issues identified are recorded in Maronan's QAQC register.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>The drill collar for MRN24003, MRN24003W1 and MRN24004 have been picked with a Garmin 66i GPS accurate to +/- 3 metres.</li> <li>The drill hole collar was surveyed in MGA94 grid system.</li> <li>Topographic relief has been surveyed with a lidar survey completed of the project area with a vertical accuracy of +/- 4cm</li> <li>Downhole surveys are completed with an axis north seeking gyroscope.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>There is approximately 5m spacing between MRN24003 and MRN24003W1; The spacing between MRN24003/3W1 and MRN24004 is approximately 30m.</li> <li>Drill spacing between surrounding holes is around 50m x 50m spacing.</li> <li>The drill pierce point spacing is sufficient to outline the structural geometry, broad extent of mineralisation and grade variations in the mineral system and is of sufficient spacing and distribution to infer a Mineral Resource.</li> <li>No sample compositing has been applied</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>Modelled zones of Silver-Lead mineralisation at the Maronan Project strike approximately 010 and dip ~ 70W.</li> <li>MRN24003 and MRN24003W1 intersect the modelled mineralisation at a dip of -51 towards 78 (true north). True width is interpreted to be approximately 85% of the downhole intercept. The drilling orientation is not considered to have introduced a sampling bias.</li> <li>MRN24004 intersects the modelled mineralisation at a dip of -51 towards 91 (true north). True width is interpreted to be approximately 90% of the downhole intercept. The drilling</li> </ul>

Criteria	JORC Code explanation	Commentary
<i>Sample security</i>	<ul style="list-style-type: none"> <li><i>The measures taken to ensure sample security.</i></li> </ul>	<p>orientation is not considered to have introduced a sampling bias</p> <ul style="list-style-type: none"> <li>Drill core is kept at the drill rig which is manned 24/7 until it is collected by Maronan Metals personnel. Maronan Metals personnel transport the drill core to Maronan Metals yard in Cloncurry. The yard in Cloncurry is secured by a six foot fence and gates are locked at all times when no personnel are at the yard.</li> <li>Samples are collected from the Maronan Metals yard by Cloncurry Couriers and transported to ALS Mt Isa.</li> <li>Samples are transported in bulka bags sealed with a cable tie.</li> <li>Upon receipt on samples at ALS Mt Isa, the dispatch is checked and a sample receipt sent to Maronan Metals confirming the dispatch details.</li> </ul>
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <li><i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>Maronan Metals completed an inspection of ALS Mt Isa Sample preparation facility in Mt Isa in April 2022 and had no adverse findings.</li> <li>A selection of historic pulps from drilling completed by Red Metal between 2011 – 2014 were submitted to ALS Mt Isa for check assaying utilising the same assay protocol as the current Maronan Metal program. Results from this program display a very strong correlation between the original Red Metal assays and the Maronan Metal check assays.</li> </ul>

## 1.2 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>Maronan is located within EPM 13368 situated in the Cloncurry region of north-west Queensland. EPM 13368 is owned 100% by Maronan Metals Limited. No material ownership issues or agreements exist over the tenement. An ancillary exploration access agreement has been established with the native title claimants and a standard landholder conduct and compensation agreement has been established with the pastoral lease holders.</li> <li>The tenements are in good standing and no known impediments exist</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>The extent of mineralisation at Maronan has been defined by 88 diamond core drill holes drilled by five different companies since 1987 until the present. Shell Minerals/Billiton/Acacia discovered base metal mineralisation on the project in 1987 and completed 16 shallow holes to 1993. From 1995 to 1996 MPI completed 3 holes into the northern and southern fold hinge structures. From 2001 to 2004 Phelps Dodge completed 6 holes. BHP Cannington undertook a campaign of lead-silver exploration from 2006 to 2008 completing 13 holes. Red Metal Limited completed 16 holes from 2011 to the 2019 seeking depth extensions to the bedded lead-silver and separate copper-gold mineralisation. Maronan Metals was spun out of Red Metals in 2022 and has subsequently drilled 47 holes and is continuing to explore the Maronan project.</li> </ul>
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration on Maronan has identified three separate styles of mineralisation, bedded lead-silver mineralisation partially overprinted by structurally controlled, copper-gold mineralisation, and gold only mineralisation</li> <li>The lead-silver mineralisation is of a similar style to the nearby Cannington deposit, one of the world's largest silver and lead producing operations. The Maronan lead-silver mineralisation occurs in two separate but sub-parallel banded carbonate-lead sulphide-magnetite-calcsilicate units referred to as the Western Horizon (Upper) and Eastern Horizon (Lower). The two horizons can be separated by up to 100 metres of quartz clastic meta-sediments</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>(psammites, pelites and quartzite). At the Northern Fold Structure the Eastern horizon is folded forming a steep plunging tight to isoclinal fold structure with attenuated or transposed limbs and a thickened hinge zone region.</p> <ul style="list-style-type: none"> <li>The overprinting copper-gold mineralisation can be compared with the ISCG mineralisation styles at the nearby Eloise and Osborne ore bodies. Mineralisation is associated with intense silica alteration within a bedding-parallel structure focused between the Western and Eastern Lead-Silver mineralised zones and comprises strong pyrrhotite with variable chalcopyrite and minor magnetite.</li> <li>Gold only mineralisation occurs in the Northern Fold area, up-plunge on bedded Lead-Silver mineralisation within the Eastern Horizon and is associated disseminated arsenopyrite within strong magnetite-carbonate facies/alteration. This zone appears to transition down-plunge to carbonate-sulphide dominant facies/alteration that hosts the lead silver mineralisation.</li> </ul>
<p><i>Drill hole Information</i></p>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>Drill hole details are included in the ASX report in Table 1 and Table 2 of this report.</li> </ul>
<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the</li> </ul>	<ul style="list-style-type: none"> <li>Assay results have been reported using length-weighting technique to calculate down hole average grades. No top-cuts have been applied.</li> <li>A cut-off grade of 1% Lead has been used for reporting of Silver-Lead intervals</li> <li>Due to the poly-metallic nature of mineralisation at Maronan,</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <ul style="list-style-type: none"> <li><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li> </ul>	<p>intervals of mineralisation below the cut-off may be included within a broader mineralised zone, Internal dilution below cut-off is also permitted where geological continuity of a particular zone is inferred.</p> <ul style="list-style-type: none"> <li>Aggregate intercepts have been included – for example: <ul style="list-style-type: none"> <li>Lead-Silver Mineralisation</li> <li>17.1m (14.5m etw) at 3.6% Pb, 102g/t Ag from 321.13m downhole including; <ul style="list-style-type: none"> <li>7.1m (6.0m etw) at 5.4% Pb, 197g/t Ag, from 331.12m downhole</li> </ul> </li> </ul> </li> </ul> <p>In this example, the sub-interval contains significantly higher grade than the broader interval.</p> <p>In addition to reporting the raw assay results, Silver-Lead results have been reported as Silver Equivalent (AgEq). The Silver Equivalent value is considered an appropriate method for reporting combined silver, lead mineralisation at Maronan because of the exceptional metallurgical recovery of both the lead and silver and the resulting concentrates very high silver content and low levels of penalty elements. The silver equivalent calculation takes into account the preliminary metallurgical results that highlighted simple processing routes to achieve recoveries of 95% for the lead and 93% for the silver (refer to Red Metal ASX announcement dated 29 July 2015). Gold values have not been used in the lead equivalent calculation due to the lack of metallurgical test work on the gold-bearing ore types.</p> <ul style="list-style-type: none"> <li><b>Silver Equivalent</b> was calculated using the formula:</li> </ul> $\text{AgEq} = ((\text{Pb} (\%) * \text{Pb}^{\text{rec}} * \text{Pb}^{\text{price}}) + (\text{Ag} (\text{g/t}) * \text{Ag}^{\text{rec}} * \text{Ag}^{\text{price}}) / \text{Ag}^{\text{price}}$ <ul style="list-style-type: none"> <li>Pb (%) is the weight percent assay grade for Lead</li> <li>Pb<sup>rec</sup> is the assumed metallurgical recovery of 95% for lead based on previous testwork at Maronan</li> <li>Pb<sup>price</sup> is the value of 1% Lead based on a price assumption of \$USD2000/tonne). In this instance the value of \$20</li> <li>Ag (g/t) is the assay grade in grams/tonne of silver</li> </ul>

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>• <math>Ag^{rec}</math> is the assumed metallurgical recovery of 93% for silver based on previous testwork at Maronan</li> <li>• <math>Ag^{price}</math> is the value of 1g/t Silver based on a price assumption of \$USD20/ounce). In this instance the value of \$0.643</li> <li>• The formula calculates the value of the recoverable metal for Lead and Silver and divides with by the value of 1gm Silver to calculate the Silver Equivalent value</li> </ul> <p>This Silver Equivalent calculation does not take into account any assumptions about payability, treatment costs or refining costs</p>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>• <i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li>• <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li>• <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drill holes are interpreted to have intersected the mineralisation at an appropriate intersection angle.</li> <li>• Modelled zones of mineralisation at the Maronan Project strike approximately 010 and dip ~ 70W.</li> <li>• Estimated True Widths are reported in Table 1 of the report</li> </ul>
Diagrams	<ul style="list-style-type: none"> <li>• <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Plan view, cross sectional and long section views are included within the body of the ASX release (Figures 1, 2, 3)</li> </ul>
Balanced reporting	<ul style="list-style-type: none"> <li>• <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>• All assay results for, gold, silver, copper, lead and zinc for MRN24003, MRN24003W1 and MRN24004 are reported in Appendix 2 of this ASX release.</li> </ul>
Other substantive exploration data	<ul style="list-style-type: none"> <li>• <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Not Applicable</li> </ul>

Criteria	JORC Code explanation	Commentary
Further work	<ul style="list-style-type: none"> <li><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> <li><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>Maronan Metals has announced a planned drilling program of between 7,000 – 10,000m within the Starter Zone area that it intends to complete during 2024. The results reported in this announcement are from drilling as part of that program</li> <li>Mineralisation on the Eastern and Western Horizon Pb-Ag domains remains open down plunge, and requires additional drilling to increase confidence in the existing resource.</li> <li>The Maronan Copper-Gold resource is open down plunge. Further infill drilling is required to upgrade the resource from inferred to indicated category.</li> </ul>



**APPENDIX 2 – ASSAY RESULTS FOR MRN24003, MRN24003W1, MRN24004**

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003	MM07938	61.00	62.00	1.82	0.01	317	1685	68
MRN24003	MM07939	71.00	72.00	0.14	0.01	59	182	33
MRN24003	MM07940	81.00	82.00	0.73	0.22	46	566	52
MRN24003	MM07941	91.00	92.00	0.26	0.01	107	68	251
MRN24003	MM07942	100.00	101.00	0.24	0.01	58	145	51
MRN24003	MM07943	110.00	111.00	0.04	0.01	7	76	74
MRN24003	MM07944	120.00	121.00	0.10	0.11	3	64	28
MRN24003	MM07945	130.00	131.00	0.07	0.01	24	75	36
MRN24003	MM07946	140.00	141.00	0.99	0.01	122	792	18
MRN24003	MM07947	150.00	151.00	0.26	0.01	5	207	28
MRN24003	MM07948	160.00	161.00	0.87	0.33	9	314	112
MRN24003	MM07949	167.50	168.40	0.11	0.02	101	25	80
MRN24003	MM07951	168.40	169.25	8.10	0.68	12500	27	101
MRN24003	MM07952	169.25	170.00	1.92	0.15	506	41	42
MRN24003	MM07953	170.00	171.00	0.05	0.01	13	64	46
MRN24003	MM07954	171.00	172.00	0.03	0.01	24	21	17
MRN24003	MM07955	173.00	174.00	0.41	0.06	520	40	110
MRN24003	MM07956	174.00	174.90	10.95	0.53	15250	49	256
MRN24003	MM07957	174.90	176.00	0.16	0.01	47	108	120
MRN24003	MM07958	180.00	181.00	0.16	0.01	15	85	278
MRN24003	MM07959	201.00	202.00	0.43	0.01	26	74	116
MRN24003	MM07960	202.00	203.00	2.47	0.01	2	477	87
MRN24003	MM07961	203.00	203.78	0.39	0.01	85	226	42
MRN24003	MM07963	203.78	204.20	1.38	0.05	484	230	34
MRN24003	MM07964	204.20	205.37	0.43	0.01	56	157	15
MRN24003	MM07965	205.37	206.37	6.88	0.51	1990	87	18
MRN24003	MM07966	206.37	207.37	16.05	0.90	7870	294	33
MRN24003	MM07967	207.37	208.00	4.28	0.24	1340	116	20
MRN24003	MM07968	208.00	209.00	3.51	0.55	553	423	83
MRN24003	MM07969	209.00	210.00	5.67	0.11	3580	700	81
MRN24003	MM07970	210.00	211.00	0.92	0.03	533	85	8
MRN24003	MM07971	211.00	212.00	3.54	0.38	2090	128	11
MRN24003	MM07972	212.00	213.00	2.09	0.09	832	325	16
MRN24003	MM07973	213.00	214.00	7.99	0.45	3270	96	15
MRN24003	MM07974	214.00	215.00	1.44	0.05	670	147	10
MRN24003	MM07976	215.00	215.93	0.84	0.03	373	76	16
MRN24003	MM07977	215.93	217.00	2.04	0.28	1330	94	20
MRN24003	MM07978	217.00	218.00	0.73	5.21	932	89	14
MRN24003	MM07979	218.00	219.00	0.16	0.01	60	101	8

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003	MM07980	219.00	220.00	2.14	0.02	45	1505	7
MRN24003	MM07981	220.00	221.00	0.37	0.01	64	446	5
MRN24003	MM07982	221.00	222.00	1.78	0.30	3160	174	13
MRN24003	MM07983	222.00	223.00	0.34	0.04	381	53	7
MRN24003	MM07984	223.00	224.00	0.46	0.03	547	79	21
MRN24003	MM07985	224.00	225.00	0.82	0.03	757	91	15
MRN24003	MM07986	225.00	226.00	0.60	0.05	668	46	10
MRN24003	MM07988	226.00	227.00	0.26	0.02	637	25	26
MRN24003	MM07989	227.00	228.00	0.49	0.03	1560	15	80
MRN24003	MM07990	228.00	229.00	0.41	0.02	1080	55	83
MRN24003	MM07991	229.00	229.72	0.88	0.13	2790	156	44
MRN24003	MM07992	229.72	230.30	0.70	0.05	2220	239	193
MRN24003	MM07993	230.30	231.33	5.74	0.10	8050	3050	79
MRN24003	MM07994	231.33	231.93	24.10	0.18	1125	1225	669
MRN24003	MM07995	231.93	232.41	0.90	0.01	929	1140	1765
MRN24003	MM07996	232.41	233.40	8.91	0.20	4190	957	313
MRN24003	MM07998	236.20	236.50	6.81	0.04	1130	293	66
MRN24003	MM08000	237.90	239.00	2.43	0.01	273	155	174
MRN24003	MM08002	239.00	240.00	5.09	0.02	1245	370	85
MRN24003	MM08004	240.00	241.00	5.70	0.02	845	153	204
MRN24003	MM08006	241.00	241.85	30.80	0.05	1840	230	258
MRN24003	MM08008	241.85	242.50	3.38	0.22	126	68	154
MRN24003	MM08010	242.50	243.35	7.89	0.91	6810	704	280
MRN24003	MM08012	243.35	244.00	1.46	0.14	3480	153	82
MRN24003	MM08013	244.00	244.69	2.26	0.15	1360	175	25
MRN24003	MM08014	244.69	245.85	0.61	0.07	498	46	32
MRN24003	MM08015	245.85	247.00	8.27	0.18	1510	612	40
MRN24003	MM08016	247.00	247.75	2.19	0.11	4720	86	31
MRN24003	MM08017	247.75	248.48	1.28	0.09	2920	77	29
MRN24003	MM08018	248.48	248.92	1.34	0.21	2760	251	227
MRN24003	MM08019	248.92	249.60	4.61	0.11	456	363	163
MRN24003	MM08020	249.60	250.32	3.18	0.12	613	265	128
MRN24003	MM08021	250.32	251.00	1.98	0.11	720	203	102
MRN24003	MM08022	251.00	252.00	6.31	0.20	1910	285	184
MRN24003	MM08023	252.00	252.70	5.04	0.71	9420	127	49
MRN24003	MM08024	252.90	254.00	3.39	0.58	4900	149	105
MRN24003	MM08026	254.00	255.00	2.35	0.14	1020	246	35
MRN24003	MM08027	255.00	256.00	0.77	0.04	1440	47	51
MRN24003	MM08028	256.00	257.00	2.54	0.34	2990	155	311
MRN24003	MM08029	257.00	258.22	1.99	0.04	1105	145	87
MRN24003	MM08030	258.22	259.00	18.50	0.06	1450	1700	36
MRN24003	MM08031	259.00	260.00	3.09	0.03	167	1135	20
MRN24003	MM08032	260.00	261.00	9.53	0.04	237	1165	30
MRN24003	MM08033	261.00	262.00	15.50	0.05	133	4580	53
MRN24003	MM08034	262.00	263.00	8.60	0.05	282	2370	50

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003	MM08035	263.00	264.00	3.33	0.02	521	418	17
MRN24003	MM08036	264.00	265.00	0.63	0.02	267	65	15
MRN24003	MM08038	265.00	266.00	0.57	0.03	481	51	22
MRN24003	MM08039	266.00	267.00	0.23	0.01	138	39	15
MRN24003	MM08040	267.00	268.00	0.19	0.01	126	32	15
MRN24003	MM08041	268.00	269.00	0.38	0.02	385	58	25
MRN24003	MM08042	269.00	270.00	2.42	0.03	3760	83	35
MRN24003	MM08043	270.00	271.15	0.78	0.02	728	177	23
MRN24003	MM08044	271.15	271.93	2.29	0.02	529	570	31
MRN24003	MM08045	271.93	272.61	0.74	0.01	95	149	25
MRN24003	MM08046	272.61	273.70	3.59	0.01	260	512	72
MRN24003	MM08047	273.70	274.70	3.90	0.01	410	471	29
MRN24003	MM08048	274.70	275.70	49.30	0.05	1245	17500	115
MRN24003	MM08049	275.70	276.70	74.90	0.05	922	25700	110
MRN24003	MM08051	276.70	277.20	5.93	0.01	200	2660	513
MRN24003	MM08052	277.20	278.00	2.24	0.01	383	450	72
MRN24003	MM08053	278.00	279.00	1.84	0.01	27	388	8
MRN24003	MM08054	279.00	280.00	13.75	0.01	552	3750	231
MRN24003	MM08055	280.00	280.85	1.28	0.01	44	501	152
MRN24003	MM08056	280.85	281.70	33.00	0.02	11	12300	11
MRN24003	MM08057	281.70	282.70	14.00	0.01	26	4900	53
MRN24003	MM08058	282.70	283.70	0.21	0.01	21	184	67
MRN24003	MM08059	292.00	293.00	0.59	0.01	28	495	35
MRN24003	MM08060	293.00	293.65	2.06	0.02	905	285	13
MRN24003	MM08061	293.65	294.00	3.84	0.11	4180	102	36
MRN24003	MM08063	294.00	295.00	3.03	0.01	44	1360	10
MRN24003	MM08064	295.00	296.00	0.39	0.01	19	184	8
MRN24003	MM08065	296.00	297.00	1.70	0.03	534	671	404
MRN24003	MM08066	297.00	298.00	1.28	0.02	693	146	139
MRN24003	MM08067	310.00	311.00	0.17	0.01	14	104	60
MRN24003	MM08068	320.00	321.13	0.38	0.01	59	350	126
MRN24003	MM08069	321.13	322.00	60.90	0.02	890	14350	73
MRN24003	MM08070	322.00	322.67	38.10	0.03	523	16850	20
MRN24003	MM08071	322.67	323.18	2.24	0.01	1195	651	56
MRN24003	MM08072	323.18	324.00	0.84	0.01	448	213	22
MRN24003	MM08073	324.00	325.00	63.00	0.03	132	37600	145
MRN24003	MM08074	325.00	326.00	70.50	0.03	327	50300	312
MRN24003	MM08076	326.00	326.92	0.41	0.01	27	207	152
MRN24003	MM08077	326.92	328.00	70.10	0.04	879	69300	146
MRN24003	MM08078	328.00	329.00	37.10	0.02	40	31300	48
MRN24003	MM08079	329.00	330.00	24.60	0.01	131	16650	48
MRN24003	MM08080	330.00	331.12	1.17	0.01	849	337	47
MRN24003	MM08081	331.12	332.00	54.00	0.03	276	47200	277
MRN24003	MM08082	332.00	333.00	57.50	0.02	127	55400	771
MRN24003	MM08083	333.00	334.00	127.00	0.02	41	77200	749

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003	MM08084	334.00	335.00	278.00	0.02	46	67200	329
MRN24003	MM08085	335.00	336.00	290.00	0.05	310	45100	375
MRN24003	MM08086	336.00	337.00	332.00	0.04	379	60900	483
MRN24003	MM08088	337.00	338.23	220.00	0.05	278	28000	182
MRN24003	MM08089	338.23	339.00	0.86	0.01	19	287	35
MRN24003	MM08090	340.00	341.00	1.38	0.01	14	302	35
MRN24003	MM08091	343.00	344.23	1.67	0.02	198	217	59
MRN24003	MM08092	344.23	345.00	32.40	0.04	558	13450	448
MRN24003	MM08093	345.00	346.00	17.10	0.02	831	5860	280
MRN24003	MM08094	346.00	347.00	105.00	0.28	596	32100	525
MRN24003	MM08095	347.00	348.00	3.35	0.03	814	274	524
MRN24003	MM08096	348.00	349.00	3.68	0.03	792	443	651
MRN24003	MM08097	349.00	350.00	3.61	0.03	742	378	386
MRN24003	MM08098	350.00	351.00	2.59	0.03	560	176	594
MRN24003	MM08099	351.00	352.00	3.73	0.02	845	471	459
MRN24003	MM08101	352.00	353.00	5.84	0.02	1410	546	662
MRN24003	MM08102	353.00	354.00	1.71	0.01	544	122	499
MRN24003	MM08103	354.00	355.00	1.96	0.03	647	163	613
MRN24003	MM08104	355.00	356.00	0.42	0.02	204	68	78
MRN24003	MM08105	361.00	362.00	0.13	0.01	14	94	53
MRN24003	MM08106	362.00	363.00	0.08	0.02	8	103	65
MRN24003	MM08107	363.00	364.00	0.76	0.02	175	97	454
MRN24003	MM08108	364.00	365.00	24.70	0.03	118	5790	612
MRN24003	MM08109	365.00	366.00	30.60	0.03	68	12100	786
MRN24003	MM08110	366.00	367.00	69.90	0.05	46	28800	656
MRN24003	MM08111	367.00	368.00	0.44	0.01	12	328	284
MRN24003	MM08113	370.00	371.00	0.11	0.01	8	171	89
MRN24003	MM08114	380.00	381.00	0.18	0.01	31	31	87
MRN24003	MM08115	390.00	391.00	0.01	0.02	1	22	45
MRN24003	MM08116	399.00	400.00	0.01	0.01	1	16	48
MRN24003W1	MM08117	215.30	216.00	1.11	0.02	582	49	14
MRN24003W1	MM08118	216.00	216.90	1.46	0.09	698	129	20
MRN24003W1	MM08119	216.90	218.00	0.43	0.14	306	88	11
MRN24003W1	MM08120	218.00	219.00	0.24	0.04	323	99	10
MRN24003W1	MM08121	219.00	220.00	0.55	0.02	45	536	11
MRN24003W1	MM08122	220.00	220.75	0.15	0.02	30	424	8
MRN24003W1	MM08123	220.75	221.46	0.30	0.02	142	332	8
MRN24003W1	MM08124	221.46	221.82	3.33	0.20	9710	96	34
MRN24003W1	MM08125	221.82	223.00	0.32	0.01	228	95	17
MRN24003W1	MM08127	223.00	224.00	0.26	0.03	458	69	35
MRN24003W1	MM08128	224.00	225.00	0.36	0.03	575	62	17
MRN24003W1	MM08129	225.00	226.00	0.15	0.01	372	30	17
MRN24003W1	MM08130	226.00	227.00	0.36	0.03	903	42	14
MRN24003W1	MM08131	227.00	228.00	0.31	0.02	989	19	93
MRN24003W1	MM08132	228.00	228.65	0.14	0.05	364	65	57

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003W1	MM08133	228.65	229.40	0.91	0.09	2360	99	26
MRN24003W1	MM08134	229.40	230.00	1.35	0.11	3240	229	61
MRN24003W1	MM08135	230.00	231.00	1.99	0.09	5960	941	103
MRN24003W1	MM08136	231.00	232.12	28.20	0.06	7500	3960	469
MRN24003W1	MM08137	232.12	233.55	6.69	0.28	1195	631	166
MRN24003W1	MM08139	233.55	234.66	5.48	0.02	2300	215	143
MRN24003W1	MM08141	234.66	235.25	3.52	0.06	142	114	130
MRN24003W1	MM08143	235.25	236.00	7.64	0.02	2310	509	94
MRN24003W1	MM08145	236.00	237.00	9.48	0.01	2250	261	73
MRN24003W1	MM08147	237.00	238.00	4.21	0.01	326	211	87
MRN24003W1	MM08149	238.00	239.00	5.46	0.02	681	81	133
MRN24003W1	MM08152	239.00	240.00	5.40	0.01	1610	229	88
MRN24003W1	MM08154	240.00	240.96	6.20	0.05	2070	162	194
MRN24003W1	MM08156	240.96	241.50	7.20	0.14	935	354	371
MRN24003W1	MM08158	241.50	242.25	5.86	0.13	967	55	199
MRN24003W1	MM08160	242.25	243.00	13.30	0.44	9200	77	237
MRN24003W1	MM08162	243.00	243.89	4.06	0.17	4090	292	101
MRN24003W1	MM08164	243.89	244.65	2.85	0.11	1155	218	18
MRN24003W1	MM08165	244.65	245.35	0.55	0.04	373	44	14
MRN24003W1	MM08166	245.35	246.00	5.13	0.16	1265	321	16
MRN24003W1	MM08167	246.00	247.00	4.00	0.41	3970	292	35
MRN24003W1	MM08168	247.00	248.15	4.90	0.55	9960	91	37
MRN24003W1	MM08169	248.15	248.85	1.43	0.12	1695	340	104
MRN24003W1	MM08170	248.85	249.55	3.37	0.11	469	258	530
MRN24003W1	MM08171	249.55	250.25	0.35	0.02	385	71	64
MRN24003W1	MM08172	250.25	251.00	0.90	0.53	1060	102	77
MRN24003W1	MM08173	251.00	252.15	3.45	0.11	1485	170	112
MRN24003W1	MM08174	252.15	253.29	6.07	2.76	9380	243	59
MRN24003W1	MM08175	253.29	254.00	0.52	0.21	549	109	43
MRN24003W1	MM08177	254.00	255.00	3.45	0.27	1355	444	74
MRN24003W1	MM08178	255.00	256.00	3.04	0.27	4820	92	99
MRN24003W1	MM08179	256.00	257.00	2.32	0.62	3090	147	111
MRN24003W1	MM08180	257.00	258.16	2.86	0.04	361	391	83
MRN24003W1	MM08181	258.16	258.55	10.15	0.04	7010	206	24
MRN24003W1	MM08182	258.55	259.25	6.28	0.01	467	525	12
MRN24003W1	MM08183	259.25	260.00	6.55	0.02	228	761	17
MRN24003W1	MM08184	260.00	261.00	4.49	0.02	196	1340	166
MRN24003W1	MM08185	261.00	262.00	6.21	0.09	138	1655	26
MRN24003W1	MM08186	262.00	263.00	12.60	0.02	216	2360	27
MRN24003W1	MM08187	263.00	264.00	1.57	0.02	176	127	15
MRN24003W1	MM08189	264.00	265.00	1.17	0.01	413	79	10
MRN24003W1	MM08190	265.00	266.00	0.56	0.01	257	92	19
MRN24003W1	MM08191	266.00	267.00	0.65	0.01	313	204	15
MRN24003W1	MM08192	267.00	268.00	0.11	0.01	117	36	21
MRN24003W1	MM08193	268.00	269.00	0.92	0.03	1225	49	24

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003W1	MM08194	269.00	270.00	0.32	0.07	313	53	45
MRN24003W1	MM08195	270.00	271.05	1.86	0.03	3010	89	38
MRN24003W1	MM08196	271.05	271.80	2.14	0.01	325	664	30
MRN24003W1	MM08197	271.80	272.40	2.48	0.01	247	522	53
MRN24003W1	MM08198	272.40	273.00	0.91	0.01	327	235	108
MRN24003W1	MM08199	273.00	274.00	7.33	0.02	278	1055	24
MRN24003W1	MM08200	274.00	275.00	47.40	0.02	434	16100	52
MRN24003W1	MM08202	275.00	275.73	50.30	0.02	616	18700	64
MRN24003W1	MM08203	275.73	276.76	27.60	0.02	192	12950	222
MRN24003W1	MM08204	276.76	277.82	2.57	0.01	248	419	47
MRN24003W1	MM08205	277.82	278.65	5.41	0.01	17	1155	8
MRN24003W1	MM08206	278.65	279.15	39.10	0.01	303	11200	93
MRN24003W1	MM08207	279.15	280.00	6.64	0.01	159	3090	88
MRN24003W1	MM08208	280.00	280.40	6.77	0.01	85	2250	125
MRN24003W1	MM08209	280.40	281.17	57.40	0.03	22	26300	13
MRN24003W1	MM08210	281.17	282.20	9.47	0.01	66	3500	81
MRN24003W1	MM08211	289.00	290.00	0.26	0.01	13	226	29
MRN24003W1	MM08212	291.91	292.60	0.95	0.02	224	381	19
MRN24003W1	MM08214	292.60	293.18	3.79	0.13	4500	40	65
MRN24003W1	MM08215	293.18	294.00	5.06	0.01	101	2420	14
MRN24003W1	MM08216	294.00	295.00	1.58	0.01	62	575	7
MRN24003W1	MM08217	295.00	296.00	0.27	0.01	192	91	6
MRN24003W1	MM08218	296.00	297.21	0.85	0.01	919	60	13
MRN24003W1	MM08219	297.21	298.00	0.51	0.01	294	168	73
MRN24003W1	MM08220	299.00	300.00	0.13	0.01	6	48	43
MRN24003W1	MM08221	310.00	311.00	0.31	0.01	68	278	82
MRN24003W1	MM08222	318.00	319.00	0.42	0.01	99	220	47
MRN24003W1	MM08223	319.00	319.85	1.42	0.01	234	640	70
MRN24003W1	MM08224	319.85	321.00	1.59	0.01	72	824	100
MRN24003W1	MM08226	321.00	322.00	35.70	0.04	215	16700	45
MRN24003W1	MM08227	322.00	323.00	33.20	0.05	569	14850	32
MRN24003W1	MM08228	323.00	323.75	88.70	0.04	1025	64100	227
MRN24003W1	MM08229	323.75	324.50	102.00	0.02	346	74100	284
MRN24003W1	MM08230	324.50	325.64	2.59	0.01	30	1940	158
MRN24003W1	MM08231	325.64	326.25	110.00	0.04	52	104500	91
MRN24003W1	MM08232	326.25	327.00	16.75	0.04	912	16350	158
MRN24003W1	MM08233	327.00	328.00	36.30	0.01	120	28600	146
MRN24003W1	MM08234	328.00	329.00	1.26	0.01	209	998	45
MRN24003W1	MM08235	329.00	330.00	16.90	0.01	251	12200	45
MRN24003W1	MM08236	330.00	331.00	80.50	0.02	105	79900	987
MRN24003W1	MM08238	331.00	332.00	32.50	0.01	138	25800	507
MRN24003W1	MM08239	332.00	333.00	117.00	0.01	89	58200	554
MRN24003W1	MM08240	333.00	334.00	327.00	0.01	65	50900	165
MRN24003W1	MM08241	334.00	335.00	283.00	0.03	304	48900	517
MRN24003W1	MM08242	335.00	335.75	446.00	0.06	216	56100	628

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24003W1	MM08243	335.75	336.37	153.00	0.03	469	15900	193
MRN24003W1	MM08244	336.37	337.25	0.98	0.01	21	284	29
MRN24003W1	MM08245	341.50	342.33	0.82	0.01	63	221	70
MRN24003W1	MM08246	342.33	343.00	72.40	0.07	437	29400	877
MRN24003W1	MM08247	343.00	344.00	93.00	0.08	725	33000	456
MRN24003W1	MM08248	344.00	345.00	71.60	0.08	824	19450	558
MRN24003W1	MM08249	345.00	346.00	2.23	0.01	611	321	600
MRN24003W1	MM08251	346.00	347.00	3.55	0.01	990	337	1170
MRN24003W1	MM08252	347.00	348.00	3.86	0.03	763	590	512
MRN24003W1	MM08253	348.00	349.00	3.85	0.01	483	789	462
MRN24003W1	MM08254	349.00	350.00	3.10	0.02	768	361	481
MRN24003W1	MM08255	350.00	351.00	1.89	0.01	385	355	569
MRN24003W1	MM08256	351.00	352.00	1.14	0.01	407	101	496
MRN24003W1	MM08257	352.00	353.00	1.85	0.01	275	230	666
MRN24003W1	MM08258	353.00	353.75	4.98	0.11	2580	286	562
MRN24003W1	MM08259	353.75	354.40	1.07	0.01	490	67	353
MRN24003W1	MM08260	354.40	355.50	0.05	0.01	5	101	46
MRN24003W1	MM08261	359.00	360.00	0.20	0.01	11	143	69
MRN24004	MM08263	47.00	47.69	4.06	0.11	65	103	25
MRN24004	MM08264	47.69	48.35	1.01	0.12	29	1185	51
MRN24004	MM08265	140.00	141.00	0.57	0.01	189	417	115
MRN24004	MM08266	141.00	142.00	0.51	0.01	36	488	43
MRN24004	MM08267	142.00	143.00	4.20	0.02	80	2050	43
MRN24004	MM08268	143.00	144.00	5.10	0.01	50	2250	24
MRN24004	MM08269	144.00	145.00	0.97	0.09	70	562	37
MRN24004	MM08270	158.00	159.00	4.56	0.02	20	1545	2380
MRN24004	MM08271	159.00	160.00	4.09	0.01	165	1435	537
MRN24004	MM08272	160.00	161.40	5.49	0.01	40	1940	2350
MRN24004	MM08273	161.40	162.00	0.15	0.01	23	82	155
MRN24004	MM08274	180.50	181.00	1.80	0.01	98	990	30600
MRN24004	MM08276	193.00	193.50	1.26	0.02	27	393	11550
MRN24004	MM08277	204.00	205.00	3.67	0.02	13	1645	146
MRN24004	MM08278	205.00	206.00	2.13	0.02	25	1940	75
MRN24004	MM08279	206.00	207.44	0.28	0.05	17	164	36
MRN24004	MM08280	207.62	208.10	3.90	0.05	1390	208	12
MRN24004	MM08281	208.86	210.00	3.25	0.02	463	213	25
MRN24004	MM08282	210.00	211.00	0.52	0.03	260	6	7
MRN24004	MM08283	211.00	212.00	5.17	0.75	945	128	8
MRN24004	MM08284	212.00	213.00	0.62	0.02	350	70	12
MRN24004	MM08285	213.00	214.00	0.40	0.02	85	74	8
MRN24004	MM08286	214.00	215.00	0.35	0.02	22	126	8
MRN24004	MM08288	215.00	216.00	0.58	0.03	201	197	8
MRN24004	MM08289	216.00	217.00	0.81	0.03	230	317	8
MRN24004	MM08290	217.00	218.00	0.25	0.04	150	104	15
MRN24004	MM08291	218.00	219.00	0.18	0.04	47	100	7

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24004	MM08292	219.00	220.00	0.94	0.07	502	527	11
MRN24004	MM08293	220.00	221.00	0.25	0.07	71	141	9
MRN24004	MM08294	221.00	222.00	0.87	0.11	43	380	8
MRN24004	MM08295	222.00	223.00	0.40	0.03	295	195	8
MRN24004	MM08296	223.00	224.00	0.20	0.05	253	109	8
MRN24004	MM08297	224.00	225.00	0.19	0.03	215	94	20
MRN24004	MM08298	225.00	226.00	0.52	0.08	846	86	20
MRN24004	MM08299	226.00	227.00	2.30	0.33	4440	244	47
MRN24004	MM08301	227.00	228.00	0.27	0.07	533	82	44
MRN24004	MM08302	228.00	228.90	0.84	0.14	1335	101	113
MRN24004	MM08303	228.90	230.30	5.82	0.06	818	478	787
MRN24004	MM08304	230.30	231.36	3.26	0.08	1600	2650	342
MRN24004	MM08305	232.95	234.00	0.57	0.10	742	160	247
MRN24004	MM08306	234.00	235.00	8.05	0.02	1020	69	217
MRN24004	MM08307	235.00	236.00	1.46	0.02	687	50	246
MRN24004	MM08308	236.00	237.00	1.12	0.03	795	465	160
MRN24004	MM08309	237.00	238.00	5.09	0.48	8580	97	557
MRN24004	MM08310	238.00	238.60	0.65	0.19	489	242	268
MRN24004	MM08311	239.90	241.00	6.48	0.31	7620	131	384
MRN24004	MM08313	241.00	242.00	14.30	1.57	705	75	231
MRN24004	MM08315	242.00	243.00	7.74	0.06	1270	83	520
MRN24004	MM08317	243.00	244.00	9.59	19.80	7220	82	488
MRN24004	MM08319	244.00	245.00	0.96	0.13	1135	347	860
MRN24004	MM08320	245.00	245.82	4.39	0.12	1320	976	209
MRN24004	MM08321	245.82	247.00	10.65	0.99	11200	2530	194
MRN24004	MM08322	247.00	248.00	5.42	0.70	8910	666	198
MRN24004	MM08323	248.00	249.00	5.26	0.10	442	1465	78
MRN24004	MM08324	249.00	250.00	14.80	0.31	343	4050	24
MRN24004	MM08326	250.00	251.00	0.74	0.04	213	193	33
MRN24004	MM08327	251.00	252.00	1.79	0.05	399	464	23
MRN24004	MM08328	252.00	253.00	2.25	0.03	526	1675	40
MRN24004	MM08329	253.00	254.00	4.38	0.04	817	645	128
MRN24004	MM08330	254.00	255.00	21.90	0.04	600	7090	277
MRN24004	MM08331	255.00	256.00	11.60	0.02	51	2570	61
MRN24004	MM08332	256.00	257.00	11.80	0.02	48	2410	79
MRN24004	MM08333	257.00	258.00	3.53	0.03	548	780	21
MRN24004	MM08334	258.00	259.00	3.32	0.07	1185	522	36
MRN24004	MM08335	259.00	260.00	0.70	0.01	267	133	23
MRN24004	MM08336	260.00	261.00	2.10	0.02	636	257	190
MRN24004	MM08338	261.00	262.00	0.23	0.01	40	115	104
MRN24004	MM08339	262.00	263.00	15.80	0.02	82	13800	18
MRN24004	MM08340	263.00	264.00	42.60	0.04	572	56000	173
MRN24004	MM08341	264.00	265.00	5.01	0.01	542	2570	88
MRN24004	MM08342	265.00	266.00	40.70	0.03	1560	18300	469
MRN24004	MM08343	266.00	267.00	3.97	0.01	693	1255	486

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24004	MM08344	267.00	268.10	0.93	0.01	91	348	350
MRN24004	MM08345	268.10	269.00	2.22	0.01	300	429	32
MRN24004	MM08346	269.00	269.60	3.12	0.02	1490	148	74
MRN24004	MM08347	269.60	270.50	2.44	0.04	259	321	58
MRN24004	MM08348	270.50	271.50	4.27	0.03	844	505	46
MRN24004	MM08349	271.50	272.60	6.18	0.02	693	1415	47
MRN24004	MM08351	272.60	274.00	0.47	0.01	23	228	77
MRN24004	MM08352	274.00	274.90	0.32	0.01	60	160	24
MRN24004	MM08353	275.62	277.00	0.22	0.01	74	150	48
MRN24004	MM08354	277.00	278.00	1.48	0.01	57	844	26
MRN24004	MM08355	278.00	279.00	2.18	0.01	57	1095	24
MRN24004	MM08356	279.00	280.00	1.38	0.01	71	808	36
MRN24004	MM08357	280.00	281.00	1.44	0.01	71	1025	46
MRN24004	MM08358	281.00	282.00	1.62	0.01	58	932	32
MRN24004	MM08359	282.00	283.00	1.21	0.01	63	708	63
MRN24004	MM08360	283.00	284.15	0.63	0.01	99	478	196
MRN24004	MM08361	284.15	285.00	3.22	0.06	1770	450	16
MRN24004	MM08363	285.00	286.00	6.09	0.03	612	3760	49
MRN24004	MM08364	286.00	287.00	5.86	0.07	1200	3520	21
MRN24004	MM08365	287.00	288.00	2.79	0.02	1010	1155	15
MRN24004	MM08366	288.00	289.00	0.70	0.02	470	223	14
MRN24004	MM08367	289.00	290.00	0.73	0.03	1050	95	20
MRN24004	MM08368	290.00	290.75	0.42	0.02	512	92	11
MRN24004	MM08369	290.75	292.00	0.13	0.01	91	93	77
MRN24004	MM08370	293.00	294.00	0.07	0.01	17	82	93
MRN24004	MM08371	294.00	295.00	0.89	0.01	403	194	162
MRN24004	MM08372	295.00	296.00	0.25	0.01	45	172	193
MRN24004	MM08373	304.40	305.00	7.29	0.04	1815	431	146
MRN24004	MM08374	307.00	308.00	1.80	0.01	84	538	180
MRN24004	MM08376	312.00	313.00	0.37	0.01	61	235	72
MRN24004	MM08377	313.00	314.30	0.25	0.01	96	249	33
MRN24004	MM08378	314.30	315.00	1.08	0.01	781	161	75
MRN24004	MM08379	315.00	316.00	0.15	0.02	120	60	58
MRN24004	MM08380	316.00	317.00	0.88	0.02	823	40	40
MRN24004	MM08381	317.00	317.60	1.52	0.01	1595	96	26
MRN24004	MM08382	318.01	319.07	1.89	0.01	1575	139	41
MRN24004	MM08383	319.72	321.00	0.23	0.01	142	218	76
MRN24004	MM08384	321.00	322.25	0.09	0.01	38	150	82
MRN24004	MM08385	322.25	322.62	0.51	0.01	145	84	141
MRN24004	MM08386	323.65	325.00	36.30	0.01	14	21000	54
MRN24004	MM08388	325.00	326.00	29.00	0.01	10	26500	59
MRN24004	MM08389	326.00	327.00	79.30	0.03	48	61700	39
MRN24004	MM08390	327.00	328.00	77.10	0.03	33	76800	32
MRN24004	MM08391	328.00	329.00	0.38	0.01	116	297	27
MRN24004	MM08392	329.00	329.42	28.60	0.02	1030	11700	229

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24004	MM08393	330.22	331.00	30.00	0.01	363	26500	439
MRN24004	MM08394	331.00	332.00	0.68	0.01	66	726	86
MRN24004	MM08395	332.00	333.00	70.80	0.04	144	43500	29
MRN24004	MM08396	333.00	334.00	245.00	0.21	529	96300	53
MRN24004	MM08397	334.00	334.50	150.00	0.06	720	59400	41
MRN24004	MM08398	335.38	336.00	174.00	0.04	135	58200	43
MRN24004	MM08399	336.00	337.00	181.00	0.05	475	57500	142
MRN24004	MM08401	337.00	338.00	389.00	0.16	577	79300	279
MRN24004	MM08402	338.00	338.65	525.00	0.07	647	96800	173
MRN24004	MM08403	338.65	339.50	99.00	0.07	353	19800	309
MRN24004	MM08404	339.50	341.00	9.66	0.01	24	2330	64
MRN24004	MM08405	341.00	342.00	6.19	0.01	43	1420	62
MRN24004	MM08406	342.00	343.00	0.89	0.03	13	610	41
MRN24004	MM08407	343.00	344.00	4.36	0.01	12	1260	70
MRN24004	MM08408	344.00	345.00	2.32	0.01	31	1150	55
MRN24004	MM08409	345.00	346.00	1.02	0.01	110	558	100
MRN24004	MM08410	346.00	347.00	34.30	0.04	1380	7320	366
MRN24004	MM08411	347.00	348.00	16.40	0.03	1370	2410	496
MRN24004	MM08413	348.00	349.00	1.58	0.05	327	252	626
MRN24004	MM08414	349.00	350.00	1.44	0.02	508	113	438
MRN24004	MM08415	350.00	351.00	0.82	0.03	178	120	491
MRN24004	MM08416	351.00	352.13	6.95	0.28	772	1190	238
MRN24004	MM08417	352.91	354.00	8.86	0.11	428	697	346
MRN24004	MM08418	354.00	354.70	1.38	0.05	257	162	241
MRN24004	MM08419	354.70	355.07	0.37	0.01	7	444	81
MRN24004	MM08420	361.00	362.00	0.09	0.01	3	104	65
MRN24004	MM08421	362.00	363.00	0.76	0.02	312	99	346
MRN24004	MM08422	363.00	364.00	1.32	0.02	349	179	485
MRN24004	MM08423	364.00	364.35	0.31	0.01	1	41	192
MRN24004	MM08424	364.35	365.00	110.00	0.06	28	39100	361
MRN24004	MM08426	365.00	365.55	116.00	0.10	71	39900	277
MRN24004	MM08427	365.55	366.00	0.38	0.01	8	307	70
MRN24004	MM08428	366.00	367.00	0.18	0.01	3	186	119
MRN24004	MM08429	367.00	368.00	0.21	0.01	1	241	66
MRN24004	MM08430	380.00	381.00	0.16	0.01	59	20	69
MRN24004	MM08431	390.00	391.00	0.02	0.01	13	19	82
MRN24004	MM08432	400.00	401.00	0.35	0.01	98	54	131
MRN24004	MM08433	410.00	411.00	0.39	0.04	392	25	92
MRN24004	MM08434	420.00	421.00	0.29	0.02	87	42	80
MRN24004	MM08435	430.00	431.00	0.13	0.03	15	72	80
MRN24004	MM08436	440.09	441.00	0.37	0.01	4	190	68
MRN24004	MM08438	450.00	451.00	0.04	0.01	2	93	58
MRN24004	MM08439	460.00	461.00	0.18	0.01	26	55	105
MRN24004	MM08440	470.00	471.00	0.03	0.01	11	25	102
MRN24004	MM08441	480.00	481.00	0.03	0.01	4	37	47

HOLE_ID	SAMPLE_ID	FROM	TO	Ag_ppm	Au_ppm	Cu_ppm	Pb_ppm	Zn_ppm
MRN24004	MM08442	490.00	491.00	0.47	0.02	37	42	70
MRN24004	MM08443	500.00	501.00	0.06	0.01	5	54	61
MRN24004	MM08444	510.00	511.00	1.36	0.02	154	93	69
MRN24004	MM08445	515.00	516.00	0.16	0.01	14	63	108
MRN24004	MM08446	520.00	521.00	0.04	0.01	9	62	109
MRN24004	MM08447	521.00	522.00	0.14	0.01	40	81	128
MRN24004	MM08448	522.00	523.00	0.53	0.01	170	140	123
MRN24004	MM08449	523.00	524.00	0.34	0.01	88	92	123
MRN24004	MM08451	524.00	525.00	0.12	0.01	12	92	136
MRN24004	MM08452	525.00	526.00	1.08	0.02	151	161	111
MRN24004	MM08453	526.00	527.00	0.81	0.02	104	127	140
MRN24004	MM08454	527.00	528.00	1.03	0.02	142	83	137
MRN24004	MM08455	528.00	529.00	1.34	0.02	177	106	126
MRN24004	MM08456	529.00	530.00	0.27	0.01	28	60	122
MRN24004	MM08457	530.00	531.00	0.30	0.01	40	69	123
MRN24004	MM08458	540.00	541.00	0.12	0.01	2	101	155
MRN24004	MM08459	550.00	551.00	0.29	0.01	4	72	94
MRN24004	MM08460	560.00	561.00	0.10	0.01	4	27	59
MRN24004	MM08461	570.00	571.00	0.06	0.01	2	98	138
MRN24004	MM08463	580.00	581.00	0.10	0.01	3	64	79
MRN24004	MM08464	590.00	591.00	0.39	0.02	5	143	268