

**EXCEPTIONAL SHALLOW HIGH-GRADE INITIAL RESAMPLING RESULTS**  
**10.98m @ 7.15% COPPER FOR JORC COMPLIANT RESOURCE DEFINITION -**  
**ICE COPPER PROJECT**

**HIGHLIGHTS:**

- Following the location of more than 10,000m of historical drill core, Bastion began core resampling at the ICE Copper Project as part of the process to convert the historical, foreign, non-JORC resource to a JORC compliant mineral resource estimate.
- As part of a two-stage sampling program, the first assays (being the smaller batch) have been received from these initial samples with **exceptional interval confirmations of 10.98m @ 7.15% Cu and 5.31m @ 9.88% Cu, shallow intersects, both from just ~90m depth.**
- Initial assay results confirm the tenor of the historically recorded mineralisation, with excellent copper, gold and cobalt intersections. Results include:
  - **5.31m @ 9.88% Cu**, 0.37g/t Au, 16 g/t Ag and 0.19% Co **from 88.57 m** (ID97-11)
  - **10.98m @ 7.15% Cu**, 0.57 g/t Au, 25 g/t Ag and 0.14% Co **from 90.02m** (ID97-13)
  - **6.51m @ 4.53% Cu**, 0.86 g/t Au and 29 g/t Ag **from 86.77m** (IC97-20)
  - **6.37m @ 2.77% Cu** and 0.34 g/t Au **from 29.9m** (IC97-30)
  - **9.49m @ 2.88% Cu from 43.59m** (IC96-02)
- The ICE Copper Project is a Cyprus-style Volcanic Hosted Massive Sulphide deposit, containing copper-gold and cobalt, with **a historical, foreign non-JORC resource of 4.56 Mt @ 1.48% Cu<sup>1</sup>** in the Yukon Territory, Canada.

*Note: A competent person has not done sufficient work to classify the historical foreign estimate as mineral resources or ore reserves in accordance with the JORC Code (2012); and it is uncertain that following evaluation and/or further exploration work that the historical foreign estimate will be able to be reported as mineral resources or ore reserves in accordance with the JORC Code.*

- Additional sample results will be reported as they are received. This information will be checked against the historical sampling intervals and used to evaluate the historical resource estimate, **which did not include value from gold or cobalt mineralisation.**
- It is important to note the second stage of drill core assay re-sampling will be conducted over more than 10% of the available mineralised drill core to be assayed, with QA/QC certified standards and duplicates included with core samples submitted for assay.

<sup>1</sup> For full details of the historical foreign non-JORC resource, refer to the Company's ASX announcement of 12 August 2024.

- **The Company is targeting the definition of a JORC (2012) compliant resource is expected in early Q1 2025, with an Exploration Target also being assessed, based on available geophysics and geochemistry.**

Bastion Minerals Ltd (ASX:BMO, **Bastion** or the **Company**) is pleased to provide an update on the highly prospective high grade Canadian Copper portfolio containing the advanced ICE Copper Project<sup>2</sup> (**ICE Project** or **Project**) in the Yukon Province, Western Canada. This is a province with a strong history of Volcanic Hosted Massive Sulphide (**VHMS**) deposit discovery and mining. BMO has now commenced activities to validate the historical, foreign non-JORC resource.

**Commenting on the initial results from the ICE Project, Executive Chairman, Mr Ross Landles, said:**

*"It's fantastic to receive these initial results, confirming the tenor of the historical mineralisation with a staggering interval of **10.98m @ 7.15% Cu from just 90m**. Re-assaying 10% of the mineralised intervals in the deposit will provide us with a high level of confidence regarding the original sampling, assaying and non-JORC foreign resource estimate. It will also provide us with additional information on the gold mineralisation."*

*"In parallel with preparing for a maiden JORC compliant resource, post re-assaying of core and geological modelling, we are excited to show the significant exploration upside of this project. With just 15% of the project area explored in any detail we are confident the historical untested geophysics and soil geochemistry will provide high priority targets for drilling when conditions allow in 2025."*

*"We are very excited with the potential to discover additional mineralised deposits, to increase the project size, as deposits of the VHMS type occur in clusters and may be vertically stacked around the feeder zones which localise mineralisation."*

### **Re-assay results**

Original assays and re-assays of intervals for copper and gold are listed in **Table 1** below. These confirm the extensive original copper and gold mineralised intervals. The comparison of the re-assay and original sample results is positive, with re-assays confirming the copper and gold results in **Table 1**.

Hole IC96-02 shows a poorer correlation than other intervals and this is likely to be related to poorer core recovery and broken core in this second hole of the drilling program on the ICE Project.

Results confirm the tenor of the historically recorded mineralisation, with excellent copper, gold and cobalt intersections. Results include:

- 5.31m @ 9.88% Cu, 0.37g/t Au, 16 g/t Ag and 1889ppm Co, from 88.57 m ID97-11)
- 10.98m @ 7.15% Cu, 0.57 g/t Au, 25 g/t Ag and 1359ppm Co from 90.02m (ID97-13)
- 6.51m @ 4.53% Cu, 0.86 g/t Au, 29 g/t Ag and 621ppm Co from 86.77m (IC97-20)

---

<sup>2</sup> Refer ASX Announcement of 30 July 2024. The acquisition of the ICE Copper Project was approved at an Extraordinary General Meeting of shareholders held in mid-October 2024 with completion expected to occur shortly.

- 6.37m @ 2.77% Cu, 0.34 g/t Au, 10 g/t Ag and 877ppm Co from 29.9m (IC97-30)
- 9.49m @ 2.88% Cu, 0.05 g/t Au, 1 g/t Ag and 276 ppm Co from 43.59m (IC96-02)

### **Resource Estimation**

The original resource was estimated in 1998 using a sectional methodology and Mapinfo Discover, over 50m spaced sections and length weighted averages for copper. Copper grades were then interpolated between drill holes on each section using an inverse distance weighted algorithm and a 1m block size. A 75m by 25m search ellipse oriented at 120 degrees was used for the drill hole data, with results clipped to the interpreted outline of the sulphide body. An average specific gravity of 4.00 was used for the density of the massive sulphide. The historical foreign non-JORC Indicated resource estimate (see **Table 4 for drilling intersections**) was 4.56 Mt, with a copper grade of 1.48% (Becker, 1998b). The location of drillholes over soil geochemistry is shown on the magnetic image (**Figure 2**), together with the location of the detected conductive zone (dark coloured lines trending NNE).

The resource estimation had a minimum thickness for mineralised blocks of 3m and a maximum of 3m of internal waste. None of the high grade values were cut or capped.

### **ICE Copper-Gold Deposit (Yukon)**

The ICE project (**Figure 1**) is located in the south of the Yukon, approximately 220 kilometres northeast of the major city of Whitehorse, which is the administrative capital of the province, and approximately 19 kilometres north of kilometre 279 on the Robert Campbell Highway, which has paved and unpaved sections. A road from the highway was previously constructed for the drilling in the late 90's. Exploration on the project was completed by the company, Expatriate Resources (later Yukon Zinc). The Yukon province contains a significant number of VHMS deposits, which have been extensively mined.

The ICE Project hosts copper+gold+cobalt+silver VHMS mineralization. Primary copper minerals are found in massive sulphide horizons and stockwork zones as chalcopyrite with pyrite and occasional bornite. Secondary copper minerals occur above or peripheral to the primary mineralization and were formed either by in situ oxidation or precipitation following leaching and groundwater transport.

### **Project History**

A total of 121 diamond drill holes (10,584 metres – **were drilled in the resource. All but five of the drill holes were drilled in a 600m by 400m area.** The outlying drill holes tested a limited number of the soil geochemical anomalies defined on the Project. Of equal importance, there are ElectroMagnetic (**EM**) geophysical targets along strike from the drilling that have not been tested.

Only a small area, over the deposit, was subject to a ground-based EM survey and no down hole EM was run in the historical drill holes. Evaluation of the EM geophysics shows equipment was low powered frequency domain equipment, with a maximum investigation depth of 50m. Use of more modern high powered equipment is expected to be much more effective in defining geophysical targets.

The resulting 1998 resource of 4.56 Mt @1.48% Cu is a historical and foreign estimate and not reported in accordance with the JORC Code (2012). A cut-off of 0.5% Cu was applied for the sulphide mineralisation and 0.3% for the oxide mineralisation in the historical foreign non-JORC resource.

This resource was classified at the time of estimation as an Indicated resource. ***A competent person has not done sufficient work to classify the historical estimates or foreign estimates as mineral resources or ore reserves in accordance with the JORC Code; and it is uncertain that following evaluation and/or further exploration work that the historical estimates or foreign estimates will be able to be reported as mineral resources or ore reserves in accordance with the JORC Code.***


Individual assays					Reassayed results		Original results		Reassayed averages		Original results	
Drill Hole ID	Interval (From) m	Interval (To) m	Width m	Total Interval m	Cu%	Au g/t	Cu%	Au g/t	Cu%	Au g/t	Cu%	Au g/t
ID97-11	88.57	89.92	1.35		5.68	0.345	5.2	0.32				
ID97-11	89.92	91.44	1.52		9.5	0.445	9.09	0.49				
ID97-11	91.44	92.81	1.37		11.8	0.357	10.8	0.34				
ID97-11	92.81	93.88	1.07	5.31	12.55	0.339	12.5	0.35	9.88	0.37	9.40	0.37
ID97-13	90.02	91.05	1.03		3.29	0.337	3.22	0.12				
ID97-13	91.05	92.38	1.33		2.98	0.521	3.64	0.47				
ID97-13	92.38	93.72	1.34		8.03	0.565	8.13	0.58				
ID97-13	93.72	95.15	1.43		9.26	0.603	5.44	0.56				
ID97-13	95.15	96.29	1.14		8.9	0.549	8.43	0.58				
ID97-13	96.29	97.23	0.94		8.5	0.302	10.2	0.39				
ID97-13	97.23	98.76	1.53		9.06	0.565	7.96	0.65				
ID97-13	98.76	99.87	1.11		6.99	0.964	7.58	0.83				
ID97-13	99.87	101	1.13	10.98	7.37	0.725	7.48	0.77	7.15	0.57	6.90	0.55
ID97-20	86.77	87.78	1.01		3.2	0.828	3.12	0.84				
ID97-20	87.78	89.36	1.58		4.15	0.478	4.57	0.46				
ID97-20	89.36	90.53	1.17		7.61	1.26	7.23	1.17				
ID97-20	90.53	91.9	1.37		4.65	1.03	4.95	0.99				
ID97-20	91.9	93.28	1.38	6.51	3.05	0.727	3.41	0.73	4.53	0.86	4.66	0.84
ID97-20	136.86	138.07	1.21		0.73	0.02	1.19	0.06				
ID97-20	138.07	139.19	1.12	2.33	0.76	0.06	0.95	0.04	0.75	0.04	1.07	0.05
ID97-30	29.9	30.66	0.76		2.63	0.175	4.81	0.26				
ID97-30	30.66	31.7	1.04		2.59	0.403	2.56	0.38				
ID97-30	31.7	33.22	1.52		2.27	0.243	2.43	0.25				
ID97-30	33.22	34.75	1.53		3.02	0.438	3.25	0.41				
ID97-30	34.75	36.27	1.52	6.37	3.33	0.425	2.77	0.43	2.77	0.34	3.16	0.34
IC96-02	43.59	45.55	1.96		2.19	0.02	2.97	0.02				
IC96-02	45.55	46.63	1.08		2.08	0.02	5.03	0.02				
IC96-02	46.63	48.16	1.53		3.05	0.02	7.13	NA				
IC96-02	48.16	49.35	1.19		7.29	0.01	8.29	0.01				
IC96-02	49.35	50.57	1.22		1.85	0.17	1.49	0.10				
IC96-02	50.57	53.08	2.51	9.49	0.80	0.09	1.2	0.09	2.88	0.05	4.35	0.05

**Table 1:** Copper and gold results for intervals re-assayed.


As required by ASX rule 5.12, the following information is provided below and in **Table 2**. Drill collars for ICE drillholes are provided in **Table 3** (in the original project Datum UTM Zone 9 NAD27 Datum). The historical foreign resource estimate did not include gold or other elements as copper equivalent values. Only copper was included in the estimate in this announcement. Gold assays were not



available for all of the drill holes and were not included in the estimate. Gold has grades up to 1.17 g/t, with elevated silver and cobalt values (**Table 4**). The resource also does not include near-surface material which was not cored in drill holes or surficial material grading up to 0.29% copper.

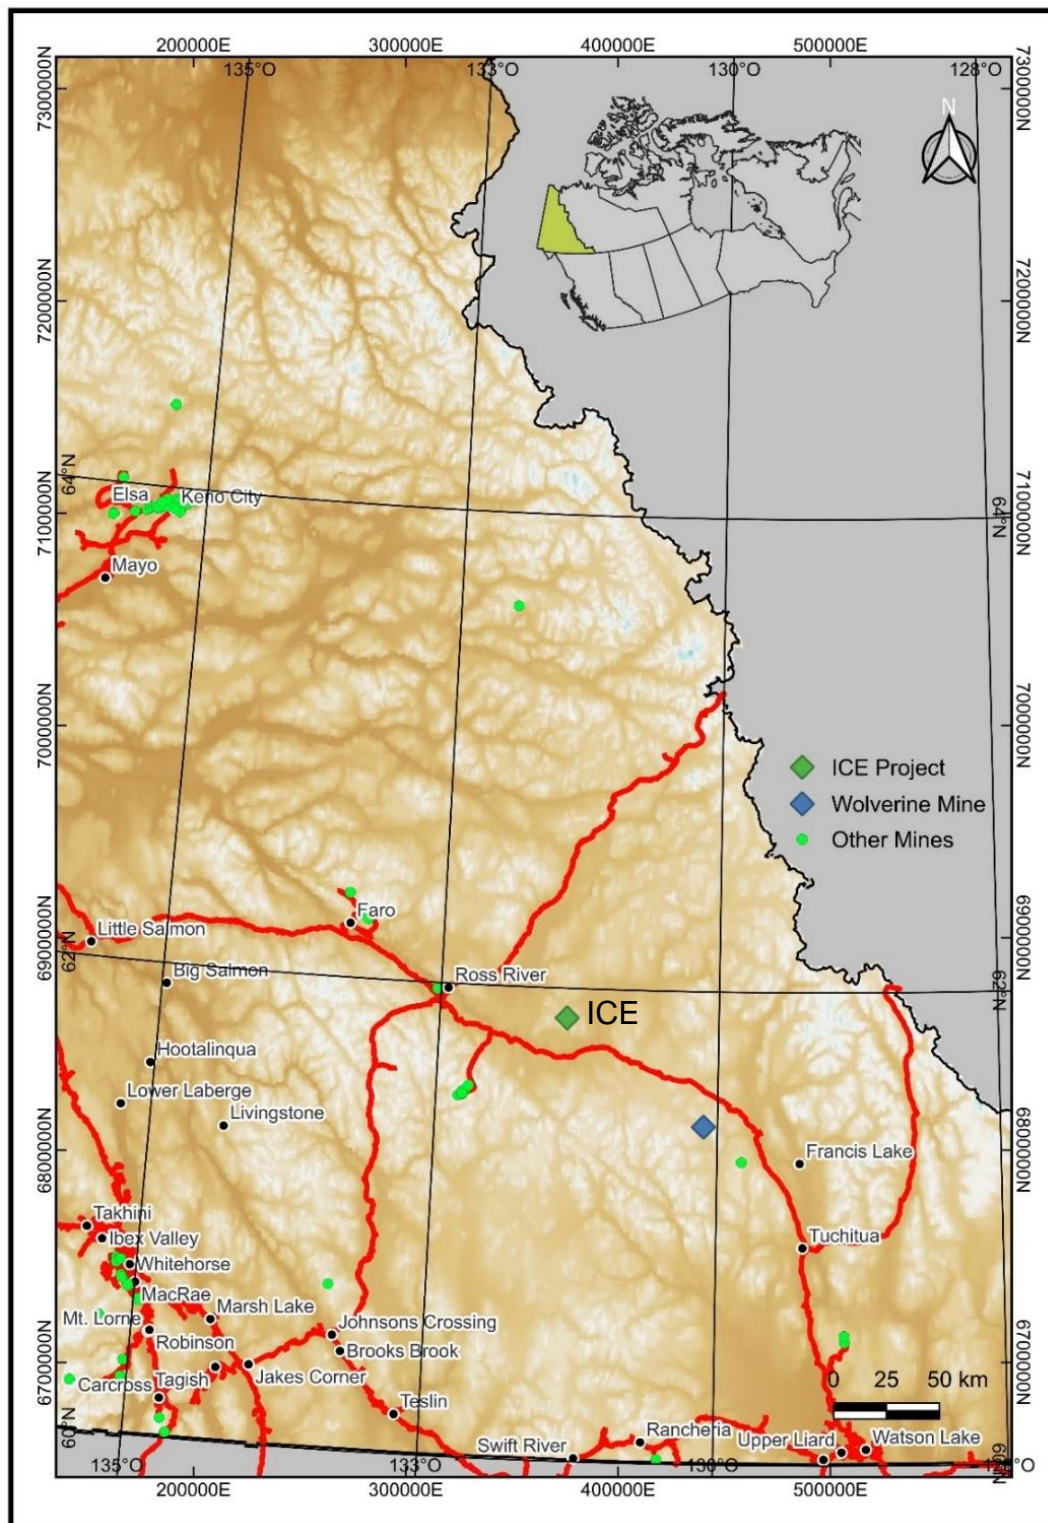

**Figure 1:** Location of the ICE Project relative to the Wolverine mine and Yukon geographical locations.

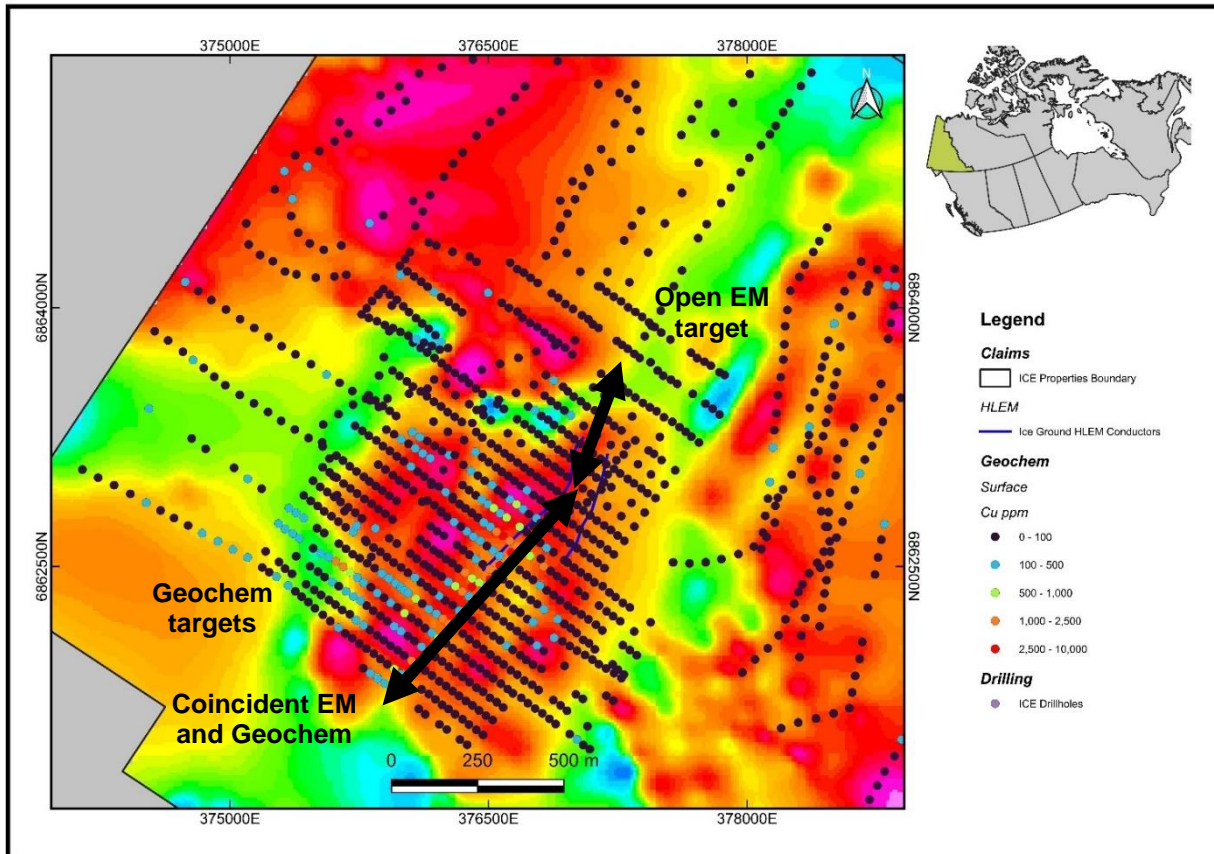

**Figure 2:** Soil geochemistry and EM trends and targets (purple lines). EM untested to the north (survey penetration was maximum 50 m depth), soils untested to the south and west.

The historical foreign non-JORC resource is considered to be material to Bastion and validation of details of this historical foreign resource is a priority for the company. The resource was prepared by a consultant to the property owner at the time (Becker, 1998b), as reported in an internal company report. The historical estimate used a category of mineralisation that is defined in Appendix 5A (JORC Code). The resource was prepared based on 116 of 121 drillholes drilled on the properties at the time of resource estimation. The resource was prepared using specific gravity data collected systematically by the assay laboratory and based on what appears to be a robust geological model. The resource was independently reviewed and audited by Thompson (1998), who confirmed the results of the estimation.

Bastion has built a geological model from the geological and assay data and evaluated the original resource tonnage and grade, confirming the original resource estimate. Assay results from the original program are available, including the original soil and drill hole assay certificates from Chemex Laboratories.



ASX Listing Rule	BMO Response
5.12 - Subject to rule 5.13, an entity reporting historical estimates or foreign estimates of mineralisation in relation to a material mining project must include all of the following information in a market announcement and give it to ASX for release to the market.	Please see sections below
5.12.1 - The source and date of the historical estimates or foreign estimates.	<p>Primary Source Report describing mineral resource calculations at ICE property Latitude 61o53'N; Longitude 131o21'W NTS 10SG/13 and 14 in the Watson Lake Mining District, Yukon Territory. Prepared by Archer, Cathro &amp; Associates (1981) Limited for Expatriate Resources Ltd. TC Becker, B.Sc., P. Geo. May 1998.</p> <p>Secondary Source Audit of mineral resources of ICE deposit, Yukon for Expatriate Resources Ltd. By I.S. Thompson, P.Eng. for Dery, Michener, Booth &amp; Wahl Consultants Ltd.</p>
5.12.2 - Whether the historical estimates or foreign estimates use categories of mineralisation other than those defined in Appendix 5A (JORC Code) and if so, an explanation of the differences.	Reference to the category of mineralisation at the time was indicated Resources, as reiterated in the Audit report. While not a JORC-compliant resource, the classification is consistent with the categories of mineralisation used by the JORC code (2012). The estimate was made prior to the JORC Code (2012) reporting guidelines formulated.
5.12.3 - The relevance and materiality of the historical estimates or foreign estimates to the entity.	The historical estimate for the ICE deposit is relevant and material to BMO's project portfolio, as it pertains to a project that could potentially be economically viable for the Company. This data is relevant to ongoing exploration efforts of the Company, which will look to expand the resource in the ICE project through new exploration activities.
5.12.4 - The reliability of the historical estimates or foreign estimates, including by reference to any of the criteria in Table 1 of Appendix 5A (JORC Code) which are relevant to understanding the reliability of the historical estimates or foreign estimates.	<p>The historical estimate appears to have been conducted with a reasonable technical basis by the author (T. Becker) in 1998. It was independently audited by consultants Dery, Michener, Booth &amp; Wahl in 1998, following completion of the estimate.</p> <p>The available information meets most JORC Table 1 requirements, with the availability of collar and survey data, digital geological logs, assay data, original assay certificates, consultants reports regarding geophysical surveys and the results of soil sampling activities. Information is available on drilling and core recovery, core diameters, geological logging codes and description of cores, the orientation of drilling relative to the orientation of mineralization assay techniques, preparation and detection limits.</p> <p>Drilling spacing and sampling is considered appropriate for a deposit of this type. The exploration programs conducted were well documented in historical company reports. Geophysical programs were conducted at the time of exploration. With more recent innovations in surveying equipment the historical surveys have less investigation depth than current surveying equipment.</p> <p>A significant number of specific gravity samples were analysed by the analytical laboratory, as part of the data collection for resource estimation. The analytical laboratory, Chemex, was later acquired by ALS laboratories, a major international laboratory group with high standards.</p> <p>Resource estimation using the sectional method (50 m spaced sections) and manually defined polygons is a standard method used historically and is considered reasonable for this style of deposit and the date of the estimate. The geological model is simple and reasonable. No grade capping or cutting is known to have occurred, which appears reasonable, with gold not included in the historical estimation.</p>



<p>5.12.5 - To the extent known, a summary of the work programs on which the historical estimates or foreign estimates are based and a summary of the key assumptions, mining and processing parameters and methods used to prepare the historical estimates or foreign estimates.</p>	<p>The cut-off grades applied at the time of the estimate are considered to have been reasonably selected and applied. The resource classification as indicated is considered reasonable, with the amount of information available.</p> <p>Although the historical foreign information did not include standard or duplicate QA/QC chemical analyses (which was normal procedure for the time when the resource was estimated in 1998) the available information collected and used for the resource estimate, and the knowledge that an independent audit of the estimate was conducted, suggest the historical foreign estimate is reliable.</p> <p>To the extent known to the Company, the historic reports indicate the following activities occurred on the property, contributing to the estimation of the historical foreign resource:</p> <ul style="list-style-type: none"> <li>□ The company conducted helicopter based magnetic and Electromagnetic surveys and a local ground-based Electromagnetic survey over the area around the outcropping deposit.</li> <li>□ Expatriate Resources drilled 121 diamond HA and NQ holes in 1996 and 1997, with 116 of these holes into the ICE deposit and the others to the southwest.</li> <li>□ An initial open pit design was made, as it was considered at the time that the majority of the resource could be extracted from an open pit.</li> <li>□ Cut-offs of 0.3% copper for oxide dominant blocks and 0.5% copper for sulphide dominant blocks were selected. The exact basis for selection of these cut-off levels is not specified.</li> </ul>
<p>5.12.6 - Any more recent estimates or data relevant to the reported mineralisation available to the entity.</p>	<p>To the extent known to the Company from historic reports no further drilling or geophysical has taken place since the resource estimate. A re-evaluation of the geophysics undertaken was undertaken by a consultant Jan Klein in 2002, along with preparation of a report on planned future activities - Summary Report for the Finlayson North Project in the Watson Lake Mining District Yukon Territory, Canada. T. Tucker, B.Sc. Geology, P.Geo. J. Moore B.A., M.Sc. Geology.</p>
<p>5.12.7 - The evaluation and/or exploration work that needs to be completed to verify the historical estimates or foreign estimates as mineral resources or ore reserves in accordance with Appendix 5A (JORC Code)</p>	<p>Field work is required that includes surveying the location of all historical drill holes and where possible checking the azimuth and dip of holes. Ideally historical drill core will be located in such a state that re-assaying of a portion of the holes can be undertaken, including analysis for gold. It is likely that twin hole drilling of a portion of the original holes in the deposit will be required to verify the historical work and estimate in accordance with Appendix 5A (JORC Code). A geological model will be built from historical drill hole logging data and information from twin holes. Assaying will include full QA/QC procedures, such as standards, duplicates and blanks.</p>
<p>5.12.8 - The proposed timing of any evaluation and/or exploration work that the entity intends to undertake and a comment on how the entity intends to fund that work.</p>	<p>BMO is planning to visit the project as soon as practical and to collect field information on the location of historical drill holes. BMO will also be applying for an environmental permit to allow validation geochemical soil sampling of untested copper in soil results and to conduct ground-based geophysical surveys to follow up on historical work.</p>



	BMO will fund this initial validation and exploration work from existing funds and additional funds raised as required, in compliance with listing rules, its Constitution, market conditions and appropriate shareholder approval.
5.12.9 - A cautionary statement proximate to, and with equal prominence as, the reported historical estimates or foreign estimates stating that: the estimates are historical estimates or foreign estimates and are not reported in accordance with the JORC Code; a competent person has not done sufficient work to classify the historical estimates or foreign estimates as mineral resources or ore reserves in accordance with the JORC Code; and it is uncertain that following evaluation and/or further exploration work that the historical estimates or foreign estimates will be able to be reported as mineral resources or ore reserves in accordance with the JORC Code.	The following cautionary statement has been inserted in the report proximal to mention of historical resources, immediately beneath the headline statement on page 1 of the announcement. That statement is repeated below for consistency:  A competent person has not done sufficient work to classify the historical foreign estimate as mineral resources or ore reserves in accordance with the JORC Code (2012); and it is uncertain that following evaluation and/or further exploration work that the historical foreign estimate will be able to be reported as mineral resources or ore reserves in accordance with the JORC Code.
5.12.10 - A statement by a named competent person or persons that the information in the market announcement provided under rules 5.12.2 to 5.12.7 is an accurate representation of the available data and studies for the material mining project. The statement must include the information referred to in rule 5.22(b) and (c).	Murray Brooker, Independent Consulting Geologist to BMO is the Competent Person for this announcement. The following statement has been included in the Competent Person section:  "The information in this announcement that relates to historical exploration reporting and historical foreign non-JORC resources has been prepared by Mr. Murray Brooker (AIG #3503; RPGeo # 10,086), of Hydrominex Geoscience Pty Limited. The information in the market announcement provided under rules 5.12.2 to 5.12.7 is an accurate representation of the available data and studies for the material mining project and the information referred to in rule 5.22(b) and (c)."

**Table 2:** ASX rule 5.12 information.

**This announcement was approved for release by the Executive Chairman of Bastion Minerals.**

For more information contact:

Ross Landles  
[ross.landles@bastionminerals.com](mailto:ross.landles@bastionminerals.com)

## APPENDIX 1

### Statements and Disclaimers

#### Competent Person Statement

The information in this announcement that relates to historical exploration reporting and historical foreign non-JORC resources has been prepared by Mr Murray Brooker (AIG #3503; RPGeo # 10,086), of Hydrominex Geoscience Pty Limited. The information in the market announcement provided under rules 5.12.2 to 5.12.7 is an accurate representation of the available data and studies for the material mining project and the information referred to in rule 5.22(b) and (c).

Mr Brooker, who is an independent geological consultant to Bastion Minerals, is a Member of the Australian Institute of Geoscientists, (AIG), and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as the "Competent Person" as defined in the 2012 Edition of the *Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves*. Mr Brooker consents to the inclusion in

the announcement of the matters based on this information in the form and context in which it appears. The announcement is based on and fairly represents information and supporting documentation prepared by the competent person.

### Forward-Looking Statements

Certain statements contained in this Announcement, including information as to the future financial or operating performance of Bastion Minerals and its projects may also include statements which are 'forward-looking statements' that may include, amongst other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions. These 'forward-looking statements' are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Bastion Minerals, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies and involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Bastion Minerals disclaims any intent or obligation to update publicly or release any revisions to any forward-looking statements, whether as a result of new information, future events, circumstances or results or otherwise after the date of this Announcement or to reflect the occurrence of unanticipated events, other than required by the *Corporations Act 2001* (Cth) and the Listing Rules of the Australian Securities Exchange (**ASX**). The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements.

All 'forward-looking statements' made in this Announcement are qualified by the foregoing cautionary statements. Investors are cautioned that 'forward-looking statements' are not guarantee of future performance and accordingly investors are cautioned not to put undue reliance on 'forward-looking statements' due to the inherent uncertainty therein.

For further information please visit the Bastion Minerals website at [www.bastionminerals.com](http://www.bastionminerals.com)

### REFERENCES

- Becker, T.C. 1998a. *Assessment report describing geological mapping, soil geochemistry and diamond drilling on the Ice property for Expatriate resources, February, 1998.*
- Becker T.C. 1998b. *Report describing mineral resource calculations at Ice property in the Watson Lake Mining District, Yukon Territory, for Expatriate Resources Ltd. May, 1998.*
- Plint H.E. and Gordon T.M. (1997). *The Slide Mountain Terrane and the structural evolution of the Finlayson Lake Fault Zone, southeastern Yukon in: Canadian Journal of Earth Sciences 34: p 105-126.*
- Tempelman-Kluit D.J., Gordey, S.P. and Read, B.C. 1976. *Stratigraphic and structural studies in the Pelly Mountains Yukon Territory; Geological Survey of Canada Paper 76-1A, p 97-106.*

*Thompson, I. S. 1998. Audit of Mineral Resources of Ice Deposit, Yukon, for Expatriate Resources Ltd. By Derry, Michener, Booth & Wahl Consultants Ltd. November 19. 1998.*

*Tucker, T. and Moore J. May 9th, 2002. A Summary Report for the Finlayson North Project in the Watson Lake Mining District Yukon Territory, Canada. Expatriate Resources Ltd Internal Report.*

Collar_ID	EastingUTM9_Nad27	NorthingUTM9_Nad27	Nad27_Elevation	Azimuth	Dip	EOH
IC96-01	376627	6862488	1256	305	-50	182
IC96-02	376788	6862687	1290	288	-50	116
IC96-03	376807	6862636	1278	316	-50	152
IC96-04	376723	6862638	1283	308	-50	148
IC96-05	376690	6862476	1246	306	-50	66
IC96-06	376709	6862596	1276	304	-50	93
IC96-07	376750	6862557	1262	320	-50	53
IC96-08	376632	6862646	1286	0	-90	74
IC96-09	376632	6862646	1286	128	-50	74
IC96-10	375995	6862395	1240	165	-51	84
IC96-11	376311	6862388	1238	300	-51	78
IC96-12	376593	6862675	1298	306	-50	70
IC96-13	376830	6862747	1301	315	-48	99
IC96-14	376671	6862618	1275	308	-50	57
IC96-15	376725	6862719	1291	308	-50	90
IC96-16	376630	6862648	1286	308	-50	54
IC96-17	376577	6862564	1272	308	-50	65
IC96-18	376689	6862726	1296	305	-50	77
IC96-19	376391	6862328	1222	308	-50	59
IC96-20	376654	6862750	1313	310	-50	64
IC96-21	376590	6862507	1259	312	-50	46
IC96-22	376533	6862597	1285	308	-50	45
IC96-23	376616	6862781	1330	307	-50	105
IC96-24	376484	6862637	1316	305	-50	78
IC96-25	376533	6862534	1265	0	-90	52
IC96-26	376580	6862810	1351	308	-50	56
IC96-27	376533	6862534	1265	130	-50	46
IC96-28	376846	6862862	1322	303	-50	85
IC96-29	376789	6862775	1309	303	-50	66
IC96-30	376908	6862814	1298	315	-49	82
IC96-31	376750	6862806	1323	308	-49	62
IC96-32	376767	6862920	1362	296	-50	55
IC96-33	376710	6862835	1337	310	-50	56
IC96-34	376870	6862715	1288	305	-50	115
IC97-35	376650	6862633	1281	0	-90	46
IC97-36	376630	6862648	1286	0	-90	42
IC97-37	376590	6862678	1300	0	-90	40
IC97-38	376611	6862662	1291	0	-90	35
IC97-39	376670	6862619	1275	0	-90	32
IC97-40	376690	6862603	1278	0	-90	35
IC97-41	376713	6862593	1275	0	-90	36
IC97-42	376732	6862574	1267	0	-90	15
IC97-43	376471	6862521	1265	0	-90	38
IC97-44	375921	6862509	1267	270	-50	165
IC97-45	375921	6862509	1267	305	-50	111
IC97-46	376680	6862674	1289	0	-90	47
IC97-47	376621	6862594	1275	0	-90	34
IC97-48	376601	6862608	1279	0	-90	32
IC97-49	376660	6862688	1287	0	-90	29

Collar_ID	EastingUTM9_Nad27	NorthingUTM9_Nad27	Nad27_Elevation	Azimuth	Dip	EOH
IC97-50	376580	6862623	1284	0	-90	34
IC97-51	376551	6862583	1279	0	-90	30
IC97-52	376571	6862568	1274	0	-90	34
IC97-53	376581	6862561	1271	115	-70	37
IC97-54	376513	6862549	1269	0	-90	34
IC97-55	376710	6862714	1289	0	-90	36
IC97-56	376700	6862784	1319	0	-90	77
IC97-57	376730	6862699	1292	0	-90	42
IC97-58	376680	6862799	1324	0	-90	40
IC97-59	376660	6862814	1333	0	-90	39
IC97-60	376625	6862770	1325	0	-90	54
IC97-61	376737	6862628	1281	0	-90	41
IC97-62	376770	6862794	1318	0	-90	80
IC97-63	376721	6862644	1282	0	-90	29
IC97-64	376700	6862659	1281	0	-90	37
IC97-65	376750	6862809	1323	0	-90	33
IC97-66	376681	6862549	1263	0	-90	17
IC97-67	376800	6862834	1325	0	-90	45
IC97-68	376661	6862563	1264	0	-90	18
IC97-69	376611	6862538	1266	0	-90	31
IC97-70	376789	6862780	1310	0	-90	49
IC97-71	376582	6862499	1258	0	-90	26
IC97-72	376601	6862483	1254	0	-90	27
IC97-73	376732	6862823	1329	0	-90	33
IC97-74	376720	6862769	1312	0	-90	50
IC97-75	376631	6862523	1261	0	-90	31
IC97-76	376651	6862509	1258	0	-90	31
IC97-77	376740	6862754	1305	0	-90	45
IC97-78	376641	6862578	1269	0	-90	31
IC97-79	376650	6862758	1316	0	-90	50
IC97-80	376553	6862519	1254	0	-90	27
IC97-81	376620	6862718	1309	0	-90	46
IC97-82	376695	6862725	1295	0	-90	46
IC97-83	376639	6862703	1300	0	-90	47
IC97-84	376760	6862739	1297	0	-90	40
IC97-85	376681	6862735	1298	0	-90	43
ID97-01	376870	6862714	1288	312	-75	173
ID97-02	376930	6862676	1267	310	-50	210
ID97-03	376930	6862676	1267	310	-70	178
ID97-04	376851	6862731	1295	303	-50	98
ID97-05	376850	6862666	1278	318	-50	264
ID97-06	377008	6862621	1255	314	-50	189
ID97-07	376850	6862666	1278	318	-80	175
ID97-08	376912	6862615	1257	307	-50	132
ID97-09	377008	6862621	1255	305	-72	187
ID97-10	376912	6862615	1258	300	-80	150
ID97-11	376944	6862724	1273	309	-51	190
ID97-12	376907	6862752	1286	303	-49	168
ID97-13	376943	6862787	1283	305	-50	149

Collar_ID	EastingUTM9_Nad27	NorthingUTM9_Nad27	Nad27_Elevation	Azimuth	Dip	EOH
ID97-14	376988	6862691	1264	309	-51	192
ID97-15	376975	6862828	1284	305	-49	128
ID97-16	376988	6862691	1264	310	-75	194
ID97-17	377009	6862801	1275	307	-50	132
ID97-18	376995	6862749	1267	307	-44	178
ID97-19	377012	6862802	1274	304	-69	178
ID97-20	376995	6862749	1267	308	-66	157
ID97-21	377089	6862752	1263	309	-52	155
ID97-22	377057	6862704	1260	307	-50	146
ID97-23	377089	6862752	1263	311	-70	272
ID97-24	377057	6862704	1260	306	-70	159
ID97-25	377062	6862649	1254	309	-58	186
ID97-26	377047	6862843	1271	301	-70	165
ID97-27	376927	6862859	1302	308	-51	110
ID97-28	376846	6862609	1267	306	-50	146
ID97-29	376884	6862832	1303	306	-48	63
ID97-30	376797	6862707	1295	305	-47	103
ID97-31	376856	6862789	1301	309	-50	101
ID97-32	377086	6862881	1274	306	-72	111
ID97-33	377118	6862781	1264	305	-49	159
ID97-34	376887	6862577	1254	310	-50	169
ID97-35	376839	6862492	1244	306	-50	89
ID97-36	376883	6862709	1284	306	-54	175

**Table 3:** ICE project historical drill collars in the historical project NAD27 datum.



DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC96-01	19.9	21.34	1.44	1.05	0.009		0.6	IC97-58	33.83	35.36	1.53	0.01	0.003		0
IC96-01	21.34	23.5	2.16	1.11	0.009		0	IC97-58	35.36	36.88	1.52	0.02	0.003		0
IC96-01	23.5	24.75	1.25	0.98	0.010		0.2	IC97-58	36.88	38.4	1.52	0.03	0.004		0
IC96-01	24.75	26.67	1.92	0.32	0.002		0	IC97-59	3.3	4.27	0.97	0.52	0.003		3.8
IC96-01	26.67	28.18	1.51	0.54	0.001		0	IC97-59	4.27	5.79	1.52	0.31	0.003		1.4
IC96-01	28.18	29.9	1.72	0.5	0.006		0.2	IC97-59	5.79	7.31	1.52	0.20	0.004		0.6
IC96-01	29.9	31.4	1.5	0.56	0.002	0.02	0	IC97-59	7.31	8.8	1.49	0.27	0.004		0.4
IC96-01	31.4	33	1.6	0.63	0.009	0.005	0.2	IC97-59	8.8	10.06	1.26	0.18	0.003		0.2
IC96-01	38.05	39.62	1.57	0.32	0.004		0.2	IC97-59	13.11	14.63	1.52	0.33	0.004		0
IC96-01	40.5	42.06	1.56	0.39	0.004		0	IC97-59	15.76	16.7	0.94	0.78	0.014		0
IC96-02	19	20.73	1.73	0.38	0.010	0.005	0	IC97-60	3.05	4.27	1.22	0.22	0.004		0
IC96-02	24.99	26.76	1.77	1.02	0.022	0.02	1.4	IC97-60	6.5	7.31	0.81	0.24	0.005		0
IC96-02	26.76	28.75	1.99	4.1	0.030	0.03	1.4	IC97-60	7.31	8.83	1.52	0.55	0.005		0
IC96-02	28.75	30.17	1.42	4.72	0.005		0	IC97-60	8.83	10.36	1.53	0.41	0.004		0.8
IC96-02	30.17	31.7	1.53	1.13	0.010		0	IC97-60	10.36	11.88	1.52	0.43	0.003		0.8
IC96-02	31.7	32.92	1.22	1.93	0.008		0	IC97-60	11.88	13.41	1.53	0.32	0.004		2.2
IC96-02	32.92	34.44	1.52	0.93	0.014		0.2	IC97-60	13.41	14.44	1.03	0.36	0.005		3.6
IC96-02	34.44	37.4	2.96	0.56	0.027	0.015	0.6	IC97-60	14.44	15.39	0.95	0.17	0.004		0
IC96-02	39.01	40.54	1.53	0.39	0.009		0	IC97-60	16.46	17.98	1.52	0.13	0.003		0.2
IC96-02	40.54	42.06	1.52	0.46	0.012	0.005	0	IC97-60	17.98	19.51	1.53	0.25	0.004		0
IC96-02	42.06	43.59	1.53	0.99	0.012		0	IC97-60	19.51	21.03	1.52	0.21	0.004		0.2
IC96-02	43.59	45.55	1.96	2.97	0.033	0.02	0	IC97-60	21.03	22.56	1.53	0.26	0.004		0
IC96-02	45.55	46.63	1.08	5.03	0.016	0.015	0	IC97-60	22.56	23.77	1.21	0.41	0.004		1.2
IC96-02	46.63	48.16	1.53	7.13	0.048		0	IC97-60	23.77	25.3	1.53	0.29	0.006		1.8
IC96-02	48.16	49.35	1.19	8.29	0.035	0.01	0	IC97-60	25.3	26.43	1.13	0.50	0.011		3.4
IC96-02	49.35	50.57	1.22	1.49	0.023	0.095	1.8	IC97-60	26.43	27.13	0.7	0.27	0.004		2.6
IC96-02	50.57	53.08	2.51	1.2	0.015	0.09	2	IC97-60	27.13	28.65	1.52	0.13	0.004		1.4
IC96-02	53.08	54.55	1.47	0.59	0.016	0.01	0	IC97-60	28.65	30.18	1.53	0.29	0.005		3.4
IC96-02	54.55	56.62	2.07	0.86	0.014		0	IC97-60	30.18	31.7	1.52	0.42	0.005		7.8
IC96-02	56.62	58.24	1.62	0.45	0.011		0	IC97-60	31.7	33.3	1.6	0.32	0.005		5.6
IC96-03	60.35	61.57	1.22	1.32	0.014	0.04	2.2	IC97-62	40.84	42.37	1.53	0.01	0.003		0
IC96-03	61.57	62.71	1.14	1.18	0.011	0.05	1.6	IC97-62	42.37	43.89	1.52	0.01	0.005		0
IC96-03	117.71	118.81	1.1	0.3	0.010		1	IC97-65	13.75	15.3	1.55	0.22	0.005		0
IC96-03	118.81	120.4	1.59	0.35	0.011		0.2	IC97-65	15.3	16.8	1.5	0.05	0.004		0
IC96-03	120.4	121.92	1.52	0.33	0.013	0.01	0.2	IC97-65	16.8	18.29	1.49	0.03	0.006		0
IC96-03	121.92	122.85	0.93	0.45	0.012	0.015	0.2	IC97-66	4.3	5.6	1.3	0.34	0.003		0
IC96-04	15.48	17.07	1.59	0.34	0.004		0	IC97-67	16.15	17.68	1.53	0.01	0.003		0
IC96-04	17.07	17.98	0.91	0.32	0.003	0.005	0	IC97-67	17.68	19.51	1.83	0.01	0.003		0
IC96-04	18.9	20.27	1.37	0.39	0.003		0	IC97-67	20.22	21.34	1.12	0.14	0.005		0
IC96-04	22.56	23.62	1.06	1.02	0.051		0	IC97-67	24.08	25.6	1.52	0.02	0.003		0
IC96-04	26.52	28.04	1.52	0.46	0.009		0	IC97-68	5.5	7.01	1.51	0.14	0.003		0
IC96-04	28.04	29.11	1.07	0.46	0.009		0	IC97-68	7.01	8.38	1.37	0.13	0.002		0
IC96-04	29.11	30.18	1.07	0.39	0.014		0	IC97-68	8.38	10.36	1.98	0.24	0.004		0
IC96-04	30.18	31.09	0.91	0.48	0.043		0	IC97-68	10.36	13.11	2.75	0.02	0.005		0
IC96-04	32.46	33.15	0.69	0.33	0.014	0.015	0	IC97-69	3.66	5.4	1.74	0.26	0.001		0
IC96-04	33.15	34.75	1.6	0.31	0.017		0	IC97-69	5.4	6.4	1	0.25	0.001		0
IC96-04	38.56	40.23	1.67	0.47	0.035		0	IC97-69	10.97	12.5	1.53	0.40	0.001		0.6
IC96-06	8.21	9.34	1.13	0.39	0.005		0.2	IC97-72	16.46	17.53	1.07	0.28	0.002		0



DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC96-06	9.34	10.36	1.02	0.3	0.006		0.2	IC97-72	17.53	19.35	1.82	0.17	0.000		0
IC96-06	11.25	12.69	1.44	0.39	0.005		0.2	IC97-73	2.1	3.66	1.56	0.24	0.011		0
IC96-06	16.46	17.48	1.02	0.38	0.003		0.2	IC97-73	8.53	10.06	1.53	0.77	0.008		1
IC96-06	17.48	18.5	1.02	0.69	0.002		0.2	IC97-73	10.06	11.73	1.67	1.30	0.008		0
IC96-06	18.5	19.51	1.01	0.97	0.003		0	IC97-73	11.73	13.41	1.68	0.44	0.004		0
IC96-06	19.51	20.5	0.99	2.92	0.003		0	IC97-73	13.41	14.78	1.37	0.24	0.003		0
IC96-06	20.5	21.34	0.84	2.98	0.002		0	IC97-73	14.78	16.31	1.53	0.01	0.003		0
IC96-06	21.34	22	0.66	1.07	0.002		0	IC97-73	16.31	17.68	1.37	0.03	0.003		0
IC96-06	22	22.6	0.6	2.47	0.003		0.2	IC97-73	17.68	19.2	1.52	0.04	0.003		0
IC96-06	22.6	23.77	1.17	1.37	0.004		0.2	IC97-73	19.2	20.73	1.53	0.01	0.002		0
IC96-06	23.77	24.6	0.83	1.14	0.004		0	IC97-74	1.22	2.74	1.52	0.24	0.002		1.4
IC96-06	24.6	25.45	0.85	1.78	0.004		0	IC97-74	2.74	4.27	1.53	0.24	0.001		0.6
IC96-06	25.45	26.4	0.95	5.15	0.021		0	IC97-74	4.27	5.8	1.53	0.28	0.001		0.2
IC96-06	26.4	27.13	0.73	0.4	0.007		0	IC97-74	5.8	7.32	1.52	0.19	0.001		0
IC96-08	13.41	14.94	1.53	0.42	0.006		0	IC97-74	40.84	42.37	1.53	0.02	0.003		0
IC96-08	14.94	16.92	1.98	0.39	0.036	0.02	0	IC97-75	6	7.92	1.92	0.45	0.003		0.2
IC96-08	16.92	18	1.08	1.7	0.045	0.02	0	IC97-75	7.92	9.45	1.53	0.47	0.002		0.2
IC96-08	18	19.02	1.02	2.06	0.078	0.02	0	IC97-75	9.45	11.35	1.9	0.51	0.002		0.2
IC96-08	19.02	20.3	1.28	4.99	0.073	0.02	1	IC97-75	11.35	13.26	1.91	0.39	0.002		0.2
IC96-08	20.3	21.8	1.5	2.35	0.021	0.01	0	IC97-75	13.26	14.78	1.52	0.29	0.002		0
IC96-08	21.8	22.9	1.1	1.99	0.039	0.03	0	IC97-75	14.78	16.31	1.53	0.24	0.002		0
IC96-08	22.9	24.08	1.18	1.63	0.064	0.025	0	IC97-75	16.31	18.29	1.98	0.25	0.002		0
IC96-08	24.08	25.6	1.52	2.36	0.006	0.01	0	IC97-75	18.29	19.81	1.52	0.25	0.003		0
IC96-08	25.6	26.5	0.9	2.75	0.006		0	IC97-75	19.81	21.34	1.53	0.41	0.003		0
IC96-08	26.5	27.8	1.3	0.6	0.010		0	IC97-75	21.34	22.71	1.37	0.24	0.004		0
IC96-09	20.73	24.69	3.96	0.89	0.003		0	IC97-76	10.67	12.19	1.52	0.14	0.003		0
IC96-09	24.69	25.95	1.26	1.82	0.005		0	IC97-76	12.19	13.11	0.92	0.01	0.004		0
IC96-09	25.95	27.83	1.88	0.58	0.004	0.015	0	IC97-76	13.11	14.48	1.37	0.01	0.005		0
IC96-09	27.83	28.65	0.82	0.7	0.004		0	IC97-76	14.48	15.85	1.37	0.32	0.006		0
IC96-09	28.65	29.87	1.22	0.5	0.004		0	IC97-76	15.85	17.53	1.68	0.24	0.008		0
IC96-09	29.87	30.95	1.08	0.99	0.032	0.1	1	IC97-76	17.53	18.44	0.91	0.26	0.008		0
IC96-09	30.95	32.35	1.4	1.72	0.069	0.025	1	IC97-77	1.22	2.74	1.52	0.01	0.003		0
IC96-09	32.35	33.22	0.87	0.83	0.008		0	IC97-77	2.74	4.27	1.53	0.02	0.003		0
IC96-09	33.22	34.75	1.53	1.22	0.007		0	IC97-77	4.27	5.79	1.52	0.06	0.004		0
IC96-09	34.75	36.27	1.52	1.41	0.007		0.2	IC97-77	5.79	7.32	1.53	0.48	0.010		0
IC96-09	36.27	37.79	1.52	1.52	0.008	0.015	0.4	IC97-77	7.32	8.84	1.52	1.06	0.003		0
IC96-09	37.79	39.55	1.76	1.18	0.009	0.01	0.2	IC97-77	8.84	11.89	3.05	0.00	0.000		0
IC96-09	39.55	40.84	1.29	1.64	0.102	0.07	1	IC97-77	11.89	13.41	1.52	0.05	0.001		59
IC96-09	40.84	42	1.16	1.69	0.054	0.03	0	IC97-77	13.41	14.94	1.53	0.05	0.000		53
IC96-09	42	43.5	1.5	2.18	0.065	0.04	1	IC97-77	14.94	16.46	1.52	0.00	0.000		0
IC96-09	43.5	45.42	1.92	0.71	0.004		0	IC97-77	16.46	18	1.54	0.01	0.000		60.2
IC96-09	45.42	46.94	1.52	1.05	0.009	0.025	0	IC97-77	18	19.51	1.51	0.66	0.002		0.2
IC96-09	46.94	48	1.06	1.01	0.007	0.025	1.2	IC97-77	19.51	21.34	1.83	1.16	0.004		0
IC96-09	48	49.23	1.23	1.64	0.007	0.03	1.2	IC97-77	21.34	23.01	1.67	0.54	0.005		0
IC96-09	49.23	50.9	1.67	0.91	0.007	0.025	0.4	IC97-77	23.01	24.38	1.37	0.26	0.010		0
IC96-09	50.9	53.04	2.14	0.39	0.006		0.2	IC97-77	24.38	25.91	1.53	0.19	0.009		0
IC96-12	26.06	27.43	1.37	0.35	0.011		0	IC97-79	14.78	16.31	1.53	0.11	0.003		0
IC96-13	46.72	47.4	0.68	0.43	0.007		0	IC97-79	37.19	38.91	1.72	0.19	0.006		0.2
IC96-13	47.4	48.58	1.18	3.61	0.005		0	IC97-79	38.91	40.23	1.32	0.10	0.007		0



DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC96-13	48.58	49.99	1.41	2.9	0.005	0.03	0	IC97-79	40.23	41.76	1.53	0.29	0.007		0
IC96-13	49.99	51.28	1.29	1.37	0.003	0.07	5	IC97-79	41.76	42.98	1.22	0.39	0.009		0
IC96-13	51.28	53.04	1.76	1.27	0.015	0.27	9	IC97-79	42.98	44.5	1.52	0.18	0.009		0
IC96-13	53.04	54.56	1.52	1.64	0.043	0.38	8	IC97-79	44.5	45.72	1.22	0.46	0.007		0
IC96-13	54.56	55.83	1.27	4.35	0.081	0.425	12	IC97-79	45.72	47.22	1.5	0.21	0.007		0.2
IC96-13	55.83	57.03	1.2	1.83	0.005	0.04	1	IC97-79	47.22	48.65	1.43	0.24	0.006		3.2
IC96-14	2.9	4.57	1.67	0.56	0.008	0.03	2.4	IC97-80	15.85	17.25	1.4	0.01	0.004		0
IC96-14	5.33	6.71	1.38	0.94	0.012	0.015	1.2	IC97-80	19.2	20.88	1.68	0.01	0.004		0
IC96-14	8.2	8.83	0.63	0.4	0.009	0.005	0.4	IC97-81	3.2	4.57	1.37	0.07	0.004		0.2
IC96-14	8.83	9.75	0.92	0.41	0.006		0.2	IC97-81	4.57	6.4	1.83	0.06	0.004		0
IC96-14	10.97	12.19	1.22	0.91	0.004		0	IC97-81	7.77	9.14	1.37	0.09	0.003		0.4
IC96-14	12.19	14.17	1.98	0.57	0.002		0	IC97-81	9.14	10.36	1.22	0.00	0.000		0
IC96-14	14.17	16.15	1.98	0.42	0.003	0.035	0.2	IC97-81	10.36	11.89	1.53	1.40	0.015		1.8
IC96-14	16.15	17.37	1.22	2.04	0.004		0	IC97-81	11.89	13.41	1.52	0.36	0.006		0.2
IC96-14	17.37	18.9	1.53	2.23	0.004		0	IC97-81	13.41	14.94	1.53	0.33	0.011		0.2
IC96-14	18.9	20.12	1.22	1.69	0.004		0.2	IC97-81	14.94	16.6	1.66	0.46	0.018		0.8
IC96-14	20.12	21.05	0.93	1.15	0.009	0.055	0.2	IC97-81	16.6	17.98	1.38	1.56	0.043		2
IC96-14	21.05	21.34	0.29	3.72	0.052	0.33	23.4	IC97-81	17.98	19.43	1.45	1.77	0.044		2.8
IC96-14	21.34	23.16	1.82	1.93	0.014	0.04	5	IC97-81	19.43	20.75	1.32	0.25	0.029		0.6
IC96-14	23.16	24.5	1.34	1.07	0.019	0.025	0.2	IC97-81	20.75	22	1.25	0.10	0.004		0.2
IC96-14	24.5	24.99	0.49	1.37	0.029	0.01	0	IC97-81	22	23.2	1.2	0.12	0.003		0
IC96-14	24.99	26.3	1.31	3.43	0.039	0.045	0.2	IC97-81	23.2	24.4	1.2	0.17	0.003		0
IC96-14	26.3	28.96	2.66	0.73	0.044	0.02	0.8	IC97-81	24.4	25.6	1.2	0.17	0.003		0
IC96-14	28.96	29.65	0.69	1.08	0.004		0.2	IC97-81	25.6	26.8	1.2	0.26	0.003		1.4
IC96-14	29.65	31.09	1.44	0.53	0.005		0	IC97-81	26.8	28.85	2.05	0.35	0.010		0.6
IC96-14	31.09	32.61	1.52	0.79	0.004		0.2	IC97-81	28.85	30.5	1.65	0.09	0.005		0
IC96-14	32.61	34.44	1.83	0.82	0.004		0	IC97-81	30.5	32.3	1.8	0.02	0.005		0
IC96-15	0	7.32	7.32	2.03	0.004		0.4	IC97-82	5.64	6.7	1.06	0.17	0.001		6.4
IC96-15	24.4	26.9	2.5	0.42	0.009		0.2	IC97-82	25.04	26.3	1.26	0.65	0.085		0
IC96-15	48.46	49.99	1.53	0.3	0.016	0.01	0.8	IC97-83	17.98	19.35	1.37	0.07	0.005		0
IC96-16	12.5	13.72	1.22	0.36	0.004		0	IC97-84	10.28	11.89	1.61	0.10	0.007		0
IC96-16	13.72	15.85	2.13	0.37	0.003		0	IC97-84	11.89	14.17	2.28	0.54	0.005		0
IC96-16	15.85	18.15	2.3	0.43	0.003		0	IC97-84	14.17	15.65	1.48	2.57	0.004		0
IC96-16	20.42	22.1	1.68	0.66	0.034	0.13	1.4	IC97-84	15.85	17.68	1.83	0.48	0.055		2.6
IC96-16	22.1	23.77	1.67	0.81	0.020	0.05	0.2	IC97-84	17.68	18.9	1.22	1.92	0.062		7.4
IC96-16	23.77	26.21	2.44	2.12	0.015	0.03	0.4	IC97-84	18.9	20.12	1.22	2.67	0.063		9.2
IC96-16	26.21	27.58	1.37	2.4	0.011	0.02	0.4	IC97-84	20.12	21.95	1.83	2.33	0.053		9.8
IC96-16	27.58	28.96	1.38	1.95	0.009		0	IC97-84	21.95	23.48	1.53	2.84	0.040		9.4
IC96-17	5.79	8.23	2.44	0.42	0.005		0	IC97-85	14.48	15.7	1.22	0.31	0.006		0
IC96-17	8.23	9.75	1.52	0.35	0.005		0	IC97-85	15.7	17.05	1.35	0.36	0.008		0
IC96-17	12	14.48	2.48	0.35	0.005		0	IC97-85	18.9	20.42	1.52	0.15	0.003		0
IC96-17	17.07	18.59	1.52	0.53	0.005		0	IC97-85	21.95	23.47	1.52	0.67	0.007		0
IC96-17	18.59	20.12	1.53	0.34	0.005		0	IC97-85	23.47	25.4	1.93	0.74	0.009		0
IC96-17	22	23.32	1.32	1.61	0.016		0.2	IC97-85	26.52	28.04	1.52	0.18	0.006		0
IC96-18	17.98	19.51	1.53	0.65	0.006	0.04	2.8	ID97-01	80.16	81.69	1.53	0.01	0.005		0
IC96-18	21.22	22.56	1.34	0.4	0.004	0.06	0.8	ID97-01	83.12	84.28	1.16	4.54	0.102	0.63	16
IC96-18	22.56	24.22	1.66	0.36	0.004	0.03	0.6	ID97-01	84.28	85.8	1.52	2.16	0.092	0.575	13
IC96-18	27.03	28.65	1.62	1.18	0.006	0.09	1.6	ID97-01	88.09	89.61	1.52	2.23	0.107	0.69	30
IC96-18	28.65	29.7	1.05	1.05	0.006	8E-05	1.4	ID97-01	89.61	91.09	1.48	2.11	0.082	0.67	23



DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC96-18	29.7	30.24	0.54	2.03	0.018	2E-04	4.4	ID97-01	91.09	92.66	1.57	0.02	0.004		0
IC96-18	34.75	36.27	1.52	1	0.019	0.015	1	ID97-01	95.4	96.77	1.37	0.30	0.012		1
IC96-20	10.36	13.41	3.05	0.39	0.010		0	ID97-01	141.43	143.02	1.59	0.31	0.009	0.025	1
IC96-20	13.41	15.8	2.39	0.62	0.007		0	ID97-01	143.02	144.17	1.15	0.02	0.005		0
IC96-20	15.8	17.37	1.57	0.37	0.006		0	ID97-01	144.17	145.69	1.52	0.03	0.004		0
IC96-20	17.37	19.96	2.59	0.47	0.006	0.02	0	ID97-01	145.69	147.07	1.38	0.02	0.004		0
IC96-20	19.96	21.96	2	0.46	0.006		0	ID97-02	81.05	82.5	1.45	0.01	0.004		0
IC96-20	24.08	27.13	3.05	0.58	0.004	0.03	1.6	ID97-02	83.14	83.8	0.66	0.04	0.001		0
IC96-20	27.13	30.18	3.05	0.36	0.010	0.01	0.6	ID97-02	83.8	84.73	0.93	2.91	0.048	0.395	8
IC96-20	37.5	39.32	1.82	0.34	0.005		0.2	ID97-02	88.41	89.74	1.33	0.92	0.007		1
IC96-20	48.2	49.99	1.79	0.45	0.022	0.025	1	ID97-02	119.89	121.34	1.45	0.04	0.003		0
IC96-20	49.99	51.1	1.11	0.32	0.010	0.02	0.6	ID97-02	121.34	122.83	1.49	0.83	0.021	0.025	1
IC96-21	7.92	9.75	1.83	0.43	0.003		0	ID97-02	129.67	130.75	1.08	0.20	0.014	0.04	0
IC96-23	10.97	12.95	1.98	0.37	0.004	0.025	1.4	ID97-03	94.06	95.7	1.64	2.84	0.050	0.35	8
IC96-23	12.95	14.94	1.99	0.33	0.005	0.01	0.4	ID97-03	95.7	97.14	1.44	1.68	0.092	0.505	7
IC96-25	7.62	9.75	2.13	0.33	0.009		0	ID97-04	55.71	57	1.29	0.05	0.003		0
IC96-25	9.75	11.58	1.83	0.34	0.007		0.2	ID97-04	57	57.9	0.9	0.12	0.005		0.8
IC96-25	11.58	15.24	3.66	0.35	0.006		0	ID97-04	57.9	58.85	0.95	0.04	0.003		0
IC96-25	15.24	16.78	1.54	0.38	0.010		0	ID97-04	74.68	76.18	1.5	0.05	0.004		0.8
IC96-25	18.9	21.03	4.25	0.8	0.009		0	ID97-04	76.18	77.42	1.24	0.03	0.004		0.2
IC96-26	11.28	13.4	2.12	0.32	0.006	0.04	1.8	ID97-05	99.24	100.28	1.04	0.58	0.015	0.07	2.6
IC96-27	9.75	11.58	1.83	0.38	0.004		0	ID97-05	114	115.52	1.52	0.01	0.006		0.6
IC96-27	24.84	26.82	1.98	0.38	0.007		0	ID97-05	122.53	124	1.47	0.01	0.031		0.2
IC96-27	26.82	27.85	1.03	0.79	0.047		0	ID97-05	124	125.3	1.3	0.01	0.015		1
IC96-29	13.11	15.85	2.74	0.4	0.007		0	ID97-05	216.87	218.39	1.52	0.01	0.001		0
IC96-29	19.2	20.73	1.53	0.3	0.004		0	ID97-05	220.68	221.59	0.91	0.00	0.001		0
IC96-29	20.73	21.95	1.22	0.95	0.006		0	ID97-05	221.59	222.96	1.37	0.01	0.001		0
IC96-29	23.16	24.38	1.22	0.3	0.004		0	ID97-05	223.72	224.94	1.22	0.00	0.001		0
IC96-29	24.38	25.7	1.32	1.04	0.007	0.1	1.6	ID97-05	224.94	226.31	1.37	0.01	0.001		0
IC96-29	25.7	26.97	1.27	1.99	0.044	0.57	8.4	ID97-05	226.31	227.38	1.07	0.01	0.001		0
IC96-29	26.97	28.15	1.18	0.89	0.004	0.01	0	ID97-05	227.38	228.3	0.92	0.01	0.001		0.4
IC96-29	28.15	29.41	1.26	0.46	0.007		0	ID97-05	228.3	229.21	0.91	0.01	0.001		0.2
IC96-29	32.31	33.83	1.52	0.42	0.006		0	ID97-05	232.26	233.78	1.52	0.01	0.001		0.2
IC96-30	53.77	54	0.23	1.69	0.050	0.6	11.8	ID97-07	104.59	105.46	0.87	0.11	0.003		0.6
IC96-32	30.1	30.5	0.4	0.45	0.009	0.365	3.8	ID97-09	60.96	63.71	2.75	0.01	0.001		0
IC96-34	72.1	73.5	1.4	1.23	0.083	0.24	1.5	ID97-11	93.88	94.49	0.61	2.77	0.041	0.05	1
IC96-34	73.5	74.7	1.2	4.97	0.084	0.19	4.2	ID97-11	94.49	95.25	0.76	0.09	0.004		0
IC96-34	74.7	76.1	1.4	12.4	0.140	0.48	62	ID97-11	95.25	96.01	0.76	0.08	0.004		0
IC96-34	76.1	77.42	1.32	8.71	0.133	0.65	52.4	ID97-11	109.2	110.53	1.33	0.02	0.002		0
IC96-34	77.42	78.94	1.52	5.06	0.074	0.52	31	ID97-11	110.53	111.86	1.33	0.02	0.003		0
IC96-34	78.94	80.47	1.53	9.17	0.019	0.4	49.6	ID97-11	111.86	113.39	1.53	0.03	0.003		0.2
IC96-34	80.47	81.99	1.52	3.45	0.036	0.54	21	ID97-11	113.39	114.02	0.63	2.93	0.018	0.06	8.8
IC96-34	81.99	83.52	1.53	3.84	0.069	1	38	ID97-11	114.02	115.62	1.6	0.01	0.003		0
IC96-34	83.52	85.04	1.52	3.52	0.056	0.67	27.1	ID97-11	115.62	117.13	1.51	0.15	0.004		0.4
IC96-34	85.04	86.56	1.52	3.67	0.030	0.66	21	ID97-11	117.13	118.85	1.72	0.01	0.003		0
IC96-34	86.56	88.09	1.53	4.47	0.027	0.65	20.1	ID97-11	125.91	127.63	1.72	0.04	0.005		0
IC96-34	88.09	89.61	1.52	3.03	0.025	0.67	19.4	ID97-11	127.63	128.96	1.33	0.01	0.003		0
IC96-34	89.61	91.14	1.53	3.88	0.028	0.71	23.1	ID97-11	128.96	130.45	1.49	0.01	0.003		0
IC96-34	91.14	92.66	1.52	6.06	0.060	0.88	35.6	ID97-11	130.45	132.08	1.63	0.29	0.020		3.6

DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC96-34	94.18	95.71	1.53	0.381	0.007		1.6	ID97-11	133.41	134.9	1.49	0.86	0.019	0.095	4
IC97-35	7.92	8.38	0.46	0.65	0.002		0.4	ID97-11	142.07	143.2	1.13	0.03	0.017		0.8
IC97-35	12.5	13.41	0.91	0.5	0.004		1.2	ID97-11	147.07	148.29	1.22	0.02	0.032		1
IC97-35	13.41	14.63	1.22	0.7	0.003		2.2	ID97-11	148.29	149.55	1.26	0.03	0.015		0.4
IC97-35	14.63	15.96	1.33	0.86	0.028		0	ID97-11	149.55	150.88	1.33	0.07	0.016		0.4
IC97-35	15.96	16.46	0.5	1.15	0.027		0.2	ID97-11	150.88	152.4	1.52	0.05	0.019		1
IC97-35	16.46	17.37	0.91	0.72	0.028	0.025	1	ID97-11	152.4	153.92	1.52	0.05	0.018		0.2
IC97-35	17.37	18.9	1.53	0.69	0.078	0.03	1	ID97-11	153.92	155.45	1.53	0.08	0.018		2.2
IC97-35	18.9	20.07	1.17	0.51	0.017	0.02	0	ID97-11	155.45	156.97	1.52	0.00	0.038		0.2
IC97-35	20.07	21.03	0.96	1.07	0.008	0.015	1	ID97-11	156.97	158.31	1.34	0.01	0.051		0.6
IC97-35	21.03	22.56	1.53	1.34	0.012		0	ID97-11	158.31	159.68	1.37	0.01	0.039		0.2
IC97-35	22.56	23.7	1.14	1.86	0.015	0.005	0	ID97-11	159.68	161.21	1.53	0.01	0.027		0
IC97-35	23.7	24.57	0.87	3.17	0.090	0.05	0	ID97-11	161.21	162.2	0.99	0.02	0.030		0
IC97-35	24.57	26	1.43	1.83	0.008	0.005	0	ID97-11	162.2	163.07	0.87	0.20	0.017	0.01	0.18
IC97-35	26	26.7	0.7	1.13	0.005	0.01	0	ID97-11	163.07	164.59	1.52	0.91	0.013	0.01	0.83
IC97-35	26.7	27.58	0.88	1.46	0.003		0.4	ID97-11	164.59	166.12	1.53	0.61	0.010	0.01	0.58
IC97-35	27.58	29.4	1.82	0.57	0.004		0.2	ID97-11	166.12	167.18	1.06	0.26	0.006	0.01	0.25
IC97-36	6.25	6.77	0.52	0.44	0.005		0	ID97-12	45.1	45.36	0.26	0.47	0.010		3.4
IC97-36	7.62	9.04	1.42	0.47	0.008		0	ID97-12	87.3	88.69	1.39	0.01	0.003		0
IC97-36	9.04	10.76	1.72	0.42	0.008		0	ID97-12	88.69	89.3	0.61	0.01	0.003		0.2
IC97-36	10.76	11.58	0.82	0.51	0.008		0	ID97-12	89.3	90.15	0.85	0.01	0.004		0.2
IC97-36	15.85	17.07	1.22	0.45	0.017		0	ID97-12	94.64	95.71	1.07	0.21	0.029	0.08	3
IC97-36	18.17	19.51	1.34	0.63	0.029	0.015	0.2	ID97-12	96.93	98.15	1.22	0.30	0.035	0.1	3
IC97-36	19.51	21.04	1.53	2.38	0.032	0.02	0	ID97-12	98.15	99.3	1.15	0.49	0.045	0.265	6.8
IC97-36	21.04	22.55	1.51	3.01	0.014	0.03	0.8	ID97-12	99.3	100.43	1.13	0.46	0.038	0.14	3.6
IC97-36	22.55	23.34	0.74	2.7	0.011		0	ID97-12	100.43	101.7	1.27	0.24	0.010	0.075	1.8
IC97-36	23.34	23.84	0.5	3.2	0.038	0.05	0.6	ID97-12	101.7	103.33	1.63	0.40	0.013	0.15	3.2
IC97-36	23.84	24.84	1	1.75	0.004		0	ID97-12	103.33	104.85	1.52	0.27	0.011	0.12	1
IC97-36	24.84	25.32	0.48	2.23	0.031	0.02	0.6	ID97-12	104.85	106.38	1.53	0.35	0.013	0.045	1
IC97-36	25.32	26.52	1.2	2.51	0.007		0	ID97-12	106.38	107.9	1.52	0.41	0.012	0.02	0.8
IC97-37	6.4	7.62	1.22	0.31	0.003		0	ID97-12	112.47	114	1.53	0.23	0.016	0.075	1
IC97-37	8.84	10.36	1.52	0.36	0.002		0	ID97-12	115.52	117.04	1.52	0.24	0.013	0.055	0.6
IC97-37	10.36	11.3	0.94	0.45	0.003		0.4	ID97-12	117.04	118.57	1.53	0.50	0.012	0.03	1.4
IC97-37	11.3	12.19	0.89	0.4	0.002		0.8	ID97-12	118.57	120.09	1.52	1.61	0.013	0.065	2.4
IC97-37	13.41	14.74	1.33	0.43	0.003		0	ID97-12	121.62	122.85	1.23	1.21	0.035	0.075	4.8
IC97-37	14.74	15.5	0.76	0.46	0.009		0	ID97-12	122.85	124.1	1.25	1.60	0.039	0.07	4.8
IC97-37	15.5	16.46	0.96	0.32	0.013		0	ID97-12	124.1	125.5	1.4	0.66	0.034	0.05	5.2
IC97-37	16.46	17.98	1.52	0.38	0.025		0	ID97-12	125.5	126.19	0.69	0.11	0.010	0.05	0.6
IC97-37	17.98	19.51	1.53	0.42	0.026		0	ID97-12	126.19	127.23	1.04	0.63	0.019	0.03	1.4
IC97-37	19.51	20.27	0.76	0.37	0.027		0	ID97-12	127.23	128.6	1.37	0.22	0.051	0.06	1.2
IC97-37	20.27	22.56	2.29	0.48	0.023		0	ID97-12	128.6	129.93	1.33	0.04	0.027		0.2
IC97-37	24.69	25.6	0.91	0.78	0.004		0	ID97-12	131.03	132.2	1.17	0.06	0.034		0.2
IC97-37	25.6	28.65	3.05	0.54	0.019		0	ID97-12	132.2	133.5	1.3	0.04	0.013		0.2
IC97-38	10.36	11.46	1.1	0.64	0.075	0.035	0	ID97-12	140.62	141.43	0.81	0.01	0.006		0
IC97-38	11.46	14.63	3.17	0.95	0.072	0.04	0	ID97-12	141.43	142.95	1.52	0.00	0.002		0
IC97-38	14.63	15.83	1.2	0.54	0.058	0.02	0	ID97-12	142.95	144.48	1.53	0.00	0.002		0
IC97-38	15.83	17.23	1.4	2.22	0.041	0.02	0	ID97-12	144.48	145.82	1.34	0.01	0.003		0
IC97-38	17.23	18.18	0.95	2.14	0.027	0.015	0	ID97-12	145.82	146.72	0.9	0.00	0.002		0
IC97-38	18.18	18.88	0.7	1.38	0.013	0.01	0	ID97-12	146.72	147.52	0.8	0.01	0.003		0





DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC97-38	18.88	19.94	1.06	1.3	0.014	0.03	0	ID97-12	147.52	148.44	0.92	0.01	0.002		0
IC97-38	19.94	21.03	1.09	1.05	0.031	0.03	0	ID97-12	148.44	149.35	0.91	0.01	0.003		0
IC97-38	22.56	24.23	1.67	0.34	0.057	0.02	0	ID97-13	85.92	87.34	1.42	0.01	0.003		0
IC97-38	24.23	25.9	1.67	0.52	0.035	0.025	0	ID97-13	87.34	88.62	1.28	0.01	0.004		0
IC97-38	25.9	27.13	1.23	1.65	0.014		0.4	ID97-13	88.62	89	0.38	0.21	0.019		0.6
IC97-39	3.81	5.33	1.52	0.3	0.001		2.6	ID97-13	93.72	95.15	1.43	5.44	0.154	0.56	42.2
IC97-39	5.33	6.886	1.556	0.41	0.001		1.2	ID97-13	95.15	96.29	1.14	8.43	0.131	0.58	29.4
IC97-39	6.886	7.72	0.834	0.35	0.003		0.6	ID97-13	96.29	97.23	0.94	10.20	0.168	0.39	14
IC97-39	7.72	9.75	2.03	1.89	0.008		2.2	ID97-13	97.23	98.76	1.53	7.96	0.104	0.645	21.2
IC97-39	9.75	11.11	1.36	2.32	0.008		1.6	ID97-13	98.76	99.97	1.21	7.58	0.101	0.83	25
IC97-39	11.11	11.89	0.78	1.49	0.003		0.8	ID97-13	99.97	101	1.03	7.48	0.066	0.765	20
IC97-39	11.89	13.41	1.52	1.42	0.004		0	ID97-13	101	101.8	0.8	1.85	0.022	0.27	2.2
IC97-39	13.41	14.63	1.22	0.88	0.013		0	ID97-13	101.8	103.08	1.28	1.40	0.014	0.07	1.4
IC97-39	14.63	17.07	2.44	0.42	0.020		0	ID97-13	103.08	104.12	1.04	3.15	0.035	0.04	3.4
IC97-39	18.55	21.67	3.12	0.75	0.022		0	ID97-13	105.16	106.68	1.52	1.20	0.034		1.4
IC97-40	10.36	11.28	0.92	0.39	0.004		0	ID97-13	117.04	118.57	1.53	1.60	0.033		5.8
IC97-40	13.41	14.17	0.76	0.35	0.003		0	ID97-13	120.93	122.55	1.62	0.03	0.004		0
IC97-40	14.17	15.85	1.68	0.49	0.003		0	ID97-13	122.55	123.8	1.25	0.03	0.006		0
IC97-40	15.85	17.07	1.22	3.4	0.004		0	ID97-13	123.8	124.66	0.86	0.04	0.054		0.2
IC97-40	17.07	18.59	1.52	1.55	0.004		0	ID97-13	124.66	126.19	1.53	0.03	0.036		0.2
IC97-40	18.59	19.81	1.22	1.8	0.003		0	ID97-13	126.19	127	0.81	0.11	0.025		0.2
IC97-40	19.81	20.8	0.99	2.09	0.005		0	ID97-13	127	127.71	0.71	0.01	0.004		0
IC97-40	20.8	21.56	0.76	3.64	0.005		0	ID97-13	127.71	129.24	1.53	0.03	0.023		0.2
IC97-40	21.56	22.56	1	2.05	0.005		0	ID97-13	129.24	130.76	1.52	0.35	0.015		0.2
IC97-41	6.71	8.38	1.67	0.3	0.006		0	ID97-13	139.75	141.04	1.29	0.01	0.002		0
IC97-41	12.34	13.41	1.07	0.54	0.005		0	ID97-14	104.25	105.47	1.22	0.01	0.004	0	0.2
IC97-41	13.41	14.38	0.97	0.38	0.005		0	ID97-14	105.47	107.14	1.67	0.01	0.004	0	0.4
IC97-41	14.38	14.94	0.56	0.99	0.002		0	ID97-14	107.14	108.12	0.98	0.24	0.007	0.3	13
IC97-41	14.94	16.07	1.13	6.54	0.008		0	ID97-14	108.12	108.93	0.81	0.59	0.027	0.48	22
IC97-46	19.26	21.34	2.08	4.25	0.029	0.435	3.8	ID97-16	136.23	137.87	1.64	0.03	0.003		0
IC97-46	21.34	22.56	1.22	2.45	0.052	0.305	4	ID97-16	137.87	139.3	1.43	0.01	0.003		0
IC97-46	22.56	23.47	0.91	4.51	0.072	0.22	5.4	ID97-18	84.84	86.16	1.32	0.01	0.003		0.2
IC97-46	23.47	24.38	0.91	4.74	0.072	0.17	5.2	ID97-18	86.16	86.31	0.15	2.71	0.051		2
IC97-46	24.38	25.76	1.38	2.57	0.053	0.09	2.6	ID97-18	86.31	87.33	1.02	0.22	0.003		0.4
IC97-46	25.76	26.12	0.36	5.04	0.034	0.125	4	ID97-18	140.49	141.88	1.39	0.01	0.003		0
IC97-46	26.12	27.53	1.41	0.86	0.010	0.015	0.6	ID97-18	141.88	143.26	1.38	0.02	0.003		0
IC97-46	27.53	28.42	0.89	0.58	0.003		0	ID97-18	143.26	144.73	1.47	0.01	0.003		0
IC97-46	28.42	30.43	2.01	0.72	0.004		0.2	ID97-18	144.73	146.3	1.5	0.41	0.016		6
IC97-46	30.43	32	1.57	9.94	0.051	0.17	4.4	ID97-18	146.3	147.83	1.54	0.03	0.007		1
IC97-46	32	33.53	1.53	9.17	0.066	0.235	4	ID97-18	147.83	149	1.05	0.04	0.017		2.2
IC97-46	33.53	34.75	1.22	10.9	0.031	0.235	3	ID97-18	149	150.48	1.48	0.01	0.003		0
IC97-46	34.75	35.66	0.91	6.25	0.066	0.19	2.8	ID97-18	150.48	152.04	1.56	0.14	0.009		0.6
IC97-46	35.66	36.88	1.22	0.48	0.005	0.01	0	ID97-18	152.04	153.53	1.49	0.09	0.018		0.8
IC97-46	36.88	38.4	1.52	1.29	0.003	0.015	0.8	ID97-18	153.53	154.85	1.32	0.04	0.014		0.2
IC97-46	38.4	39.93	1.53	1.49	0.004	0.01	0.2	ID97-18	154.85	156.05	1.2	0.01	0.024		0.4
IC97-46	39.93	41.3	1.37	0.97	0.007		0	ID97-18	156.05	157.42	1.37	0.01	0.012		0.2
IC97-46	41.3	42.37	1.07	1.17	0.008		0.4	ID97-18	157.42	158.85	1.43	0.01	0.012		0.2
IC97-46	42.37	43.59	1.22	0.56	0.007	0.01	0	ID97-18	158.85	160.02	1.17	0.00	0.009		0.4
IC97-46	43.59	44.35	0.76	2.12	0.010	0.02	0.8	ID97-18	160.02	161.54	1.52	0.01	0.011		0.6



DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC97-46	44.35	45.87	1.52	0.347	0.011		0	ID97-18	161.54	163.07	1.53	0.01	0.011		0.6
IC97-46	45.87	46.94	1.07	0.318	0.009		0	ID97-18	163.07	164.59	1.52	0.00	0.011		0.2
IC97-47	7.62	9.14	1.52	0.359	0.005		0	ID97-18	166.12	167.64	1.52	0.00	0.014		0.6
IC97-47	10.66	11.32	0.66	1.18	0.003		0	ID97-18	168.24	169.76	1.52	0.01	0.003		0.2
IC97-47	11.32	12.75	1.43	2.51	0.003		0	ID97-18	169.76	170.84	1.08	0.01	0.003		0.4
IC97-47	12.75	13.81	1.06	2.89	0.003		0	ID97-18	170.84	172.21	1.37	0.01	0.003		0.6
IC97-47	13.81	15.09	1.28	1.95	0.003		0	ID97-19	60.6	60.96	0.36	0.64	0.004		0.4
IC97-47	15.09	17.07	1.98	1.93	0.003		0	ID97-19	64.73	65.75	1.02	0.01	0.001		0
IC97-47	17.07	17.68	0.61	2.77	0.004		0	ID97-19	89.61	91.13	1.52	0.01	0.002		0
IC97-47	17.68	18.9	1.22	1.74	0.003		0	ID97-19	91.13	92.66	1.53	0.01	0.003		0
IC97-47	18.9	20.42	1.52	1.43	0.006		0	ID97-19	92.66	93.9	1.24	0.01	0.003		0
IC97-47	20.42	21.64	1.22	0.46	0.007		0	ID97-19	93.9	95.45	1.55	1.76	0.073	0.35	4.6
IC97-47	21.64	23.16	1.52	0.51	0.008		0	ID97-19	95.45	96.25	0.8	4.22	0.051	0.71	20.4
IC97-47	23.16	24.69	1.53	0.55	0.008		0	ID97-19	96.25	97.65	1.4	0.04	0.002		0
IC97-48	10.97	12.34	1.37	0.43	0.003		0	ID97-19	149.96	151.49	1.53	1.07	0.012	0.03	5
IC97-48	12.34	14.02	1.68	1.01	0.003		0	ID97-19	151.49	153.01	1.52	0.87	0.012	0.03	3.8
IC97-48	14.02	15.07	1.05	0.83	0.003		0	ID97-19	153.01	154.53	1.52	1.29	0.016	0.065	7.8
IC97-48	15.07	16.96	1.89	1.25	0.004		0	ID97-19	154.53	156.06	1.53	1.16	0.020	0.05	7.4
IC97-48	16.96	18.59	1.63	0.83	0.005		0	ID97-19	156.06	157.58	1.52	0.49	0.012	0.035	3
IC97-48	18.59	20	1.41	0.37	0.006		0	ID97-19	157.58	158.95	1.37	0.54	0.012	0.04	3.2
IC97-49	12.6	13.18	0.58	0.46	0.036		0.4	ID97-20	91.9	93.28	1.38	3.41	0.007	0.725	18.2
IC97-49	13.18	14.33	1.15	2.19	0.021		0.8	ID97-20	93.28	94.32	1.04	0.51	0.005	0.305	1.4
IC97-49	14.33	15.54	1.21	2.77	0.021		1	ID97-20	94.32	95.86	1.54	0.05	0.002		0
IC97-49	15.54	17.07	1.53	2.56	0.009		0.6	ID97-20	95.86	97.54	1.68	0.04	0.002		0
IC97-49	17.07	17.85	0.78	1.28	0.006		0.4	ID97-20	97.54	99.21	1.67	0.03	0.002		0
IC97-49	17.85	18.75	0.9	1.96	0.011		0.2	ID97-20	129.84	131.37	1.53	0.01	0.003		0
IC97-49	18.75	20.27	1.52	0.75	0.016		0	ID97-20	131.37	132.82	1.45	0.01	0.003		0
IC97-49	22.86	24.38	1.52	0.32	0.010		0	ID97-20	135.84	136.86	1.02	0.54	0.026	0.02	0.8
IC97-49	24.38	25.3	0.92	0.49	0.007		0	ID97-20	136.86	138.07	1.21	1.19	0.046	0.055	2.2
IC97-49	25.3	26.21	0.91	0.67	0.010		0	ID97-20	138.07	139.19	1.12	0.95	0.014	0.035	1.2
IC97-49	26.21	27.73	1.52	0.34	0.007		0.6	ID97-20	139.19	139.9	0.71	0.15	0.006		0.6
IC97-49	27.73	29.26	1.53	0.42	0.013		1.2	ID97-20	139.9	141.13	1.23	0.08	0.006		0.4
IC97-50	13.37	14.93	1.56	0.45	0.004		0	ID97-22	130.87	132.02	1.15	0.06	0.005	0	0
IC97-50	14.93	15.85	0.92	0.99	0.004		0	ID97-22	132.02	133.5	1.48	1.12	0.076	0.38	3.6
IC97-50	15.85	16.72	0.87	0.34	0.007		0	ID97-22	133.5	134.77	1.27	0.97	0.055	0.42	4.8
IC97-51	3.35	5.18	1.83	0.35	0.004		0	ID97-26	86.67	88.33	1.66	0.01	0.003		0
IC97-51	5.18	6.25	1.07	0.35	0.005		0	ID97-26	88.33	88.58	0.25	0.04	0.002	0.09	0
IC97-51	7.16	8.67	1.51	0.56	0.012		0	ID97-26	90.19	91.7	1.51	3.91	0.101	0.68	10
IC97-51	8.67	9.82	1.15	0.35	0.004		0	ID97-26	91.7	92.96	1.26	0.02	0.003		0
IC97-51	9.82	11.3	1.48	0.53	0.005		0	ID97-26	92.96	94.18	1.22	0.02	0.003		0
IC97-51	11.3	12.65	1.35	0.45	0.004		0	ID97-26	94.18	95.55	1.37	0.01	0.003		0
IC97-51	12.65	13.11	0.46	0.39	0.008		0	ID97-28	93.42	94.66	1.24	0.38	0.003		0.8
IC97-51	14.02	14.94	0.92	0.3	0.009		0	ID97-28	100.6	101.46	0.86	0.17	0.003		0.2
IC97-51	15.85	17.07	1.22	0.4	0.010		0	ID97-28	102.76	104.01	1.25	0.76	0.004	0.015	1.6
IC97-51	17.07	18.07	1	0.31	0.007		0	ID97-28	104.01	104.85	0.84	2.10	0.006	0.04	5.6
IC97-52	3.66	5.18	1.52	0.39	0.003		0	ID97-28	115.82	117.3	1.48	0.01	0.023		0.6
IC97-52	5.18	6.71	1.53	0.41	0.004		0	ID97-28	117.3	118.87	1.57	0.00	0.021		0
IC97-52	6.71	7.77	1.06	0.37	0.004		0	ID97-28	118.87	120.09	1.22	0.05	0.012		0
IC97-52	7.77	9.3	1.53	0.6	0.007		0	ID97-28	120.09	120.7	0.61	0.01	0.017		0.2

DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC97-52	9.3	10.52	1.22	0.333	0.003		0	ID97-28	120.7	122	1.3	0.00	0.014		0
IC97-52	10.52	12.04	1.52	0.3	0.003		0	ID97-28	122	123.14	1.14	0.02	0.018		0.2
IC97-52	12.04	13.41	1.37	0.45	0.005		0	ID97-28	123.14	124.36	1.22	0.01	0.017		0.2
IC97-52	13.41	14.94	1.53	0.34	0.004		0	ID97-28	124.36	125.27	0.91	0.02	0.040		0.4
IC97-52	14.94	16.15	1.21	0.58	0.003		0	ID97-28	125.27	126.24	0.97	0.04	0.023		0.4
IC97-52	16.15	17.68	1.53	0.61	0.005		0	ID97-28	126.24	127.4	1.16	0.05	0.034		1.6
IC97-52	17.68	18.29	0.61	0.68	0.005		0	ID97-28	127.4	128.47	1.07	0.26	0.006	0.11	1.4
IC97-52	18.29	19.81	1.52	0.75	0.005		0	ID97-28	128.47	129.24	0.77	0.99	0.046	0.04	2.8
IC97-52	19.81	21.2	1.39	1.27	0.009		0.8	ID97-28	129.24	130.26	1.02	2.16	0.078	0.08	7.6
IC97-52	21.2	22.65	1.45	0.97	0.004		0	ID97-28	130.26	131.15	0.89	2.27	0.088	0.065	7
IC97-52	22.65	23.7	1.05	0.84	0.005		0	ID97-28	131.15	132.28	1.13	0.56	0.025	0.025	1.4
IC97-53	2.44	3.66	1.22	0.41	0.002		1	ID97-30	28.65	29.3	0.65	0.07	0.013		0
IC97-53	5.64	7.62	1.98	0.39	0.006		0	ID97-30	29.9	30.66	0.76	4.81	0.052	0.26	13
IC97-53	10.5	12.05	1.55	0.49	0.005		0	ID97-30	33.22	34.75	1.53	3.25	0.102	0.405	7
IC97-53	15.39	17.2	1.81	0.3	0.003		0	ID97-30	37.8	38.94	1.14	1.58	0.058	0.325	5
IC97-53	17.2	19.2	2	0.35	0.004		0	ID97-30	38.94	39.65	0.71	3.16	0.081	0.475	8
IC97-53	19.2	21.03	1.83	1.74	0.005		0.2	ID97-30	39.65	41.72	2.07	1.56	0.021	0.08	1.2
IC97-53	21.03	23	1.97	1.43	0.005		0	ID97-30	41.72	42.92	1.2	0.19	0.014	0.05	0.6
IC97-55	3.65	4.57	0.92	0.44	0.008		0	ID97-31	66.14	67.36	1.22	0.01	0.003		0
IC97-55	4.57	7.03	2.46	1.83	0.007		0	ID97-31	67.36	68.88	1.52	0.01	0.003		0
IC97-55	7.03	8.07	1.04	2.36	0.006		0	ID97-31	68.88	70.41	1.53	0.02	0.003		0
IC97-55	8.07	8.83	0.76	3.49	0.010		0	ID97-31	70.41	71.93	1.52	0.03	0.003		0
IC97-55	8.83	10.05	1.22	0.53	0.014		0	ID97-31	71.93	73.46	1.53	0.04	0.003		0.2
IC97-55	10.05	11.27	1.22	0.73	0.020		0	ID97-31	73.46	74.98	1.52	0.01	0.003		0
IC97-55	11.27	12.03	0.76	0.8	0.018		0	ID97-31	74.98	76.5	1.52	0.01	0.003		0
IC97-55	12.03	13.71	1.68	0.53	0.009		0	ID97-31	76.5	78.03	1.53	0.01	0.003		0
IC97-55	13.71	14.78	1.07	0.59	0.007		0	ID97-31	78.03	79.25	1.22	0.01	0.003		0
IC97-55	14.78	16.3	1.52	0.44	0.008		0	ID97-31	79.25	80.16	0.91	0.01	0.003		0
IC97-55	16.3	17.25	0.95	0.5	0.035		0	ID97-31	80.16	81.28	1.12	0.01	0.003		0
IC97-55	20.42	21.37	0.95	1.95	0.017		0	ID97-31	85.07	86.05	0.98	0.12	0.003		0.8
IC97-55	21.37	22.24	0.87	0.46	0.030		0	ID97-31	86.05	87.17	1.12	0.01	0.003		0.6
IC97-55	22.24	23.46	1.22	0.59	0.020		1.6	ID97-31	87.17	88.85	1.68	0.02	0.004		4.4
IC97-55	23.46	23.98	0.52	0.47	0.007		0.4	ID97-31	88.85	90.37	1.52	0.01	0.003		0
IC97-56	5.79	7.76	1.97	0.31	0.004		0.6	ID97-34	133.33	134.76	1.43	0.18	0.007		0.6
IC97-56	17.98	19.51	1.53	0.37	0.002		1.4	ID97-34	142.18	143.26	1.08	0.04	0.010		0
IC97-56	21.03	22.45	1.42	0.48	0.004		0	ID97-34	144.58	145.39	0.81	0.07	0.009		0.4
IC97-56	22.45	24.08	1.63	0.32	0.004		0	ID97-34	145.39	146.61	1.22	0.01	0.010		0
IC97-56	24.08	25.6	1.52	0.36	0.003		0	ID97-34	146.61	147.68	1.07	0.01	0.009		0
IC97-56	25.6	27.13	1.53	0.34	0.003		0	ID97-34	147.68	149.05	1.37	0.08	0.011		0
IC97-56	27.13	28.65	1.52	0.31	0.003		0	ID97-34	149.05	149.96	0.91	0.02	0.010		0
IC97-56	28.65	30.15	1.5	0.38	0.003		0	ID97-34	149.96	150.78	0.82	0.12	0.009		0.2
IC97-56	34.9	36.5	1.6	0.68	0.016		0.4	ID97-34	153.3	154.23	0.93	0.01	0.003		0
IC97-56	36.5	38.45	1.95	2.81	0.013		0.2	ID97-35	2.44	3.66	1.22	0.01	0.003		0
IC97-56	38.45	40.39	1.94	0.92	0.010		0	ID97-35	3.66	4.88	1.22	0.01	0.003		0
IC97-56	49.99	51.51	1.52	0.67	0.014		0	ID97-36	76.66	78.33	1.67	0.01	0.003		0
IC97-56	51.51	53.04	1.53	0.56	0.009		0	ID97-36	78.33	79.55	1.22	0.01	0.004		0
IC97-56	53.04	54.56	1.52	0.53	0.007		0	ID97-36	79.55	80.4	0.85	0.33	0.007		0.4
IC97-56	54.56	56.08	1.52	0.42	0.008		0	ID97-36	80.4	81.22	0.82	7.24	0.165	0.42	11.4
IC97-56	56.08	57.4	1.32	0.63	0.008		0	ID97-36	81.22	82.32	1.1	8.32	0.131	0.94	26.8

DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t	DDH	From	To	Interval	Cu%	Co%	Au g/t	Ag g/t
IC97-56	57.4	58.67	1.27	0.5	0.009		0	ID97-36	82.32	83.4	1.08	9.92	0.069	0.715	27
IC97-56	58.67	60.2	1.53	1.03	0.011		0	ID97-36	83.4	84.43	1.03	4.43	0.061	0.795	22.4
IC97-56	61.57	62.8	1.23	1.08	0.008		0	ID97-36	85.95	87.48	1.53	3.93	0.082	0.735	15.4
IC97-56	62.8	64.31	1.51	1.76	0.010		0	ID97-36	87.48	89	1.52	2.68	0.035	0.755	13.2
IC97-56	64.31	65.23	0.92	0.92	0.010		0	ID97-36	89	90.53	1.53	4.05	0.047	0.65	10
IC97-56	65.23	66.75	1.52	0.85	0.011		0	ID97-36	90.53	91.59	1.06	3.54	0.061	0.43	7.2
IC97-56	66.75	68.3	1.55	1.43	0.011		0	ID97-36	91.59	93.12	1.53	4.23	0.057	0.675	13.2
IC97-56	68.3	69.8	1.5	1.27	0.011		0	ID97-36	93.12	94.64	1.52	3.44	0.032	0.57	8.6
IC97-56	69.8	71.3	1.5	0.31	0.008		0	ID97-36	94.64	96.16	1.52	3.01	0.041	0.7	6.6
IC97-56	71.3	72.85	1.55	0.41	0.007		0	ID97-36	96.16	97.84	1.68	4.12	0.059	0.795	17.2
IC97-56	74.37	75.74	1.37	0.31	0.009		0	ID97-36	99.3	100.89	1.59	0.02	0.002		0
IC97-56	75.74	77.11	1.37	0.7	0.014		0	ID97-36	100.89	102.41	1.52	0.01	0.003		0
IC97-57	9.75	11.12	1.37	0.418	0.002		1.6	ID97-36	102.41	104.09	1.68	0.01	0.003		0
IC97-57	13.25	14.8	1.55	2.96	0.021		6	ID97-36	107	108.51	1.51	1.41	0.047		4.8
IC97-57	14.8	16.5	1.7	4.24	0.019		3	ID97-36	108.51	110.33	1.82	0.88	0.043		3.4
IC97-57	16.5	18.29	1.79	3.72	0.021		4	ID97-36	110.33	112.15	1.82	0.76	0.021		2.6
IC97-57	18.29	19.81	1.52	5.78	0.028		6	ID97-36	112.15	113.08	0.93	0.36	0.018		2
IC97-57	19.81	20.8	0.99	11.6	0.058		9	ID97-36	113.08	114.6	1.52	0.01	0.015		0.2
IC97-57	20.8	22.1	1.3	3.78	0.017		0	ID97-36	114.6	116.13	1.53	0.15	0.018		1
IC97-57	22.1	22.9	0.8	3.97	0.022		0	ID97-36	116.13	117.65	1.52	0.01	0.009		0.6
IC97-57	22.9	24.84	1.94	2.32	0.014		0	ID97-36	117.65	119.18	1.53	0.01	0.012		0.6
IC97-57	24.84	26.35	1.51	2.87	0.015		0	ID97-36	119.18	120.7	1.52	0.01	0.008		0
IC97-57	26.35	28.25	1.9	4.26	0.061		3	ID97-36	120.7	122.22	1.52	0.02	0.008		0.2
IC97-57	28.25	29.35	1.1	4.09	0.059		7	ID97-36	122.22	124.21	1.99	0.02	0.010		0
IC97-57	29.35	30.48	1.13	4.37	0.043		7	ID97-36	124.21	125.57	1.36	0.01	0.007		0
IC97-57	30.48	31.7	1.22	2.26	0.013		1	ID97-36	125.57	127.1	1.53	0.01	0.006		0
IC97-57	31.7	32.92	1.22	3.57	0.025		3	ID97-36	127.1	128.63	1.53	0.01	0.008		0
IC97-57	32.92	34.14	1.22	2.87	0.022		1	ID97-36	128.63	130.15	1.52	0.01	0.007		0
IC97-57	34.14	35.66	1.52	1.3	0.032		1	ID97-36	130.15	131.67	1.52	0.01	0.007		0.2
IC97-57	35.66	37.19	1.53	1	0.026		0	ID97-36	131.67	133.2	1.53	0.02	0.010		0.6
IC97-57	37.19	38.7	1.51	1.05	0.033		1	ID97-36	133.2	134.72	1.52	0.01	0.006		0
IC97-57	38.7	40.5	1.8	1.07	0.016		0	ID97-36	134.72	135.95	1.23	0.40	0.006		0.4
IC97-57	40.5	41.76	1.26	0.39	0.021		0								
IC97-58	2	3.45	1.45	0.4	0.007		2								
IC97-58	13.11	14.63	1.52	0.33	0.003		0.8								

**Table 4:** ICE drilling intersections >0.3% Cu, which are 823 of the total 2595 assays in the drilling database.

## APPENDIX 2 - JORC Code, 2012 Edition – Table 1

### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>HQ diamond drill core was drilled in 121 holes, with holes reduced to NQ deeper in the holes. Triple tube drilling was used to improve the drilling recovery.</li> <li>Drill core was historically split using a core pressure splitter on site, for assaying by Chemex Laboratories. Re-sampled core was cut and quarter core submitted for assay, with the remaining quarter maintained for future reference.</li> <li>Assays were typically 1.5 m assays, though thicknesses vary between approximately 1 and 2 m long, depending on mineralisation and core recovery.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Holes were all diamond drill holes with HQ core diameter, reducing to NQ diameter, depending on the hole depth.</li> <li>It is unknown whether triple tubes were used in the drilling. Core was generally highly competent.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Drill cores were recovered to surface and placed in wooden core boxes, stored in core racks and on pallets. Core trays were labelled with aluminium tags, allowing identification of holes and core intervals. Sampled intervals were marked with flagging tape.</li> <li>Core recovery was noted and is generally high, due to the compact nature of the basalt host rock. Samples were sent for analysis to the Chemex laboratory in Vancouver (now part of ALS laboratories).</li> </ul>



Criteria	JORC Code explanation	Commentary
Logging	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>A soil sampling grid was carried out across the ICE project area, with samples spaced every 25 m NW to SE, collected on lines with a general spacing of 50 m in the central deposit area, with samples on contour lines outside this area taken approximately every 50 m.</li> <li>The details of the soil sampling were not documented in available reports. However, they are believed to be conventional sieved soil samples, most likely taken at a depth of 20 to 30 cm, consistent with prevailing industry practice at the time.</li> <li>Longhand descriptive logs of drill holes were prepared during the drilling process and units and mineralisation summarised into codes and relative abundances as part of the geological logging. This information was collated in excel spreadsheets and a database.</li> <li>Logging was both qualitative and quantitative. No core photographs are available.</li> <li>10,584 m of core were drilled historically.</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>Core was sub-sampled for assay. Core was split using a core splitter.</li> <li>Details of the sample preparation are not certain, due to the historical nature of the activities.</li> <li>Drill hole orientations appear to have intersected mineralisation at a high angle, resulting in thicknesses that are close to true thicknesses of mineralisation.</li> <li>Quality control procedures are unknown, regarding the use of duplicate and standard or blank samples. There is no recorded QA/QC procedure.</li> <li>Given that the descriptions of core recovery generally appear to be acceptable (high recovery) it is likely that sufficient sample was submitted for analysis to produce repeatable results.</li> <li>Sample sizes were appropriate for the mineralisation style.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>ICE Samples were crushed, pulverised to -50 mesh using a chrome steel ring mill and then digested with nitric-aqua regia, before being analysed for 32 elements using ICP equipment. This provided total digestion for Cu, Ag and Zn, but only partial digestion for some 14 of the elements analysed. Most of the primary massive sulphide samples were fire assayed for gold and results were reported in ppb from a 30 gram sample.</li> <li>Petrology was carried out by Vancouver Petrographics, who verified the mineral modes and textures on four core samples. Whole rock analyses were conducted on selected analyses.</li> <li>The assay results are considered appropriate, given the available</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>information. However, given their historical nature not all the details of sampling and assaying are available.</p> <ul style="list-style-type: none"> <li>Given the historical nature of the analyses it is likely that there were no QA/QC samples included with the primary samples.</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>The original ICE resource estimate and supporting information was reviewed by Mr Thompson of independent consultants Derry, Michener, Booth &amp; Wahl (1998) following the resource estimate.</li> <li>Bastion has conducted a check estimate with the assay results and an Inverse Distance Squared methodology to check that the resource is comparable to the documented historical and foreign non-JORC resource.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>Drill collars were located on the local grid and were located with chain measurements. The location of the holes was surveyed with a Nikon DTM-A20 total station. They were subsequently converted to the UTM9N NAD27 coordinate system.</li> <li>The project historically used a local grid, with a NE trending baseline and NW trending grid lines for drilling and geophysics.</li> <li>Field validation of drill holes using GPS in UTM with the NAD83 datum located holes within 5 m of the location shown in historical maps converted to the NAD83 datum. This is within the GPS measurement error.</li> <li>Topographic contours are available for the project, based on original surveying.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Soil sampling and the drilling data spacing is appropriate for the style of mineral deposit explored and to confirm geological and grade continuity.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>The orientation is considered to be appropriate for the ICE deposit, with drilling intended to drill perpendicular to the deposit orientation, with the results showing this is generally the case.</li> </ul>

Criteria	JORC Code explanation	Commentary
Sample security	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>It is unknown the details of how samples were sent to the assay laboratories on the project.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>A review and audit of the ICE project data and resource estimate was undertaken by an independent consultant Thompson (1998), upon completion of the original resource estimate. Bastion has conducted a check estimate, based on the available assay data and geology, which validates the contained metal of the original estimate.</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The ICE project consists of 260 hard rock quartz claims covering an area of ~5,330 ha</li> <li>The properties were originally staked in 1993 by Yukon Zinc Corporation, the 100% property owner.</li> <li>The project is within an area of First Nations land rights.</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Previous work at ICE was conducted by Yukon Zinc Corporation from soil samples, mapping, geophysics, drilling and resource estimation, before the owner concentrated on their priority of developing and operating the Wolverine zinc project.</li> </ul>
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The ICE project is a Cyprus-style volcanic massive sulphide (VHMS) deposit.</li> </ul>
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from</li> </ul>	<ul style="list-style-type: none"> <li>Drillhole coordinates are provided in Table 3 of this report. Coordinates are in UTM9N, with the NAD27 data, converted from the local grid. The currently used datum in this part of Canada is the NAD83 datum.</li> <li>Holes were surveyed downhole with a Pajari borehole instrument and were noted to have only minor deviation, with almost all holes &lt; 200 m deep.</li> <li>Elevations are shown in Table 3.</li> <li>Holes are predominantly drilled at -50 degrees to 300 degrees, although some holes are drilled vertically and several are drilled towards the SE.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	<ul style="list-style-type: none"> <li>The deepest hole is 271 m and the average depth is 88.6 m.</li> </ul>
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <li><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></li> <li><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></li> <li><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li> </ul>	<ul style="list-style-type: none"> <li>In the ICE project historical estimate drill assays were not cut or capped.</li> <li>The details of the original resource estimate were documented in reasonable detail. Mineralised intersections in the individual resource cells were weighted based on copper grade and length of intersection. A maximum of 3 m of internal waste was included in the resource intervals.</li> <li>The original resource estimate was calculated for copper only.</li> </ul>
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> <li><i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>Drill holes at ICE were oriented to cut the mineralised zone as close to perpendicular as possible.</li> <li>The mineralisation dips in a consistent direction and was drilled accordingly.</li> <li>Mineralised intersects represent close to true thickness, given the drilling orientation relative to the mineralisation.</li> </ul>
<i>Diagrams</i>	<ul style="list-style-type: none"> <li><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></li> </ul>	<ul style="list-style-type: none"> <li>Maps and tables are shown in the body of report</li> </ul>
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <li><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>Assay results from drilling samples, are provided (Tables 4).</li> <li>Graphics are provided in the announcement showing relevant information.</li> <li>In the opinion of the CP the Information provided gives a balanced view of the project and the potential.</li> </ul>
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <li><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>Airborne magnetic geological survey data was obtained over the ICE project, as was helicopter EM.</li> <li>The magnetic and EM survey data was acquired in 1997 by DIGHEM of Ontario, Canada. The survey covered 1320 line kilometres.</li> <li>Magnetics used a Scintrex MP-3 proton precession and Scintrex MEP-710 caesium vapour magnetometers.</li> <li>The EM system used was a frequency domain system, with maps produced for 900 and 7200 Hz coplanar data.</li> <li>The survey lines were flown with an approximate 200 m spacing.</li> <li>QA/QC was conducted by an independent geophysicist, who</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>subsequently conducted a full review of the data.</p> <ul style="list-style-type: none"> <li>The ground geophysical survey (HLEM survey) was done on three frequencies with 100 m coil separation which theoretically could detect conductors up to 50 m below surface. The lower frequencies outlined two weak to moderate conductors, the strongest of which started at local grid Line 10950N, through the area of surface mineralization continuing north to grid Line 1 1800N. The core of this conductor is directly above the massive sulphide mineralization in Holes IC 96-02 and -13 (Table 4).</li> <li>Specific gravity data was collected on 273 samples from ICE by Chemex laboratories in Vancouver.</li> </ul>
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>Full compilation of available data has been undertaken, including magnetic and Electromagnetic data, geological mapping, soil sampling and drilling information.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in the preceding section also apply to this section.) The resource discussed is historical, foreign and non JORC compliant

Criteria	JORC Code explanation	Commentary
Database integrity	<ul style="list-style-type: none"> <li>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</li> <li>Data validation procedures used.</li> </ul>	<ul style="list-style-type: none"> <li>Data for the ICE project was imported and compiled from excel spreadsheets available for individual holes.</li> <li>Data was plotted to check the spatial location and relationship to drill hole locations on historical maps, with locations coinciding with drill pad locations when overlaid.</li> </ul>
Site visits	<ul style="list-style-type: none"> <li>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</li> <li>If no site visits have been undertaken indicate why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>The JORC Competent Person has now visited the ICE project, and confirmed the presence of all the original drill core and checked the location of a selection of IC96, IC97 and ID97 drill hole locations on the ground, locating the collars and original tags confirming hole locations. The site winter access road is not currently in sufficient condition to allow access to the project site and access is by helicopter only.</li> </ul>
Geological interpretation	<ul style="list-style-type: none"> <li>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</li> <li>Nature of the data used and of any assumptions made.</li> </ul>	<ul style="list-style-type: none"> <li>The project is a Cyprus-style volcanic massive sulphide (VHMS) deposit, a well-known deposit type in a belt know for hosting for VHMS style mineralisation.</li> </ul>



Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li><i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i></li> <li><i>The use of geology in guiding and controlling Mineral Resource estimation.</i></li> <li><i>The factors affecting continuity both of grade and geology.</i></li> </ul>	<ul style="list-style-type: none"> <li>Because the information is historical and the level of documentation regarding information collection is not exhaustive the assumptions made are that the survey, assay and geological data were fit for the purpose of the original historical foreign resource estimation.</li> <li>An alternative interpretation of the geology, and hence mineral resource, would have a limited impact on the final estimate number, as interpretation is fairly tightly constrained by the geology.</li> <li>Geology is used in guiding the stratabound resource estimate.</li> <li>Continuity in grade depends on the location within the deposit and whether there is feeder zone stockwork mineralisation present in addition to massive sulphides.</li> <li>Continuity in the geology depends on the original sub sea floor architecture.</li> </ul>
<i>Dimensions</i>	<ul style="list-style-type: none"> <li><i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource</i></li> </ul>	<ul style="list-style-type: none"> <li>The deposit has been drilled out covering an area of approximately 600 by 400 m. The deposit varies in thickness, up to approximately 15 m in thickness in the thickest part.</li> <li>The mineralisation thins towards the edges of the Ice deposit.</li> <li>Mineralisation outcrops in the northwest corner of the deposit, dipping away to the southeast.</li> <li>Elevations are shown in Table 3.</li> </ul>
<i>Estimation and modelling techniques</i>	<ul style="list-style-type: none"> <li><i>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i></li> <li><i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i></li> <li><i>The assumptions made regarding recovery of by-products.</i></li> <li><i>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).</i></li> <li><i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i></li> <li><i>Any assumptions behind modelling of selective mining units.</i></li> <li><i>Any assumptions about correlation between variables.</i></li> <li><i>Description of how the geological interpretation was used to control the Resource estimates.</i></li> </ul>	<ul style="list-style-type: none"> <li>The historical modelling consisted of a sectional model prepared in Mapinfo Discover, with 50 m spaced sections and an inverse distance estimation methodology, with the 75 by 25 m search ellipse aligned with long axis to 120 degrees.</li> <li>No grade capping or cutting is known to have occurred. The deposit was modelled with hard boundaries for the sulphide lens constraining the estimation.</li> <li>Cells were defined on each profile and the intersection width, assay results and SG determined for that cell, calculating the result from weighted data from individual samples to reflect the length of samples relative to the total length of the cell. The size and tonnage of each resource cell was determined, with cells extending half way in distance to the next section line.</li> <li>The cross sectional area of each cell and the volume were calculated by multiplying by 50 m, for the thickness of the section.</li> <li>Bastion has conducted a check estimate of the deposit, using the available survey, geological, assay and bulk density data, resulting in a similar estimate to the historical foreign non JORC resource.</li> <li>The original resource estimate was calculated for copper only. Gold,</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>Discussion of basis for using or not using grade cutting or capping.</li> <li>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</li> </ul>	<p>silver and cobalt would provide additional economic value for the resource, but were not included, as assays were not available for gold for all of the holes.</p> <ul style="list-style-type: none"> <li>The historical resource used an irregular block size, as the resource was done as a polygonal model.</li> <li>Geological interpretation of the sulphide lens and underlying stockwork zone constrained the resource estimate, with the resource polygons tightly tied to the drill holes laterally and vertically.</li> </ul>
Moisture	<ul style="list-style-type: none"> <li>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</li> </ul>	<ul style="list-style-type: none"> <li>It is unknown whether the tonnage was estimated on a dry basis or with natural moisture. Considering the environment it is considered most likely the estimate was on a natural moisture basis.</li> </ul>
Cut-off parameters	<ul style="list-style-type: none"> <li>The basis of the adopted cut-off grade(s) or quality parameters applied.</li> </ul>	<ul style="list-style-type: none"> <li>The author of the historical resource report (Becker, 1998b) describes the use of a cut-off grade of 0.5% Cu applied for primary copper and 0.3% for secondary copper was applied to the historical foreign resource, as by-product credits (such as gold) were not included at the time of the historical estimate. These cut-offs were not based on any metallurgical data.</li> <li>During the estimation intervals were classified as oxide or primary, for the application of the relevant cut-off used in the resource.</li> </ul>
Mining factors or assumptions	<ul style="list-style-type: none"> <li>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</li> </ul>	<ul style="list-style-type: none"> <li>The deposit was considered to be principally amenable to open pit mining, with an initial pit shell design that would have left a minor part of the resource for underground exploitation.</li> <li>Given the outcrop of part of the deposit it is considered that open pit mining would be appropriate for extraction. Consideration of current economics would be required to assess the basis of extraction with current commodity prices.</li> <li>The maximum slope for the conceptual pit design was 50 degrees on the eastern side and 45 degrees on the other three sides.</li> <li>The maximum stripping ratio for the historical pit outline was considered to be 10:1 for the massive sulphide mineralisation.</li> <li>Some of the oxide material was reportedly not included in the resource, as it was not sampled with diamond core during the drilling.</li> </ul>
Metallurgical factors or assumptions	<ul style="list-style-type: none"> <li>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous.</li> </ul>	<ul style="list-style-type: none"> <li>No significant metallurgy has been conducted on the deposit, which consists primarily of chalcopyrite, with pyrite and minor bornite locally. There is gold associated with the massive sulphides, minor cobalt and silver and only traces of zinc.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i>	
<i>Environmental factors or assumptions</i>	<ul style="list-style-type: none"> <li>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</li> </ul>	<ul style="list-style-type: none"> <li>Waste disposal could potentially be in pit, or in an appropriate tailings facility. With pyrite in the upper part of the deposit there is some acid generating potential, which can be mitigated by disposal of tailings below the water level.</li> </ul>
<i>Bulk density</i>	<ul style="list-style-type: none"> <li>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</li> <li>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</li> <li>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</li> </ul>	<ul style="list-style-type: none"> <li>The specific gravity for the massive sulphide mineralisation was assumed at 4 g/cc, based on some measurements made during the original exploration program. 273 measurements of specific gravity were made during the original program on a variety of rock types.</li> <li>Detailed measurements should be made on future drill core.</li> </ul>
<i>Classification</i>	<ul style="list-style-type: none"> <li>The basis for the classification of the Mineral Resources into varying confidence categories.</li> <li>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</li> <li>Whether the result appropriately reflects the Competent Person's view of the deposit</li> </ul>	<ul style="list-style-type: none"> <li>The historical, foreign resource was classified as Indicated.</li> </ul>
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <li>The results of any audits or reviews of Mineral Resource estimates</li> </ul>	<ul style="list-style-type: none"> <li>An audit of the original sectional inverse distance squared (ID2) resource was carried out by the consulting company Derry, Michener, Booth &amp; Wahl Consultants Ltd by I.S. Thompson in a report dated November 19 1998. The report (Thompson, 1998) agreed with the estimation methodology and results.</li> <li>Bastion has conducted a check estimate of the deposit, using the available survey, geological, assay and bulk density data, resulting in</li> </ul>

Criteria	JORC Code explanation	Commentary
		a similar estimate to the historical foreign non JORC resource.
Discussion of relative accuracy/ confidence	<ul style="list-style-type: none"> <li>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the Resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</li> <li>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</li> <li>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</li> </ul>	<ul style="list-style-type: none"> <li>Based on the available information (which does not include QA/QC sampling, such as standards and duplicates) and the check estimate conducted by Bastion, using the available data, the estimate appears to be of reasonable. This is based on the geological interpretation that the mineralised zone has not been significantly offset by faults. Using a less constrained estimation method results in a lower grade estimation, with higher influence from thinner, lower grade intersections on the margins of the deposit.</li> <li>However, the drill core has only recently been sighted by the CP and only a limited number of intersections have been evaluated to date. The geological interpretation and assay results rely on the original data, which has not been verified. Consequently, the result is not consistent with the JORC code and cannot be relied upon.</li> <li>In order to validate the historical resource, the core will be re-assayed in a selection of holes and gold assays will be completed to allow estimation throughout the deposit. New measurements of specific gravity would be made to check the original results. Location and surveying of drill holes will also be completed, along with an assessment of whether downhole EM tools can be run in the historical holes. Based on whether this is feasible a decision will be made regarding completing high powered ground or airborne EM surveys.</li> <li>The competent person Murray Brooker notes the information in this market announcement provided under rules ASX rules 5.12.2 to 5.12.7 is an accurate representation of the available data and studies for the material mining project. This statement include information referred to in rule 5.22(b) and (c).</li> </ul>