

ASX Release

20 September 2022

In-fill DSO resource drilling progressing well

Highlights:

- In-fill drilling at the Bekisopa Southern Zone commenced September 8
- 22 drill holes completed
- Iron mineralisation present in drill core from surface

AKORA Resources Managing Director Paul Bibby, commented “Drilling and geological evaluation progressing extremely well with good intercepts of weathered massive iron mineralisation observed from surface with potential for DSO mineralisation in these iron rich areas.”



Introduction

AKORA Resources (“AKORA” or “the Company”) (ASX Code: AKO) is pleased to provide shareholders with an Update on the 2022 Bekisopa Southern Zone DSO in-fill resource drilling.

Since drilling commenced on 8 September twenty-two drill holes have been completed for 283 metres at a 94% core recovery. Images set out below show the geological evaluation and iron mineralisation in drill core.

The drilling has achieved very encouraging intercepts of iron mineralisation with preparation for geological evaluation and assay preparation underway. The drill core assay pulps will be prepared at the OMNIS Laboratory in Antananarivo and dispatched to ALS Perth Iron Ore Technical Centre for assaying, as previously.

2022 Bekisopa Southern Zone DSO in-Fill resource drilling




Drill core logging, including magnetic susceptibility measurements and photographing which is indicating some high iron grades in the near surface drill core.



Bekisopa drill core for hole BEKD72 showing weathered zone iron mineralisation at surface.



Solid weathered zone drill core potentially high-grade DSO lump and fines iron ore.

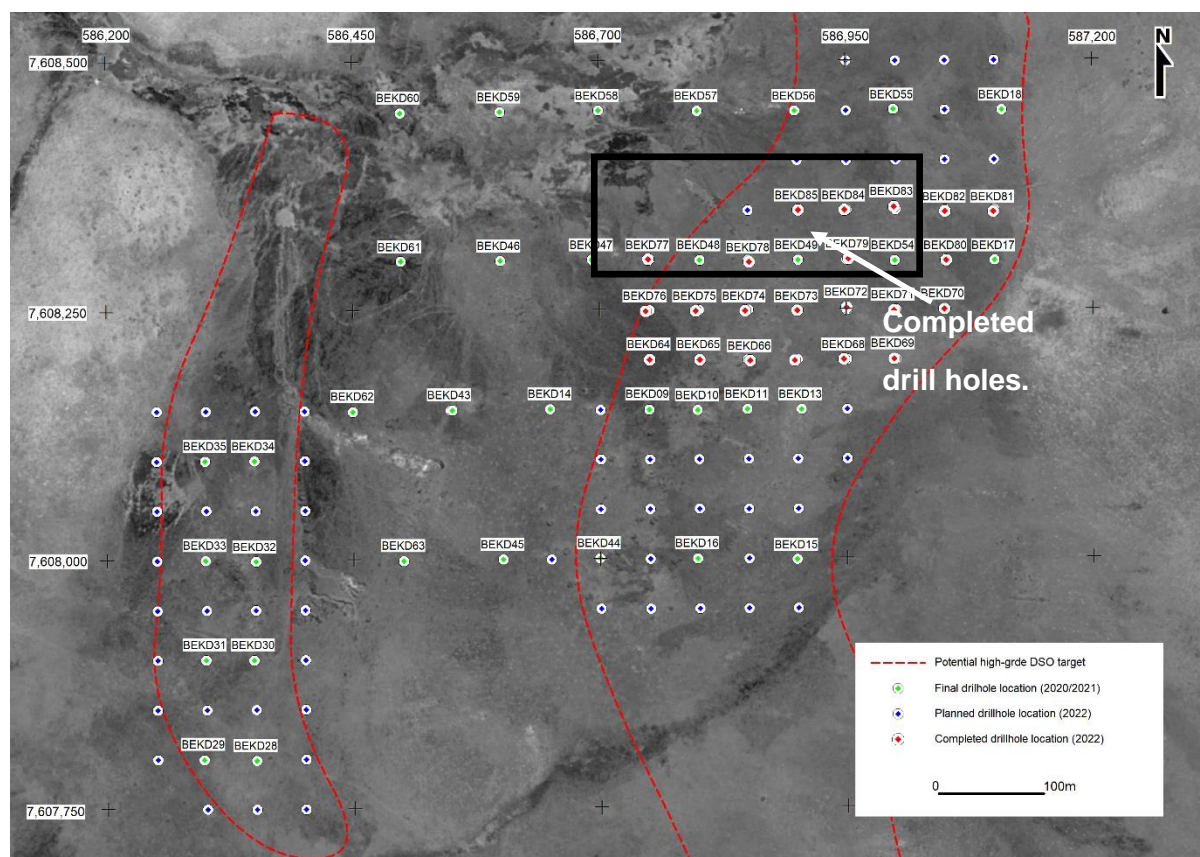

DSO in-fill drilling progressing well with good surface intercepts being observed.

For further information please contact:

Paul G Bibby
Managing Director
Phone +61(0) 419 449 833
www.akoravy.com

Peter Taylor
Investor Relations
Phone +61(0) 412 036 231
Peter@nwrcommunications.com.au

About AKORA Resources

AKORA Resources (ASX: AKO) is an exploration company engaged in the exploration and development of the Bekisopa, Tratramarina and Ambodilafa Projects. All iron ore prospects in Madagascar where AKORA holds some 308 km² of tenements across these three prospective exploration areas. Bekisopa Iron Ore Project is a high-grade iron ore project with an ~6km strike length and a proven inferred resource of 194.7million tonnes. Bekisopa has outcropping and weathered zone DSO iron ore and potential to produce a premium grade +68% iron concentrate suitable for Direct Reduced Iron pellets for the Green Steel future.

Competent Person's Statement

The information in this statement that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Jannie Leeuwner – BSc (Hons) Pr.Sci.Nat. MGSSA and is a full-time employee of Vato Consulting LLC. Mr. Leeuwner is a registered Professional Natural Scientist (Pr.Sci.Nat. - 400155/13) with the South African Council for Natural Scientific Professions (SACNASP). Mr. Leeuwner has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and the activity being

undertaken to qualify as a Competent Person as defined in the Note for Mining Oil & Gas Companies, June 2009, of the London Stock Exchange and the 2012 Edition of the 'Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (JORC Code). Mr. Leeuwner consents to the inclusion of the information in this release in the form and context in which it appears.

Authorisation

This announcement has been authorised by the AKORA Resources Board of Directors on 19 September 2022.

JORC Code, 2012 Edition - Table 1 - Bekisopa Project

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Diamond drilling was used to obtain HQ size core, with the weathered (friable) core split using a chisel/hammer and fresh (competent) core cut using a diamond blade core saw. Samples were taken along the depth intervals and lithological sub-division mark-ups to gather representative samples. Sampling consists of approx. 1m samples of ½ core with breaks at lithological discontinuities - typical 1-5kg. Sample preparation and analysis are pending.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Conventional wireline diamond drilling is used to obtain all drill core and drilling is undertaken with a EP200 man portable drilling rig. Nominal core diameter is 63.5mm (HQ) in 0.5-1.5m runs. Drill holes are inclined at -90° (vertical) and core is not orientated. A total of 22 diamond holes (BEKD64 to BEKD85) and 283.16m drilled to date, with drilling ongoing.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Core recovery is measured every run by geologists. Core recoveries of 94% on average were achieved for sampled core. No bias or relationship has been observed between recovery and grade.

Criteria	JORC Code explanation	Commentary
<i>Logging</i>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • A set of standard operating procedures for drilling and sampling were prepared by the company and Vato Consulting, who is supervising the program, and these are always adhered to. • All drill core is logged quantitatively using industry standard practice on site in enough detail to allow mineral resource estimates as required. • Logging included: core recovery %, primary lithology, secondary lithology, weathering, colour, grain size, texture, mineralisation type (generally magnetite or hematite), mineralisation style, mineralisation %, structure, magnetic susceptibility (see below), notes (longhand). • All core is photographed both wet and dry and as both whole and half core. • All core is geotechnically logged and RQD's calculated for every core run. • All drill-holes are logged using a ZH-SM30 magnetic susceptibility meter to enable accurate distinction of iron (magnetite) rich units and to potentially differentiate between magnetite and hematite rich mineralisation. Readings recorded in 25cm intervals. • Density measurements are made using both the Archimedes method (mainly fresh competent rock) and the Caliper Vernier (mainly weathered friable rock) methods. • All diamond core holes logged in their entirety.
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> 	<ul style="list-style-type: none"> • A set of standard operating procedures for drilling and sampling were prepared by the company and Vato Consulting, who is supervising the program, and these are always adhered to. • All core is fitted together so that a consistent half core could be collected, marked up with a "top" line (line perpendicular to dip and strike, or main foliation), sample intervals decided and marked up and the core subsequently cut in half using a core

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p>saw, separating samples into the marked-up intervals. If the core is weathered (friable), it is split in half using a hammer and chisel. The intervals are nominally 1m, but smaller intervals are marked if a change in geology occurred within the 1m interval.</p> <ul style="list-style-type: none"> The half core sample intervals are placed into polythene bags along with a paper sample tag. This is then sealed using a cable tie and placed into a second polythene bag with a second paper tag and this is sealed using a cable tie. Sample batch transport to and subsequent preparation at the preparation laboratory facility in Antananarivo (OMNIS) are pending.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> No assaying has been undertaken as yet on the drillholes being reported.
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> As assaying has not yet been undertaken, only qualitative descriptions are reported, and magnetic susceptibility readings are recorded.
<p>Location of data points</p>	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drillhole collars have been provisionally located using a handheld GPS (+/-2-3m accuracy). Final collar locations will be completed at the end of the drilling program by using differential GPS (dGPS) (with an accuracy to cm). The grid system used is UTM, WGS84, Zone 38 Southern

Criteria	JORC Code explanation	Commentary
		<p>Hemisphere</p> <ul style="list-style-type: none"> An accurate topographic survey was completed in 2021 by FUTURMAP, a local surveying consultant. The survey was conducted using PHANTOM 4 Pro type drones, and a pair of LEICA System 1200 dual frequency GPS. An accuracy of 10mm horizontal and 20mm vertical is quoted.
<p><i>Data spacing and distribution</i></p>	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> Data spacing nominally at 50m x 50m for infill drillhole collars within the southern mineralisation zone. The high-grade iron mineralisation suitable for Direct Shipping Ore (DSO) within the regolith (weathered material) as identified by previous drilling in 2020/2021 (an estimate of 4.2Mt) are covered by the infill drilling program. The data spacing and distribution is considered appropriate to establish geological and grade continuity for the style of mineralisation being intersected and the classification of Mineral Resources. No sample compositing has been applied.
<p><i>Orientation of data in relation to geological structure</i></p>	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> The ironstone unit has a strong north-south trend with a steep to shallow westerly dip. The ironstone unit has a conspicuous regolith zone with completely to highly weathered material up to 10-20m deep. The regolith hosts iron mineralisation with enrich DSO parts. The vertical infill drillholes to test the mineralisation in the regolith (weathered zone). No sample known bias present.
<p><i>Sample security</i></p>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> Chain of Custody procedures are implemented to document the possession of the samples from collection through to storage, customs, export, analysis, and reporting of results. Chain of custody forms are a permanent records of sample handling and

Criteria	JORC Code explanation	Commentary
		<p>off-site dispatch.</p> <ul style="list-style-type: none"> The on-site Geologist is responsible for the care and security of the samples from the sample collection to the export stage. Samples prepared during the day are stored in the preparation facility in labelled sealed plastic bags. Samples will be delivered to the preparation laboratory and subsequent analytical laboratory by courier.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> No audit has been conducted.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> The Company completed the acquisition of the minority interest in Iron Ore Corporation of Madagascar sarl held by Cline Mining Corporation on 5 August 2020. The Company holds through Iron Ore Corporation of Madagascar sarl, Universal Exploration Madagascar sarl and a Farm-in Agreement 12 exploration permits in three geographically distinct areas. All administration fees due and payable to the Bureau du Cadastre Minier de Madagascar (BCMM) have been and accordingly, all tenements are in good standing with the government. The tenements are set out in the below

Criteria	JORC Code explanation	Commentary																																																																																																																							
		<table border="1"> <thead> <tr> <th>Project ID</th> <th>Tenement Holders</th> <th>Permit ID</th> <th>Permit Type</th> <th>Number of Blocks</th> <th>Granting Date</th> <th>Expiry Date</th> <th>Submission Date</th> <th>Actual Status</th> </tr> </thead> <tbody> <tr> <td rowspan="5">Tratramarina</td> <td>UEM</td> <td>16635</td> <td>PR</td> <td>144</td> <td>23/09/2005</td> <td>22/09/2015</td> <td>04/09/2015</td> <td>Under renewal process</td> </tr> <tr> <td>UEM</td> <td>16637</td> <td>PR</td> <td>48</td> <td>23/09/2005</td> <td>23/09/2015</td> <td>04/09/2015</td> <td>Under renewal process</td> </tr> <tr> <td>UEM</td> <td>17245</td> <td>PR</td> <td>160</td> <td>10/11/2005</td> <td>09/11/2015</td> <td>04/09/2015</td> <td>Under renewal process</td> </tr> <tr> <td>RAKOTOARISOA</td> <td>18379</td> <td>PRE</td> <td>16</td> <td>11/01/2006</td> <td>11/01/2014</td> <td>27/03/2012</td> <td>Under transformation</td> </tr> <tr> <td>RAKOTOARISOA</td> <td>18891</td> <td>PRE</td> <td>48</td> <td>18/11/2005</td> <td>17/11/2013</td> <td>27/03/2012</td> <td>Under transformation</td> </tr> <tr> <td rowspan="3">Ambodilafa</td> <td>MRM</td> <td>6595</td> <td>PR</td> <td>98</td> <td>20/05/2003</td> <td>19/05/2013</td> <td>08/03/2013</td> <td>under renewal process</td> </tr> <tr> <td>MRM</td> <td>13011</td> <td>PR</td> <td>33</td> <td>15/10/2004</td> <td>14/10/2014</td> <td>07/08/2014</td> <td>under renewal process</td> </tr> <tr> <td>MRM</td> <td>21910</td> <td>PR</td> <td>3</td> <td>23/09/2005</td> <td>22/09/2015</td> <td>12/07/2015</td> <td>under substance extension and renewal process</td> </tr> <tr> <td rowspan="6">Bekisopa</td> <td rowspan="5">IOCM</td> <td>10430</td> <td>PR</td> <td>64</td> <td>04/03/2004</td> <td>03/03/2014</td> <td>28/11/2013</td> <td>Under renewal process</td> </tr> <tr> <td>26532</td> <td>PR</td> <td>768</td> <td>16/10/2007</td> <td>03/02/2019</td> <td></td> <td>Relinquished</td> </tr> <tr> <td>35828</td> <td>PR</td> <td>80</td> <td>16/10/2007</td> <td>03/02/2019</td> <td></td> <td>Relinquished</td> </tr> <tr> <td>27211</td> <td>PR</td> <td>128</td> <td>16/10/2007</td> <td>23/01/2017</td> <td>20/01/2017</td> <td>Under renewal process</td> </tr> <tr> <td>35827</td> <td>PR</td> <td>32</td> <td>23/01/2007</td> <td>23/01/2017</td> <td>20/01/2017</td> <td>Under renewal process</td> </tr> <tr> <td>RAFAFINDRAVOLA</td> <td>PRE</td> <td>16</td> <td>26/03/2001</td> <td>25/11/2019</td> <td></td> <td>Transferred to IOCM gerant.</td> </tr> </tbody> </table>	Project ID	Tenement Holders	Permit ID	Permit Type	Number of Blocks	Granting Date	Expiry Date	Submission Date	Actual Status	Tratramarina	UEM	16635	PR	144	23/09/2005	22/09/2015	04/09/2015	Under renewal process	UEM	16637	PR	48	23/09/2005	23/09/2015	04/09/2015	Under renewal process	UEM	17245	PR	160	10/11/2005	09/11/2015	04/09/2015	Under renewal process	RAKOTOARISOA	18379	PRE	16	11/01/2006	11/01/2014	27/03/2012	Under transformation	RAKOTOARISOA	18891	PRE	48	18/11/2005	17/11/2013	27/03/2012	Under transformation	Ambodilafa	MRM	6595	PR	98	20/05/2003	19/05/2013	08/03/2013	under renewal process	MRM	13011	PR	33	15/10/2004	14/10/2014	07/08/2014	under renewal process	MRM	21910	PR	3	23/09/2005	22/09/2015	12/07/2015	under substance extension and renewal process	Bekisopa	IOCM	10430	PR	64	04/03/2004	03/03/2014	28/11/2013	Under renewal process	26532	PR	768	16/10/2007	03/02/2019		Relinquished	35828	PR	80	16/10/2007	03/02/2019		Relinquished	27211	PR	128	16/10/2007	23/01/2017	20/01/2017	Under renewal process	35827	PR	32	23/01/2007	23/01/2017	20/01/2017	Under renewal process	RAFAFINDRAVOLA	PRE	16	26/03/2001	25/11/2019		Transferred to IOCM gerant .
Project ID	Tenement Holders	Permit ID	Permit Type	Number of Blocks	Granting Date	Expiry Date	Submission Date	Actual Status																																																																																																																	
Tratramarina	UEM	16635	PR	144	23/09/2005	22/09/2015	04/09/2015	Under renewal process																																																																																																																	
	UEM	16637	PR	48	23/09/2005	23/09/2015	04/09/2015	Under renewal process																																																																																																																	
	UEM	17245	PR	160	10/11/2005	09/11/2015	04/09/2015	Under renewal process																																																																																																																	
	RAKOTOARISOA	18379	PRE	16	11/01/2006	11/01/2014	27/03/2012	Under transformation																																																																																																																	
	RAKOTOARISOA	18891	PRE	48	18/11/2005	17/11/2013	27/03/2012	Under transformation																																																																																																																	
Ambodilafa	MRM	6595	PR	98	20/05/2003	19/05/2013	08/03/2013	under renewal process																																																																																																																	
	MRM	13011	PR	33	15/10/2004	14/10/2014	07/08/2014	under renewal process																																																																																																																	
	MRM	21910	PR	3	23/09/2005	22/09/2015	12/07/2015	under substance extension and renewal process																																																																																																																	
Bekisopa	IOCM	10430	PR	64	04/03/2004	03/03/2014	28/11/2013	Under renewal process																																																																																																																	
		26532	PR	768	16/10/2007	03/02/2019		Relinquished																																																																																																																	
		35828	PR	80	16/10/2007	03/02/2019		Relinquished																																																																																																																	
		27211	PR	128	16/10/2007	23/01/2017	20/01/2017	Under renewal process																																																																																																																	
		35827	PR	32	23/01/2007	23/01/2017	20/01/2017	Under renewal process																																																																																																																	
	RAFAFINDRAVOLA	PRE	16	26/03/2001	25/11/2019		Transferred to IOCM gerant .																																																																																																																		
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Exploration has been conducted by UNDP (1976 - 78) and BRGM (1958 - 62). Final reports on both episodes of work are available and have been utilised in the recent IGR included in the Akora prospectus. Airborne magnetics was flown for the government by Fugro and has since been obtained, modelled and interpreted by Cline Mining and Akora. 																																																																																																																							
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The tenure was acquired by AKO during 2014 and work since then has consisted of: <ul style="list-style-type: none"> Data compilation and interpretation; Confirmatory rock chip sampling (118 samples) and mapping; Re-interpretation of airborne geophysical data; Ground magnetic surveying (305-line km's); The 2020 drilling program of 1095.5m diamond core drilling in 12 drillholes. The 2021 drilling program of 5117.02m diamond core drilling in 52 drillholes. The drilling has shown that the surface mineralisation continues at depth, with at most a 25% increase in grade due to weathering effects. However, it should be noted that some 																																																																																																																							

Criteria	JORC Code explanation	Commentary
		<p>downslope creep of scree from these units may exaggerate apparent width at surface.</p> <ul style="list-style-type: none"> The mineralisation occurs as a series of magnetite bearing gneisses and calc-silicates that occur as zones between 50m and 150m combined true width. The mineralisation occurs as layers of massive magnetite (sometimes altered to hematite) between 1m and 7m true width plus a lower grade zone that consists of lenses, stringers, boudins and blebs of magnetite aggregates that vary from 1cm to 10's of cm wide within a calc-silicate/gneiss unit (informally termed "coarse disseminated" here). These units sometimes have an outer halo of finer disseminated magnetite (informally termed "disseminated" here). This wide mineralisation halo provides a large tonnage potential over the 6-7km strike of mapped mineralisation and associated magnetic anomaly within the Akora tenement.
<p><i>Drill hole Information</i></p>	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> All relevant drillhole information related to the 2020/2021 drilling programs have been previously reported to the ASX. No material changes have occurred to this information since it was originally reported. Another 22 diamond drillholes (BEKD64 to BEKD85) have been completed in 2022 with drill collar data as stated in this release. Drilling is ongoing.
<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade 	<ul style="list-style-type: none"> NA, sample preparation and analysis are pending.

Criteria	JORC Code explanation	Commentary
	<p><i>results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <ul style="list-style-type: none"> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> NA, sample preparation and analysis are pending.
<i>Diagrams</i>	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> All relevant maps and tabulations of drill hole collars provided in this release.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> NA, sample preparation and analysis are pending. Drilling is ongoing.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> NA
<i>Further work</i>	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Drilling is ongoing to complete approx. 850m of planned drillholes.

2022 BEKISOPA Southern Zone DSO In-fill Drilling Collars

Hole_ID	Depth	Easting	Northing	RL	Azimuth	Inclination
BEKD64	10.68	586750	7608200	871	0	-90
BEKD65	8.63	586801	7608200	875	0	-90
BEKD66	10.60	586852	7608199	879	0	-90
BEKD67	19.53	586897	7608199	885	0	-90
BEKD68	14.62	586947	7608200	890	0	-90
BEKD69	14.61	586998	7608200	886	0	-90
BEKD70	8.60	587049	7608250	897	0	-90
BEKD71	7.58	586998	7608249	884	0	-90
BEKD72	10.50	586950	7608252	883	0	-90
BEKD73	12.59	586900	7608249	876	0	-90
BEKD74	10.60	586847	7608249	871	0	-90
BEKD75	14.59	586797	7608249	870	0	-90
BEKD76	8.64	586746	7608249	866	0	-90
BEKD77	9.66	586749	7608301	865	0	-90
BEKD78	12.58	586851	7608298	869	0	-90
BEKD79	14.66	586952	7608301	882	0	-90
BEKD80	14.58	587051	7608299	901	0	-90
BEKD81	12.57	587099	7608348	904	0	-90
BEKD82	17.63	587050	7608348	899	0	-90
BEKD83	16.53	586998	7608353	894	0	-90
BEKD84	20.57	586948	7608350	876	0	-90
BEKD85	12.61	586901	7608350	871	0	-90