

01 October 2024

EXCEPTIONAL ROCK CHIP ASSAYS up to 930 g/t Ag, 10.05% Cu, and 8.09% Zn at first pass sampling at PEARL COPPER PROJECT.

HIGHLIGHTS

Recent rock chip sampling at the Odyssey prospect, part of the Pearl Copper Project located in Arizona, USA has returned exceptional assay results:

- Silver assay highlights include: 930 g/t, 233 g/t, 274 g/t.
- Copper assay highlights include: 10.05%, 4.23%, 4.13%.
- Zinc assay highlights include: 8.09%, 7.21%, 6.33%.

Of the 14 first pass rock chip samples taken to test for mineralisation at Odyssey:

- 10 samples assayed >30 g/t Silver,
- 12 samples assayed >1.5% Copper,
- 10 samples assayed > 1.0% Zinc.

Mineralisation at the Odyssey Prospect is visible at the surface with a strike length of >800m and includes multiple NNW trending extensional veins.

These veins contain visible copper minerals (malachite and chrysocolla) but the presence of silver and zinc mineralisation indicates much broader mineralisation potential.

The Odyssey prospect has never been drilled.



Figure 1: Odyssey Prospect hydrated copper carbonate and phyllosilicate mineralisation

Golden Mile Resources Limited (“Golden Mile”; “the Company”; ASX: “**G88**”) is pleased to announce multi-element assays from rock chip samples taken for geochemical orientation over the Odyssey Prospect which is contained within the Company’s Pearl Copper Project (“Pearl”; “Pearl Project”; “the Project”).

Whilst initially viewed as an epithermal copper target, the significant, high-grade assays of not only copper but also silver and zinc have expanded the exceptional prospectivity of the Project for not only copper but also multi-element epithermal mineralisation.

Golden Mile’s Managing Director Damon Dormer commented: *“These results – with exceptional high grades of copper, silver and zinc not only broadens the mineralisation potential of the Odyssey Prospect but also provides increased confidence for additional prospects within the Pearl Project area. By any measure these are exciting results and will provide numerous targets for our maiden drilling program.”*

Rock chip sampling at the Odyssey Prospect covered approximately 400m strike length, centred on the historic workings, which extends for over 800m. The mineralised structure hosts three quartz veins with polymetallic mineralisation within a granodiorite host rock. Wall rock alteration and mineralisation is also strongly evident, with a broad propylitic alteration halo (Figure 2).

Table 1: Pearl Project rock chip assays results

Sample	Prospect	East	North	RL	Au	Ag	Cu	Pb	Zn
		(m)	(m)	(m)	(ppm)	(ppm)	(%)	(%)	(%)
24PRL001	Odyssey	524450	3621949	1101	0.09	233	2.37	0.45	0.15
24PRL002	Odyssey	524479	3621900	1102	0.09	930	2.74	0.26	0.07
24PRL003	Odyssey	524465	3621919	1108	0.09	274	2.06	0.26	0.06
24PRL004	Odyssey	524414	3622021	1098	0.03	42.5	0.83	0.47	1.71
24PRL005	Odyssey	524400	3622042	1109	0.02	42.2	0.7	0.47	1.88
24PRL006	Odyssey	524425	3622001	1092	0.03	18.6	1.66	0.59	3.22
24PRL007	Odyssey	524456	3622900	1105	0.06	32	3.34	0.35	1.28
24PRL008	Odyssey	524496	3621850	1098	0.15	100	4.13	0.67	6.33
24PRL009	Odyssey	524504	3621817	1102	0.11	19.7	3.66	0.67	8.09
24PRL010	Odyssey	524523	3621780	1097	0.12	65.4	2.98	0.44	5.21
24PRL011	Odyssey	524546	3621750	1095	0.09	26.9	2.82	0.54	5.83
24PRL012	Odyssey	524556	3621709	1089	0.09	39.7	3.33	0.72	7.21
24PRL013	Odyssey	524560	3621689	1084	0.09	38.3	4.23	0.61	5.78
24PRL016	Odyssey	524556	3621768	1093	0.06	2.1	10.05	0.01	0.1

Coordinates UTM Zone 12 (NAD83)

The recent rock-chip results (Table 1) have reinforced the Company’s belief that the Pearl Project has the potential to host significant polymetallic epithermal mineralisation. Further, these structures provide near-term targets for a maiden drill program.

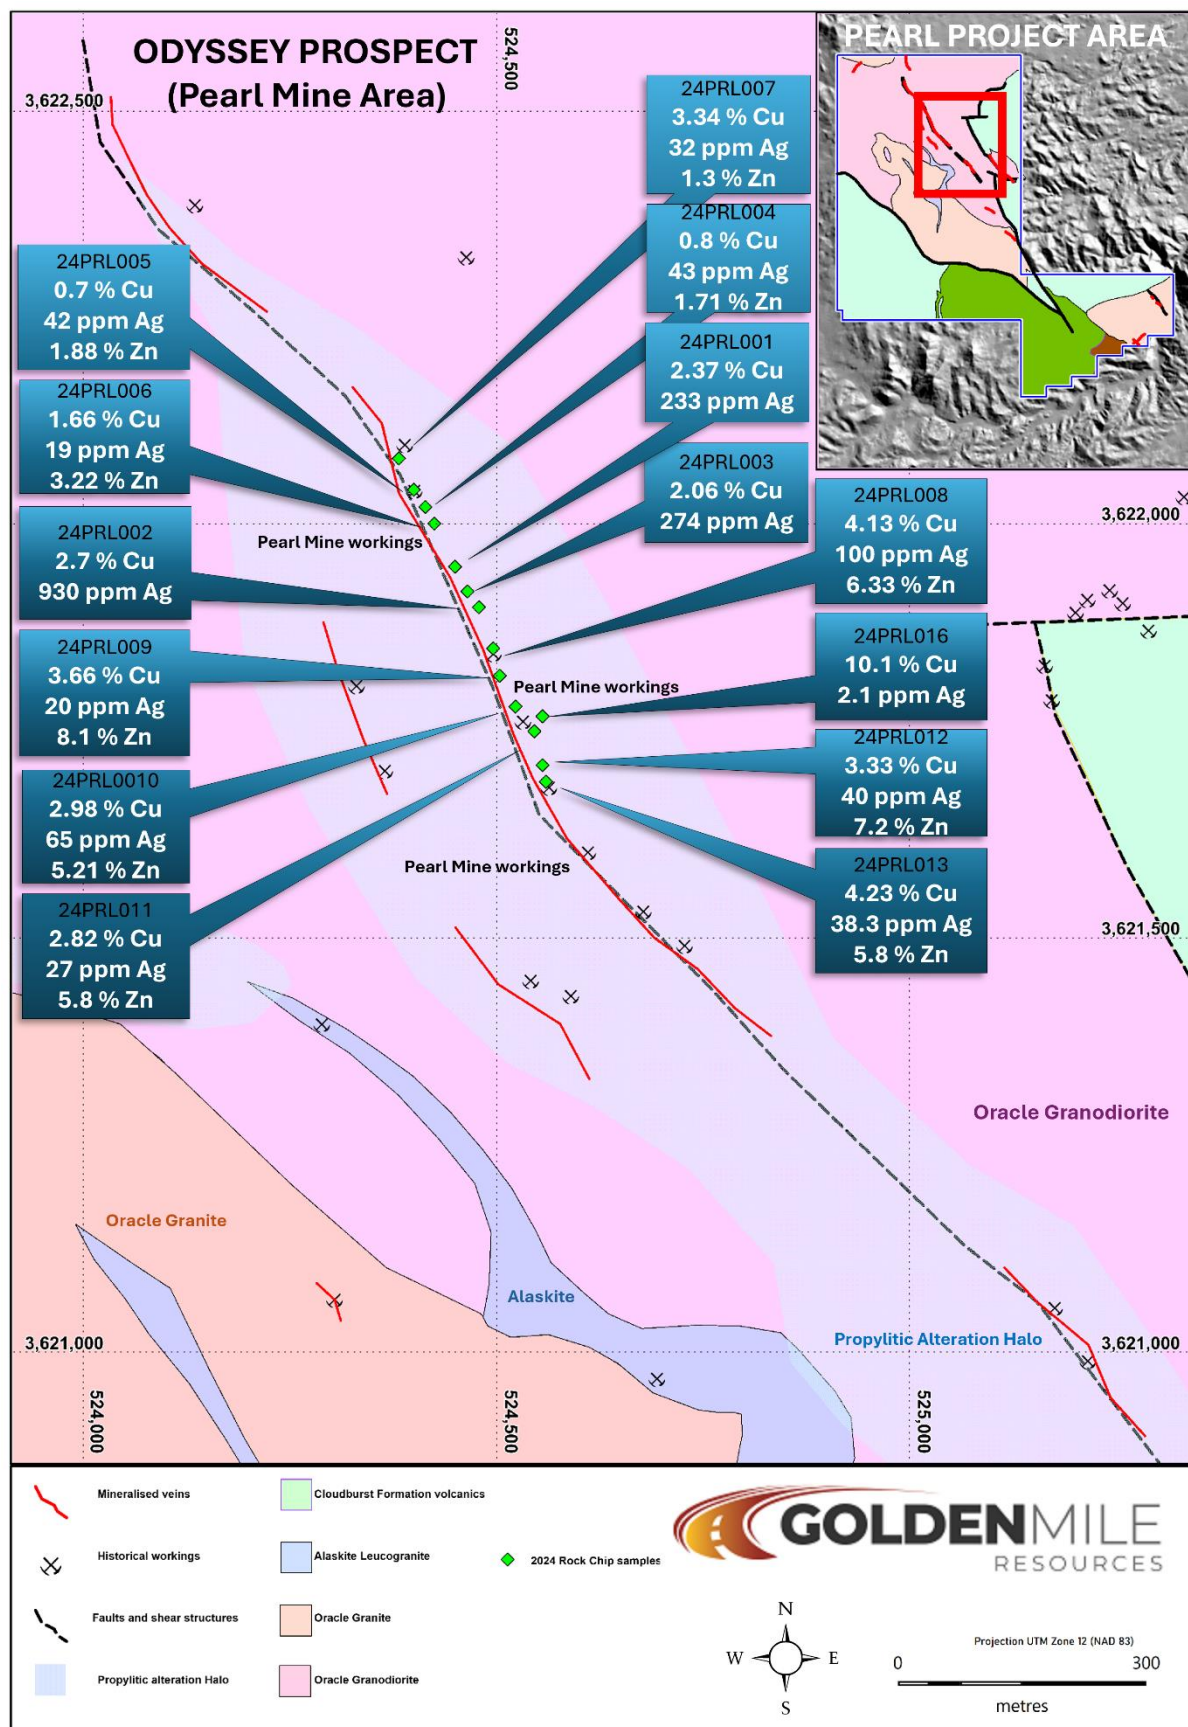


Figure 2: Odyssey Prospect - rock chip assays over geology and alteration halo with veins.



Figure 3: 24PRL002. 930 g/t Ag, 2.37% Cu. Quartz vein with iron oxides, copper carbonate within granodiorite host rock.

The mineralised hydrothermal veins at the Odyssey Prospect are within a larger, north-west trending extensional fault structure. This structure can be traced over many kilometres, with several parallel structures apparent from photogrammetry interpretation (Figure 2).

These results were highly encouraging indicating the presence of significant grades of copper, lead, and zinc. This area will be the subject of a more detailed lithological and structural mapping program, with more systematic rock-chip and channel sampling.

The Next Steps

The Company is actively advancing its maiden drilling program for the Odyssey Prospect and is currently working through the government approval process for the associated land clearing permits.

Prior to the execution of the maiden drilling, the resolution of targets at Odyssey will be improved via detailed geological and structural mapping, supported by further rock chip sampling. Across the greater extent of the Project, further geochemical programs will include more detailed soil and stream sediment sampling.

The Company is also investigating the most effective geophysical targeting methods for the Pearl Copper Project to identify further polymetallic anomalies.

PEARL COPPER PROJECT

The Pearl Copper Project (“Pearl” and/or the “Project”) is situated in the San Manuel mining district, Pinal County, Arizona, approximately 40km north-east of Tucson, near the town of Mammoth.

Arizona is a Tier 1 mining jurisdiction, and the USA’s top copper producing state. It is also an established and attractive mining jurisdiction, ranking No. 7 in 2023’s Investment Attractiveness Index by the Fraser Institute. It is supported by world class infrastructure which includes sealed roads, railways and mains power transmission lines, with access to a highly skilled workforce.

Pearl lies within the world-class Laramide Porphyry Copper Province, within the prolific Southwestern North American Porphyry Copper Province. This is the principal copper metallogenic province of the USA, accounting for approximately 70% of total USA copper production in 2023.

The Project has been subject to minimal modern exploration surveys, yet is situated immediately north of BHP’s San Manuel-Kalamazoo Mine, one of the largest deposits in the Laramide Porphyry Copper Province.



Figure 5: Major resource projects in Arizona, USA.

References

¹ Force, E.R., 1997, Geology and mineral resources of the Santa Catalina Mountains, southeastern Arizona: a cross-sectional approach. University of Arizona Center for Mineral Resources, Monograph in Mineral Resource Science

² Fraser Institute Annual Survey of Mining Companies 2023

This Announcement has been approved for release by the Board of Golden Mile Resources Limited.

For further information please contact:

Damon Dormer – Managing Director

Golden Mile Resources Ltd (ASX: G88)

ABN 35 614 538 402

T: (08) 6383 6508

E: info@goldenmilresources.com.au

W: www.goldenmilresources.com.au

S: LinkedIn: @Golden Mile Resources Ltd & Twitter: @GoldenMileRes

Note 1: Refer ASX announcement on the said date for full details of these results. Golden Mile is not aware of any new information or data that materially affects the information included in the said announcement.

About Golden Mile Resources Ltd

Golden Mile Resources Ltd (Golden Mile; ASX: G88) is a project development company and mineral exploration company. The primary focus is on growing the company with a multi asset and multi commodity strategy through advancement of core projects, acquisition of high-quality assets and tactical alliances with joint venture partners.

Competent Persons Statement- Exploration Results

The information included in the report is based on information compiled by Mr Martin Dormer, a consultant to Golden Mile Resources Ltd. Mr Dormer is a Member of the Australasian Institute of Mining and Metallurgy (Member ID 304615), and the Australian Institute of Geoscientists (Member ID 7370). Mr Dormer has sufficient relevant experience in the styles of mineralisation and deposit type under consideration, and to the activity which he is undertaking, to qualify as a Competent Person as defined in "The Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code 2012 Edition)". Mr Dormer consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Martin Dormer is an employee of Golden Mile Resources Ltd and currently holds securities in the company

The Company confirms it is not aware of any new information or data that materially affects the exploration results set out in the in the original announcements referenced in this announcement and all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcements.

Forward-Looking Statements

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning Golden Mile Resources Ltd (ASX: G88) planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could," "plan," "estimate," "expect," "intend," "may", "potential," "should," and similar expressions are forward-looking statements. Although Golden Mile Resources Ltd (ASX: G88) believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Appendix 1: JORC Code, 2012 Edition – Table 1

Section 1 - Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<p><u>Rock Chip Sampling</u></p> <p>Samples were collected by Golden Mile technical staff.</p> <p>Samples were collected using industry standard procedures.</p> <p>Samples were approximately 0.5kg on average and included both outcrop and mine dump sampling.</p> <p>Sampling was for due diligence purposes and meant as a guide. This was not a detailed systematic program, as will be carried out at a later date.</p>
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	Not Applicable. No drilling.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	Not Applicable. No drilling
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<p><u>Rock chip Sampling</u></p> <p>Observations for each sample location were made including the following tabulated data:</p> <ul style="list-style-type: none"> Location coordinates and elevation Sample type ie outcrop, grab, float Detailed description of visible minerals. The presence of veins, mineralization, and alteration type and intensity

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<u>Rock Chip Sampling</u> No sub-sampling undertaken. Laboratory crush, split, pulverise PREP-31Y (ALS Laboratory Wangara, WA).
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<u>Rock-Chip Sampling</u> Samples were submitted to ALS Global in Wangara for analysis for: <ul style="list-style-type: none"> 48 element ICP-MS (ME-MS61) Au, Pt, Pd (PGM-MS23) Fire assay ICP-MS Ore Grade Cu, Pb, Zn, Ag – four acid (OG62) Au 30g FA ICP-AES finish (Au-ICP21) No field blanks or standards were used. ALS laboratories also included a series of in-house standards in the analytical process.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<u>Rock-Chip Sampling</u> Sample information was recorded by Exploration Manager and stored appropriately. No adjustments were made to assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	Location data recorded with GPS. Garmin 62SX. The grid system used is NAD 83 Zone 12N. Topographic control is adequate and based on handheld GPS and local topographic maps.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<u>Rock chip Sampling</u> Carried at irregular intervals due to the first pass nature. Samples adequately covered a range of approximately 400m of strike along the mineralised Pearl Mine structure and veins. The Company believes the sample density is sufficient in the geological setting to establish continuity.

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<p>Rock chip sampling</p> <p>Sampling was carried out at irregular intervals. 14 samples were taken across a strike length of 400m. This is considered reasonable detail for a first pass, due-diligence exercise such as this.</p> <p>There is directional bias.</p>
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	The small number of samples remained in the possession of Exploration Manager from site to the ALS laboratory in Wangara, Western Australia.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	No audits of sampling techniques and data have been completed.

Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p>The Project is comprised of 241 unpatented mining claims. These are tabulated within this document.</p> <p>Golden Mile has secured an Option Agreement for this project. Details are contained in the relevant sections of this announcement.</p> <p>Following the Option Agreement, which was in place at the time of sampling, the Company has now signed a formal agreement to form a JV to acquire the Pearly Project.</p> <p>There are no significant impediments to the Company working in the area.</p>
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<p>The Company is not aware of the activities of previous exploration beyond 2021, when Zacapa Resources Limited secured the project.</p> <p>Historic mining within the project has occurred since 1900 at the Ford and Pearl Mines (not currently in operation).</p> <p>There is significant historic artisanal workings and excavations at the project.</p>
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	The target deposit type is Laramide age porphyry copper deposits associated with the San Manuel granodiorite, akin to the San Manuel-Kalamazoo deposit. There are also significant areas of epithermal polymetallic mineralisation as evident at the Odyssey and Ford Prospects and historical mines.

Criteria	JORC Code explanation	Commentary
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	No drilling – not applicable.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	No data aggregating or metal equivalence were used.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	The geometry of mineralised structures and lines made by artisanal workings are typically NW to NNW in orientation. Veins are dipping moderately to the west.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	Appropriate maps and tabulations are presented in the body of the announcement.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<u>Rock Samples</u> Comprehensive reporting of all Exploration Results is not practicable.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	There is no other substantive exploration data that is not mentioned in the report.

Criteria	JORC Code explanation	Commentary
Further work	<ul style="list-style-type: none">• The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).• Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	<ul style="list-style-type: none">• Further work is discussed in the body of the announcement.