



INFILL AND EXTENSION ASSAYS CONTINUES TO CONFIRM CONTINUITY ALONG STRIKE AND AT DEPTH

Highlights

- **Gruyere Deposit resource definition drilling complete**
- **Assays from infill and deep extensional drilling confirm exceptional continuity along strike and at depth**
- **31 Diamond holes (6,734 metres diamond with 4,283 metres RC pre-collar) and 24 RC holes (3,313 metres) complete on an even 100 metre section spacing to at least 350 metres depth**
- **Localised high-grade zones include 19 metres at 6.35 g/t Au (14GYDD0045) and 10 metres at 5.94 g/t Au (14GYRC0033A)**
- **Best intersections include 52.2 metres at 3.17 g/t Au (14GYDD0045), 169.2 metres at 2.15 g/t Au (14GYDD0020), and 238.3 metres at 1.21 g/t Au (14GYDD0018)**

Gold Road Resources Limited (**Gold Road or the Company**) (ASX: GOR) has completed all the planned resource definition drilling on the Gruyere Deposit in June 2014 (refer ASX announcement dated 23 June 2014). Assays are now available for the main component of the drilling programme which aimed to provide a framework of drill holes on an even 100 metre section spacing over the main 1,800 metres strike of the deposit, and to depths of 350 to 450 metres below surface. A total of 55 drill holes (31 diamond holes – Figure 1; and 24 Reverse Circulation (RC) holes – Figure 2) comprised this programme for 11,017 metres (6,734 metres diamond, 4,283 metres RC pre-collar and 3,313 metres RC).

Assay information confirms that the exceptional continuity of mineralisation continues at depth, proving consistent with geological expectations based on previous interpretation. Very thick low to moderate grade intersections include broad internal higher grade zones. Discrete high-grade “pods” that can be associated with identifiable structural controls and highly visual alteration assemblages.

Programmes remaining to be reported include additional infill drilling, extensions to historic holes, and a detailed drill pattern testing short scale continuity. This comprises of an additional 66 drill holes. Gold Road expects to finalise reporting of all holes outstanding during the current September 2014 quarter, and to have all assays available for use in the pending Mineral Resource estimate.

ASX Code: GOR

ABN 13 109 289 527

COMPANY DIRECTORS

Ian Murray
Chairman

Ziggy Lubieniecki
Executive Director

Russell Davis
Non-Executive Director

Martin Pyle
Non-Executive Director

Kevin Hart
Company Secretary

CONTACT DETAILS

Principal & Registered Office
22 Altona St, West Perth, WA, 6005

Website
www.goldroad.com.au

Email
perth@goldroad.com.au

Phone
+61 8 9200 1600

Fax
+61 8 9481 6405



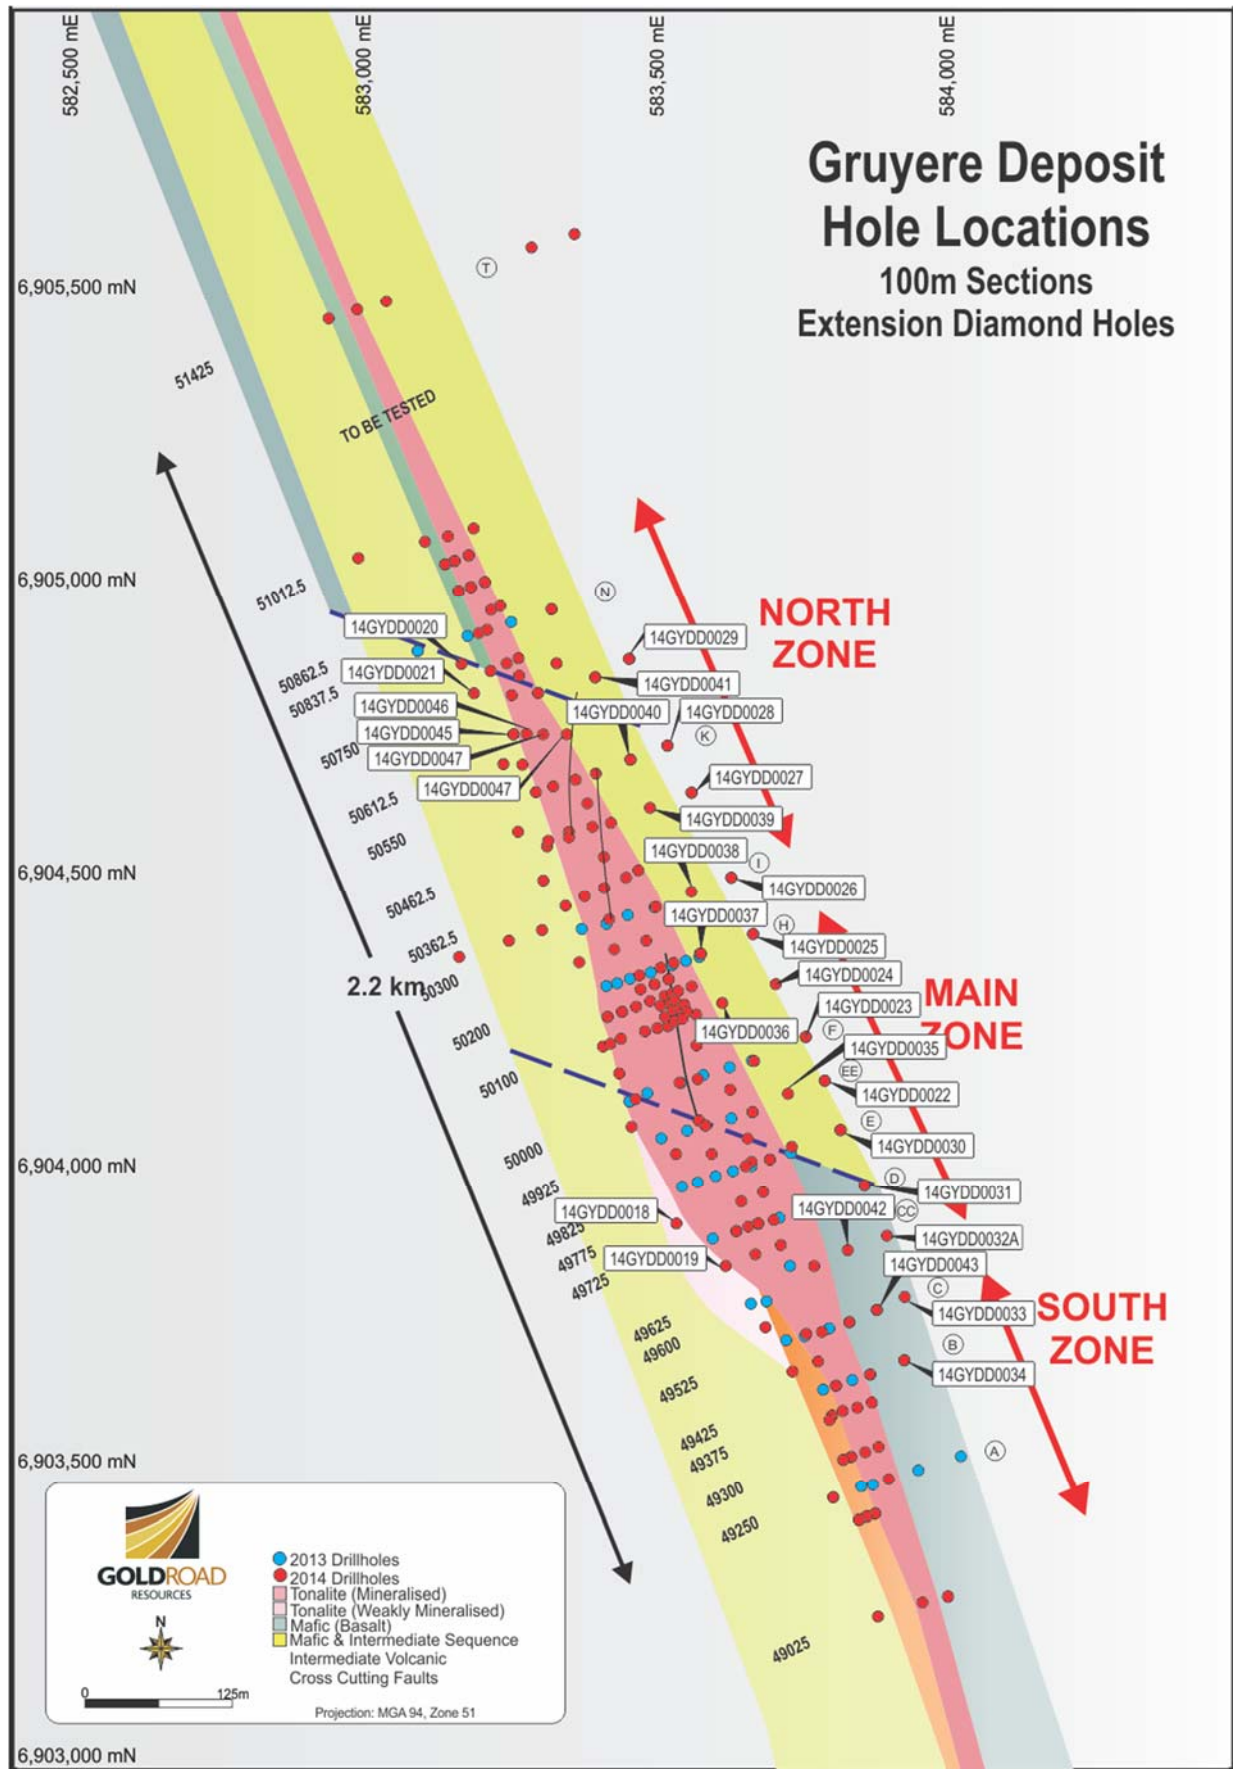


Figure 1: Gruyere plan projection illustrating interpreted geology and location of recent Diamond Drill Hole collars

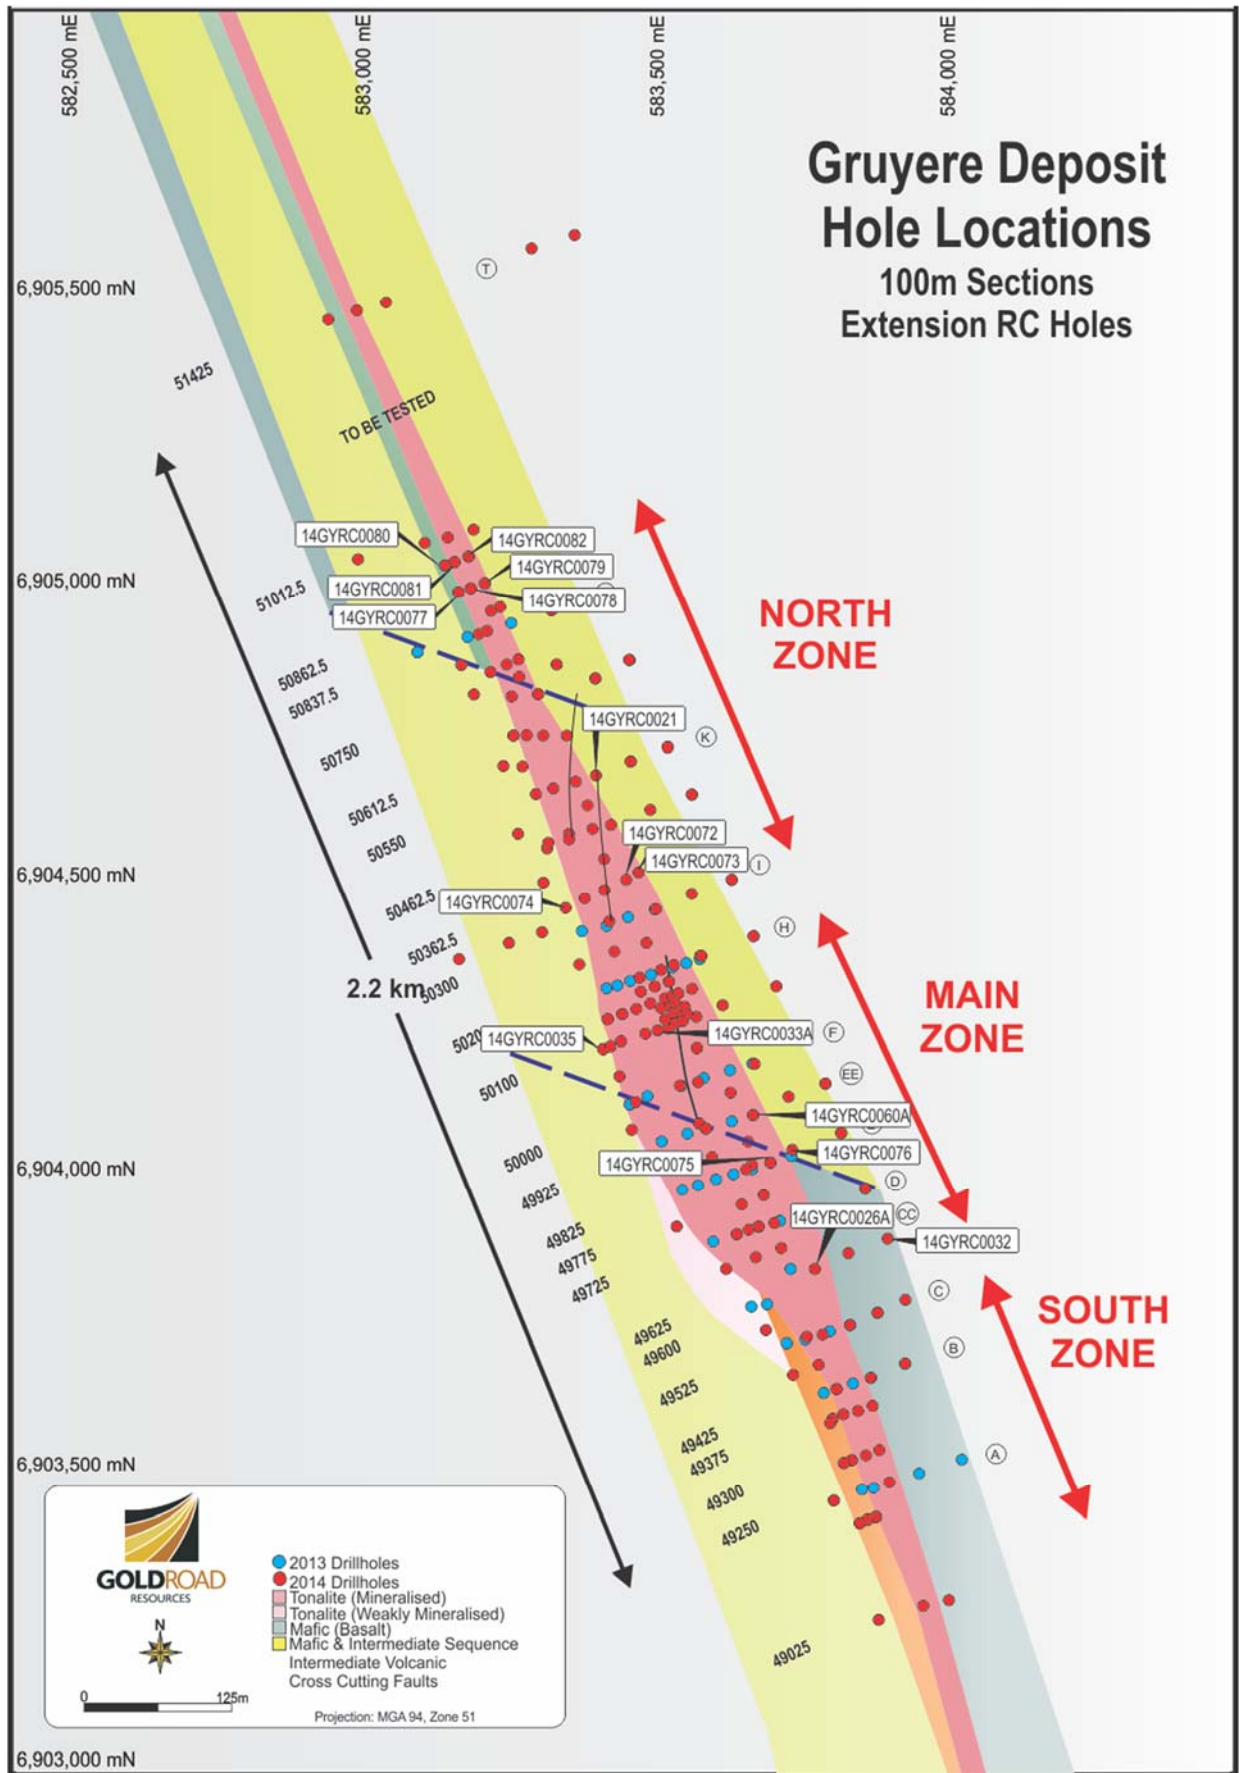


Figure 2: Gruyere plan projection illustrating interpreted geology and location of recent RC Drill Hole collars

Best gold intercepts (at 0.5 g/t Au cut-off, minimum 10 metre mineralised intersection, maximum 10 metres internal waste) included the following intersections, with internal higher grade zones (1.0 g/t Au cut-off):

- **52.2 metres at 3.17 g/t Au from 58 metres**, including **19.4 metres at 6.35 g/t Au from 58 metres**, and 15.2 metres at 1.98 g/t Au from 95 metres; in hole 14GYDD0045
- **169.2 metres at 2.15 g/t Au from 62.8 metres**, including 7.2 metres at 2.95 g/t Au from 62.8 metres, 33 metres at 2.43 g/t Au from 73 metres, 28.6 metres at 2.28 g/t Au from 110 metres, 30 metres at 2.16 g/t Au from 142 metres, 17.8 metres at 2.20 g/t Au from 175 metres, and 37 metres at 2.29 g/t Au from 195 metres; in hole 14GYDD0020
- **238.3 metres at 1.21 g/t Au from 41 metres**, including 18 metres at 1.53 g/t Au from 66 metres, 37.2 metres at 1.80 g/t Au from 86.8 metres, and 24 metres at 1.63 g/t Au from 128 metres; in hole 14GYDD0018;
- **104.5 metres at 1.94 g/t Au from 77.7 metres**, including 26.3 metres at 2.86 g/t Au from 77.7 metres, and 38 metres at 2.23 g/t Au from 130 metres; in hole 14GYDD0021
- **73 metres at 1.94 g/t Au from 237 metres**, including 17 metres at 1.80 g/t Au from 237 metres, 15.4 metres at 1.91 g/t Au from 257.1 metres, 18.5 metres at 2.90 g/t Au from 275.5 metres, and 11 metres at 2.13 g/t Au from 298 metres; in hole 14GYDD0041
- **86 metres at 1.77 g/t Au from 57 metres**, including 33 metres at 1.51 g/t Au from 57 metres, 7 metres at 2.64 g/t Au from 93 metres, 9 metres at 2.17 g/t Au from 103 metres, **6.7 metres at 5.61 g/t Au from 121.8 metres**, and 11.5 metres at 1.47 g/t Au from 131.5 metres; in hole 14GYDD0046
- **61.2 metres at 1.70 g/t Au from 275.8 metres**, including 21.2 metres at 1.72 g/t Au from 275.8 metres, and 25.5 metres at 2.31 g/t Au from 305.5 metres; in hole 14GYDD0029
- **84.2 metres at 1.57 g/t Au from 108.8 metres**, including 23 metres at 2.23 g/t Au from 135 metres, and 18.2 metres at 1.91 g/t Au from 161 metres; in hole 14GYDD0047
- **81.9 metres at 1.55 g/t Au from 198.1 metres**, including 31.9 metres at 1.66 g/t Au from 198.1 metres, and 19.1 metres at 1.77 g/t from 254.9 metres; in hole 14GYDD0040
- **68.4 metres at 1.39 g/t Au from 245.1 metres**, including 18.9 metres at 1.63 g/t Au from 245.1 metres, 9.6 metres at 2.07 g/t Au from 272.1 metres, and 12.4 metres at 1.75 g/t Au from 301 metres; **and 80 metres at 1.42 g/t Au from 331 metres**, including 18 metres at 2.14 g/t Au from 350 metres, and 13 metres at 2.75 g/t Au from 398 metres; in hole 14GYDD0025
- **178 metres at 1.19 g/t Au from 146 metres**, including 30 metres at 1.80 g/t Au from 171 metres, 21.3 metres at 1.40 g/t Au from 268.9 metres, and 22 metres at 1.74 g/t Au from 293 metres; in hole 14GYDD0038
- **95.3 metres at 1.18 g/t Au from 103 metres**, including 11 metres at 2.04 g/t Au from 109 metres, 5 metres at 2.35 g/t Au from 125 metres, and 15 metres at 2.53 g/t Au from 161 metres; in hole 14GYRC0021
- **154 metres at 1.44 g/t Au from 14 metres**, including **10 metres at 5.94 g/t Au from 36 metres**, 13 metres at 1.80 g/t Au from 49 metres, 4 metres at 3.31 g/t Au from 89 metres, 24 metres at 2.01 g/t Au from 104 metres, and 13 metres at 1.54 g/t Au from 132 metres; in hole 14GYRC0033A
- **102 metres at 1.25 g/t Au from 68 metres**, including 10 metres at 1.90 g/t Au from 86 metres, and 46 metres at 1.72 g/t Au from 123 metres; in hole 14GYRC0073
- **24 metres at 1.78 g/t Au from 31 metres**, including 13 metres at 2.40 g/t Au from 42 metres; **and 99 metres at 1.65 g/t Au from 106 metres**, including 31 metres at 2.04 g/t Au from 113 metres, and 42 metres at 1.83 g/t Au from 147 metres; in hole 14GYRC0074



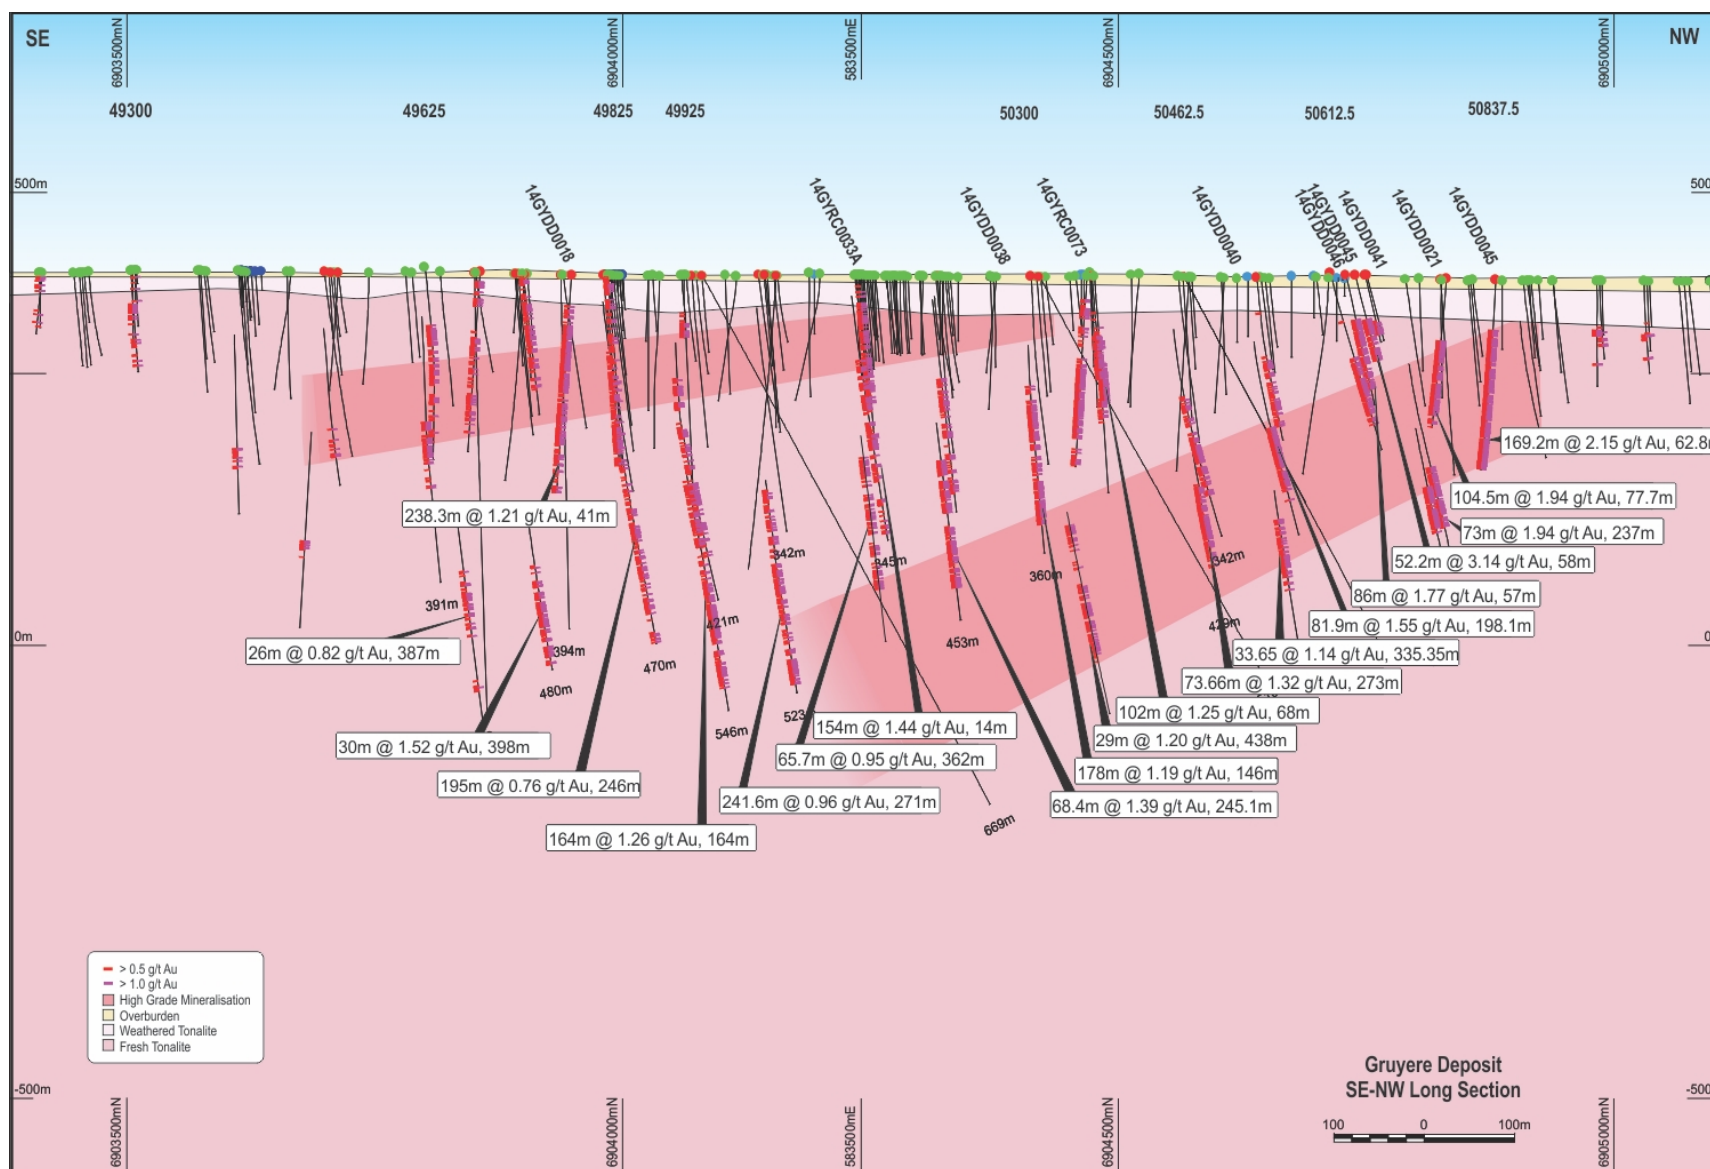


Figure 3: Gruyere longitudinal projection showing selected new drill results, highlighting continuity of the mineralised system. Intercepts are reported at 0.5 g/t Au cut-off with minimum 10 metre length and maximum 10 metres internal waste. Internal higher grade zones occur within all intercepts.

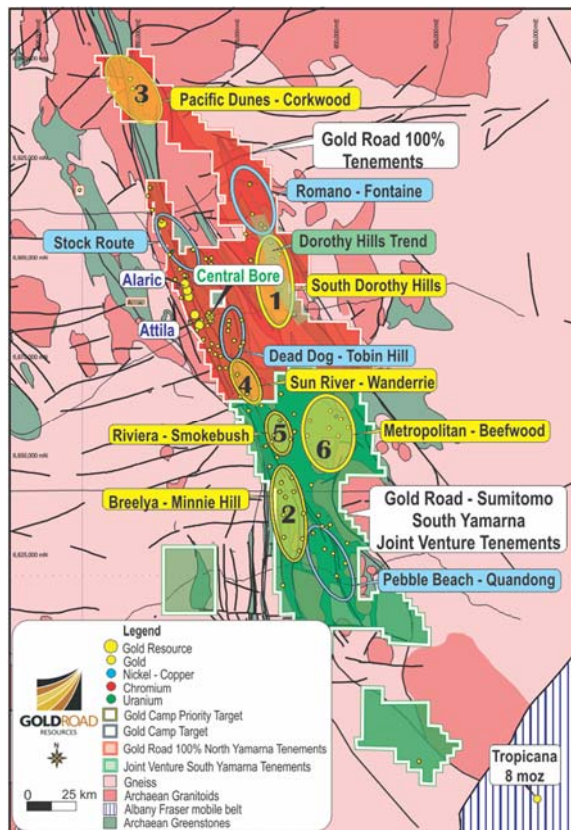

Gold Road 100% tenements and Gold Road-Sumitomo South Yamarna Joint Venture tenements showing location of Dorothy Hills Trend as well as other Gold Camps and Redox Targets

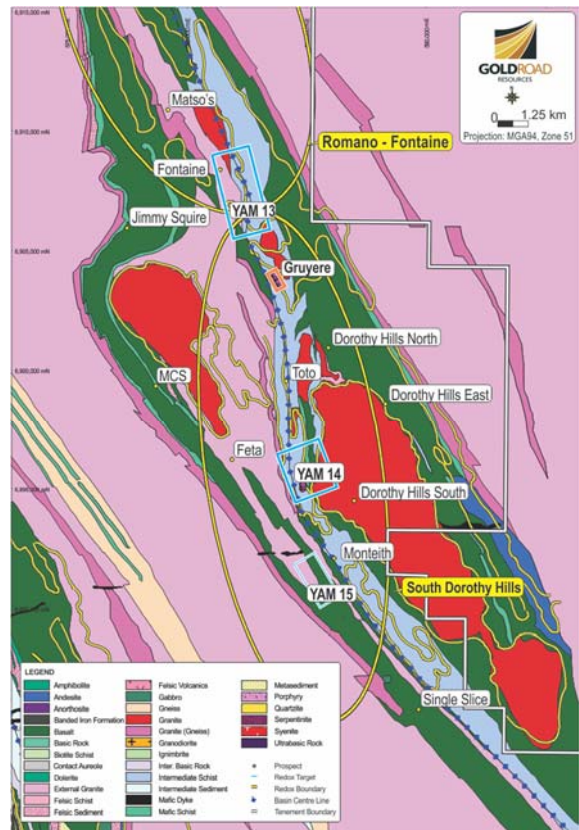

The Dorothy Hills trend showing Gruyere and YAM14

For further information please visit www.goldroad.com.au or contact:

Gold Road Resources

Ian Murray
Executive Chairman
Telephone: +61 8 9200 1600

Media

Karen Oswald
Marko Communications
Mob: 0423 602 353
karen.oswald@markocommunications.com.au

About Gold Road Resources

Gold Road Resources Limited (ASX: GOR) is exploring and developing its wholly-owned **Yamarna Belt**, a newly discovered gold region covering ~4,900 square kilometres on the Yilgarn Craton, 150 kilometres east of Laverton in Western Australia.

Gold Road announced in May 2013 an exploration joint venture with Sumitomo Metal Mining Oceania Pty Ltd (a subsidiary of Sumitomo Metal Mining Co. Limited) for Sumitomo Metal Mining to earn up to 50% interest in Gold Road's South Yamarna tenements, an area covering ~2,800 square kilometres.

The Yamarna Belt, adjacent to the 500 kilometre long Yamarna shear zone, is historically underexplored and highly prospective for gold mineralisation. Geologically similar to the prolific Kalgoorlie Gold Belt, the Yamarna Belt has a current reported Mineral Resource of 1.3 million ounces of gold, hosts a number of significant new discoveries and lies immediately north of the 7.9 million ounce Tropicana deposit.

Gold Road prioritises exploration on its tenement holding into six of ten **Gold Camp Targets** on the Yamarna Belt. Identified in 2012 through interpretation of various geological and geophysical data sets, each target has a 15-25 kilometre strike length and contains numerous prospects. Initial exploration of these targets has been very encouraging, highlighted by the discovery of the Gruyere Deposit in 2013.

The first Gold Camp Target was the South Dorothy Hills Trend which initially yielded the recent Gruyere and YAM14 gold discoveries, followed by identification of a significant regional scale geochemical anomaly at Toto. These discoveries, which exhibit differing mineralisation styles not seen before in the Yamarna Belt, occur along a nine kilometre structural trend on the Dorothy Hills Shear Zone, approximately 25 kilometres north-east of its more advanced project Central Bore. The occurrence of multiple mineralised positions confirms the potential for the Dorothy Hills Trend to host further significant gold deposits.

NOTES:

The information in this report which relates to Exploration Results or Mineral Resources is based on information compiled by Mr Justin Osborne, Exploration Manager for Gold Road Resources Limited. Mr Osborne is an employee of Gold Road Resources Limited, as well as a shareholder and share option holder, and is a Fellow of the Australasian Institute of Mining and Metallurgy. Mr Osborne has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Osborne consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.

Appendix A – Gruyere Diamond Drilling

Table 1: Summary of Significant Diamond Drilling Intercepts
(0.5 g/t Au cut-off, maximum 10 metre waste and minimum 10 metre intercept)

Hole_ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYDD0018	41	279.3	238.3	1.21	288.3	583,531.7	6,903,904.1
14GYDD0019	14	45.5	31.5	1.17	36.9	583,616.5	6,903,831.6
	77.5	206.9	129.4	0.72	93.2		
14GYDD0020	62.8	232	169.2	2.15	363.8	583,164.1	6,904,858.8
14GYDD0021	77.7	182.2	104.5	1.94	202.7	583,181.8	6,904,807.3
14GYDD0022	261	343.3	82.3	0.83	68.3	583,783.8	6,904,130.3
	354	518	164.0	1.26	206.6		
14GYDD0023	271	512.6	241.6	0.96	231.9	583,749.9	6,904,212.2
14GYDD0024	242.6	284	41.4	0.93	38.5	583,704.1	6,904,306.5
	295	349	54.0	0.96	51.8		
	362	427.7	65.7	0.95	62.4		
14GYDD0025	245.07	313.44	68.4	1.39	95.0	583,659.2	6,904,386.3
	331	411	80.0	1.42	113.6		
14GYDD0026	307	338	31.0	1.17	36.3	583,622.1	6,904,491.1
	378	465	87.0	1.39	120.9		
14GYDD0027	273	383	110.0	1.22	134.2	583,557.5	6,904,646.4
14GYDD0028	297.85	385	87.2	0.90	78.4	583,515.3	6,904,719.0
14GYDD0029	275.8	337	61.2	1.70	104.0	583,446.2	6,904,863.0
14GYDD0030	246	441	195.0	0.76	148.2	583,813.6	6,904,052.7
	456	469.2	13.2	1.23	16.2		
14GYDD0031	353	474	121.0	0.97	117.4	583,851.1	6,903,958.6
14GYDD0032A	366	445	79.0	0.69	54.5	583,894.6	6,903,889.8
14GYDD0033	330	349.6	19.6	0.68	13.3	583,918.6	6,903,765.2
14GYDD0034	232	257	25.0	0.62	15.5	583,919.6	6,903,666.3
14GYDD0035	137	178	41.0	0.90	36.9	583,718.9	6,904,111.7
	194	365	171.0	1.00	171.0		
14GYDD0036	113	183	70.0	0.77	53.9	583,610.1	6,904,275.7
	194	270	76.0	0.82	62.3		
	293	336.9	43.9	0.54	23.7		
14GYDD0037	136	224	88.0	1.01	88.9	583,575.4	6,904,357.9
	234.45	286	51.6	0.66	34.0		
14GYDD0038	146	324	178.0	1.19	211.8	583,560.4	6,904,467.5
14GYDD0039	161	289	128.0	1.11	142.1	583,484.1	6,904,607.9
14GYDD0040	198.1	280	81.9	1.55	126.9	583,454.7	6,904,690.8
14GYDD0041	237	310	73.0	1.94	141.6	583,397.0	6,904,849.7
14GYDD0042	194	275	81.0	0.81	65.6	583,820.3	6,903,848.6
14GYDD0043	216.47	238	21.5	1.46	31.4	583,873.1	6,903,751.6
14GYDD0044	60	78.07	18.1	1.18	21.3	583,255.1	6,904,741.2
14GYDD0045	58	110.2	52.2	3.17	165.5	583,279.6	6,904,740.1
14GYDD0046	57	143	86.0	1.77	152.2	583,303.0	6,904,739.3
14GYDD0047	108.85	193	84.2	1.57	132.1	583,343.3	6,904,738.7

Table 2: Summary of Significant RC Drilling Intercepts
(0.5 g/t Au cut-off, maximum 10 metre waste and minimum 10 metre intercept)

Hole_ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYRC0021	103	198.25	95.3	1.18	112.4	583,394.1	6,904,672.1
14GYRC0026A [#]	4	153	149.0	0.80	119.2	583,764.5	6,903,831.3
14GYRC0032	75	150	75.0	1.10	82.5	583,890.4	6,903,885.5
	161	193	32.0	0.65	20.8		
14GYRC0033A [#]	14	168	154.0	1.44	221.8	583,518.2	6,904,246.7
	189	199	10.0	0.96	9.6		
14GYRC0060A [#]	51	84	33.0	0.80	26.4	583,663.3	6,904,099.5
14GYRC0072	79	135	56.0	1.08	60.5	583,441.5	6,904,494.1
	160	189	29.0	1.11	32.2		
14GYRC0073	68	170	102.0	1.25	127.5	583,466.2	6,904,508.0
14GYRC0074	31	55	24.0	1.78	42.7	583,377.9	6,904,459.6
	66	90	24.0	0.64	15.4		
	106	205	99.0	1.65	163.4		
	218	239	21.0	0.81	17.0		
14GYRC0075	3	130	127.0	0.59	74.9	583,645.7	6,903,999.3
	141	168	27.0	0.58	15.7		
	186	243	57.0	0.56	31.9		
14GYRC0076	103	249	146.0	0.73	106.6	583,728.0	6,904,033.2
14GYRC0078	59	84	25.0	0.66	16.5	583,181.3	6,904,992.4
14GYRC0081	67	80	13.0	0.99	12.9	583,153.3	6,905,037.2
14GYRC0085	45	72	27.0	0.80	21.6	583,849.1	6,903,514.5
14GYRC0086	89	124	35.0	0.51	17.9	583,873.0	6,903,523.2
14GYRC0087	50	66	16.0	0.55	8.8	583,842.1	6,903,402.1
14GYRC0089	11	25	14.0	0.65	9.1	583,869.7	6,903,410.5

Notes:

14GYRC0033A was drilled to extend original drill hole 14GYRC0033. The original hole could not be re-entered, so a new hole was drilled immediately adjacent to the original hole 14GYRC0033. The new hole 14GYRC0033A acts as a twin of the original to a depth of 120 metres, and then provides new information from 120 meters to end of hole.

Table 3: Summary of Significant Diamond drilling Intercepts - (1.0 g/t Au cut-off, minimum 2 metre intercept)

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYDD0018	46	50	4.0	1.69	6.8	583,531.7	6,903,904.1
	54	57	3.0	3.18	9.5		
	66	84	18.0	1.53	27.5		
	86.8	124	37.2	1.80	66.9		
	128	152	24.0	1.63	39.1		
	166	179	13.0	1.30	16.9		
	182	192.1	10.1	1.57	15.8		
	195	197	2.0	3.02	6.0		
	200	218	18.0	1.44	25.9		
	231	237	6.0	1.54	9.2		
	242	245	3.0	1.27	3.8		
	251	253	2.0	2.17	4.3		
	272	274	2.0	1.94	3.9		
	277	279.3	2.3	1.75	4.0		
14GYDD0019	14	22	8.0	1.78	14.2	583,616.5	6,903,831.6
	36	45.5	9.5	1.88	17.9		
	87	93	6.0	1.54	9.2		
	98	102	4.0	1.21	4.8		
	159	171	12.0	1.56	18.7		
	180	184	4.0	3.35	13.4		
14GYDD0020	62.8	70	7.2	2.95	21.2	583,164.1	6,904,858.8
	73	106	33.0	2.43	80.2		
	110	138.6	28.6	2.28	65.2		
	142	172	30.0	2.16	64.8		
	175	192.8	17.8	2.20	39.2		
	195	232	37.0	2.29	84.7		
14GYDD0021	77.7	104	26.3	2.86	75.2	583,181.8	6,904,807.3
	108	113	5.0	1.29	6.5		
	116	125	9.0	2.81	25.3		
	130	168	38.0	2.23	84.7		
	175.2	178	2.8	1.07	3.0		
14GYDD0022	274	277.5	3.5	1.07	3.7	583,783.8	6,904,130.3
	300	306	6.0	1.63	9.8		
	309	325.5	16.5	1.09	18.0		
	333	341	8.0	1.49	11.9		
	374	376	2.0	1.24	2.5		
	389	399	10.0	1.07	10.7		
	403	411	8.0	1.44	11.5		
	415	456	41.0	2.63	107.8		
	472	477	5.0	1.16	5.8		
	492	504	12.0	1.34	16.1		
14GYDD0023	279	282	3.0	1.43	4.3	583,749.9	6,904,212.2
	296	298	2.0	1.75	3.5		
	312	321.9	9.9	1.55	15.3		
	329	338	9.0	1.20	10.8		
	363	367	4.0	1.57	6.3		
	371	379	8.0	2.20	17.6		
	382	388	6.0	1.31	7.9		
	391	400	9.0	2.90	26.1		
	408	412	4.0	1.29	5.2		
	426	433	7.0	1.12	7.8		
	436	438	2.0	1.79	3.6		
	469.3	474	4.7	2.46	11.4		
	482	503	21.0	1.87	39.3		
	506	512.6	6.6	1.30	8.6		
14GYDD0024	247	254	7.0	1.73	12.1	583,704.1	6,904,306.5
	257	269.1	12.1	1.16	14.0		
	295	302.2	7.2	1.37	9.9		
	308	311	3.0	1.55	4.7		
	319	330	11.0	1.37	15.1		
	334	342	8.0	1.05	8.4		
	347	349	2.0	1.81	3.6		
	366	373	7.0	1.18	8.3		
	376	379	3.0	1.13	3.4		
	395	397	2.0	1.55	3.1		
	401	408	7.0	2.61	18.3		
	416	427.7	11.7	1.47	17.2		

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYDD0025	245.1	264	18.9	1.63	30.9	583,659.2	6,904,386.3
	272.1	281.7	9.6	2.07	19.9		
	285	297	12.0	1.59	19.1		
	301	313.4	12.4	1.75	21.8		
	333	342	9.0	1.13	10.2		
	350	368	18.0	2.14	38.5		
	386.4	391	4.6	1.79	8.3		
	398	411	13.0	2.75	35.8		
14GYDD0026	280	289	9.0	1.17	10.5	583,622.1	6,904,491.1
	307	318	11.0	1.73	19.0		
	323	327	4.0	2.19	8.8		
	381	389	8.0	2.42	19.4		
	392	396	4.0	1.34	5.4		
	401	417	16.0	2.02	32.3		
	423	431.5	8.5	2.29	19.5		
	438	463	25.0	1.30	32.5		
14GYDD0027	277	285	8.0	1.84	14.7	583,557.5	6,904,646.4
	289	291	2.0	3.53	7.1		
	294	297.2	3.2	2.46	7.8		
	301	308.8	7.8	1.79	14.0		
	314	345.9	31.9	1.37	43.6		
	349	357	8.0	2.04	16.3		
	364.2	374	9.8	1.26	12.4		
14GYDD0028	297.8	303	5.2	1.95	10.0	583,515.3	6,904,719.0
	307.3	310	2.7	1.26	3.3		
	313	316	3.0	1.36	4.1		
	337	339	2.0	1.99	4.0		
	342	357.3	15.3	1.40	21.4		
	362	365	3.0	1.33	4.0		
	376	378	2.0	2.22	4.4		
14GYDD0029	275.8	297	21.2	1.72	36.5	583,446.2	6,904,863.0
	305.5	331	25.5	2.31	58.9		
14GYDD0030	270	272	2.0	1.68	3.4	583,813.6	6,904,052.7
	302	310	8.0	1.22	9.8		
	323	338	15.0	1.63	24.5		
	353	357	4.0	1.59	6.4		
	360.3	364	3.7	1.45	5.4		
	374	379	5.0	1.93	9.7		
	415	418	3.0	1.76	5.3		
	422	427	5.0	1.44	7.2		
	458	461	3.0	2.73	8.2		
14GYDD0031	373	379	6.0	1.65	9.9	583,851.1	6,903,958.6
	386	393	7.0	1.60	11.2		
	398	410	12.0	1.68	20.2		
	413	428	15.0	1.56	23.4		
	431	435	4.0	1.43	5.7		
	442	445.4	3.4	2.09	7.1		
	452	464	12.0	1.05	12.6		
	471	473	2.0	1.74	3.5		
14GYDD0032A	381	384	3.0	1.90	5.7	583,894.6	6,903,889.8
	393	402	9.0	1.10	9.9		
	417	421	4.0	1.74	7.0		
	434	436	2.0	1.09	2.2		
14GYDD0033	330	339	9.0	1.23	11.1	583,918.6	6,903,765.2
14GYDD0034	232	234	2.0	1.36	2.7	583,919.6	6,903,666.3
14GYDD0035	147	159	12.0	1.39	16.7	583,718.9	6,904,111.7
	168	174	6.0	1.61	9.7		
	203	212	9.0	1.77	15.9		
	225	231	6.0	1.25	7.5		
	234	236	2.0	2.11	4.2		
	271	299	28.0	1.50	42.0		
	322	331	9.0	3.99	36.1		
	342.2	345	2.8	5.11	14.5		
14GYDD0036	122	128	6.0	1.67	10.0	583,610.1	6,904,275.7
	135	137	2.0	1.40	2.8		
	147	151	4.0	1.09	4.4		
	162	176	14.0	1.23	17.2		
	194	198	4.0	1.04	4.2		

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYDD0036	210	213.4	3.4	1.17	3.9		
	216	229	13.0	2.06	26.8		
	263	266	3.0	1.22	3.7		
	293	296	3.0	1.15	3.5		
	334	336.9	2.9	1.65	4.8		
14GYDD0037	136	140	4.0	2.18	8.7	583,575.4	6,904,357.9
	152	155	3.0	3.84	11.5		
	159	161	2.0	1.82	3.6		
	164	172	8.0	2.95	23.6		
	175	177	2.0	1.21	2.4		
	205	213	8.0	1.76	14.1		
	235.5	241	5.5	1.29	7.1		
	255	258.7	3.7	1.32	4.9		
	268.4	272	3.6	1.61	5.8		
14GYDD0038	165	168	3.0	1.39	4.2	583,560.4	6,904,467.5
	171	201	30.0	1.80	54.0		
	205	216	11.0	1.90	20.9		
	222.5	228.1	5.6	2.09	11.6		
	246	256	10.0	1.12	11.2		
	268.9	290.2	21.3	1.40	29.8		
	293	315	22.0	1.74	38.3		
	318	323	5.0	2.20	11.0		
14GYDD0039	173	179	6.0	1.19	7.1	583,484.1	6,904,607.9
	190	193	3.0	1.61	4.8		
	216	221	5.0	2.69	13.5		
	225	247.4	22.4	2.05	45.9		
	253	262	9.0	2.32	20.9		
	266	268.7	2.7	2.51	6.8		
	283	289	6.0	1.41	8.5		
14GYDD0040	198.1	230	31.9	1.66	53.0	583,454.7	6,904,690.8
	234	249.9	15.9	1.32	61.8		
	254.9	274	19.1	1.77	80.0		
14GYDD0041	237	254	17.0	1.80	30.6	583,397.0	6,904,849.7
	257.1	272.5	15.4	1.91	29.4		
	275.5	294	18.5	2.90	53.7		
	298	309	11.0	2.13	23.4		
14GYDD0042	194	204	10.0	1.65	16.5	583,820.3	6,903,848.6
	214	220	6.0	1.41	8.5		
	223	237	14.0	1.30	18.2		
	243	245	2.0	1.39	2.8		
	272	275	3.0	1.85	5.6		
14GYDD0043	234	237	3.0	1.43	4.3	583,873.1	6,903,751.6
14GYDD0044	63	78.1	15.1	1.25	18.8	583,255.1	6,904,741.2
14GYDD0045	58	77.4	19.4	6.35	122.9	583,279.6	6,904,740.1
	80	85	5.0	1.05	5.3		
	88	90	2.0	1.61	3.2		
	95	110.2	15.2	1.98	30.1		
14GYDD0046	57	90	33.0	1.51	49.8	583,303.0	6,904,739.3
	93	100	7.0	2.64	18.5		
	103	112	9.0	2.17	19.5		
	121.8	128.5	6.7	5.61	37.6		
	131.5	143	11.5	1.47	16.9		
14GYDD0047	108.8	112	3.2	2.24	7.1	583,343.3	6,904,738.7
	115	130.3	15.3	1.38	21.1		
	135	158	23.0	2.23	51.3		
	161	179.2	18.2	1.91	34.8		
	184.6	189	4.4	1.69	7.4		

Table 4: Summary of Significant RC drilling Intercepts - (1.0 g/t Au cut-off, minimum 2 metre intercept)

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYRC0021	109	120	11.0	2.04	22.4	583,394.1	6,904,672.1
	125	130	5.0	2.35	11.8		
	144	148	4.0	1.07	4.3		
	151	153	2.0	1.40	2.8		
	161	176	15.0	2.53	38.0		
	180	182	2.0	1.25	2.5		
	192	198.3	6.3	1.07	6.7		
14GYRC0026A	9	14	5.0	1.22	6.1	583,764.5	6,903,831.3
	41	50	9.0	1.59	14.3		
	70	73	3.0	1.31	3.9		
	76	88	12.0	1.35	16.2		
	91	95	4.0	1.67	6.7		
	100	104	4.0	1.24	5.0		
	114	116	2.0	1.47	2.9		
	120	125	5.0	1.33	6.7		
	138	141	3.0	1.49	4.5		
	147	150	3.0	1.37	4.1		
14GYRC0032	79	100	21.0	1.66	34.9	583,890.4	6,903,885.5
	108	110	2.0	1.28	2.6		
	116	120	4.0	1.12	4.5		
	124	127	3.0	2.77	8.3		
	131	137	6.0	1.41	8.5		
	143	147	4.0	1.56	6.2		
	165	171	6.0	1.44	8.6		
14GYRC0033A	27	29	2.0	2.38	4.8	583,518.2	6,904,246.7
	36	46	10.0	5.94	59.4		
	49	62	13.0	1.80	23.4		
	71	86	15.0	1.11	16.7		
	89	93	4.0	3.31	13.2		
	104	128	24.0	2.01	48.2		
	132	145	13.0	1.54	20.0		
	194	198	4.0	1.60	6.4		
14GYRC0035				NSA		583,403.7	6,904,208.1
14GYRC0060A	65	70	5.0	1.05	5.3	583,663.3	6,904,099.5
	75	83	8.0	1.45	11.6		
14GYRC0072	79	84	5.0	1.51	7.6	583,441.5	6,904,494.1
	89	97	8.0	1.45	11.6		
	100	120	20.0	1.26	25.2		
	125	132	7.0	1.11	7.8		
	163	170	7.0	1.61	11.3		
	175	177	2.0	4.39	8.8		
	180	183	3.0	1.64	4.9		
14GYRC0073	86	96	10.0	1.90	19.0	583,466.2	6,904,508.0
	116	120	4.0	2.65	10.6		
	123	169	46.0	1.72	79.1		
14GYRC0074	31	34	3.0	2.58	7.7	583,377.9	6,904,459.6
	42	55	13.0	2.40	31.2		
	67	69	2.0	1.33	2.7		
	113	144	31.0	2.04	63.2		
	147	189	42.0	1.83	76.9		
	192	198	6.0	1.59	9.5		
	201	205	4.0	1.28	5.1		
	231	237	6.0	1.42	8.5		
14GYRC0075	13	23	10.0	1.25	12.5	583,645.7	6,903,999.3
	39	46	7.0	1.16	8.1		
	60	64	4.0	1.24	5.0		
	84	87	3.0	1.26	3.8		
	90	92	2.0	1.26	2.5		
	142	145	3.0	1.34	4.0		
	207	209	2.0	1.39	2.8		
14GYRC0076	240	242	2.0	1.80	3.6	583,728.0	6,904,033.2
	135	138	3.0	1.16	3.5		
	143	146	3.0	1.32	4.0		
	159	166	7.0	1.11	7.8		
	186	188	2.0	1.13	2.3		
14GYRC0077	201	234	33.0	1.16	38.3	583,161.5	6,904,986.5
				NSA			

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYRC0078	74	77	3.0	1.27	3.8	583,181.3	6,904,992.4
14GYRC0078	81	84	3.0	1.23	3.7		
14GYRC0079*	64	72	8.0	1.48	11.8	583,202.3	6,904,998.2
	109	111	2.0	1.65	3.3		
14GYRC0080				NSA		583,135.3	6,905,032.1
14GYRC0081	69	72	3.0	2.07	6.2	583,153.3	6,905,037.2
14GYRC0082	70	72	2.0	2.74	5.5		
	99	101	2.0	1.10	2.2	583,176.7	6,905,044.0
14GYRC0083				NSA		583,814.9	6,903,504.1
14GYRC0084	10	12	2.0	2.03	4.1	583,824.7	6,903,506.7
14GYRC0085	46	57	11.0	1.09	12.0	583,849.1	6,903,514.5
	61	65	4.0	1.17	4.7		
14GYRC0086	89	91	2.0	1.43	2.9	583,873.0	6,903,523.2
	116	118	2.0	1.04	2.1		
	122	124	2.0	1.44	2.9		
14GYRC0087	65	67	2.0	2.06	4.1	583,842.1	6,903,402.1
14GYRC0088	7	10	3.0	1.59	4.8	583,855.6	6,903,405.8
14GYRC0089	23	24	2.0	1.26	2.5	583,869.7	6,903,410.5

Notes:

* Intersection in 14GYRC0079 from 64 to 72 metres is derived from two 4m composite samples from 1m sample intervals. The original 1m samples will be assayed.

Table 5: Summary of High Grade (>5.0 g/t Au) Assays – Diamond Drilling

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYDD0018	54	55	1.0	7.04	7.04	583,531.7	6,903,904.1
	89	90	1.0	6.44	6.44		
	107	108	1.0	5.14	5.14		
	195	196	1.0	5.04	5.04		
14GYDD0019	19	20	1.0	5.58	5.58	583,616.5	6,903,831.6
	37	38	1.0	9.85	9.85		
	160	161	1.0	6.02	6.02		
	180	181	1.0	9.69	9.69		
14GYDD0020	67	68	1.0	6.89	6.89	583,164.1	6,904,858.8
	79	80	1.0	7.79	7.79		
	103	104	1.0	5.14	5.14		
	115	116	1.0	8.94	8.94		
	143	144	1.0	6.62	6.62		
	165	166	1.0	8.64	8.64		
	177	178	1.0	9.76	9.76		
	187	188	1.0	5.02	5.02		
	199	200	1.0	5.67	5.67		
	219	222	3.0	4.89	14.67		
14GYDD0021	91	92	1.0	5.07	5.07	583,181.8	6,904,807.3
	98	101	3.0	3.67	11.01		
	117	119	2.0	6.76	13.52		
	160	161	1.0	14.47	14.47		
14GYDD0022	302	302.8	0.8	5.49	4.23	583,783.8	6,904,130.3
	382	383	1.0	5.28	5.28		
	426	427	1.0	5.04	5.04		
	440	444	4.0	6.16	24.64		
	454	455	1.0	9.74	9.74		
	487	488	1.0	6.12	6.12		
14GYDD0023	321	321.9	0.9	5.75	5.00	583,749.9	6,904,212.2
	372	373	1.0	5.91	5.91		
	489	490	1.0	9.45	9.45		
14GYDD0024	402	403	1.0	5.49	5.49	583,704.1	6,904,306.5
14GYDD0025	253	254	1.0	5.16	5.16	583,659.2	6,904,386.3
	357.4	358	0.6	6.85	4.45		
	400	401	1.0	7.31	7.31		
	407	408	1.0	5.21	5.21		
14GYDD0026	386.5	389	2.5	4.49	11.23	583,622.1	6,904,491.1
	415	416	1.0	5.91	5.91		
14GYDD0027	289	290	1.0	5.40	5.40	583,557.5	6,904,646.4
	370	371	1.0	5.30	5.30		
14GYDD0028	297.9	298.5	0.6	7.12	4.63	583,515.3	6,904,719.0
14GYDD0029	310	311	1.0	5.24	5.24	583,446.2	6,904,863.0
	330	331	1.0	6.93	6.93		
14GYDD0031	402	403	1.0	6.20	6.20	583,851.1	6,903,958.6
14GYDD0035 <i>including</i>	326.9	330	3.1	8.86	27.29	583,718.9	6,904,111.7
	329	330	1.0	12.08	12.08		
	344	345	1.0	7.69	7.69		
14GYDD0037	154	155	1.0	7.85	7.85	583,575.4	6,904,357.9
	166	167	1.0	5.11	5.11		
	206	207	1.0	5.57	5.57		
14GYDD0038	196	197	1.0	8.38	8.38	583,560.4	6,904,467.5
	210	210.5	0.5	9.14	4.57		
	320	321	1.0	5.80	5.80		
14GYDD0039	219	220	1.0	7.03	7.03	583,484.1	6,904,607.9
	242	243	1.0	11.35	11.35		
14GYDD0040	215	216	1.0	5.05	5.05	583,454.7	6,904,690.8
	278	279	1.0	10.57	10.57		
14GYDD0041	237	238	1.0	8.17	8.17	583,397.0	6,904,849.7
	265	266	1.0	8.21	8.21		
	282	283	1.0	5.22	5.22		
	289	290	1.0	7.50	7.50		
	298	299	1.0	5.73	5.73		
14GYDD0043	228.1	228.5	0.4	38.13	16.78	583,873.1	6,903,751.6
14GYDD0045	58	59	1.0	84.88	84.88	583,279.6	6,904,740.1
	74	75	1.0	5.62	5.62		
	105.5	106	0.5	5.63	3.10		
14GYDD0046	98	99	1.0	5.22	5.22	583,303.0	6,904,739.3

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYDD0046	121.8	123	1.2	19.36	23.23	583,343.3	6,904,738.7
	128	128.5	0.5	10.44	5.22		
14GYDD0047	140	141	1.0	6.38	6.38		
	145	148	3.0	13.92	41.76		

Table 6: Summary of High Grade (>5.0 g/t Au) Assays – RC Drilling

Hole ID	From (m)	To (m)	Length (m)	Grade	Gram x Metre	GDA94_East	GDA94_North
14GYRC0021	115	116	1	6.32	6.32	583,394.1	6,904,672.1
	127	128	1	7.69	7.69		
	165.7	166	0.3	9.91	3.47		
	174	175	1	7.09	7.09		
14GYRC0026A	47	48	1	5.06	5.06	583,764.5	6,903,831.3
14GYRC0032	84	85	1	5.12	5.12	583,890.4	6,903,885.5
	124	125	1	5.63	5.63		
14GYRC0033A Including and	39	42	3	16.84	50.52	583,518.2	6,904,246.7
	39	40	1	39.10	39.10		
	41	42	1	11.08	11.08		
	92	93	1	7.39	7.39		
	124	125	1	9.40	9.40		
14GYRC0072	90	91	1	5.21	5.21	583,441.5	6,904,494.1
	175	176	1	7.55	7.55		
14GYRC0073	117	118	1	5.83	5.83	583,466.2	6,904,508.0
	154	155	1	5.25	5.25		
14GYRC0074	45	46	1	8.60	8.60	583,377.9	6,904,459.6
	124	125	1	6.42	6.42		
	171	172	1	6.00	6.00		

Table 7: Sample intervals in drill hole 14GYDD0024 which were taken for destructive geotechnical testwork. These samples intervals were not assayed for gold and appear in respective reported intercepts as internal waste at zero grade.

Hole ID	From (m)	To (m)	Length (m)
14GYRC0024	258.4	258.75	0.35
	289.75	290	0.25
	293.7	293.9	0.2
	303.35	303.5	0.15
	318.05	318.3	0.25
	322.7	323	0.3
	352.55	352.95	0.4
	387.55	387.8	0.25
	393.7	393.85	0.15
	428.85	429.05	0.2
	430.8	431	0.2
	437.75	437.9	0.15
	468.85	469.1	0.25
	492.5	492.75	0.25

Table 8: Summary of Gruyere Deposit assay methods used for Diamond holes

Hole_ID	Drill Method	From	To	Assay Method
14GYDD0018	DIAMOND	20.8	279.3	FA_ICPES
14GYDD0019	DIAMOND	7	230.7	FA_ICPES
14GYDD0020	DIAMOND	62.8	232.7	FA_ICPES
14GYDD0021	DIAMOND	4	182.2	FA_ICPES
14GYDD0022	RC	0	200	Not sampled
	DIAMOND	200	246	Not sampled
	DIAMOND	246	533	FA_ICPES
14GYDD0023	RC	0	200	Not sampled
	DIAMOND	254	523.26	FA_FAAS
14GYDD0024	DIAMOND	231	442	FA_ICPES
	DIAMOND	Geotech samples – details in Table 7		
14GYDD0025	RC	0	200	Not sampled
	DIAMOND	200	227	Not sampled
	DIAMOND	227	316	LW_ICPMS
	DIAMOND	316	427	FA_ICPES
14GYDD0026	RC	0	200	Not sampled
	DIAMOND	200	269	Not sampled
	DIAMOND	269	493	LW_AAS
14GYDD0027	RC	0	183	Not sampled
	DIAMOND	183	259	Not sampled
	DIAMOND	259	397	FA_ICPES
14GYDD0028	RC	0	204	Not sampled
	DIAMOND	204	287	Not sampled
	DIAMOND	287	397	FA_ICPES
14GYDD0029	RC	0	204	Not sampled
	DIAMOND	204	246	Not sampled
	DIAMOND	246	360.3	FA_ICPES
14GYDD0030	RC	0	200	Not sampled
	DIAMOND	200	222	Not sampled
	DIAMOND	222	470.4	FA_FAAS
14GYDD0031	RC	0	204	Not sampled
	DIAMOND	204	342	Not sampled
	DIAMOND	342	479.9	FA_FAAS
14GYDD0032A	RC	0	90	Not sampled
	DIAMOND	90	171	Not sampled
	DIAMOND	171	552.6	FA_ICPES
14GYDD0033	RC	0	186	Not sampled
	DIAMOND	186	197.2	Not sampled
	DIAMOND	197.2	432.6	FA_ICPES
14GYDD0034	RC	0	204	Not sampled
	DIAMOND	204	221	Not sampled
	DIAMOND	221	267	FA_ICPES
14GYDD0035	RC	0	129	Not sampled
	RC	129	180	FA_FAAS
	DIAMOND	180.2	403	FA_ICPES
14GYDD0036	RC	0	100	Not sampled
	RC	100	204	FA_FAAS
	DIAMOND	202.9	345.4	FA_ICPES
14GYDD0037	RC	0	110	Not sampled
	RC	110	180	FA_FAAS
	DIAMOND	180.3	309.6	FA_ICPES
14GYDD0038	RC	0	140	Not sampled
	RC	140	180	FA_FAAS
	DIAMOND	180.2	360.4	FA_ICPES
14GYDD0039	RC	0	140	Not sampled
	RC	140	204	FA_FAAS
	DIAMOND	204	306	FA_ICPES
14GYDD0040	RC	0	180	Not sampled
	RC	180	198	FA_FAAS
	DIAMOND	198.1	303	FA_ICPES
14GYDD0041	RC	0	202	Not sampled
	DIAMOND	202	226.1	Not sampled
	DIAMOND	226.1	334	FA_ICPES
14GYDD0042	RC	0	180	Not sampled
	RC	180	204	FA_FAAS
	DIAMOND	204	390	FA_ICPES

Hole_ID	Drill Method	From	To	Assay Method
	DIAMOND	390	391	Unclassified
14GYDD0043	RC	0	190	Not sampled
	RC	190	204	FA_FAAS
	DIAMOND	204	250	FA_ICPES
14GYDD0044	DIAMOND	8.15	87.3	FA_ICPES
14GYDD0045	DIAMOND	7.4	186.1	FA_ICPES
14GYDD0046	DIAMOND	6.8	157	FA_ICPES
14GYDD0047	DIAMOND	10.65	213.1	FA_ICPES

Notes:

FA_AAS: Fire Assay with AAS finish

FA_ICPES: Fire Assay with ICP ES finish

LW_AAS: LeachWell cyanide leach with AAS finish, and Fire Assay with AAS on final leached tail

LW_ICPMS: LeachWell cyanide leach with ICP MS finish, and Fire Assay with ICP ES on final leached tail

Table 9: Summary of Gruyere Deposit assay methods used for RC holes

Hole_ID	Drill Method	From	To	Method Assay
14GYRC0021	RC	0	160	FA_FAAS
	RC	159.4	217	FA_ICPES
14GYRC0026A	RC	0	185	FA_ICPES
14GYRC0032	RC	0	120	FA_FAAS
	RC	124	240	FA_ICPES
14GYRC0033A	RC	0	200	FA_ICPES
14GYRC0035	RC	0	84	FA_FAAS
14GYRC0060A	RC	0	84	FA_ICPES
14GYRC0072	RC	0	216	FA_FAAS
14GYRC0073	RC	0	170	FA_FAAS
14GYRC0074	RC	0	240	FA_FAAS
14GYRC0075	RC	0	252	FA_FAAS
14GYRC0076	RC	36	249	FA_FAAS
14GYRC0077	RC	0	70	FA_FAAS
14GYRC0078	RC	0	100	FA_FAAS
14GYRC0079	RC	0	140	FA_FAAS
14GYRC0080	RC	0	58	FA_FAAS
	RC	58	60	FA_ICPES
14GYRC0081	RC	0	90	FA_FAAS
14GYRC0082	RC	0	120	FA_FAAS
14GYRC0083	RC	0	40	FA_ICPES
14GYRC0084	RC	0	75	FA_ICPES
14GYRC0085	RC	0	100	FA_ICPES
14GYRC0086	RC	0	131	FA_ICPES
14GYRC0087	RC	0	80	FA_FAAS
14GYRC0088	RC	0	40	FA_FAAS
14GYRC0089	RC	0	70	FA_FAAS

Notes:

FA_AAS: Fire Assay with AAS finish

FA_ICPES: Fire Assay with ICP ES finish

LW_AAS: LeachWell cyanide leach with AAS finish, and Fire Assay with AAS on final leached tail

LW_ICPMS: LeachWell cyanide leach with ICP MS finish, and Fire Assay with ICP ES on final leached tail

Table 10: Summary of Gruyere Prospect Diamond drill hole collar details

Hole_ID	Depth (m)	Depth (m) RC Pre-collar	GDA94_East	GDA94_North	m RL	Dip	MGAn Azimuth
14GYDD0018	279.3	0.0	583,531.7	6,903,904.1	410.4	-60.0	72.7
14GYDD0019	230.7	0.0	583,616.5	6,903,831.6	413.7	-60.0	72.7
14GYDD0020	232.7	0.0	583,164.1	6,904,858.8	404.8	-65.0	70.0
14GYDD0021	182.2	0.0	583,181.8	6,904,807.3	406.7	-65.0	72.7
14GYDD0022	546	200.0	583,783.8	6,904,130.3	412.1	-60.0	252.7
14GYDD0023	523.3	200.0	583,749.9	6,904,212.2	412.1	-60.0	252.7
14GYDD0024	501.4	0.0	583,704.1	6,904,306.5	411.0	-60.0	252.7
14GYDD0025	453.3	200.0	583,659.2	6,904,386.3	410.0	-60.0	252.7
14GYDD0026	534.5	200.0	583,622.1	6,904,491.1	409.5	-60.0	252.7
14GYDD0027	429.4	183.0	583,557.5	6,904,646.4	410.6	-59.7	257.9
14GYDD0028	462.4	204.0	583,515.3	6,904,719.0	407.4	-60.0	252.7
14GYDD0029	360.3	204.0	583,446.2	6,904,863.0	405.3	-60.0	252.7
14GYDD0030	470.4	200.0	583,813.6	6,904,052.7	412.4	-59.2	255.6
14GYDD0031	479.9	204.0	583,851.1	6,903,958.6	413.6	-59.3	261.9
14GYDD0032	252	252.0	583,890.1	6,903,885.2	415.2	-61.5	254.4
14GYDD0032A	552.6	90.0	583,894.6	6,903,889.8	415.1	-60.3	259.4
14GYDD0033	432.6	186.0	583,918.6	6,903,765.2	415.7	-60.6	257.6
14GYDD0034	313.4	204.0	583,919.6	6,903,666.3	416.4	-60.0	252.7
14GYDD0035	420.8	180.0	583,718.9	6,904,111.7	410.9	-57.0	252.7
14GYDD0036	345.4	204.0	583,610.1	6,904,275.7	410.1	-60.0	252.7
14GYDD0037	309.6	180.0	583,575.4	6,904,357.9	409.3	-60.0	252.7
14GYDD0038	360.4	180.0	583,560.4	6,904,467.5	409.0	-60.0	250.0
14GYDD0039	342.4	204.0	583,484.1	6,904,607.9	411.0	-60.0	252.7
14GYDD0040	336.3	198.0	583,454.7	6,904,690.8	408.0	-60.0	252.7
14GYDD0041	342.1	202.0	583,397.0	6,904,849.7	405.2	-60.0	252.7
14GYDD0042	391.4	204.0	583,820.3	6,903,848.6	414.6	-59.5	253.0
14GYDD0043	272.5	204.0	583,873.1	6,903,751.6	414.4	-60.0	252.7
14GYDD0044	87.3	0.0	583,255.1	6,904,741.2	410.4	-60.0	250.0
14GYDD0045	186.1	0.0	583,279.6	6,904,740.1	410.2	-60.0	270.0
14GYDD0046	162.1	0.0	583,303.0	6,904,739.3	410.1	-60.0	270.0
14GYDD0047	225	0.0	583,343.3	6,904,738.7	412.1	-60.0	272.7

Table 11: Summary of Gruyere Prospect RC drill hole collar details

Hole_ID	Depth (m)	GDA94_East	GDA94_North	m RL	Dip	MGAn Azimuth
14GYRC0021	217	583,394.1	6,904,672.1	407.7	-60.0	270.0
14GYRC0026A	185	583,764.5	6,903,831.3	414.3	-61.3	257.4
14GYRC0032	240	583,890.4	6,903,885.5	415.1	-58.4	224.8
14GYRC0033A	200	583,518.2	6,904,246.7	409.8	-61.2	258.5
14GYRC0035	84	583,403.7	6,904,208.1	409.3	-61.2	253.6
14GYRC0060A	84	583,663.3	6,904,099.5	410.1	-61.5	258.7
14GYRC0072	276	583,441.5	6,904,494.1	408.7	-59.6	244.9
14GYRC0073	170	583,466.2	6,904,508.0	408.7	-59.3	253.9
14GYRC0074	240	583,377.9	6,904,459.6	408.4	-60.9	254.0
14GYRC0075	252	583,645.7	6,903,999.3	409.9	-60.1	72.8
14GYRC0076	249	583,728.0	6,904,033.2	411.0	-60.0	252.7
14GYRC0077	70	583,161.5	6,904,986.5	403.3	-60.0	252.7
14GYRC0078	100	583,181.3	6,904,992.4	403.3	-59.9	246.4
14GYRC0079	140	583,202.3	6,904,998.2	403.4	-61.2	247.6
14GYRC0080	60	583,135.3	6,905,032.1	403.3	-60.0	252.7
14GYRC0081	90	583,153.3	6,905,037.2	403.3	-59.7	249.4
14GYRC0082	120	583,176.7	6,905,044.0	403.3	-60.9	250.2
14GYRC0083	40	583,814.9	6,903,504.1	415.8	-61.4	248.5
14GYRC0084	75	583,824.7	6,903,506.7	415.6	-60.7	234.4
14GYRC0085	100	583,849.1	6,903,514.5	415.7	-60.0	252.7
14GYRC0086	131	583,873.0	6,903,523.2	415.4	-59.3	246.9
14GYRC0087	80	583,842.1	6,903,402.1	412.8	-60.0	252.7
14GYRC0088	40	583,855.6	6,903,405.8	412.7	-60.3	74.3
14GYRC0089	70	583,869.7	6,903,410.5	412.5	-60.0	252.7

Appendix 2

JORC Code, 2012 Edition – Table 1 report - Gruyere Deep Extensional Drilling

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<p>The sampling has been carried out using a combination of Reverse Circulation (RC) Drilling and Diamond Drilling (DD).</p> <p>24 RC holes (3,313 metres) were drilled in the reported programme. The majority of RC holes (22) were drilled angled -60 degrees to 252.7 degrees azimuth (MGAn). Two holes (14GYRC0075 and 14GYRC0088) were drilled at -60 degrees to 072.5 degrees azimuth. Samples were collected as drilling chips from the RC rig using a cyclone collection unit and directed through a rotary splitter to create a 2-3 kg sample for assay.</p> <p>31 Diamond Holes have been reported. These comprised of 4,283 metres of pre-collar RC drilling, and 6,734 metres of diamond drilling. The majority of Diamond holes (27) were drilled angled -60 degrees to 252.7 degrees azimuth (MGAn). Four holes (14GYDD0018 to 21) were drilled at -60 to -65 degrees to 072.5 degrees azimuth.</p> <p>RC Pre-collars drilled through the barren hangingwall waste lithologies and in general were not sampled for assay other than selected zones with identifiable alteration from logging. Drill core is logged geologically and marked up for assay at approximate one metre intervals based on geological observation. Drill core is cut in half by a diamond saw and half core samples submitted for assay analysis.</p>
	<i>Include reference to measures taken to ensure sample representation and the appropriate calibration of any measurement tools or systems used.</i>	Sampling was carried out under Gold Road's protocols and QAQC procedures as per industry best practice. See further details below.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	<p>The RC holes were drilled with a 5.25 inch face-sampling bit, 1m samples collected through a cyclone and cone splitter, to form a 2-3kg sample. All holes with reported assays from RC drilling completed assaying on the original 1 metre samples collected from the splitter except the following which were 4 metre composite samples collected through logged waster zones:</p> <p>14GYRC0073: 0-48 metres 14GYRC0077: 0-16 metres, 58-70 metres 14GYRC0078: 0-16 metres, 24 – 32 metres, 90-98 metres 14GYRC0079: 0 – 80 metres 14GYRC0081: 72 – 88 metres 14GYRC0082: 0 – 24 metres, 110 – 118 metres 14GYRC0085: 0 – 40 metres 14GYRC0086: 0 – 80 metres</p> <p>Four-metre composite samples created by spear sampling of the total one metre samples collected in large plastic bag from the drilling rig and deposited into separate numbered calico bags for sample despatch. Only two samples (14GYRC0079, 64-68m and 68-72m) recorded assays >0.5 g/t. These two 4m zones will be re-assayed at the original 1m sample intervals collected from the drill rig.</p> <p>Diamond drilling was completed using an HQ or NQ drilling bit for all holes. Core is cut in half for sampling, with a half core sample sent for assay at measured intervals.</p> <p>All samples were fully pulverised at the lab to -75um, to produce a 50g charge for Fire Assay with AAS finish.</p>
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>Two RC drilling rig, owned and operated by Raglan Drilling, were used to collect the RC samples. The face-sampling RC bit has a diameter of 5.25 inches (13.3 cm).</p> <p>Two diamond drilling rig operated by Terra Drilling Pty Ltd, and three diamond drilling rigs operated by WDD Pty Ltd under sub-contract to Terra Drilling, collected the diamond core as NQ or HQ size. The majority of diamond holes used RC precollars to drill through barren hangingwall zones to specified depth, and then diamond core of</p>

Criteria	JORC Code explanation	Commentary
		<p>NQ size from the end of precollar to end of hole. This ensured diamond core recovery through the mineralised zones. Pre-collar depths are tabulated in Table 10.</p> <p>The following diamond holes were drilled as diamond from surface, with bit size as specified:</p> <p>14GYDD0018 HQ: 0 m to 49 m; NQ: 49 m to 279.3 m, EOH</p> <p>14GYDD0019 HQ: 0 m to 75.1 m; NQ: 75.1 m to 230.7 m, EOH</p> <p>14GYDD0020 HQ: 0 m to 81.5 m; NQ: 81.5 m to 232.7 m, EOH</p> <p>14GYDD0021 HQ: 0 m to 80.6 m; NQ: 80.6 m to 186.1 m, EOH</p> <p>14GYDD0024 HQ: 0 m to 92.8 m; NQ: 92.8 m to 501.4 m, EOH</p> <p>14GYDD0044 HQ: 0 m to 87.3 m, EOH</p> <p>14GYDD0045 HQ: 0 m to 80.6 m; NQ: 80.6 m to 186.1 m, EOH</p> <p>14GYDD0046 HQ: 0 m to 77.4 m; NQ: 77.4 m to 162.1 m, EOH</p> <p>14GYDD0047 HQ: 0 m to 80.4 m; NQ: 80.4 m to 225 m, EOH</p> <p>Core is oriented using downhole Reflex surveying tools, with orientation marks provided after each drill run.</p>
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	<p>The majority of RC samples were dry. Ground water egress occurred into some holes at variable depths of between 100 to 160 metres. Drilling operators' ensured water was lifted from the face of the hole at each rod change to ensure water did not interfere with drilling and to make sure samples were collected dry. All samples collected were dry. RC recoveries were visually estimated, and recoveries recorded in the log as a percentage. Recovery of the samples was good, generally estimated to be full, except for some sample loss at the top of the hole.</p> <p>All diamond core collected is dry. Drillers' measure core recoveries for every drill run completed using a 3 metre core barrel. The core recovered is physically measured by tape measure and the length recovered is recorded for every 3 metre "run". Core recovery can be calculated as a percentage recovery. Almost 100% recoveries were achieved.</p>
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	<p>RC face-sample bits and dust suppression were used to minimise sample loss. Drilling airlifted the water column above the bottom of the hole to ensure dry sampling. RC samples are collected through a cyclone and cone splitter, the rejects deposited in a plastic bag and the lab samples up to 3kg collected, to enable a full sample pulverisation.</p> <p>Diamond drilling collects uncontaminated fresh core samples which are cleaned at the drill site to remove drilling fluids and cuttings to present clean core for logging and sampling.</p>
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	<p>All RC samples were dry with the exception of a few samples (<5%) that are reported as slightly damp to end of hole. Except for the top of the holes while drilling through the sand dune cover, there is no evidence of excessive loss of material and at this stage no information is available regarding possible bias due to sample loss.</p> <p>There is no significant loss of material reported in any of the Diamond core.</p>
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	<p>All chips and drill core were geologically logged by Gold Road geologists, using the Gold Road logging scheme. This provides data to a level of detail adequate to support Mineral Resource Estimation activities.</p> <p>Diamond drill hole 14GYDD0024 was drilled for geotechnical purposes as well as geology and was geotechnically logged on detail suitable for future mining studies.</p> <p>All holes are surveyed using down hole optical and acoustic televiewer tools which provide additional information suitable for geotechnical studies.</p>
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	<p>Logging of RC chips records lithology, mineralogy, mineralisation, weathering, colour and other features of the samples. All samples are wet-sieved and stored in a chip tray.</p> <p>Logging of drill core records lithology, mineralogy, mineralisation, weathering, colour and other features of the samples, and structural information from oriented drill core. All samples are stored in core trays.</p> <p>All core is photographed in the cores trays, with individual photographs taken of each tray both dry, and wet, and photos uploaded to the GOR server database.</p>
	<i>The total length and percentage of the relevant intersections logged</i>	All holes were logged in full.
Sub-sampling techniques and	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Core samples were cut in half using an automated Corewise diamond saw. Half core samples were collected for assay, and the remaining half core samples stored in the core trays.

Criteria	JORC Code explanation	Commentary
sample preparation	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	One-metre RC drill samples are channelled through a rotary cone-splitter, installed directly below a rig mounted cyclone, and an average 2-3 kg sample is collected in an un-numbered calico bag, and positioned on top of the plastic bag. >95% of samples were dry. The listed hole intervals below utilised four-metre composite samples created by spear sampling of the total one metre samples collected in large plastic bag from the drilling rig and deposited into separate numbered calico bags for sample despatch. 14GYRC0073: 0-48 metres 14GYRC0077: 0-16 metres, 58-70 metres 14GYRC0078: 0-16 metres, 24 – 32 metres, 90-98 metres 14GYRC0079: 0 – 80 metres 14GYRC0081: 72 – 88 metres 14GYRC0082: 0 – 24 metres, 110 – 118 metres 14GYRC0085: 0 – 40 metres 14GYRC0086: 0 – 80 metres
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Samples were prepared at the Intertek Laboratory in Kalgoorlie. Samples were dried, and the whole sample pulverised to 80% passing 75um, and a sub-sample of approx. 200g retained. A nominal 50g was used for the analysis. The procedure is industry standard for this type of sample.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representation of samples.</i>	A duplicate RC field sample is taken from the cone splitter at a rate of approximately 1 in 40 samples. A duplicate half-core sample is taken at a frequency of one in 40 samples, with one half representing the primary result and the second half representing the duplicate result. At the laboratory, regular Repeats and Lab Check samples are assayed.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Duplicate samples were collected at a frequency of 1 in 40 for all drill holes. RC duplicate samples are collected directly from the Rig-mounted rotary cone splitter. Core duplicate samples take the second half core after cutting.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample sizes are considered appropriate to give an indication of mineralisation given the particle size and the preference to keep the sample weight below a targeted 3kg mass which is the optimal weight to ensure requisite grind size in the LM5 sample mills used by Intertek in sample preparation.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Samples were analysed at the Intertek Laboratory in Perth. The analytical method used was a 50g Fire Assay with AAS finish for gold only, which is considered to be appropriate for the material and mineralization. The method gives a near total digestion of the material intercepted in RC drilling.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	Calibration of the hand-held XRF tools is applied at start-up. XRF results are only used for indicative purposes of lithogeochemistry and alteration to aid logging and subsequent interpretation. Down-hole survey of rock property information for all holes reported is being completed in a dedicated follow-up programme which commenced March 2014. ABIMS contractor is completing this work.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Gold Road protocol for RC programmes is for Field Standards (Certified Reference Materials) and Blanks inserted at a rate of 3 Standards and 3 Blanks per 100 samples. Field Duplicates are generally inserted at a rate of approximately 1 in 40. For the programme reported the relevant assays were part of a total sample submission of 12,511 samples. This included 333 Field Blanks, 328 Field Standards and 216 Field Duplicates. At the Lab, regular assay Repeats, Lab Standards, Checks and Blanks are analysed. In addition 296 Lab blanks, 394 Lab checks, and 415 Lab standards were inserted and analysed by Intertek Laboratories. Results of the Field and Lab QAQC were checked on assay receipt using QAQCR software. All assays passed QAQC protocols, showing no levels of contamination or sample bias. Analysis of field duplicate assay data suggests appropriate levels of sampling precision, with less than 10% pair difference.
	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant results were checked by the Project Geologist and Exploration Manager. Additional checks are completed by two independent company consultants, and the GOR Technical Director.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<i>The use of twinned holes.</i>	One twin holes 14GYRC0033A was completed during the programme to verify assay results; the twin hole was drilled next to the original hole less than five metres from the original collar position.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	All field logging is carried out on Toughbooks using LogChief. Logging data is submitted electronically to the Database Geologist in the Perth office. Assay files are received electronically from the Laboratory. All data is stored in a Dashed/SQL database system, and maintained by the GOR Database Manager.
	<i>Discuss any adjustment to assay data.</i>	No assay data was adjusted. The lab's primary Au field is the one used for plotting and resource purposes. No averaging is employed.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	The drill hole locations were initially was picked up by handheld GPS, with an accuracy of 5m in Northing and Easting. All holes were later picked up by a Qualified Surveyor using DGPS. For angled drill holes, the drill rig mast is set up using a clinometer. Drillers use an electronic single-shot camera to take dip and azimuth readings inside the stainless steel rods, at 50m intervals. Downhole directional surveying using North-seeking Gyroscopic tools was completed on site and live (down drill rod string) or after the rod string had been removed from the hole. Most diamond drill holes were surveyed live whereas most RC holes were surveyed upon exiting the hole.
	<i>Specification of the grid system used.</i>	Grid projection is GDA94, Zone 51.
	<i>Quality and adequacy of topographic control.</i>	RL's are allocated to the drill hole collars using detailed DTM's generated during aeromag surveys in 2011. The accuracy of the DTM is estimated to be better than 1-2m. Drill holes with final collars surveyed by GPS are within a 1cm accuracy in elevation.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Both RC and diamond drill holes were spaced to create an even 100m spacing for resource definition.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Spacing of the reported drill holes are sufficient for the geological and grade continuity of the deposit, and are appropriate for resource estimate procedures.
	<i>Whether sample compositing has been applied.</i>	RC drill holes 14GYRC0073, 77, 78, 79, 81, 82, 85, and 86 utilised 4m compositing of original one metre samples taken from the drilling rig, with only two anomalous assays reported. No compositing has been employed in the diamond drilling. No sample compositing has been used during reporting – all reported intersections report full length weighted average grades across the intersection length.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	The orientation of the drill lines (250 degrees azimuth) is approximately perpendicular to the regional strike of the targeted mineralisation. The majority of RC holes (22) are drilled -60 degrees to 252.7 degrees azimuth (MGAn). Two RC holes (14GYRC0075 & 88) were drilled to 72.5 degrees azimuth (MGAn). The majority of Diamond holes (27) were drilled angled -60 degrees to 252.7 degrees azimuth (MGAn). Four holes (14GYDD0018 to 21) were drilled at -60 to -65 degrees to 072.5 degrees azimuth.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Detailed structural logging of diamond drill core identified important quartz veins sets with an approximate orientation of shallow to the east. Drilling angled at either -60 to the east or west does not introduce any directional bias given the structural orientations and current understanding of the mineralisation.
Sample security	<i>The measures taken to ensure sample security.</i>	For all RC drilling and Diamond drilling pre-numbered calico sample bags were collected in plastic bags (five calico bags per single plastic bag), sealed, and transported by company transport to the Intertek Laboratory in Kalgoorlie. Pulps were despatched by Intertek to their laboratory in Perth for assaying.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Sampling and assaying techniques are industry-standard. No specific audits or reviews have been undertaken at this stage in the programme.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The RC and Diamond drilling occurred within tenement E38/2362, which is fully owned by Gold Road Resources Ltd. The tenement is located on the Yamarna Pastoral Lease, which is owned and managed by Gold Road Resources Ltd. Tenement E38/2362 is located inside the Yilka Native Title Claim WC2008/005, registered on 6 August 2009. The 2004 “Yamarna Project Agreement” between Gold Road and the Cosmo Newberry Aboriginal Corporation govern the exploration activities respectively inside the Pastoral Lease. Aspects of these agreements are currently under review.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The tenement is in good standing with the WA DMP.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	No previous exploration has been completed on this prospect by other parties.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The target Gruyere Prospect comprises of a narrow to wide tonalitic intrusive dyke (Gruyere Intrusive) measuring approximately 35 to 190 metres in width and striking over a current known length of 2,200 metres. The Gruyere Intrusive dips steeply (75-80 degrees) to the north east. A sequence of intermediate volcanic and volcanoclastic rocks define the stratigraphy to the west of the Intrusive and mafic volcanics (basalt) occur to the east of the Intrusive. Mineralisation is confined ubiquitously to the Gruyere Intrusive and appears to be associated with pervasive overprinting albite-sericite-chlorite-pyrite alteration which has obliterated the primary texture of the rock. Minor fine quartz-carbonate veining occurs throughout. Pyrite is the primary sulphide mineral and some visible gold has been observed on logged diamond drill core. The Gruyere Prospect is situated in the north end of the regional camp-scale South Dorothy Hills Target identified by Gold Road Resources during its Regional Targeting campaign completed in early 2013. Gruyere target comprises a coincident structural-geochemical target within a major regional-scale structural corridor associated with the Dorothy Hills Shear Zone. This zone occurs within the Dorothy Hills Greenstone Belt at Yamarna in the eastern part of the Archaean Yilgarn Craton. The Dorothy Hills Greenstone is the most easterly known occurrence of outcropping to sub-cropping greenstone in the Yilgarn province of Western Australia.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ■ easting and northing of the drill hole collar ■ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ■ dip and azimuth of the hole ■ down hole length and interception depth ■ hole length. <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Refer to Tables 1 to 11 in the body of text.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	Grades are reported as down-hole length-weighted averages of grades using the following criteria: <ul style="list-style-type: none"> • Au > 0.5 ppm, with maximum internal dilution of 10 metres and minimum width of 10 metres • Au > 1.0 ppm, with maximum internal dilution of 2 metres and minimum width of 2 metres • All individual assays Au > 5 ppm No top cuts have been applied to the reporting of the assay results. Highest individual assay values > 5 g/t Au have been specified in the body of the text.

Criteria	JORC Code explanation	Commentary
	<p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p>Higher grade intervals are included in the reported grade intervals. In addition, internal intervals above 1 g/t Au and individual assays > 5 g/t Au are also reported separately, with a minimum width of 2 metres (>1.0 g/t) with from and to depths recorded.</p> <p>No metal equivalent values are used.</p>
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></p>	<p>Mineralisation is hosted within a steep east dipping, NNW striking tonalitic porphyry. The porphyry is mineralised almost ubiquitously at greater than 0.3 g/t Au characterised by pervasive sub-vertical shear fabric and sericite-pyrite alteration. Higher grade zones occur in alteration packages characterised by albite-sericite-pyrite-pyrrhotite alteration and quartz and quartz-carbonate veining. Orientation of these packages is approximately 45° dip to SE, with strike extents SW to NE of over 100m.</p> <p>The general drill direction of 60° to 250 is approximately perpendicular to the main alteration packages and suitable drilling direction to avoid directional biases. However, due to the general broad nature of the mineralised intersections the downhole length of intersections are reported, as true width is not known.</p>
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to Figures and Tables in the body of text.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All results above 0.5 ppm Au (minimum 10 metre intercept) have been reported, along with results above 1 g/t Au (minimum 2 metre intercept) and greater than 5 g/t Au.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Drill hole location data are plotted on the interpreted geology map (Figures 1 & 2).
Further work	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	Further work is being planned to test the continued to mineralisation at depth (Figure 3).