

HIGH GRADE GRAPHITE ZONE AVERAGING 19.6%GrC INTERSECTED NORTH OF NICANDA HILL

HIGHLIGHTS:

- Drilling results return stronger and more continuous graphitic mineralisation to the North, including **10m at 19.6%GrC** within **142m at 10.2%GrC** (GBNC0034).
- Multiple high grade zones confirmed by drilling assays over a **3.2kms** strike length.
- Diamond drill hole (GBND0017) intersects **275m** graphite mineralisation from surface, finishing in graphite mineralisation and remains open at depth.
- Multiple high-grade graphite drill intercepts across the Nicanda Hill mineralisation footprint of up to **25.2%** graphite carbon (GrC) (GBNC0026).
- Significant graphite interceptions with the weighted average graphite carbon, include
 - **142m continuous at 10.2% GrC** (GBNC0034), including
 - 36m at 15.2%GrC
 - 10m at 19.6%GrC
 - **137m total at 10.1% GrC** (GBNC0026), including
 - 22m at 12.6% GrC
 - 8m at 15.9%GrC
 - **144m continuous at 10.4% GrC** (GBNC0029), including
 - 20m at 15.5%GrC
- Triton undertakes updated and expanded metallurgical sampling program in the North.
- All drill holes continue to show substantial visible flake graphite and roscoelite from surface to end of hole holes, with most open at depth.
- Costean trenching confirms continuous visible flake graphite and roscoelite at surface over a **horizontal width of 220m** across Nicanda Hill.
- Overall drilling assay results at 6.5% cutoff, average **10.32%** GrC
- Initial metallurgical and petrographic testwork on-schedule for completion shortly.

Triton Minerals Limited (ASX: TON, "Triton", "the Company") is pleased to confirm the next batch of assay results from the current RC and Diamond drilling program continues to identify substantial high grade graphite mineralisation at the Nicanda Hill prospect.

Triton Minerals Managing Director Brad Boyle said "The continued interception of strong graphitic and vanadium mineralisation on the initial wide-spaced drilling grid reinforces the Company's belief that the Nicanda Hill prospect will become one of the world's largest multi-element project."

2 September 2014

Further, the interception of graphite mineralisation of grades up to 25.2%, also continues to validate the extension of the previously identified high grade zones that are present along the entire mineralisation strike length of 4.8kms and can be seen from surface to depths in excess of 400 vertical metres.

These latest drill results continue to provide a solid foundation for the rapid progression and creation of the JORC 2012 resource at Nicanda Hill.”

SIGNIFICANT ASSAY RESULTS

Triton has completed approximately 70% of the current exploratory drilling program on the Nicanda Hill prospect, with forty five (45) RC drill holes and twenty three (23) diamond drill holes finished.

The Company is also pleased to confirm that diamond drill hole (GBND0017) on drill section N6 has intercepted **275m** graphite mineralisation from surface, finishing in graphite mineralisation and **the hole remains open at depth**.

Using a 5%GrC cut off, RC drill hole GBNC0026 returned high grade mineralization of **137m** (combined intersections) at **10.1%** GrC, whilst RC drill hole GBNC0029 returned **144m** at **10.4%** GrC and RC drill hole GBNC0022 returned **41m** at **10.7%** GrC.

Also of note in drill hole GBNC0026 and close to surface is the high grade mineralisation interception of **8m** at **15.9%** GrC and drill hole GBNC0029 has the interception of **20m** at **15.5%**GrC.

In addition RC drill hole GBNC0034, located on section N12 located 2,200m to the north of the main drilled area, returned high grade mineralisation including **36m** at **15.2%** GrC within an overall continuous intersection from near-surface of **142m** at **10.2%**GrC, which includes the mineralisation interval of **10m** at **19.6%** GrC.

These solid drill results confirm Triton’s belief that the graphite mineralisation intensifies and strengthens towards the north of the mineralisation footprint. With this early validation of the northern exploration targeting model, Triton confirms that subsequent drilling will continue to focus on the location and interception of the high-grade areas.

The drilling results have returned multiple very high grade graphite intercepts across the whole of the Nicanda Hill mineralisation footprint of up to **25.2%** GrC, as seen in drill hole GBNC0026. These results continue to indicate the strong present of graphite and vanadium and Triton is confident of further high grade interceptions.

Triton confirms about 30% of RC and Diamond drilling assay results have now been received back from the SGS South African laboratory.

The Company verifies using a 6.5% GrC cutoff, with all of the drill core samples received to date, the assays results have returned an overall average graphite grade of **10.32% GrC**.

The additional assay results for the RC and Diamond drill holes that have been received for this part of the drilling program are shown in more detail in Table 1 and Appendix 2.

These drilling results continue to reaffirm the Triton's interpretation of the strong and continuous graphite and vanadium mineralisation over a strike-length of 6.2kms.

The drilling cross section spacing is currently on very wide spacing of 200m to 400m apart. On each cross section, drill holes are spaced 100m apart. This initial wide spacing is designed to locate the higher grade zones that will be subsequently targeted with closer-spaced drilling with the intent of elevating the final overall graphite and vanadium grades contained within the mineralised footprint.

The priority focus of the current drilling program has moved to northern section of the mineralisation footprint and to the ridges where the highest VTEM response was received. The Company has encountered some logistical restrictions when moving into the northern section of the mineralised footprint while access tracks are developed and water pipelines are laid for the diamond drill rig.

Triton confirms these latest RC and Diamond drill holes continue to show substantial visible flake graphite and roscoelite from surface to the end of hole with many holes over 200m deep and open at depth.

Drilling results are showing strong graphitic mineralisation from surface in the northern section of the mineralisation footprint and with less internal dilution from a reduced number of gneiss (non-graphitic) bands.

Due to strong drilling results obtained from the northern prospects of the mineralisation footprint and to assist with pre-feasibility works, Triton has now updated and expanded metallurgical sampling program to focus on these recently identified and extended high grade graphitic zones.

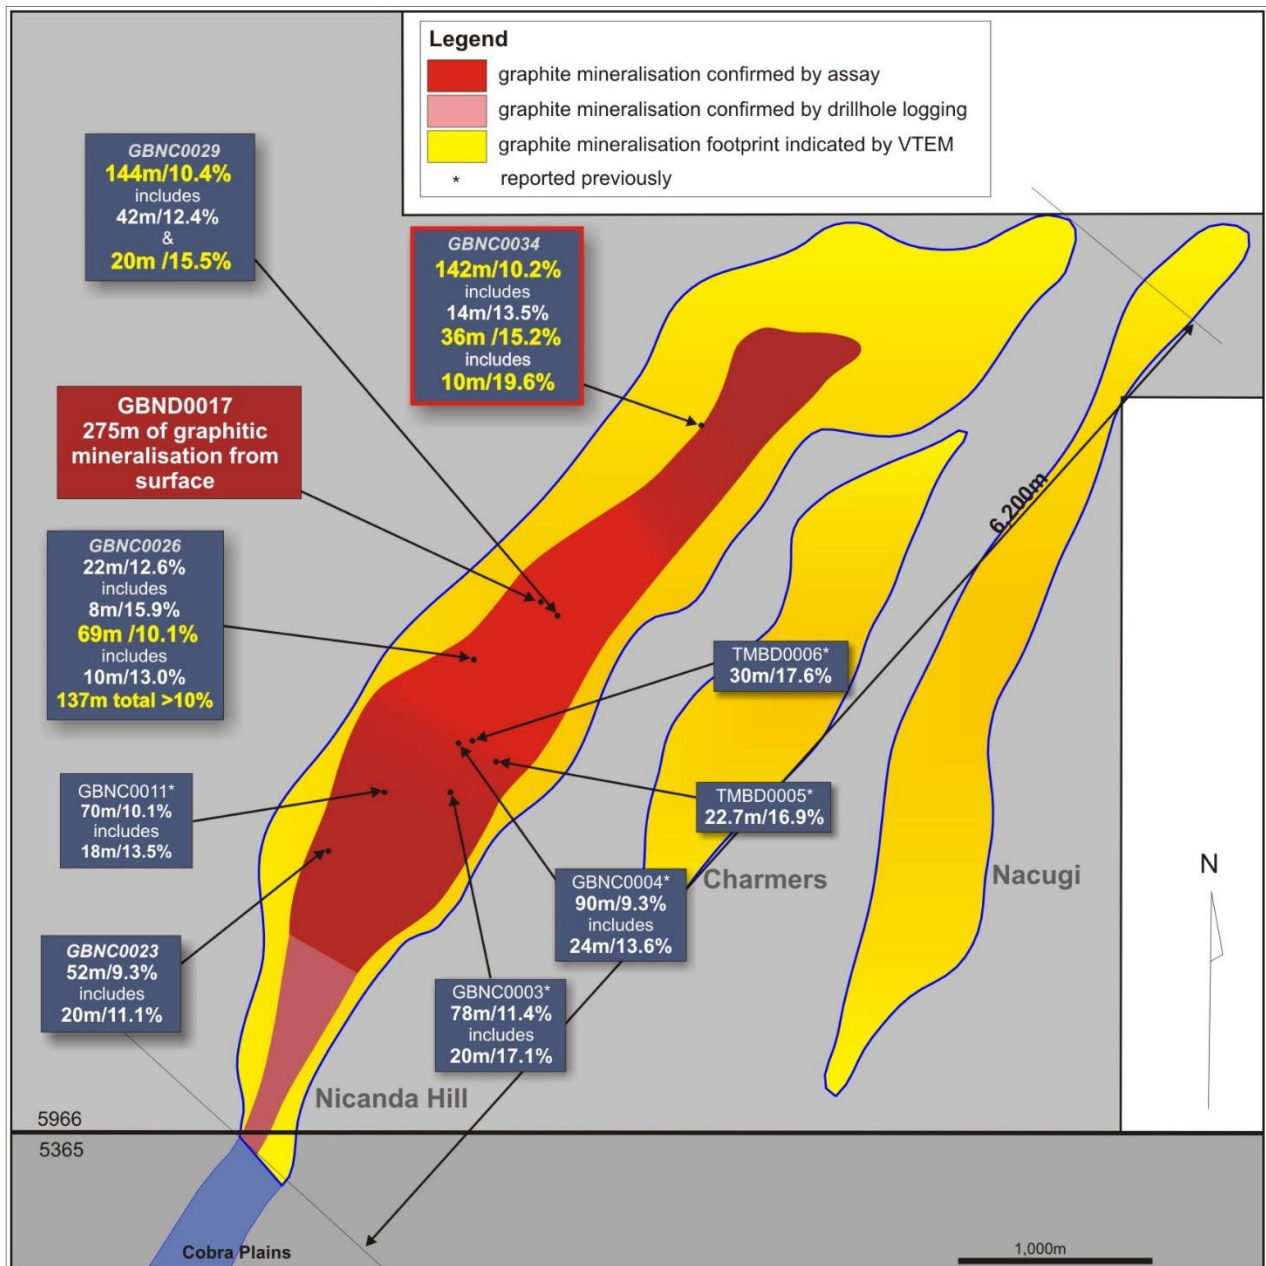


Figure 1. Plan showing significant drilling results at Nicanda Hill on License 5966

The assay and visual drilling results continue indicate the strong present of graphite and vanadium across the entire mineralisation footprint and Triton is confident of further high grade interceptions on the Nicanda Hill prospect.



Figure 2. Diamond drill core from Nicanda Hill prospect on License 5966 showing graphite and vanadium mineralisation.

Due to the presence of the strong mineralisation together with the highest VTEM response to in the northern prospects of the mineralisation footprint, Triton has now prioritised the sampling and testing of the drill core obtained from this area (Figure 3).

Within the Nicanda Hill footprint, continuous graphite and vanadium mineralisation has been further demonstrated, both by assay, costean trenching and the logging of drilling samples, over the **4.8kms** strike-length. This mineralized strike-length is expected to increase with further drilling to the north.

Hole ID	East	North	RL	Total Depth (m)	Dip	Azimuth	From (m)	To (m)	Interval (m)	Gr_C% (5% cut off)
GBNC0021	476972	8542660	496	150	-60	120	46.0	59.0	13.0	11.0
GBNC0021						includes	53.0	59.0	6.0	13.8
GBNC0022	477147	8542560	502	150	-60	120	2.0	43.0	41.0	10.7
GBNC0022						includes	2.0	12.0	10.0	12.4
GBNC0022						includes	23.0	39.0	16.0	12.3
GBNC0022							66.0	110.0	44.0	8.3
GBNC0022						includes	66.0	76.0	10.0	11.5
GBNC0023	477061	8542608	498	108	-60	120	29.0	81.0	52.0	9.3
GBNC0023						includes	35.0	55.0	20.0	11.1
GBNC0023						includes	69.0	75.0	6.0	12.4
GBNC0025	477076	8542138	510	84	-60		49.0	84.0	35.0	9.7
GBNC0025							66.0	78.0	12.0	13.7
GBNC0026	477788	8543572	495	150	-60	120	4.0	26.0	22.0	12.6
GBNC0026						includes	16.0	24.0	8.0	15.9
GBNC0026							30.0	99.0	69.0	10.1
GBNC0026						includes	30.0	38.0	8.0	13.4
GBNC0026						includes	59.0	69.0	10.0	13.0
GBNC0026							104.0	150.0	46.0	10.1
GBNC0026						includes	104.0	124.0	20.0	11.8
GBNC0028	478041	8543893	491		-60	120	7.0	66.0	59.0	10.2
GBNC0028						includes	7.0	29.0	22.0	13.5
GBNC0029	478207	8543794	499	150	-60	120	6.0	150.0	144.0	10.4
GBNC0029						includes	44.0	50.0	6.0	11.9
GBNC0029						includes	56.0	98.0	42.0	12.4
GBNC0029						includes	90.0	98.0	8.0	17.0
GBNC0029						includes	128.0	148.0	20.0	15.5
GBNC0029						includes	134.0	140.0	6.0	17.2
GBNC0030	477950	8543941	486	150	-60	120	2.0	58.0	56.0	8.1
GBNC0030						includes	15.0	28.0	13.0	11.1
GBNC0030						includes	30.0	34.0	4.0	12.2
GBNC0034	478935	8544761	479	186	-60	120	8.0	150.0	142.0	10.2
GBNC0034						includes	46.0	60.0	14.0	13.5
GBNC0034							86.0	122.0	36.0	15.2
GBNC0034						includes	86.0	96.0	10.0	19.6
GBND0001	477632	8543201	501	373	-60	120	55.4	64.0	8.6	11.8
GBND0001						includes	155.0	230.9	75.9	9.0
GBND0001						includes	188.6	208.8	20.2	11.6
GBND0001						includes	210.9	254.0	43.1	10.6
GBND0005	477170	8543003	494	429	-60	120	32.1	46.5	14.4	9.1
							46.5	EOH		pending

Table 1. Significant Intersections from RC and Diamond drilling at Nicanda Hill prospect

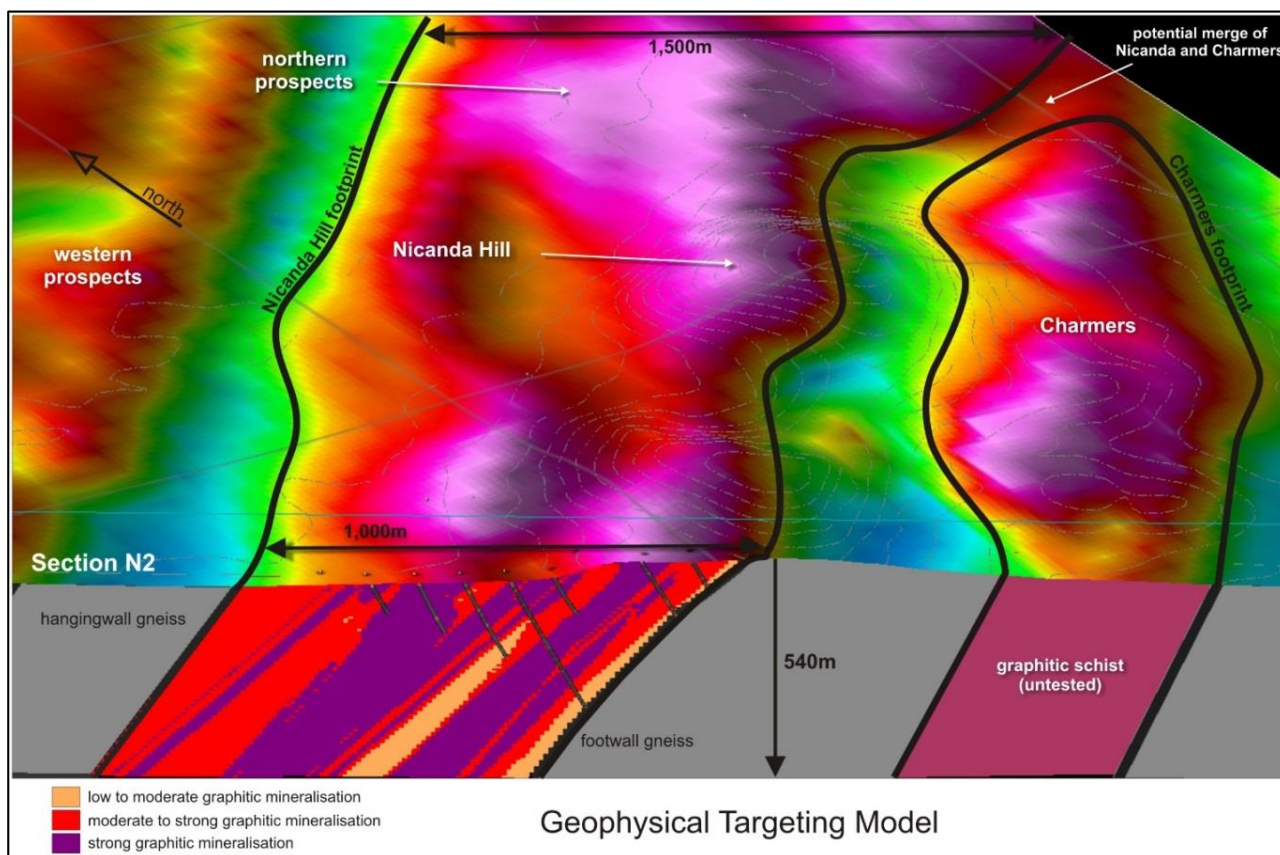


Figure 3. 3D cross section image of drill section N2 block model with VTEM draped on topography. This image is for illustrative purposes only and forms a part of a block model, which uses geostatistics to assess trends for better drill targeting.

CURRENT EXPLORATION ACTIVITIES

Triton confirms that one RC and two Diamond drill rigs continue the drilling program 24 hours a day at the Nicanda Hill prospect.

The modified drilling program has been designed to test the full width and potential continuity of the interpreted high grade graphitic zones, as previously confirmed by drilling and as suggested by the conductive zones identified in VTEM data along the full length of mineralisation footprint.

The Company confirms that pre-feasibility preparatory works are now underway at Nicanda Hill. Triton has created number of costean trenches and transverses with a bulldozer across the top of the ridges of Nicanda Hill.

The trenches have been created in order to further confirm the continuation of graphitic and vanadium mineralisation and to provide facilities for bulk sampling. Costean trenching near drill sections N4 and N10 have also confirmed the strong continuous presence at surface of visible flake graphite and roscoelite over a distances of more than 220m.

The heavy earth moving equipment has also successfully created the various access tracks and drill pads along the ridges of Nicanda Hill and Charmers prospects. As a result Triton is pleased to confirm drilling is also well underway on the ridges of the Nicanda Hill prospect.

Triton notes the strong presence of continuous graphitic and vanadium mineralisation across the Nicanda Hill and Charmers prospects during the construction of the various access tracks as seen in Figure 4 below.



Figure 4. Strong graphite mineralisation present at surface on access tracks at Nicanda Hill prospect

Triton also notes during the construction of the access tracks and costean trenches the bulldozer intercepted at surface a number of high grade graphite zones, including the HG1 zone, which is clearly demonstrated but the graphitic silvery area seen in Figure 5 below.

Triton confirms the initial metallurgical and petrographic test work for the Nicanda Hill drill core samples are almost complete, as the Company is currently waiting for the completion of the graphite flake size distribution analysis. Triton expects to receive the metallurgical and petrographic results from ALS Laboratory Group (Adelaide) within the next two weeks.

The metallurgical test work will then progress to reviewing options for optimisation of graphite flake recovery and the determining the best methods for the delineation of high grade graphitic and vanadium concentrates.



Figure 5. Close up image of high grade graphite mineralisation exposed at surface in HG1 at Nicanda Hill prospect.

GRAFEX LTD

Triton confirms the final payment under Tranche 1 was made to the Grafex shareholders last week, after the Company's placement capacity was refreshed when approval was received on 20 August 2014, at the General Meeting of Shareholders. Triton now holds 80% equity interest in Grafex Ltd and all three graphite projects, namely Balama North, Balama South and Ancuabe.

On the completion of the Tranche 2 payment early next year, Triton will acquire 100% equity interest of Grafex Ltd and full control of all the graphite projects in Mozambique.

CONCLUSIONS

All of the exploration and drilling data received to date for the Nicanda Hill prospect continue to support the rapid advancement of the JORC 2012 compliant resource by the end of 2014.

The Company remains extremely confident that the Balama North project will host one of largest high-grade graphite and vanadium projects in the world.

Triton is optimistic continued exploration success and looks forward to providing further exploration updates to the market as the information becomes available.

Regards



Brad Boyle
CEO & Managing Director
Triton Minerals Ltd

For further information, please contact:

Brad Boyle
CEO & Managing Director
Tel: + 61 8 6489 2555
Email: bboyle@tritonmineralsltd.com.au

Michael Brady
General Counsel & Company Secretary
Tel: + 61 8 6489 2555
Email: mbrady@tritonmineralsltd.com.au

Competent Person's Statement

The information in this report that relates to Exploration Results on Balama North project is based on, and fairly represents, information and supporting documentation prepared by Mr. Alfred Gillman, who is a Fellow of Australian Institute of Mining and Metallurgy (CP Geol). Mr. Gillman is a Non-Executive Director of the Company. Mr. Gillman has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Mineral Resources and Ore Reserves (the JORC Code)'. Mr. Gillman consents to the inclusion in this report the exploration results and the supporting information in the form and context as it appears.

The information in this announcement that relates to Exploration Results on Balama North project is extracted from the reports entitled ASX Release "High Grade Graphite Discovery at Nicanda Hill" created 22 January 2014 and ASX Release "Exceptional Graphite Interceptions At Nicanda Hill" created 19 May 2014, ASX Release "Enormous Graphite Intercepts At Nicanda Hill", created 4 June 2104, ASX Release "Significant High-Grade Graphite Intersected At Nicanda Hill" created 23 June 2014, ASX Release "Nicanda Hill Mineralised Footprint Defined Over 6,200m Strike Length" created 11 August 2014 and are available to view on www.tritonmineralsltd.com.au. The reports were issued in accordance with the 2012 Edition of the JORC Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

Forward-Looking Statements

This document may include forward-looking statements. Forward-looking statements include, but are not necessarily limited to, statements concerning Triton Minerals Limited's planned exploration program and other statements that are not historic facts. When used in this document, the words such as "could", "plan", "estimate" "expect", "intend", "may", "potential", "should" and similar expressions are forward-looking statements. Although Triton Minerals Limited believes that its expectations reflected in these are reasonable, such statements involve risks and uncertainties, and no assurance can be given that actual results will be consistent with these forward-looking statements.

Appendix 1

Balama North Project (Licence 5966 & 5365) Operated under Agreement between Triton Minerals and Grafex Lda. Information pertaining to drill data.

JORC Table 1 - Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p>	<p>The Nicanda Hill prospect is located on the Balama North Project. The new drill results included in this report were obtained from Reverse Circulation (RC) and Diamond drilling. The nominal hole spacing of the current program is 100m x 400m. Diamond drill holes will be interspersed within the planned drill grid to provide qualitative information on structure and physical properties of the mineralisation. Holes were drilled -60 degrees towards UTM south east to optimally intersect the mineralised zones.</p>
	<p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used</i></p>	<p>Drillhole locations were picked up by differential GPS (with nominal error of +- 0.5 metres) and reported using the World Geodetic System (1984 Spheroid and Datum; Zone 37 South). Downhole surveys of the RC and Diamond holes were measured using a Reflex single shot downhole survey tool. The collar surveys were validated with the use of a compass and inclinometer.</p> <p>RC samples have been collected using a riffle splitter to obtain a 1/8th sample, which is split and combined to produce 2m composite samples. Efforts are taken to keep the RC drill sample material dry during drilling to avoid any bias. Wet samples are dried before riffle splitting and recorded to monitored results for bias.</p>
	<p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information</i></p>	<p>Reverse circulation drilling was used to obtain 1m samples collected in a large bag and passed through a 3-tier riffle splitter to generate 1/8th samples (approximately 3kg) contained in a labelled calico bag and the residual 7/8th is retained at the drill site in the large bag. Where wet samples are encountered, the 3kg sample is allowed to dry before passing through the second stage (50:50) riffle splitter described below. The 3kg RC samples are split using a 50:50 splitter with one half combined with the half split of the next consecutive 1m sample to produce a 2m composite sample. This sample will be pulverised (total prep) by the lab to produce a sub sample for assaying. In addition, select RC samples will be submitted for multi-element analysis (55 elements) by sodium peroxide fusion with an ICP-AES finish. The diamond drill core samples are prepared as quarter core using diamond impregnated blade core saw. Samples generally are defined on the basis of geological contacts and range in drill hole intersections of 1.5 to 3m, with most approximately 2m.</p>
Drilling techniques	<p><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p>The reverse circulation drill rig uses a 5.5 inch size hammer. Hole depths range up to a maximum depth of 222m (rig capability limit).</p> <p>The diamond drill holes are drilled with a PQ core size collar (typically around 30m deep) and HQ3 (61.1mm diameter) core size to the end of hole. Core is oriented using the Reflex ACTII tool.</p>

Criteria	JORC Code explanation	Commentary
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed</i>	<p>The condition and a qualitative estimate of RC sample recovery was determined through visual inspection of the 1m sample bags and recorded at the time of sampling. A hard copy and digital copy of the sampling log is maintained for data verification.</p> <p>Generally drill core recovery is above 95% below the base of oxidation. Core recovery is measured and compared directly with drill depths to determine sample recoveries.</p>
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples</i>	<p>Diamond core is reconstructed into continuous runs on an angle iron cradle for orientation marking. Depths are checked against the depth given on the core blocks and rod counts are routinely carried out by the drillers.</p> <p>RC samples were visually checked for recovery, moisture and contamination. Water entrainment into the sample is minimized through the use of additional high pressure air supply down hole. Wet samples are recorded as these generally have lower sample recovery.</p>
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	<p>Comparisons of RC and Diamond drill sample material on the neighbouring Cobra Plains deposit showed no statistically significant bias associated with the RC drill technique.</p> <p>Extensive diamond drilling will be carried out as part of this program to confirm the QAQC parameters of the sample material. Similar statistical assessments of the sample result bias will be undertaken for the current drill program.</p>
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	<p>Geological logging is carried out on holes for the full mineral assemblage that can be identified in hand specimen, in addition to texture, structure and estimates of graphite flake content and size.</p> <p>Geotechnical logging is carried out on all diamond drillholes for recovery, RQD and number of defects (per interval). Information on structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness and fill material is stored in the structure table of the database.</p> <p>The mineralogy, textures and structures are recorded by the geologist into a digital data file at the drill site, which are regularly submitted to the Perth office for compilation and validation.</p>
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	<p>Logging of RC and Diamond drill holes includes recording lithology, mineralogy, mineralisation, weathering, colour and other features of the samples. RC Chip trays and diamond core trays are photographed. Geological descriptions of the mineral volume abundances and assemblages are semi-quantitative.</p>
	<i>The total length and percentage of the relevant intersections logged</i>	<p>All drillholes are logged in full.</p>
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	<p>Diamond core (HQ3) will be cut into quarter core onsite using a diamond impregnated blade on a brick saw. Quarter core samples generally 2 metres or less in core length will be submitted to the lab labelled with a single sample name. Each approximately 2m sample will be crushed and a 300g split will be taken. For pulverisation. Samples are generally defined according to geological unit boundaries.</p> <p>A batch of duplicate samples to sampled quartered core will be submitted to the same lab to investigate if any statistical bias is associated with the quarter compared to half core. The results of this study will be used to determine the appropriate sample methodology for future drill holes.</p>

Criteria	JORC Code explanation	Commentary
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	RC samples are collected on the rig using two riffle splitters. The majority of samples are dry. Two metre composite samples are generated by taking the 1m samples from the drill cyclone into a large bag and passing this material through a 3-tier riffle splitter to generate 1/8 th samples (approximately 3kg) contained in a labelled calico bag and the residual 7/8 th is retained at the drill site in the large bag. The 3kg RC samples will be split using a 50:50 splitter to and one half is to be combined with the half split of the consecutive 1m sample, producing a 2m composite sample. were generated for drilled intersections with visible graphite (>0.5% graphite). Where wet samples are encountered, the 3kg sample produced from the 1/8 th splitter is left to dry before passing through the 50:50 splitter. The typical composite sample size is 3 to 4kg.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	The sample preparation of the diamond core samples follows industry best practice in sample preparation involving oven drying (105°C), coarse crushing of the diamond core sample down to ~2 mm, split (500g) and pulverizing to a grind size of 85% passing 75 micron. The sample preparation for RC samples is identical, without the coarse crush stage.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Field QC procedures involve the use of two certified reference material assay standards, along with certified blanks, and insertion of field duplicates. Certified standards are inserted at a rate of 1 in 25 (DD, RC and rock chip samples), duplicates were inserted at a rate of 1 in 20 and blanks are inserted at a rate of 1 in 50. QAQC samples are submitted with the rock chip samples.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Field duplicates are taken on 2m composites for RC, using a riffle splitter. Field duplicates are taken as quarter core splits for diamond core.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The drill sample sizes are considered to be appropriate to correctly represent mineralisation at the Balama North project based on the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and percent value assay ranges for the primary elements.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	The analytical techniques to be used to analyse all samples for Graphitic Carbon, Total Sulphur, and Total Carbon on a Leco Combustion Infrared Detection instrument. Detection limits for these analyses are considered appropriate for the reported assay grades. In addition, selected drill samples will be analysed for multi-element abundances using a fused disc digested in a four acid digest with ICP/OES or ICP/MS finish The acids used are hydrofluoric, nitric, perchloric and hydrochloric acids, suitable for silica based samples. The method approaches total dissolution of most minerals.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools were used to determine any element concentrations.

Criteria	JORC Code explanation	Commentary
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	<p>The RC and diamond core samples are submitted to the lab with blind certified standards (4 per 100 samples), blanks (2 per 100 samples) and field duplicates (5 per 100 samples). These QAQC samples represent 11% of the unknown samples analysed.</p> <p>Twinned RC and diamond holes provided a means of evaluating any bias associated with sampling and drill technique. From the Cobra Plains drilling, field duplicate datasets showed strong correlation coefficients (0.92 for the diamond samples and 0.98 for RC samples), indicating good repeatability of grades between paired samples.</p> <p>Sample preparation checks for fineness will be carried out by the laboratory as part of their internal procedures to ensure the grind size of 85% passing 75 micron was being attained. Laboratory QAQC involves the use of internal lab standards using certified reference material, blanks, and repeats as part of their in house procedures. Repeat analysis for samples reveals that precision of samples is within acceptable limits. A selection of the 1/8th riffle split samples will be submitted for umpire assays to SGS and an independent laboratory as independent checks of the assay results. Umpire laboratory campaigns using other laboratories is yet to be undertaken.</p>
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Carl Young of Model Earth Geological Global Services, a consultant for Triton, has visually verified the geological observations of most of the reported RC and Diamond drill holes. The geological of all drill chips and core is undertaken by by trained geological staff on site.
	<i>The use of twinned holes.</i>	Three RC holes were twinned with diamond holes at the neighbouring Cobra Plains deposit to investigate sample bias related to the RC drill and sampling methods. The mineralisation zones within the holes show a reasonable correlation. Though the grade graphs suggest that the diamond holes are reporting higher graphitic carbon grades than the RC holes.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Sample information is recorded at the time of sampling in electronic and hard copy form. Assay data is received from SGS in electronic form and compiled into the Company's digital database. Secured electronic print files have been provided to the Company for verification purposes.
	<i>Discuss any adjustment to assay data.</i>	No adjustments or calibrations are made to any assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<p>Collar locations for all GNBC and GBND holes were surveyed with a differential GPS.</p> <p>The drillholes with the prefix TMB (drilled in 2013) were surveyed by hand-held GPS (nominal error of 5 metres). Drill holes were oriented at the collar using sighting pegs installed with the use of a magnetic compass and GPS. The dip of all RC holes is recorded for the collar only and no downhole surveys were taken.</p> <p>The dip and azimuth of all DD holes is measured by the drill company using a Reflex singleshot downhole survey tool. Readings were taken at the completion of the hole at an interval spacing of 30 m on the diamond holes, and at the collar and end of hole on the RC holes. Stated accuracy of the tool is $\pm 1^\circ$.</p> <p>Downhole survey measurements considered to be poor quality are coded as 'Priority 2' and are excluded from the drill location calculations.</p>
	<i>Specification of the grid system used.</i>	The grid system for Balama North Project area is World Geodetic System (1984 Spheroid and Datum; Zone 37 South).

Criteria	JORC Code explanation	Commentary
	<i>Quality and adequacy of topographic control.</i>	Topographic surface for drill section is based on the differential GPS coordinates for the drill holes.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	The nominal drillhole spacing is 100 m on drill lines spaced 400m apart. The drill lines have a bearing of 120° (UTM grid northeast).
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	The current data spacing and distribution is insufficient for the purpose of estimating a mineral resources for Nicanda Hill prospect. On completion of the current drill program and the receipt of all necessary data, the Company will undertake an estimation of the resource for the Nicanda Hill prospect.
	<i>Whether sample compositing has been applied.</i>	Samples have been composited to a maximum of two metres for RC samples. Most diamond core samples are taken as approximately 2m lengths of quarter core, with few samples of upto 3m in length of core for zones of low graphite. Diamond core sample breaks corresponding to geological boundaries.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	The deposit is drilled towards the south east (magnetic grid) at approximately -60° to intersect the mineralised zones approximately orthogonal to the interpreted dip and strike of the geological units. Several characteristic geological units have been delineated in several drill holes giving a higher degree of confidence in the attitude and orientation of the graphite mineralisation. Near continuous sampling of all geological units bearing graphite is routinely undertaken.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Local increased graphite abundances are observed proximal to small-scale folding and thin tonalite veins. The orientation of these folds and veins is generally parallel to the attitude of the graphitic schist and mineralisation. Thus, the current drilling is not expected to produce any biased samples.
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of custody is managed by Triton. Samples are stored at a secure yard on the project prior to shipping to SGS in South Africa. Any visible signs of tampering of the samples are reported by the lab. A chain of custody has been maintained for the shipment of the samples to South Africa.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	A QAQC review of the sampling data from the drill holes at Cobra Plains was carried out by Optiro as part of the resource estimate for the Cobra Plains deposit. This deposit is located to the southeast of Nicanda Hill. The Cobra Plains database was considered by Optiro to be of sufficient quality to carry out that resource estimation. No reviews or audits of sampling techniques were undertaken by Optiro or any other external consultant. The QAQC samples inserted with the reported RC chip samples returned values within the expected value ranges. On this basis, the reported drill assay results are considered representative and suitable for assessing the graphite grades of the intersected graphite mineralisation.

JORC Table 1 - Section 2 Reporting Of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The Cobra Plains Deposit and the Nicanda Hill Prospect are located wholly within Exploration Licences EL5365 and EL5966 respectively within the Cabo Delgado Province of Mozambique. Both licences are held by Grafex Limitada (Grafex), a Mozambican registered company. Triton Minerals entered into a Joint Venture (JV) agreement in December 2012 with Grafex to earn up to an 80% interest in Grafex's portfolio of graphite projects. In late 2013 Triton increased their holding in the projects to 60% by taking a direct equity interest in Grafex. EL5365 is valid until 29/10/2017 and EL5966 is valid until 19/06/2018.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	All statutory approvals have been acquired to conduct exploration and Triton Minerals has established a good working relationship with local stakeholders
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	No previous systematic exploration has been undertaken at the Cobra Plains or the Nicanda Hill Prospects of the Balama North Project. The Company has acquired the data from an airborne electromagnetic survey that covers Licences 5966 and 5365. This data has been reprocessed and interpreted with some results included in this release. Small scale exploratory pits dug for ruby and/or graphite exploration have been identified. Data or reports disclosing the results of this work have not been located.
Geology	Deposit type, geological setting and style of mineralisation.	The Cobra Plains graphite deposit is hosted within Neoproterozoic rocks of the Xixano Complex in north-eastern Mozambique. The Xixano complex is composed dominantly of mafic to intermediate orthogneiss with intercalations of paragneiss, meta-arkose, quartzite, tremolite-rich marble and graphitic schist. Graphite mineralisation is hosted within fine grained graphitic schists underlain and overlain by felsic gneiss rock types. Mineralisation occurs as series of multiple stacked tabular northeast-southwest striking lodes moderately dipping to the northwest. Graphite mineralisation outcrops at surfaces and has been intersection at down hole depths of up to 428.55m below surface. Graphitic mineralisation is interpreted to be continuous between the Cobra Plains and the Nicanda Hill Prospects of the Balama North Deposit, based on the interpretation of the airborne electromagnetic survey data and drill results. Occurrences of vanadium mineralisation noted in the samples is thought to be associated with quartz muscovite ± roscoelite schists.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:	
	<ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. 	Refer to Appendix 4 below

Criteria	JORC Code explanation	Commentary
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	No top cut applied Minimum composite width = 6m Maximum internal dilution = 2m Weighted average grades calculated using the Surpac High Grade reporting function using the above parameters
	Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	The significant weighted average graphite carbon (GrC) intersections reported were calculated as core-length weighted assay intercepts. The intersection calculations were made applying a maximum internal dilution of 2m for material below the GrC cutoff grade and a minimum composite width of 2m. Significant intercepts are reported at cutoff grade of 10% GrC.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	V2O5 is calculated from V% using a factor of 1.786
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	The graphite schists and tonalite gneiss units dip moderately northwest based on outcrop exposures and measured structure in the oriented diamond drill holes. All GNBC drill holes are inclined -60° to the southeast to intersect the mineralised zones approximately orthogonal to the interpreted dip and strike of the geological boundaries. The reported intersections are considered to be near to true intercept widths.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to Figure 1 to 4 in the body of the text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Assays for all drill holes except GBNC0003 and the upper part of GBNC005 are outstanding.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Selected core samples from all diamond drill holes are measured for bulk densities. This, and additional data from future drill holes will be used to estimate average densities for rock types. Multi element assaying was conducted on selected zones in the diamond drill holes TMBD0005 and TMBD006. Geotechnical logging is routinely carried out on all diamond drillholes for recovery, RQD and number of defects (per interval). Information on structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness and fill material is stored in the structure table of the database. Regional scale mapping has been carried out in the area to identify outcrop of graphitic material. This mapping is ongoing.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive	Further drill testing using reverse circulation and diamond drilling is underway on the Nicanda Hill prospect to determine the grade continuity and width of the graphitic units. Exploration activities resumed in April 2014.

Appendix 2

Table 1. Completed drill holes as at 31 August 2014 on the Balama North project on License 5966.

HOLEID	x	y	z	Depth (m)	Azimuth	Dip	Type
GBND0001	477632	8543201	501	373	120	-60	DD
GBND0002	477608	8542754	509	185	120	-60	DD
GBND0003	477536	8542681	515	156	120	-60	DD
GBND0004	477621	8542632	513	162	120	-60	DD
GBND0005	477171	8543003	494	429	120	-60	DD
GBND0006	477530	8543026	505	220	120	-60	DD
GBND0007	477709	8542583	519	113	120	-60	DD
GBND0008	477550	8542559	513	135	120	-60	DD
GBND0009	477469	8542606	509	200	120	-60	DD
GBND0010	477319	8542458	510	218	120	-60	DD
GBND0011	477403	8542407	513	153	120	-60	DD
GBND0012	477161	8542093	514	153	120	-60	DD
GBND0013	477671	8542897	511	211	120	-60	DD
GBND0014	476992	8542186	504	207	120	-60	DD
GBND0015	476846	8541809	510	177	120	-60	DD
GBND0016	476760	8541393	544	150	120	-60	DD
GBND0017	478116	8543846	495	279	120	-60	DD
GBND0018	476564	8541049	515	152	120	-60	DD
GBND0019	478290	8543742	500	200	120	-60	DD
GBND0020	478477	8543866	505	200	120	-60	DD
GBND0021	478563	8543866	510	200	120	-60	DD
GBND0022	477847	8543521	508	250	120	-60	DD
GBND0023	478133	8543371	601	275	120	-60	DD
GBNC0001	477882	8542824	523	72	120	-60	RC
GBNC0002	477694	8542701	514	114	120	-60	RC
GBNC0003	477628	8542973	507	153	120	-60	RC
GBNC0004	477719	8543151	506	117	120	-60	RC
GBNC0005	477548	8543251	497	222	120	-60	RC
GBNC0006	477460	8543298	494	150	120	-60	RC
GBNC0007	477367	8543354	491	108	120	-60	RC
GBNC0008	477784	8542657	517	84	120	-60	RC
GBNC0009	477518	8542801	505	150	120	-60	RC
GBNC0010	477431	8542854	502	291	120	-60	RC
GBNC0011	477346	8542902	498	118	120	-60	RC
GBNC0012	477259	8542957	497	90	120	-60	RC
GBNC0013	477447	8543077	499	150	120	-60	RC
GBNC0014	477358	8543125	495	150	120	-60	RC
GBNC0015	477274	8543183	492	150	120	-60	RC
GBNC0016	477290	8543413	489	150	120	-60	RC
GBNC0017	477980	8543001	545	125	120	-60	RC
GBNC0018	477625	8542499	519	90	120	-60	RC

HOLEID	x	y	z	Depth (m)	Azimuth	Dip	Type
GBNC0019	477490	8542361	518	100	120	-60	RC
GBNC0020	477238	8542511	506	150	120	-60	RC
GBNC0021	476971	8542657	506	150	120	-60	RC
GBNC0022	477144	8542557	506	130	120	-60	RC
GBNC0023	477057	8542607	506	108	120	-60	RC
GBNC0024	477249	8542044	522	82	120	-60	RC
GBNC0025	477076	8542138	510	84	120	-60	RC
GBNC0026	477788	8543572	495	150	120	-60	RC
GBNC0027	477702	8543625	489	114	120	-60	RC
GBNC0028	478041	8543894	491	150	120	-60	RC
GBNC0029	478207	8543794	500	150	120	-60	RC
GBNC0030	477951	8543941	487	150	120	-60	RC
GBNC0031	478383	8543693	507	150	120	-60	RC
GBNC0032	479199	8544610	499	102	120	-60	RC
GBNC0033	479111	8544658	494	150	120	-60	RC
GBNC0034	478936	8544761	479	186	120	-60	RC
GBNC0035	478739	8544412	490	200	120	-60	RC
GBNC0036	478548	8544291	490	150	120	-60	RC
GBNC0037	478215	8544017	491	150	120	-60	RC
GBNC0038	478379	8543898	500	192	120	-60	RC
GBNC0039	478308	8543972	495	150	120	-60	RC
GBNC0040	479393	8544954	477	150	120	-60	RC
GBNC0041	479224	8545056	472	162	120	-60	RC
GBNC0042	479048	8545154	466	138	120	-60	RC
GBNC0043	476904	8542236	501	165	120	-60	RC
GBNC0044	477004	8541715	514	110	120	-60	RC
GBNC0045	476917	8541764	514	150	120	-60	RC