

**Large surface gold target defined by trenching at Toro Gordo  
23.00m @ 2.16g/t Au, 40.00m @ 1.23g/t Au, 18.00m @ 1.23g/t Au and  
grades up to 42.70g/t Au**

- Assay results received for trench sampling at the Toro Gordo Prospect, El Zorro Gold Project (Chile).
- Extensive surface gold mineralisation defined over an area of 650m by 500m, immediately south of the Ternera Gold Deposit.
- Significant trench sampling results include:
  - **17.00m @ 1.48g/t Au, including 1.00m @ 22.30g/t Au;**
  - **23.00m @ 2.16g/t Au, including 1.00m @ 42.70g/t Au;**
  - **40.00m @ 1.23g/t Au, including 8.00m @ 3.14g/t Au;**
  - **5.00m @ 1.26g/t Au;**
  - **5.00m @ 1.08g/t Au;**
  - **26.00m @ 0.92g/t Au, including 5.00m @ 1.97g/t Au; and**
  - **18.00m @ 1.23g/t Au, including 4.00m @ 3.97g/t Au.**
- Mineralisation associated with vein system and gold mineralised alteration zones.
- Initial drilling of the Toro Gordo vein and alteration system planned for January 2021.
- Toro Gordo is one of five gold targets at the El Zorro Gold Project area that has yet to be drill tested.

**Tesoro Resources Limited (ASX: TSO) (Tesoro or the Company)** is pleased to announce assay results for a systematic surface trench sampling program, completed over the Toro Gordo Prospect at the El Zorro Gold Project (**El Zorro**), Chile.

Multiple wide mineralised zones have been delineated, associated with high frequency quartz veining, hematite and quartz breccias, and gold mineralised alteration zones within the Toro Gordo granodiorite. Surface gold mineralisation at Toro Gordo has now been delineated over an area covering approximately 650m by 500m, with mineralisation appearing to be continuous between the Ternera deposit and Toro Gordo.

These results will be used to plan drilling, with a maiden drill program planned to commence at Toro Gordo in January 2021.

**Tesoro Managing Director Zeff Reeves commented:**

“El Zorro continues to deliver exciting exploration results and these results from Toro Gordo further enhance the scale and prospectivity of the project. Surface gold mineralisation is now continuous from Toro Gordo, to the north of Ternera, over 1,500m of strike. To have results such as these consistently returned over a large area is encouraging and drilling is planned at Toro Gordo in early 2021. We are excited at what lies ahead for Tesoro in 2021, with continued drilling at Ternera, and multiple targets with extensive surface gold mineralisation, El Zorro is demonstrating its potential to be a significant district scale gold system.”

**Toro Gordo Surface Sampling**

A total of 538 controlled samples were collected from 25 excavated trenches at Toro Gordo, to further expand and understand mineralisation previously discovered by the Tesoro exploration team (ASX Announcement 13 May 2020).

Trenches were excavated continuously across strike of mapped structures to an average depth of 0.50m, bedrock was then continuously sampled along the trench walls, with sample width of between 1.00m and 5.00m.

Sampling has delineated an area of abundant quartz veins, brecciation and associated alteration over an area of approximately 650m north to south and 150m east to west, with mineralised veins extending west from the alteration zone and remaining well mineralised at surface (Figure 1). This large gold mineralised alteration zone adjoins the southern part of the Ternera Gold Deposit, however, it is hosted in granodiorite lithology, whereas the Ternera dominant host lithology is the El Zorro Tonalite. This is encouraging, as it demonstrates the potential for gold mineralisation to occur in multiple lithologies within the El Zorro Project area.

Hole_ID	From (m)	To (m)	Interval	Au (g/t)	Comments
TR0125_COQ_A	5.00	12.00	7.00	0.69	
TR0125_COQ_C	14.00	31.00	17.00	1.48	
TR0125_COQ_C	17.00	18.00	1.00	22.30	including
TR0126_COQ_A	0.00	4.00	4.00	0.31	
TR0126_COQ_A	12.00	17.00	5.00	0.55	
TR0126_COQ_A	15.00	16.00	1.00	1.78	including
TR0126_COQ_B	4.00	27.00	23.00	2.16	
TR0126_COQ_B	4.00	5.00	1.00	3.78	including
TR0126_COQ_B	16.00	17.00	1.00	42.70	including
TR0127_COQ_A	13.00	19.00	6.00	0.32	
TR0127_COQ_A	33.00	34.00	1.00	0.91	
TR0129_COQ_A	18.00	20.00	2.00	0.49	
TR0129_COQ_A	57.00	60.00	3.00	0.55	
TR0151_COQ_A	14.00	20.00	6.00	0.30	
TR0151_COQ_A	32.00	45.00	13.00	0.32	
TR0152_COQ_A	4.00	30.00	26.00	0.45	
TR0153_COQ_A	39.50	109.00	69.50	0.83	
TR0153_COQ_A	69.00	109.00	40.00	1.23	including
TR0153_COQ_A	69.00	71.00	2.00	7.31	including
TR0153_COQ_A	101.00	109.00	8.00	3.14	including
TR0154_COQ_A	10.00	15.00	5.00	1.26	
TR0155_COQ_A	5.00	10.00	5.00	1.08	
TR0156_COQ_A	0.00	26.00	26.00	0.92	
TR0156_COQ_A	0.00	3.00	3.00	1.79	including
TR0156_COQ_A	17.00	22.00	5.00	1.97	including
TR0159_COQ_A	0.00	18.00	18.00	1.23	
TR0159_COQ_A	14.00	18.00	4.00	3.97	including
TR0160_COQ_A	4.00	23.00	19.00	0.51	
TR0160_COQ_A	16.00	20.00	4.00	1.12	including
TR0164_COQ_A	0.00	63.00	63.00	0.32	
TR0164_COQ_A	0.00	2.00	2.00	3.57	including

**Table 1 – Toro Gordo Significant Trench Sampling Results – full results presented in Appendix 1**

TRENCH_ID	UTM_E	UTM_N	dip	Azimuth	length (m)
TR0125_COQ_A	341531	7035650	-10	38	12.00
TR0125_COQ_B	341532	7035666	-20	50	13.00
TR0126_COQ_A	341511	7035686	-15	55	22.00
TR0126_COQ_B	341529	7035707	5	115	27.00
TR0125_COQ_C	341507	7035625	0	50	38.00
TR0127_COQ_A	341508	7035620	0	250	83.00
TR0128_COQ_A	341453	7035544	0	220	37.00
TR0128_COQ_B	341458	7035509	-5	170	10.00
TR0129_COQ_A	341434	7035388	5	20	103.00
TR0130_COQ_A	341436	7035386	0	190	73.00
TR0150_COQ_A	341536	7035535	0	90	27.50
TR0151_COQ_A	341561	7035551	5	35	58.00
TR0152_COQ_A	341576	7035633	5	328	30.00
TR0153_COQ_A	341575	7035683	0	60	109.00
TR0154_COQ_A	341574	7035794	0	40	20.00
TR0155_COQ_A	341580	7035841	10	20	15.00
TR0156_COQ_A	341588	7035856	-5	140	33.00
TR0157_COQ_A	341370	7035557	0	30	14.00
TR0158_COQ_A	341327	7035514	0	70	9.00
TR0159_COQ_A	341279	7035495	0	75	21.00
TR0160_COQ_A	341172	7035571	0	235	23.00
TR0161_COQ_A	341283	7035774	0	60	7.00
TR0162_COQ_A	341295	7035787	0	50	1.00
TR0163_COQ_A	341468	7035879	-20	245	10.00
TR0164_COQ_A	341476	7035760	10	50	68.00

**Table 2 – Toro Gordo trench location details – PSAD56/19S datum**

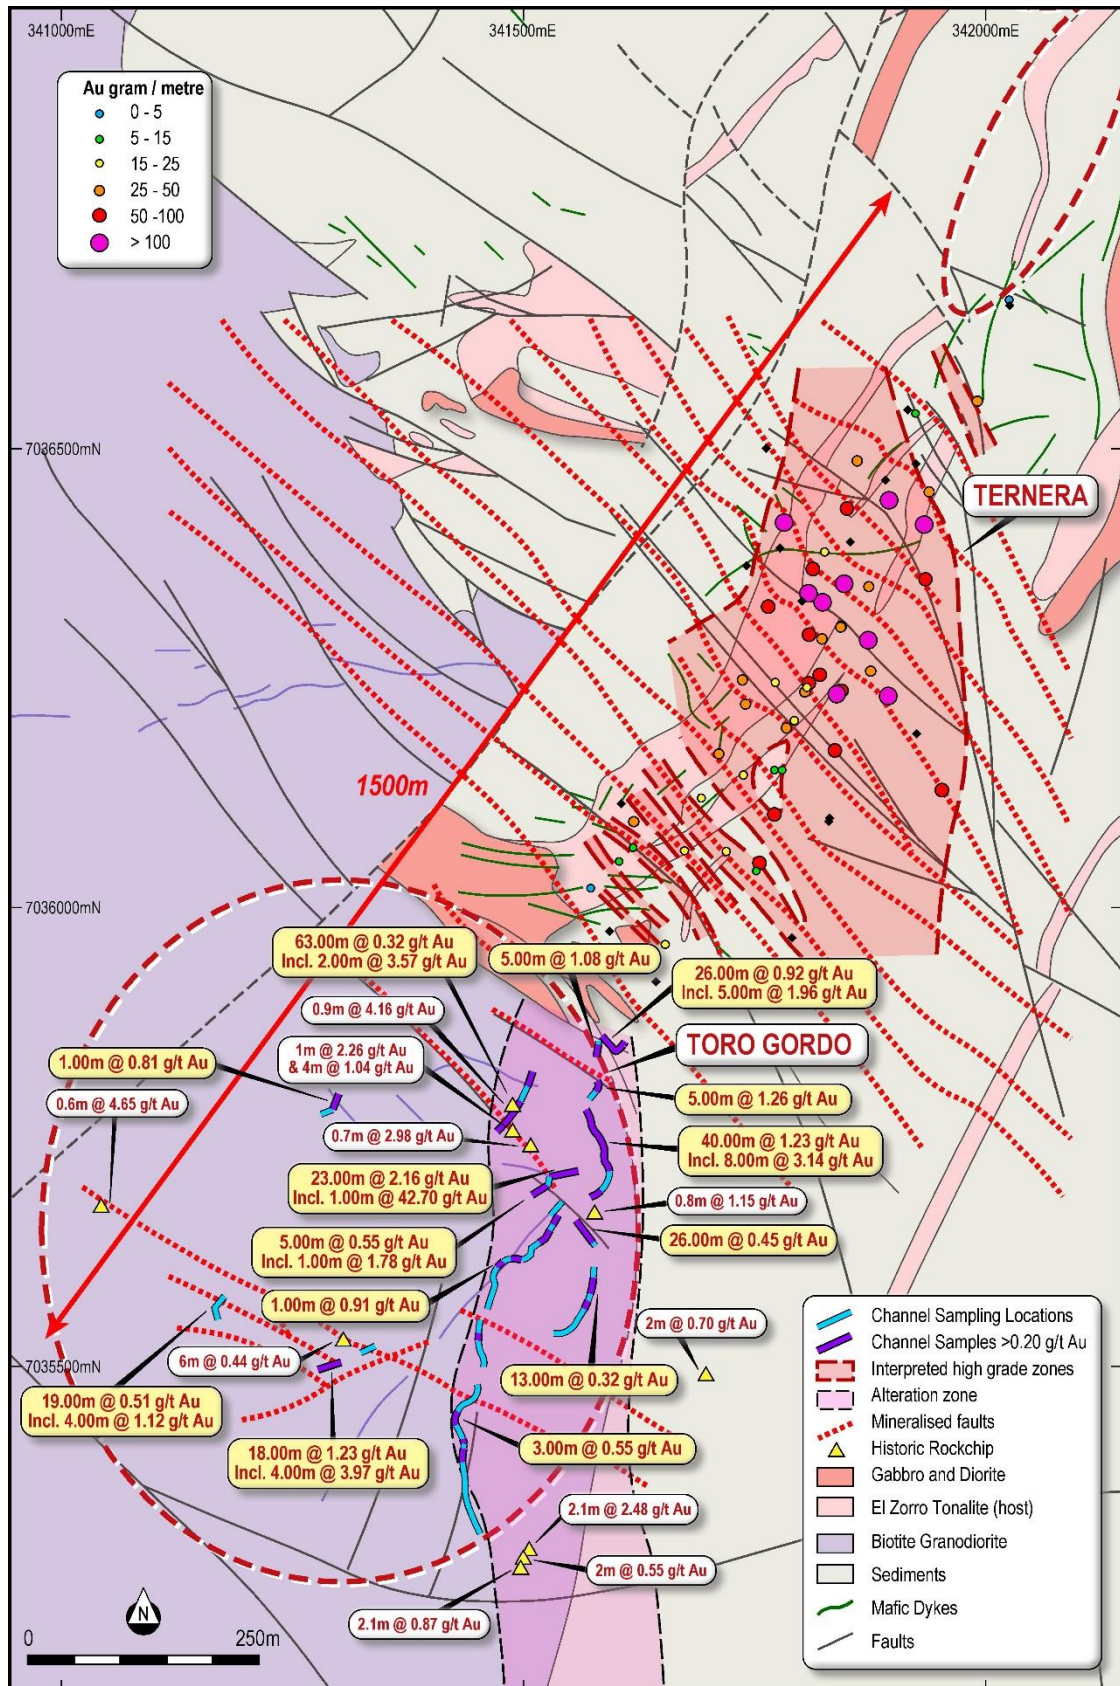


Figure 1 – Toro Gordo trench sampling results for this announcement in gold highlight. Previously announced results in white (ASX Announcement 13 May 2020). Ternera drill collars coloured to g/m Au drill intercept.

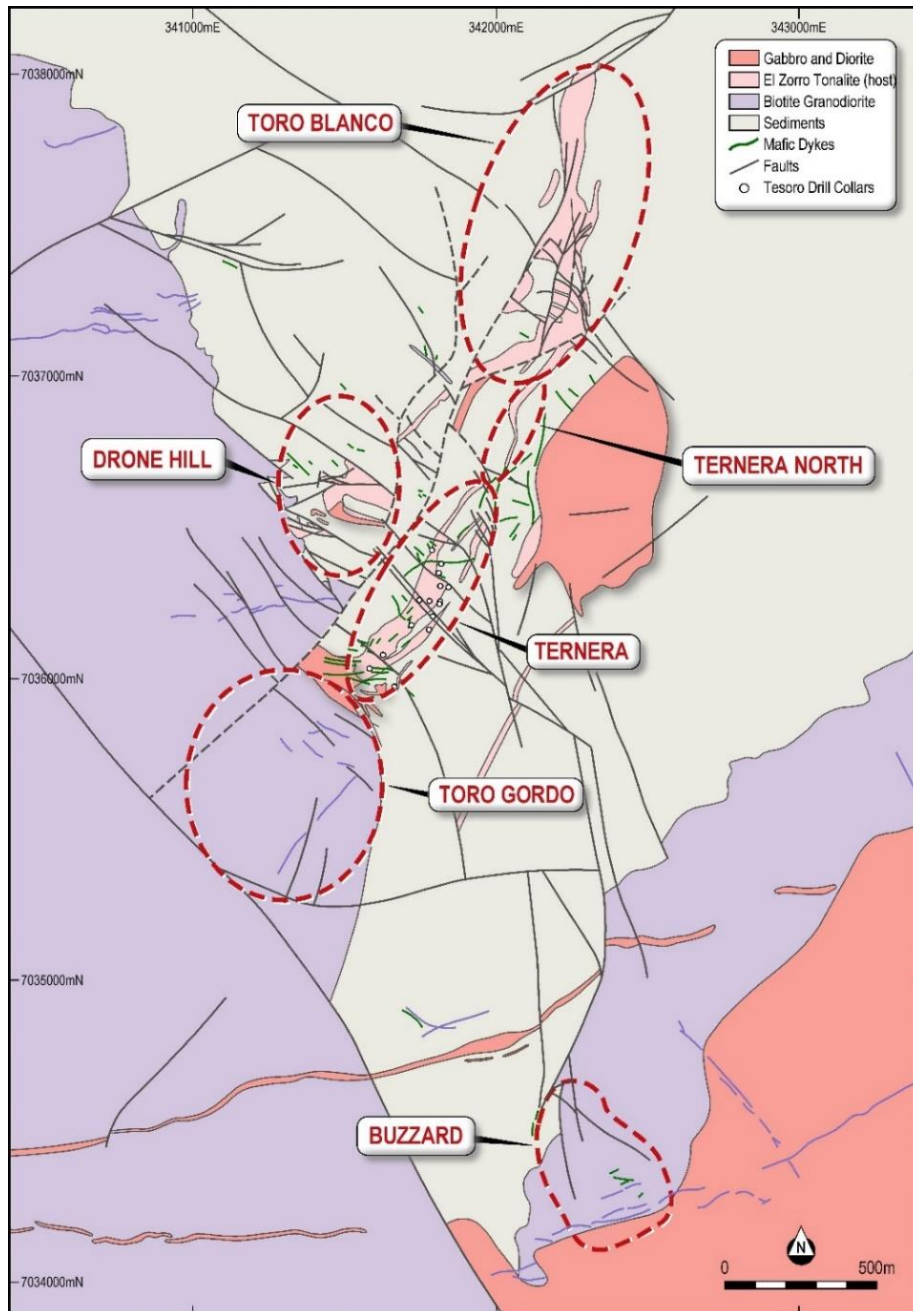


Figure 2 - El Zorro Gold Project district geology and prospect map.

Authorised by the Board of Tesoro Resources Limited.

**For more information:**

**Company:**

Zeff Reeves Managing Director  
Tesoro Resources Limited  
+61 8 9322 1587

**Investors:**

Peter Taylor  
NWR Communications  
+61 (0) 412 036 231  
peter@nwrcommunications.com.au

## About Tesoro

Tesoro Resources Limited was established with a strategy of acquiring, exploring and developing mining projects in the Coastal Cordillera region of Chile. The Coastal Cordillera region is host to multiple world class copper and gold mines, has well established infrastructure, service providers and an experienced mining workforce. Large areas of the Coastal Cordillera remain unexplored due to the unconsolidated nature of mining concession ownership, but Tesoro, via its in-country network and experience has been able secure rights to a district scale gold project in-line with the Company's strategy. Tesoro has rights to acquire up to 80% of the El Zorro Gold Project.



## Competent Persons Statement

The information in this report that relates to Exploration Results is based on information compiled by Mr Zeffron Reeves (B App Sc (Hons) Applied Geology) MBA, MAIG). Mr Reeves is a member of the Australian Institute of Geoscientists and a Director and major shareholder of the Company. Mr Reeves has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Reeves consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

## Future Performance

This announcement may contain certain forward-looking statements and opinion. Forward-looking statements, including projections, forecasts and estimates, are provided as a general guide only and should not be relied on as an indication or guarantee of future performance and involve known and unknown risks, uncertainties, assumptions, contingencies and other important factors, many of which are outside the control of the Company and which are subject to change without notice and could cause the actual results, performance or achievements of the Company to be materially different from the future results, performance or achievements expressed or implied by such statements. Past performance is not necessarily a guide to future performance and no representation or warranty is made as to the likelihood of achievement or reasonableness of any forward-looking statements or other forecast. Nothing contained in this announcement nor any information made available to you is, or and shall be relied upon as, a promise, representation, warranty or guarantee as to the past, present or the future performance of Tesoro.







## Appendix 2 – JORC TABLES

### Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</li> </ul>	Tesoro completed channel sampling from excavated trenches. Trenches were excavated to a depth of between 0.50m and 1.00m by heavy machinery. Sampling processes are considered appropriate for the style of mineralisation.
	<ul style="list-style-type: none"> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> </ul>	Tesoro completed channel sampling. Sampling processes are considered appropriate for the style of mineralisation. Channel sampling sites were painted across the sample site by Tesoro to the width of the sample. Surficial material was removed from the sample.
	<ul style="list-style-type: none"> <li>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done; this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<p>Tesoro has completed a channel sampling program of 538 samples at the Toro Gordo I prospect.</p> <p>Sampling was by industry standard technique including:</p> <ul style="list-style-type: none"> <li>location of the station using handheld GPS.</li> <li>Trench excavated to a minimum of 0.50m depth into bedrock and marked with a paint line for sampling.</li> <li>trench along the painted sample line.</li> <li>Samples of up to 2kg of rock are packed in plastic bags with assay-number tickets stapled to the bag.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</li> </ul>	No drilling has been completed in the reported results of this report.
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	No drilling has been completed in the reported results of this report.
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	No drilling has been completed in the reported results of this report.
<b>Subsampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>Quality control procedures adopted for all subsampling stages to maximise representivity of samples.</li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected,</li> </ul>	No drilling has been completed in the reported results of this report.

Criteria	JORC Code explanation	Commentary
	<p><i>including for instance results for field duplicate/second-half sampling.</i></p> <ul style="list-style-type: none"> <li>• <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	No drilling has been completed in the reported results of this report.
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> </ul>	Tesoro's channel sampling program was undertaken using a 50g fire assay technique for gold. QAQC data was monitored and reported by Cube Consulting. Reviewing the summary of results by Cube the overall survey is of reasonable quality and fit for purpose for geochemical exploration.
	<ul style="list-style-type: none"> <li>• <i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> </ul>	Standard chemical analyses were used for grade determination. There was no reliance on determination of analysis by geophysical tools.
	<ul style="list-style-type: none"> <li>• <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></li> </ul>	Standards and blanks have been inserted into the sample stream every 20 samples, which is deemed acceptable for a program of this nature.
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>• <i>The use of twinned holes.</i></li> </ul>	No drilling has been completed in the reported results of this report.
	<ul style="list-style-type: none"> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> </ul>	Sample data is digitally entered and stored following documented sample and data handling protocols which have been reviewed by CSA Global. The protocols are considered adequate.
	<ul style="list-style-type: none"> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	No adjustments were made to Tesoro geochemistry
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> </ul>	Sample locations have been located using a handheld GPS
	<ul style="list-style-type: none"> <li>• <i>Specification of the grid system used.</i></li> </ul>	The El Zorro Project uses the PSAD56 grid system
	<ul style="list-style-type: none"> <li>• <i>Quality and adequacy of topographic control.</i></li> </ul>	The topography generated from a detailed topographic survey and generation of a DTM
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> </ul>	The channel sampling is collected on a nominal 1m long channel, up to a maximum of 3m. this spacing is deemed acceptable for the style of mineralisation.
	<ul style="list-style-type: none"> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> </ul>	The channel sample spacing is deemed appropriate for this stage of exploration.
	<ul style="list-style-type: none"> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	No compositing has been used
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> </ul>	Channel samples are generally, where possible, sampled perpendicular to interpreted geological structures.
	<ul style="list-style-type: none"> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	No drilling has been completed in the reported results of this report.
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• <i>The measures taken to ensure sample security.</i></li> </ul>	Chain of Custody of digital data is managed by the Company. Physical material was stored on site and, when necessary, delivered to the assay laboratory. Thereafter laboratory samples were controlled by the nominated laboratory which to date has been ALS Laboratories, Santiago. All sample collection was controlled by digital sample control file(s) and hardcopy ticket books.
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• <i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	No audits have been undertaken.

(Criteria in this section apply to all succeeding sections)

## Section 2: Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> </ul>	Information regarding tenure is included in the company's September 2020 quarterly activities report released to the ASX on 20 October 2020
	<ul style="list-style-type: none"> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	The Concessions is believed to be in good standing with the governing authority and there is no known impediment to operating in the area.
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	Little historical exploration has been undertaken in either project area. Coeur d'Alene's Chilean exploration division undertook activities on the Coquetas prospect, under an option agreement with the previous owners between April 1990 and January 1993.
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<p>The mineralisation model is to likely to be intrusive related gold deposit. The key characteristics that are consistent with this style deposit include:</p> <ul style="list-style-type: none"> <li>Low sulphide content, (typically &lt;5%); reduced ore mineral assemblage that typically comprises pyrite and lacks primary magnetite or hematite</li> <li>Mineralisation occurs as sheeted vein deposits or stockwork assemblages and often combine gold with variably elevated Bi, W, As, Mo, Te, and/or Sb but low concentrations of base metals as seen in the initial four holes by Tesoro at El Zorro</li> <li>Restricted and commonly weak proximal hydrothermal alteration</li> <li>Intrusions of intermediate to felsic composition.</li> </ul>
<b>Drillhole information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: <ul style="list-style-type: none"> <li>easting and northing of the drillhole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar</li> <li>dip and azimuth of the hole</li> <li>downhole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	See prospectus dated 30 <sup>th</sup> October 2019 lodged by Plukka Ltd
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> </ul>	<p><b>El Zorro:</b> No cutting of grades has been undertaken at this early stage of exploration.</p> <p>Channel intercepts are calculated using a length weighted averaging method.</p>
	<ul style="list-style-type: none"> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> </ul>	Along Channel length weighted average results are calculated using a 0.20g/t Au cut off and a maximum of 5m internal dilution
	<ul style="list-style-type: none"> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	No metal equivalents are reported.
<b>Relationship between</b>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> </ul>	

Criteria	JORC Code explanation	Commentary
mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</li> </ul>	<b>EL Zorro:</b> The mineralisation forms sub-vertical sheeted veins and individual veins and may form plunging zones within the mineralised structures. Drilling and sampling by Tesoro has been undertaken to test these orientations.
	<ul style="list-style-type: none"> <li>If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known').</li> </ul>	<b>EL Zorro:</b> Exploration results are reported as along channel widths as the true width is not known with any certainty.
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.</li> </ul>	Relevant maps and diagrams are included in the body of the report.
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	All assay results from sampling are reported.
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	All material exploration data is reported in the body of the report.
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> </ul>	<b>El Zorro:</b> Further work will be focused on drill testing the Coquetas mineralisation and additional prospects as defined in the work program. Core will be used for metallurgical testwork and resource modelling is planned.
	<ul style="list-style-type: none"> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	Diagrams have been included in the body of this report.