

Exploration Update - Gordons Gold Project

- Assays from structural diamond drill core at the Gordons Dam gold prospect provide further encouraging results associated with a felsic intrusive including;
 - 3.40m @ 4.68g/t Au within 33.75m @ 1.11g/t Au from 62.00m (YRLDD007)
- The results when combined with adjacent high-grade RC and diamond drill intercepts (up to 73.12g/t Au¹ for oxide and 17.01g/t Au² for primary rocks) and an improved geological understanding of the mineralisation controls, provide compelling exploration targets for immediate testing;
- RC drilling to confirm new geological interpretations of the high grade mineralisation has commenced - diamond drilling to follow;
- 37 RC and 115 AC drill holes for 6,990m have been completed since January at a number of prospects within the Gordons gold project as part of the Company's 100,000m program for 2021 – all results pending.

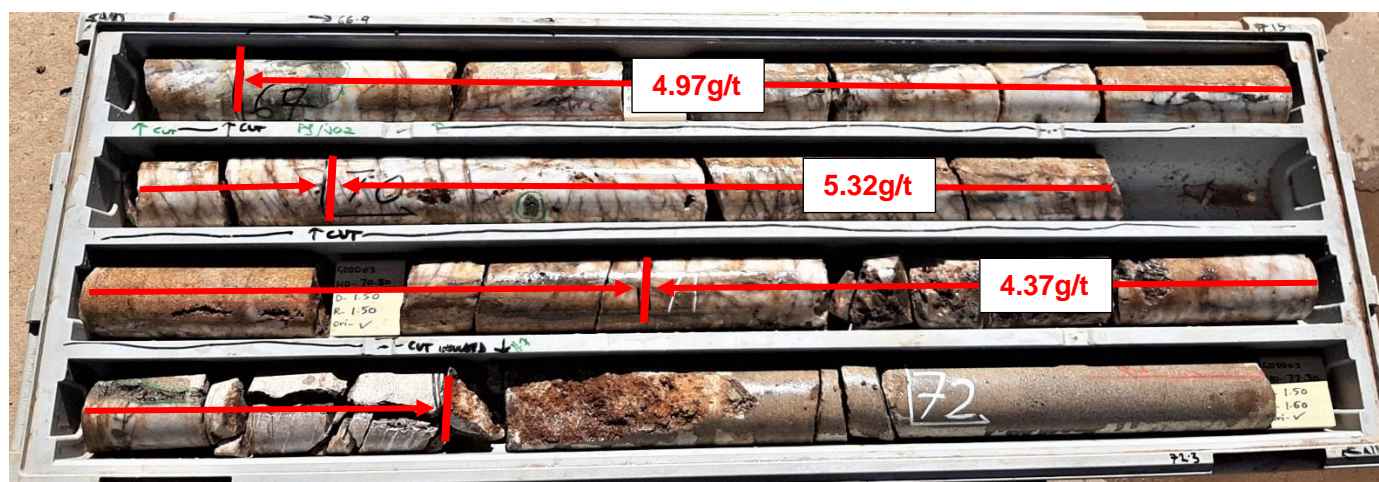


Figure 1 – Gordons Dam diamond drill hole YRLDD007 from 69.00m – 71.70m downhole showing gold grades within a strongly mineralised quartz vein within a felsic porphyry host rock.

Yandal Resources' Managing Director; Mr Lorry Hughes commented:

"It is evident mineralisation at Gordons Dam occurs within a number of different rock types, styles and structural orientations. The diamond drilling has proved invaluable in developing new geological interpretations and I believe we are now well placed to test for high-grade extensions at depth.

We will use several drill directions to test new targets with RC drilling first and then if successful follow-up with more RC and diamond drilling in the June Quarter".

¹ Refer to YRL ASX announcement dated 8 October 2020, ² Refer to YRL ASX announcement dated 27 May 2020.



Registered Address

Yandal Resources Limited
ACN 108 753 608 ABN 86 108 753 608

A 159 Stirling Highway
Nedlands WA 6009
P PO Box 1104
Nedlands WA 6909

Board Members

Lorry Hughes	Managing Director/CEO
Katina Law	Chair
Tim Kennedy	Non-Executive Director
Bianca Taveira	Company Secretary

T +61 8 9389 9021
E yandal@yandalresources.com.au
W www.yandalresources.com.au

Gold Projects

Ironstone Well (100% owned)	
Barwidgee (100% owned)	
Mt McClure (100% owned)	
Gordons (100% owned)	
Shares on Issue	92,890,541
Share Price	\$0.42
Market Cap	\$40M
ASX Code	YRL

Yandal Resources Ltd (ASX: YRL, “Yandal Resources” or the “Company”) is pleased to report new downhole fire assay results from diamond core (“DD”) drilling at the Gordons Dam prospect within the Gordons gold project located in the highly prospective Kalgoorlie-Boulder Region of Western Australia (Figure 2).

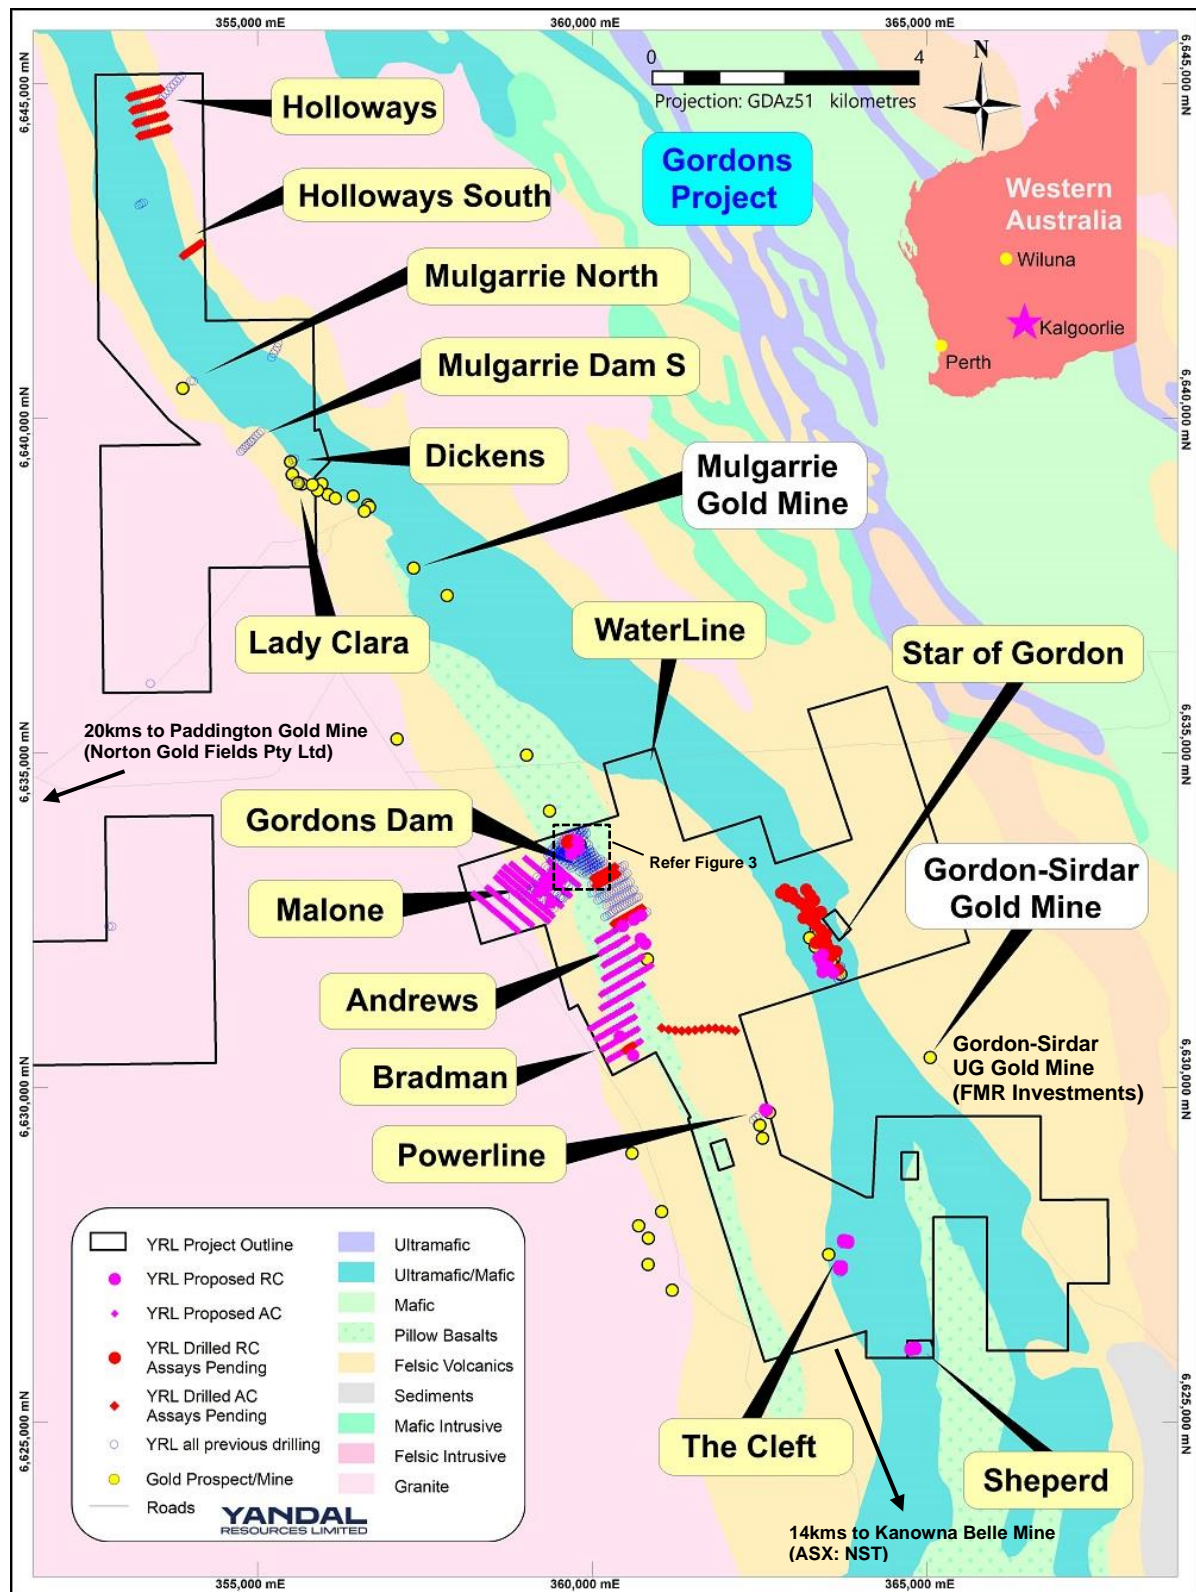


Figure 2 – Location map of key prospects within the Gordons gold project in relation to nearby operating third party gold mines, project tenure and regional geology.

Gordons Dam Prospect

A total of three angled DD holes for 943.80m (YRLDD005-007) were completed at the Gordons Dam prospect during the December Quarter 2020; results from YRLDD005 and the majority of YRLDD006 were reported in January 2021¹.

The holes were designed to provide new geological and structural data in order to improve the geological interpretation of the underlying mafic, intrusive porphyry and felsic volcanic rock sequence and the controls to the gold mineralisation discovered to date.

Hole YRLDD007 successfully intersected significant mineralisation within an intrusive porphyry unit, quartz veins within the intrusive and at both the upper and lower contacts of the intrusive with surrounding mafic rocks. Best intercepts included;

- 5.00m @ 1.19g/t Au within 20.00m @ 0.66g/t Au from 36.00m
- 3.40m @ 4.68g/t Au within 33.75m @ 1.11g/t Au from 62.00m

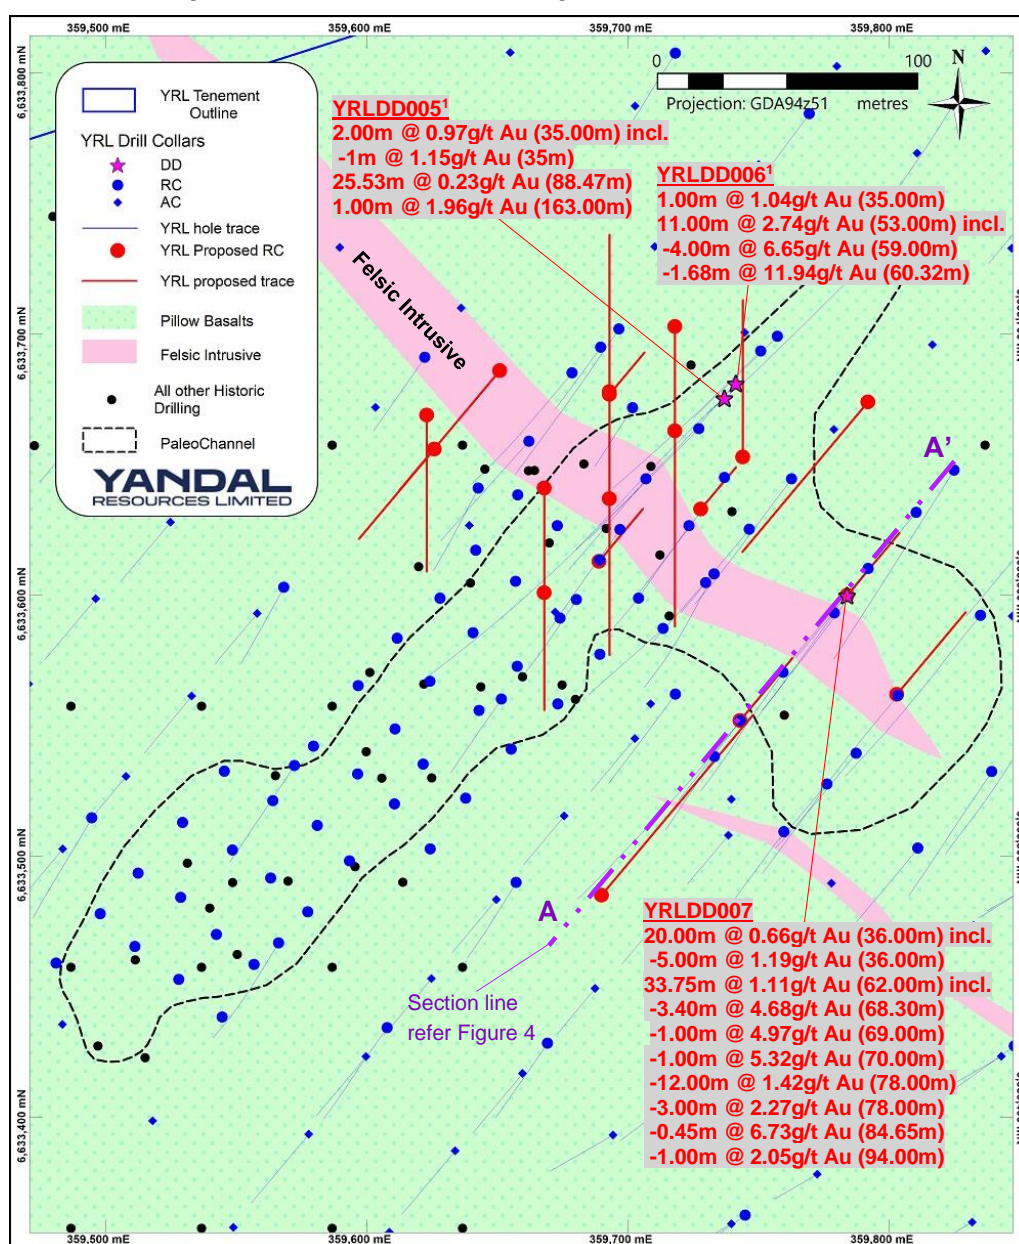


Figure 3 – Gordons Dam prospect collar and drill trace plan over interpreted geology showing the location of new DD holes, the Figure 4 cross-section line A-A', planned RC follow-up holes and historic holes.

¹ Refer to YRL ASX announcement dated 14 January 2021.

Earlier DD hole YRLDD006 located ~100m to the northwest of YRLDD007 intersected 4.00m @ 6.65g/t Au from 59.00m including 1.68m @ 11.94g/t Au from 60.32m¹ within sheared pillow basalts and quartz veins oriented at 10-30 degrees to core axis.

The results indicate the potential for multiple high grade structures with quartz veining oriented sub-parallel to the predominant direction of RC and diamond drilling completed to date. In addition, there is potential for these mineralised structures to cross cut both the basaltic rock sequence and the intrusive porphyry rocks. RC drilling has commenced at a number of new orientations to test for high grade structures with RC and DD drilling to follow in the June Quarter.

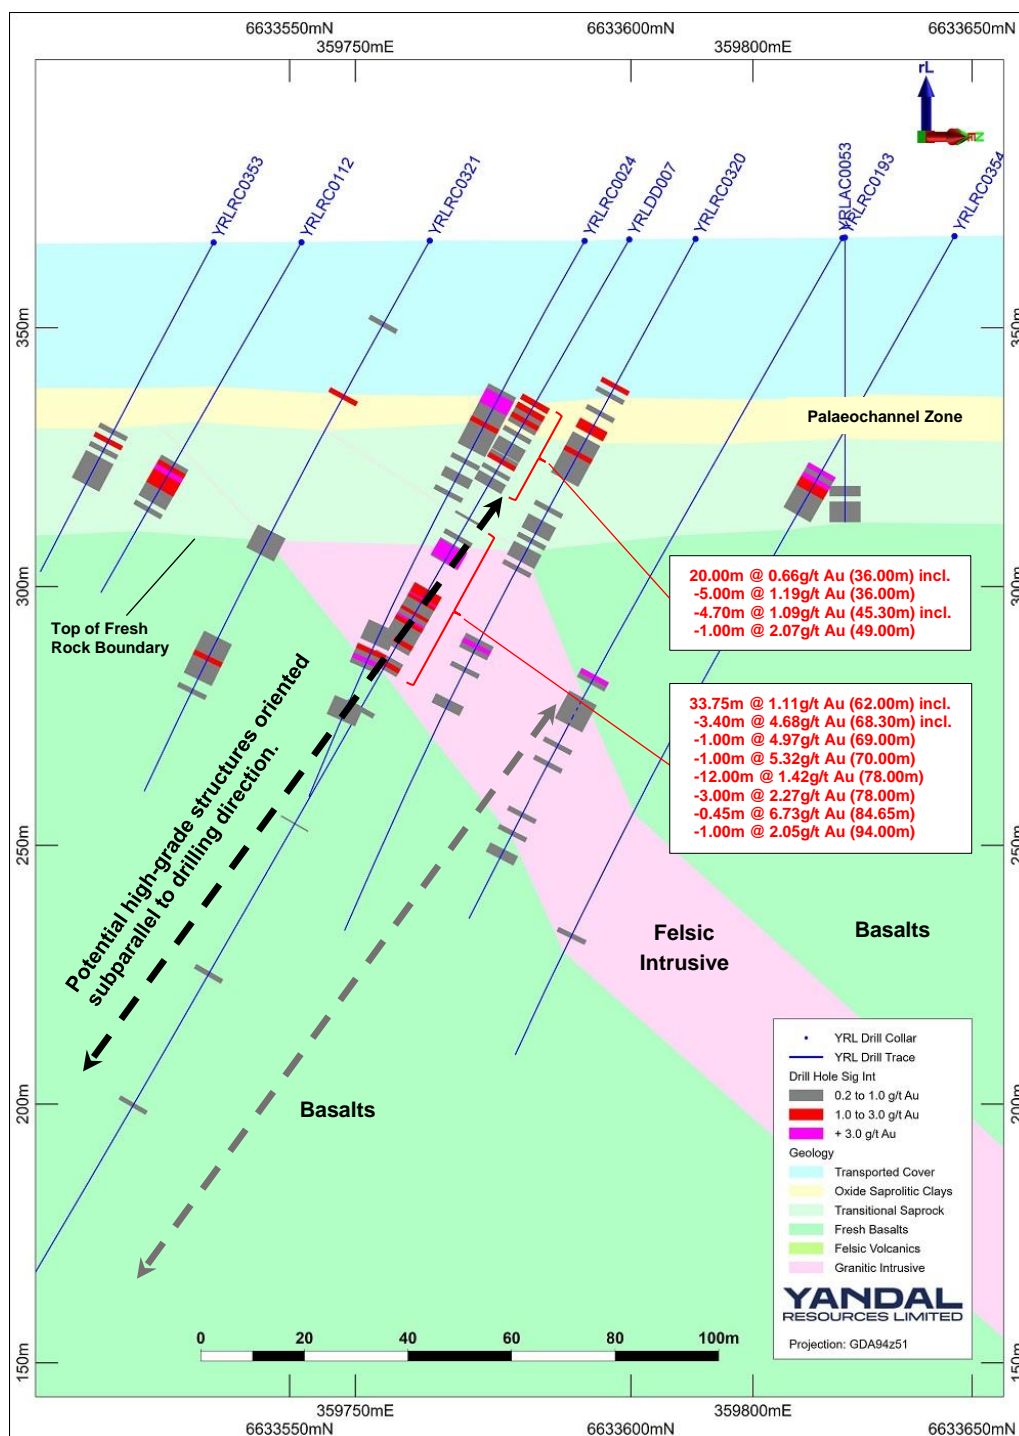


Figure 4 – Gordons Dam prospect schematic cross section plan (A – A', refer Figure 3) over interpreted geology showing the location of DD hole YRLDD007 and Yandal Resources drilling located on section.

¹ Refer to YRL ASX announcement dated 14 January 2021.

Understanding the geology and the orientation of high grade structures in the vicinity of known high-grade mineralisation will improve exploration targeting within the project area. Currently the Company has intersected highly anomalous transitional and bedrock gold mineralisation for ~1.5km from the DD holes in the east-west direction and for ~2.5km in the north-south direction (Figure 2).

Substantial ongoing follow-up RC and AC drilling programs to expand known mineralisation at Gordons Dam and other priority prospects within the project commenced in mid-January. A total of 6,990m comprising 37 RC holes for 3,555m and 117 AC holes for 3,435m have been completed. Prospects tested include Star of Gordons (RC), Gordons Dam (RC), Malone (AC), Gordons Dam SE (AC), Andrews (AC), Brayshaw (AC), Bradman (AC), Holloways Sth (AC) and Holloways (AC). All results are pending.

Next Steps

Key exploration activities planned during the remainder of the March Quarter include;

- Receive and interpret 1m RC assays from Sims Find, Flinders Park, Mt McClure, Oblique and Quarter Moon and commence follow-up RC programs;
- Complete 20,000m combined of AC and RC drilling across the Gordons project and assess whether sufficient data is present to compile a maiden MRE for Gordons Dam;
- Commence pit optimisation and technical activities for mining approvals at Gordons Dam;
- Commence AC drilling at several priority prospects at the Yandal belt projects.

Authorised by the board of Yandal Resources

For further information please contact:

Lorry Hughes
Managing Director
Yandal Resources Limited
yandal@yandalresources.com.au

Bianca Taveira
Company Secretary
+61 8 9389 9021
yandal@yandalresources.com.au

Table 1 – DD drill collar locations, depth, orientation and down hole assay results for the Gordons Dam gold prospect.

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)	Core loss (m)
Gordons Dam Prospect DD Intervals (>0.10g/t Au)											
YRLDD006	6633679	359745	325.40	-75	220	290.00	291.00	1.00	0.15	-	-
						322.00	323.00	1.00	0.25	-	-
YRLDD007	6633600	359781	310.70	-60	220	23.00	24.00	1.00	0.13	-	-
						36.00	56.00	20.00	0.66	-	2.20
					Incl.	36.00	41.00	5.00	1.19	-	0.60
					Incl.	36.00	38.00	2.00	1.49	-	0.60
						45.30	50.00	4.70	1.09	-	0.10
					Incl.	49.00	50.00	1.00	2.07	-	
						62.00	95.75	33.75	1.11	-	-
					Incl.	68.30	71.70	3.40	4.68	-	-
					Incl.	69.00	70.00	1.00	3.64	4.97	-
					Incl.	70.00	71.00	1.00	5.32	5.15	-
						71.00	71.70	0.70	4.37	-	-
					Incl.	78.00	90.00	12.00	1.42	-	-
					Incl.	78.00	81.00	3.00	2.27	-	-
					Incl.	84.65	86.00	1.35	4.32	-	-
					Incl.	84.65	85.10	0.45	4.20	6.73	-
						94.00	95.00	1.00	2.05	1.99	-
						101.15	102.00	0.85	0.17	-	-
						104.00	105.00	1.00	0.22	-	-
						129.90	130.20	0.30	0.31	-	-
						163.00	165.00	2.00	0.16	-	-
						188.00	189.00	1.00	0.13	-	-
						192.30	198.00	5.70	0.12	-	-
						251.00	252.00	1.00	0.16	-	-

Notes to Table 1; 1. An accurate dip and strike and the controls on mineralisation are only interpreted and the true width of mineralisation is unknown at this stage. 2. For AC and RC drilling, 4m composite samples are submitted are analysed using a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit), for DD drilling samples are analysed using a 50g fire assay with ICP-MS finish gold analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia. 3. Au1 is the original assay, Au2 is the highest grade from duplicate or repeat samples if they have been completed. 4. g/t (grams per tonne). 5. Intersections are calculated over intervals >0.10g/t or as indicated. 6. Drill type AC = Air-core, RC = Reverse Circulation, DD = Diamond. 7. Coordinates are in GDA94, MGA Z51. 8. # denotes an end of hole assay. 9. ABD denotes hole abandoned before target depth. 10. Incl. denotes including.

About Yandal Resources Limited

Yandal Resources listed on the ASX in December 2018 and has a portfolio of advanced gold exploration projects in the highly prospective Yandal and Norseman-Wiluna Greenstone Belts of Western Australia.

Yandal Resources' Board has a track record of successful discovery, mine development and production.

November 2020 Mineral Resource Estimate Summary Table – Flushing Meadows Gold Deposit

Material Type	Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Oz	Tonnes	Au (g/t)	Oz	Tonnes	Au (g/t)	Oz
Laterite	89,853	1.26	3,631	86,671	1.23	3,422	176,524	1.24	7,054
Oxide	2,015,900	1.33	86,071	2,246,845	1.10	79,389	4,262,745	1.21	165,420
Transition	35,223	1.20	1,360	1,160,471	1.10	40,966	1,195,695	1.10	42,325
Fresh				1,751,484	0.95	53,440	1,751,484	0.95	53,440
Total	2,140,976	1.32	91,062	5,245,471	1.05	177,217	7,386,448	1.13	268,352

* Reported above 0.5g/t Au lower cut-off grade, refer to Yandal Resources Ltd ASX announcement dated 4 November 2020 for full details.

Competent Person Statement

The information in this document that relates to Exploration Results, geology and data compilation is based on information compiled by Mr Trevor Saul, a Competent Person who is a Member of The Australian Institute of Mining and Metallurgy. Mr Saul is the Exploration Manager for the Company, is a full-time employee and holds shares and options in the Company.

Mr Saul has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Saul consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

The information in this announcement that relates to the Flushing Meadows Mineral Resource Estimate is based on information compiled and generated by Andrew Bewsher, an employee of BM Geological Services Pty Ltd ("BMGS"). Both Andrew Bewsher and BMGS hold shares in the company. BMGS consents to the inclusion, form and context of the relevant information herein as derived from the original resource reports. Mr Bewsher has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which is being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

Appendix 1 – Gordons Gold Project
JORC Code (2012) Table 1, Section 1 and 2

Mr Trevor Saul, Exploration Manager of Yandal Resources compiled the information in Section 1 and Section 2 of the following JORC Table 1 and is the Competent Person for those sections. The following Table and Sections are provided to ensure compliance with the JORC Code (2012 edition) requirements for the reporting of Mineral Resources.

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> 4m composite samples taken with a sample scoop thrust into the RC sample bag which is laid out in individual metres in a plastic bag or on the ground for AC samples. 1m single splits taken using a cone splitter at time of drilling, if 4m composites are anomalous (>100-200ppb or lower depending on location), 1m single splits are submitted for analyses. Average sample weights about 3.0kg for 4m composites and 3.0-4.0kg for 1m samples. For DD drilling samples HQ-3 and NQ2 core is stored in specially made plastic core trays and sampled at a maximum of 1m intervals (smaller intervals based on geology observations). Average weights are variable.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	<ul style="list-style-type: none"> For RC and AC drilling regular air and manual cleaning of cyclone to remove hung up clays where present. Routinely regular standards are submitted during composite analysis and standards, blanks and duplicates for 1m samples. Based on statistical analysis and cross checks of these results, there is no evidence to suggest the samples are not representative. Standards & replicate assays taken by the laboratory.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	<ul style="list-style-type: none"> RC and DD drilling was used to obtain 1m or smaller samples from which approximately 1.0-3.0kg sample was pulverised to produce a 50g fire assay with ICP-MS (inductively coupled plasma - mass spectrometry) finish gold analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia. Samples assayed for Au only for this program. Drilling intersected oxide, transitional and primary mineralisation to a maximum drill depth of 325.40m for DD.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<ul style="list-style-type: none"> RC drilling with a 6' ½ inch face sampling hammer bit. DD drilling used a HQ-3 and NQ2 drill bit.
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> RC recovery and meterage was assessed by comparing drill chip volumes for individual meters. Estimates of sample recoveries were recorded. Routine checks for correct sample depths are undertaken every RC rod (6m). For DD sample recovery/core loss or gain was written on core blocks after each run by the drillers. RC sample recoveries were visually checked for recovery, moisture and contamination. The cyclone was routinely cleaned ensuring no material build up. Due to the generally good/standard drilling conditions and appropriately powered drilling rigs the geologist believes the RC and DD samples are representative. At depth there were some wet RC samples and these are recorded on geological logs.

Criteria	JORC Code explanation	Commentary
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<ul style="list-style-type: none"> • RC drill chip logging is routinely completed on one metre intervals at the rig by the geologist. The log was made to standard logging descriptive sheets, and transferred into Micromine software on a computer once back at the Perth office. Logging was qualitative in nature. For DD drilling detailed geological logs have been recorded for geology, geotechnical and structural aspects. • All intervals logged for RC drilling completed during drill programs with a representative sample placed into chip trays.
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<ul style="list-style-type: none"> • RC samples taken. • RC samples were collected from the drill rig by spearing each 1m collection bag and compiling a 4m composite sample. Single splits were automatically taken by the rig cone splitter for RC. • Duplicate 1m samples were taken in the field, with standards and blanks inserted with the RC and DD samples for analyses. • 1m samples were consistent and weighed approximately 3.0–4.0kg for RC, it is common practice to review sample results and then review sampling procedures to suit. • Once samples arrived in Perth, further work including duplicates and QC was undertaken at the laboratory. Yandal Resources Ltd has determined that at the Gordons Dam prospect there is sufficient data for a MRE and an initial one is planned upon completion upon receipt of all pending results and QA/QC re-sample and re-assay programs (however the deposit is open in many directions). • Mineralisation mostly occurs within intensely oxidised saprolitic and palaeochannel clays after altered mafic, porphyry and felsic rocks (typical greenstone geology). The sample sizes is standard practice in the WA Goldfields to ensure representivity.
Quality of assay data and laboratory tests	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<ul style="list-style-type: none"> • The RC and DD samples were assayed using a 50g fire assay with ICP-MS (inductively coupled plasma - mass spectrometry) finish gold analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia for gold only. Initial 4m samples were assayed by Aqua Regia with fire assay checks (0.01ppm detection limit). • No geophysical assay tools were used. • Laboratory QA/QC involves the use of internal lab standards using certified reference material, blanks, splits and replicates as part of the in-house procedures. QC results (blanks, duplicates, standards) were in line with commercial procedures, reproducibility and accuracy. These comparisons were deemed satisfactory. Some re-splitting with an onsite three-tier riffle splitter has been undertaken in the palaeochannel area for analyses. A number of samples have been selected for future metallurgical testing. A number of 1m residues from RC assays are planned to be analysed at other laboratories for comparison.
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p>	<ul style="list-style-type: none"> • Work was supervised by senior Aurum Laboratory staff experienced in metals assaying. QC data reports confirming the sample quality have been supplied. • Data storage as PDF/XL files on company PC in the Perth office. • No data was adjusted. • Significant intercepts reported in Tables 1 by Mr Trevor Saul of Yandal Resources and were generated by compositing to the indicated downhole thickness. A 0.10g/t Au lower cut-off was used for results and intersections generally calculated with a maximum of 2m of internal dilution.

Criteria	JORC Code explanation	Commentary
	<i>Discuss any adjustment to assay data.</i>	
Location of data points	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<ul style="list-style-type: none"> • All drill collar locations were initially pegged and surveyed using a hand held Garmin GPS, accurate to within 3-5m. Holes were drilled at various spacings dependent on prospect assessment. All reported coordinates are referenced to the GDA. The topography is very flat at the location of the Gordons Dam prospect. Down hole surveys utilised a proshot camera at the end of hole plus every 30m while pulling out of the hole. • Grid MGA94 Zone 51. • Topography is very flat, small differences in elevation between drill holes will have little effect on mineralisation widths on initial interpretation. All new holes and some available historic holes have been surveyed by DGPS as well as a surveyed topographical surface for compilation of MRE's. The topographic surface has been generated by using the hole collar surveys. It is considered to be of sufficient quality to be valid for this stage of exploration.
Data spacing and distribution	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<ul style="list-style-type: none"> • Holes were variably spaced in accordance with the collar details/coordinates supplied in Table 1. • The hole spacing was determined by the Company to be sufficient when combined with confirmed historic drilling results to define mineralisation in preparation for a JORC Compliant Resource Estimate update if completed at the Gordons Dam prospect only. Some historic holes have been redrilled and sampled for comparative purposes. The sample spacing and the appropriateness of each hole to be included to make up data points for a Mineral Resource has not been determined. It will depend on results from all the drilling and geological interpretations when complete.
Orientation of data in relation to geological structure	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<ul style="list-style-type: none"> • No, drilling angle or vertical holes is deemed to be appropriate to intersect the supergene mineralisation and potential residual dipping structures and is appropriate for the current stage of the prospects. At depth angle holes have been used to intersect the interpreted dipping lodes. True widths are often calculated depending upon the geometry. • The relationship between the drilling orientation and the orientation of mineralised structures is not considered to have introduced a sampling bias. Given the style of mineralisation and drill spacing/method, it is the most common routine for delineating shallow gold resources in Australia. • Angle holes are the most appropriate for exploration style and Resource style drilling for the type and location of mineralisation intersected.
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> • Samples were collected on site under supervision of the responsible geologist. The work site is on a pastoral station. Once collected samples were wrapped and transported to Perth for analysis. Dispatch and consignment notes were delivered and checked for discrepancies. • Sample security for historical samples was highly variable and dependent on the exploration company however most of the companies working in the area are considered leaders in improving the sample security, QAQC procedures and exploration procedures.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> • No Audits have been commissioned.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	<ul style="list-style-type: none"> The drilling was conducted on P27/1911 and M27/502. The tenements are 100% owned by the Company and there are no 3rd party royalties. The tenements are in good standing and no known impediments exist.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"> Previous workers in the area include among others, North Ltd, Delta Gold Ltd, Aurion Gold Ltd, Placer Dome Asia Pacific, Barmenco Investments, Mt Kersey Mining NL, Gutnick Resources NL, Pacific Arc Exploration, Geopeko, Flinders Resources Ltd, Kesli Chemicals Pty Ltd and Windsor Resources NL.
Geology	Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none"> Archaean Orogenic Gold mineralisation hosted within the Boorara domain of the Kalgoorlie Terrane within the Norseman-Wiluna Archaean greenstone belt. The granite-greenstone belt is approximately 600 km long and is characterised by very thick, possibly rift controlled accumulations of ultramafic, mafic and felsic volcanics, intrusive and sedimentary rocks. It is one of the granite / greenstone terrains of the Yilgarn Craton of WA.
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<ul style="list-style-type: none"> See Table 1. All holes reported from the current program are listed in Table 1 or can be viewed in Yandal's other ASX releases during 2019-2021 and Yandal's Replacement Prospectus dated 22 November 2018 lodged on the ASX 12 December 2018. Other hole collars in the immediate area of the Gordons Dam prospect have been included for diagrammatic purposes and Mr Saul considers listing all of the drilling details is prohibitive and would not improve transparency or materiality of the report. Plan view diagrams are shown in the report of all drilling collars in close proximity to the new drilling for exploration context in Figures 1-4. No information is excluded.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<ul style="list-style-type: none"> No weighting or averaging calculations were made, assays reported and compiled are as tabulated in Table 1. All assay intervals reported in Table 1 are typically 1m downhole intervals above 0.10g/t Au lower cut-off or as shown. No metal equivalent calculations were applied.

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	<ul style="list-style-type: none"> • Oxide and Transitional mineralisation is generally flat lying (blanket like) while mineralisation at depth is generally steeper dipping. Further orientation studies are required. • Drill intercepts and true width appear to be close to each other, or within reason allowing for the minimum intercept width of 1m. Yandal Resources Ltd estimates that the true width is variable. • Given the nature of RC drilling, the minimum width of assay interval is 1m (max. 1m), for DD the interval is variable up to a max. of 1m. • Given the highly variable geology and mineralisation including supergene mineralisation and structurally hosted gold mineralisation there is no project wide relationship between the widths and intercept lengths.
Diagrams	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p>	<ul style="list-style-type: none"> • See Figures 1-4 and Table 1.
Balanced reporting	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<ul style="list-style-type: none"> • Summary results for all RC and DD assays > 0.10g/t are shown in Table 1 for the current drilling. • Diagrammatic results are shown in Figures 1-4.
Other substantive exploration data	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<ul style="list-style-type: none"> • There have been no historical Mineral Resource Estimates. • There has been no historic mining at the Gordons Dam prospect as it is a new discovery.
Further work	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<ul style="list-style-type: none"> • Additional exploration including AC, RC and DD drilling and or geophysical surveys to advance known prospects is warranted. Additional exploration drilling is likely if new programs can be approved by the Company.