

10 March 2021

ASX Announcement

RESULTS CONTINUE TO CONFIRM HIGH-GRADE HALLOYSITE AND ULTRA-BRIGHT-WHITE KAOLIN, NOOMBENBERRY PROJECT, WA

HIGHLIGHTS:

- **Results from the second batch of samples from the Noombenberry project have continued to show bright to ultra-bright white kaolin and high-grade Halloysite. With results including:**
 - *NBAC055: 17m @ 12% halloysite, 65% Kaolinite, 75 ISO-B from 3m Inc: 3m @ 23% halloysite, 65% Kaolinite, 86 ISO-B from 8m*
 - *NBAC031: 10m @ 10% halloysite, 80% Kaolinite, 73 ISO-B from 2m*
 - *NBAC034: 16m @ 7% halloysite, 65% Kaolinite, 77 ISO-B from 5m Inc: 4m @ 14% halloysite, 66% Kaolinite, 81 ISO-B from 9m*
 - *NBAC043: 17m @ 5% halloysite, 87% Kaolinite, 83 ISO-B from 10m Inc: 5m @ 12% halloysite, 67% Kaolinite, 76 ISO-B from 22m*
- **Work has commenced on the construction of geological wireframes in preparation for the planned maiden JORC resource estimate.**
- **Results received so far from 50 of 197 holes drilled, with further results anticipated to be received in the coming weeks.**
- **Given shallow nature of the mineralisation, and consistency of assay results, and over \$4.5 million cash at end of December 2020, the Company remains well funded to undertake additional drilling to extend the maiden JORC resource estimate, targeted for Q2 2021.**

Latin Resources Limited (ASX: LRS) (“Latin” or “the Company”) is very pleased to advise that the second batch of results from its 100% owned Noombenberry Project (“**Noombenberry**” or “the **Project**”), have continued to show bright to ultra-bright kaolinite and high grade halloysite, with individual composite sample grades of up to **23% halloysite/ 87 ISO-B Brightness**¹.

Latin Resources Executive Director, Chris Gale commented, “We are extremely pleased to see our initial results mirrored in this next batch of results from our test work. We now have results for over 50 of our 197 holes drilled at Noombenberry, and we are seeing continuity and consistency of the high-grade halloysite and bright to ultra-bright white kaolinite. This is shaping up to be a very large and more importantly, a high-quality deposit that we expect will command strong attention from potential end-users.”

¹ See Table 3, Appendix 1 for full details

He went on to say, “Work is well underway on building our geological wireframes, so that we can be ready to commence the resource estimate as soon as all of our test work results have been received. The team is focused on fast tracking this process, as well as looking toward the next phase of drilling to extend our coverage to the north, where our initial results show the mineralisation remain open.”

Significant composite results from the recently received test work results from the Noombenberry Project are presented in the table below (Table 1), with a full list of results received and drillhole collar details provided in Appendix 1.

Hole ID	From (m)	To (m)	Interval (m)	-45um (%)	Fe2O3 (%)	Al2O3 (%)	TiO2 (%)	SiO2 (%)	Kaolinite (%)	Halloysite (%)	Brightness (ISO-B)
NBAC029	4	14	10	39.5	1.0	33.1	0.3	52.1	80	3	77
NBAC030	6	25	19	48.9	0.9	34.6	1.8	48.1	76	2	76
NBAC031	2	7	5	35.6	1.1	35.0	1.3	48.2	80	10	73
NBAC032	7	11	4	55.1	1.0	36.6	1.5	47.1	91	3	75
NBAC033	7	22	15	46.5	1.9	33.6	2.5	48.0	77	2	65
NBAC034	5	21	16	34.4	0.9	32.4	0.4	52.2	65	7	77
<i>Inc</i>	9	13	4	32.9	0.7	34.4	0.3	50.4	66	14	81
NBAC035	4	6	2	19.9	2.2	34.6	0.3	49.1	88	1	61
NBAC036	8	15	7	50.2	0.7	35.4	1.1	48.0	84	0	81
NBAC037	4	26	22	39.1	1.2	32.9	0.8	50.9	79	0	70
NBAC038	5	24	19	38.9	0.7	34.6	1.5	49.1	81	2	76
<i>Inc</i>	5	8	3	21.5	1.5	34.3	1.4	49.6	79	10	64
NBAC039	8	20	12	33.4	1.0	33.5	0.5	51.4	84	0	79
NBAC040	6	9	3	36.8	1.1	36.7	0.8	47.6	88	7	64
NBAC042	7	9	2	69.3	1.4	37.4	0.3	46.5	98	0	81
NBAC043	10	27	17	46.8	0.6	36.6	0.6	47.9	87	5	83
<i>Inc</i>	22	27	5	37.7	1.0	33.5	0.7	50.0	67	12	76
NBAC051	9	23	14	49.3	1.3	36.2	0.4	48.3	93	0	78
NBAC052	9	21	12	37.4	0.9	35.3	0.3	49.6	87	0	82
NBAC053	8	24	16	33.6	0.8	31.9	1.0	51.8	77	0	77
NBAC055	3	20	17	34.6	1.0	33.4	0.4	51.2	65	12	75
<i>Inc</i>	8	11	3	49.8	0.2	36.4	0.4	48.6	65	23	86
NBAC056	6	20	14	31.8	0.6	34.4	0.4	50.6	86	2	77
<i>Inc</i>	14	18	4	36.8	0.6	31.9	0.4	53.3	72	7	77
NBAC057	10	15	5	42.0	1.1	33.8	0.6	50.2	81	0	77

Table 1: Significant Intersection for the current batch of results - Noombenberry Project, Western Australia

The Company plans to re-commence drilling once all statutory approvals have been received to extend the current drill coverage into its adjacent 100% owned tenement (E77/2624), where these initial results show the bright-white kaolin and high grade halloysite mineralisation is open to the north.

Latin has formally engaged a suitable independent consulting group to undertake a maiden JORC resource estimate for the Noombenberry Project mineralisation. Latin’s geological team is working closely with the consultant group, with geological domaining and the construction of wireframe model underway. This precursor work will enable the fast tracking of the estimation process once all test work results have been received.

The Company has started to receive inbound enquires from potential offtake partners and will continue to progress these discussions as we gain a better appreciation for the scale and characteristics of our Halloysite project.

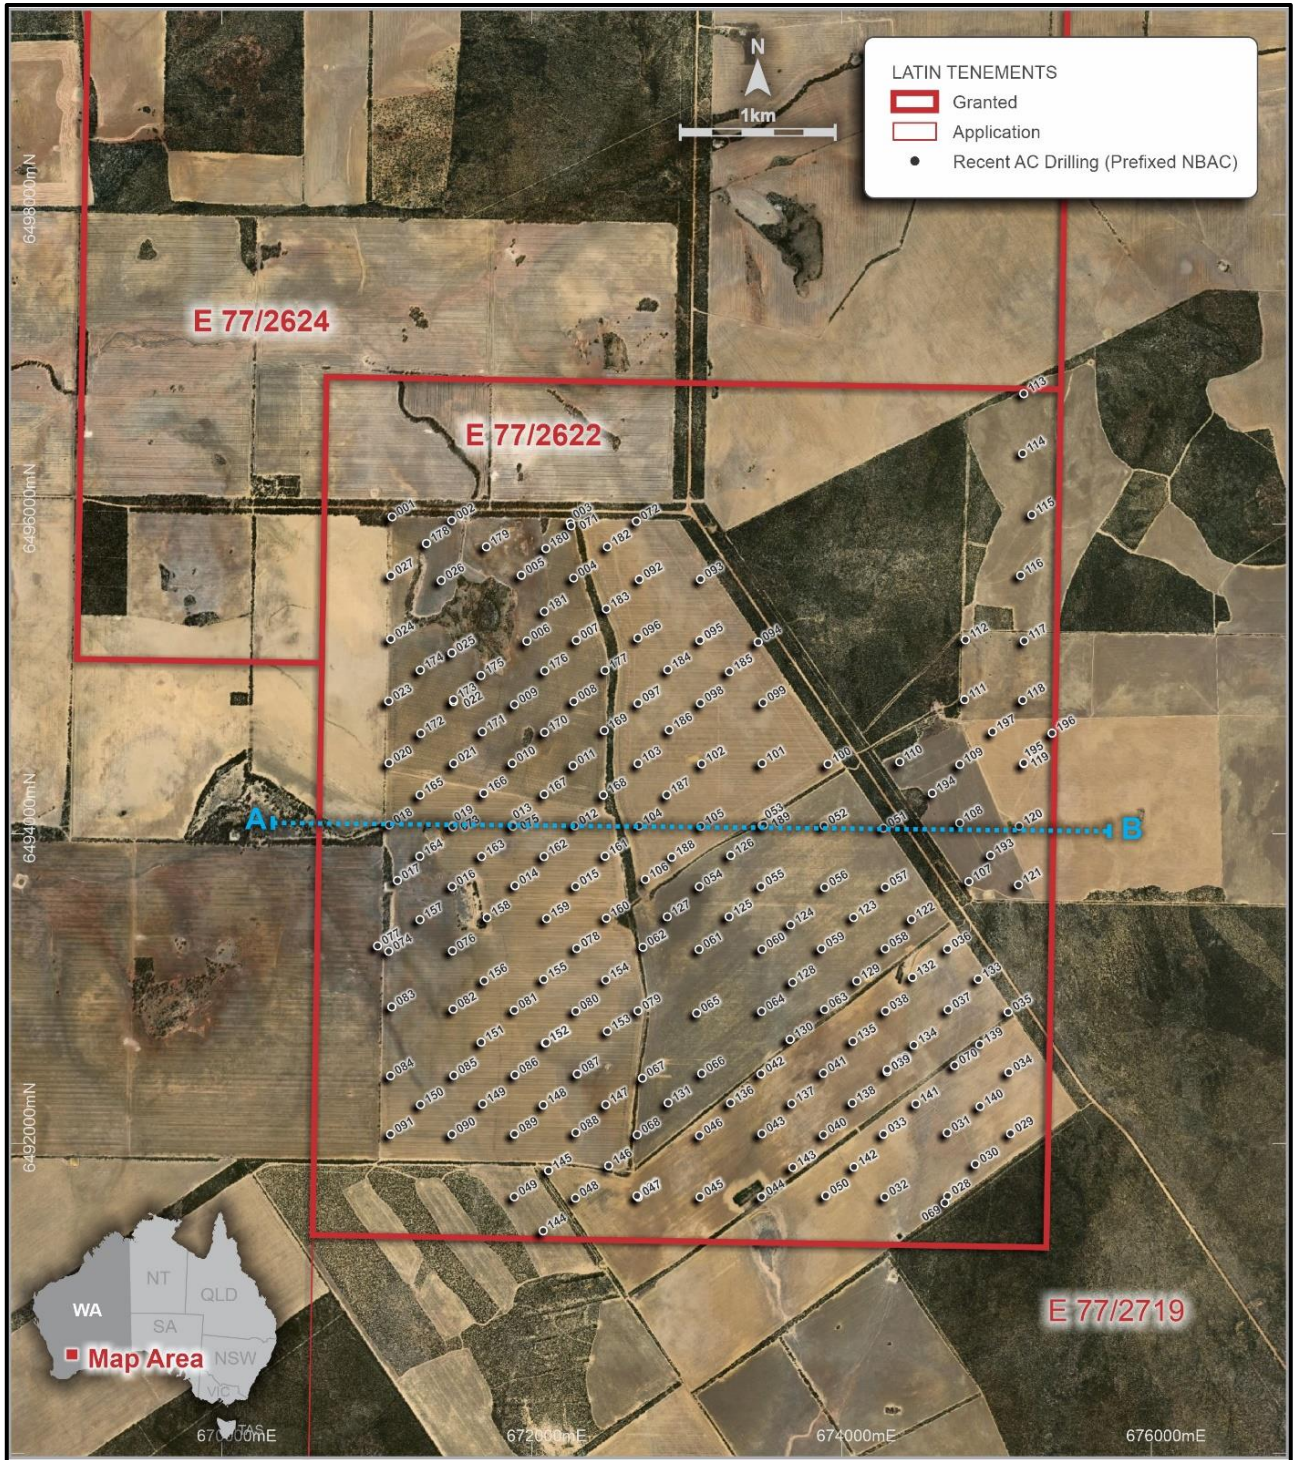


Figure 1: Noomberry Project showing completed air-core drill sites

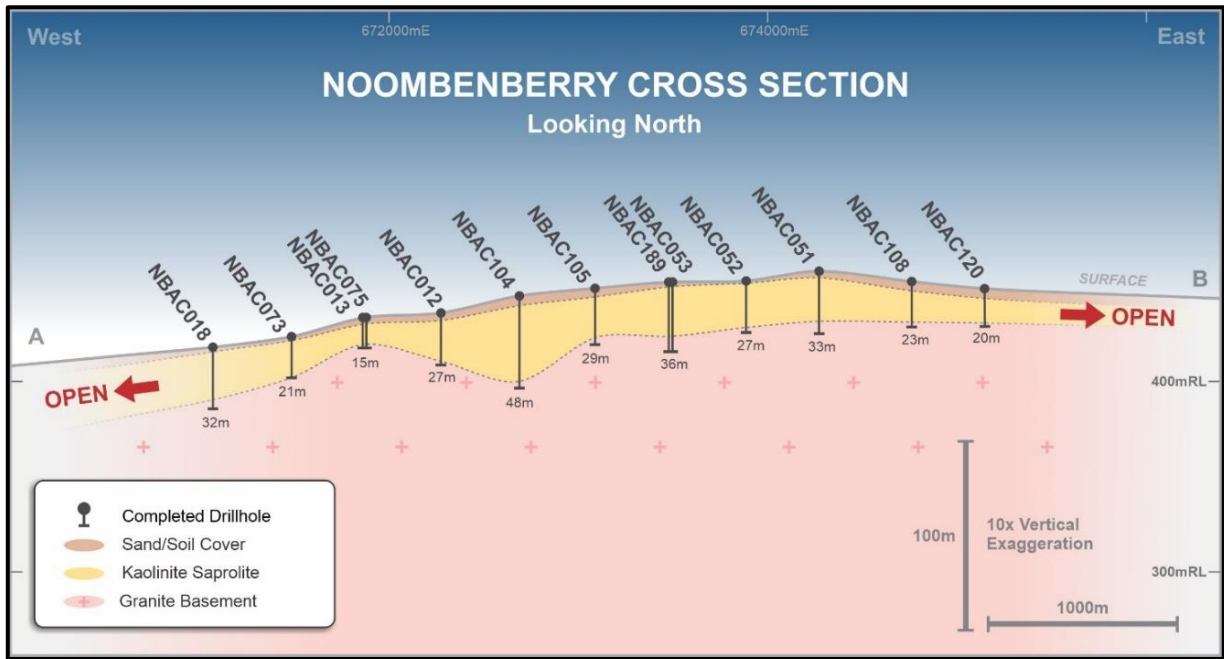


Figure 2: Cross Section 6,494,000mN, showing a representative simplified geological interpretation across the project area

This Announcement has been authorised for release to ASX by the Board of Latin Resources

For further information please contact:

Chris Gale
 Executive Director
 Latin Resources Limited
 +61 8 6117 4798

Sarah Smith
 Company Secretary
 Latin Resources Limited
 +61 8 6117 4798

info@latinresources.com.au

www.latinresources.com.au



About Latin Resources

Latin Resources Limited (ASX: LRS) is an Australian-based mineral exploration company with several mineral resource projects in Latin America and Australia. The Australian projects include the Yarara gold project in the NSW Lachlan Fold belt, Noombenberry Halloysite Project near Merredin, WA, and the Big Grey Project in the Paterson region, WA.

The Company recently signed a JV agreement with the Argentinian company Integra Capital to fund the next phase of exploration on its lithium pegmatite projects in Catamarca, Argentina. The company is also actively progressing its Copper Porphyry MT03 project in the Ilo region.

Forward Looking Statement

This ASX announcement may include forward-looking statements. These forward-looking statements are not historical facts but rather are based on Latin Resources Ltd.'s current expectations, estimates and assumptions about the industry in which Latin Resources Ltd operates, and beliefs and assumptions regarding Latin Resources Ltd.'s future performance. Words such as "anticipates", "expects", "intends", "plans", "believes", "seeks", "estimates", "potential" and similar expressions are intended to identify forward-looking statements. Forward-looking statements are only predictions and are not guaranteed, and they are subject to known and unknown risks, uncertainties and assumptions, some of which are outside the control of Latin Resources Ltd. Past performance is not necessarily a guide to future performance and no representation or warranty is made as to the likelihood of achievement or reasonableness of any forward-looking statements or other forecast. Actual values, results or events may be materially different to those expressed or implied in this ASX announcement. Given these uncertainties, recipients are cautioned not to place reliance on forward looking statements. Any forward-looking statements in this announcement speak only at the date of issue of this announcement. Subject to any continuing obligations under applicable law and the ASX Listing Rules, Latin Resources Ltd does not undertake any obligation to update or revise any information or any of the forward-looking statements in this announcement or any changes in events, conditions or circumstances on which any such forward looking statement is based.

Competent Person Statement

Information in this ASX release that relates to Exploration Results and Exploration Targets is based on information completed by Mr Anthony Greenaway, who is a member of the Australasian Institute of Mining and Metallurgy. Mr Greenaway is a full-time employee of Latin Resources Ltd and has sufficient experience which is relevant to the style of mineralisation and types of deposits under consideration and to the activities undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code for Reporting of Mineral Resources and Ore Reserves". Mr Greenaway consents to the inclusion in this report of the matters based on information in the form and context in which it appears.

APPENDIX 1

Noombenberry Project Drill Collar and Assay Information

Table 2 – Air-Core drill hole collar details, Noombenberry Project, WA

Details and co-ordinates of air-core drill holes from the Noombenberry Halloysite-Kaolin Project WA.

Hole ID	East (m)	North (m)	RL	Dip	Azi	EOH (m)	Comments
NBAC028	674685	6491661	427	-90	360	3	Hole not sampled
NBAC029	675092	6492065	436	-90	360	21	
NBAC030	674865	6491867	429	-90	360	35	
NBAC031	674683	6492070	427	-90	360	17	
NBAC032	674280	6491656	423	-90	360	19	
NBAC033	674272	6492061	429	-90	360	32	
NBAC034	675081	6492462	436	-90	360	26	
NBAC035	675077	6492851	439	-90	360	8	
NBAC036	674685	6493257	437	-90	360	25	
NBAC037	674689	6492866	433	-90	360	33	
NBAC038	674284	6492856	440	-90	360	33	
NBAC039	674295	6492465	434	-90	360	32	
NBAC040	673884	6492057	437	-90	360	12	
NBAC041	673884	6492454	443	-90	360	5	Hole not sampled
NBAC042	673481	6492451	445	-90	360	14	
NBAC043	673487	6492064	438	-90	360	28	
NBAC044	673484	6491657	427	-90	360	33	Results Pending
NBAC045	673087	6491656	434	-90	360	22	Results Pending
NBAC046	673084	6492053	440	-90	360	34	Results Pending
NBAC047	672687	6491654	438	-90	360	35	Results Pending
NBAC048	672282	6491649	439	-90	360	29	Results Pending
NBAC049	671887	6491657	437	-90	360	10	Results Pending
NBAC050	673899	6491664	431	-90	360	32	Results Pending
NBAC051	674271	6494037	458	-90	360	33	
NBAC052	673887	6494054	453	-90	360	27	
NBAC053	673488	6494056	452	-90	360	36	
NBAC054	673082	6493660	455	-90	360	2	Hole not sampled
NBAC055	673481	6493660	454	-90	360	32	
NBAC056	673892	6493655	452	-90	360	22	
NBAC057	674283	6493656	451	-90	360	39	

Table 3 – Full geochemical results for air-core composite samples received to date


Hole ID	From (m)	To (m)	Interval (m)	-45um (%)	Fe2O3 (%)	Al2O3 (%)	TiO2 (%)	SiO2 (%)	Kaolinite (%)	Halloysite (m)	Brightness (ISO-B)
NBAC028	Hole Not Sampled										
NBAC029	4	8	4	52.7	0.9	36.3	0.3	48.2	92	3	
NBAC029	8	11	3	38.7	1.1	34.3	0.3	50.7	80	7	75
NBAC029	11	14	3	22.7	1.0	27.7	0.4	58.5	65	0	73
NBAC030	2	6	4	49.5	1.7	34.7	1.5	48.0	89	0	62
NBAC030	6	10	4	61.4	0.9	36.1	2.2	46.7	88	0	76
NBAC030	10	14	4	54.1	1.0	34.9	1.9	47.0	76	1	76
NBAC030	14	17	3	46.4	0.8	34.7	1.5	48.7	71	4	74
NBAC030	17	21	4	40.9	0.8	34.0	1.4	48.7	70	3	73
NBAC030	21	25	4	40.8	0.9	33.5	2.0	49.4	75	0	78
NBAC030	25	29	4	55.1	1.2	34.1	2.4	47.3	77	0	74
NBAC030	29	31	2	44.0	0.9	33.3	2.7	47.9	74	0	72
NBAC031	2	7	5	35.6	1.1	35.0	1.3	48.2	80	10	73
NBAC032	7	11	4	55.1	1.0	36.6	1.5	47.1	91	3	75
NBAC033	7	10	3	21.9	1.1	29.8	4.1	53.1	76	3	64
NBAC033	10	14	4	65.7	1.4	36.5	1.6	46.2	91	0	74
NBAC033	14	18	4	48.5	1.5	34.5	2.3	47.1	76	0	68
NBAC033	18	22	4	43.8	3.4	32.6	2.5	46.9	63	4	56
NBAC034	5	9	4	48.1	0.4	36.8	0.4	48.2	87	6	83
NBAC034	9	13	4	37.2	0.7	34.4	0.3	50.4	66	14	81
NBAC034	13	17	4	33.0	1.2	31.9	0.4	52.1	69	2	73
NBAC034	17	21	4	19.5	1.3	26.4	0.4	58.3	37	4	71
NBAC035	4	6	2	19.9	2.2	34.6	0.3	49.1	88	1	61
NBAC036	6	8	2	28.9	0.9	32.6	3.5	50.8	83	0	63
NBAC036	8	12	4	56.2	0.6	36.3	1.0	47.5	89	0	82
NBAC036	12	15	3	42.3	0.9	34.2	1.3	48.8	78	0	79
NBAC037	4	6	2	19.7	1.8	25.8	2.7	58.8	68	1	60
NBAC037	6	9	3	62.7	1.4	36.3	1.5	46.5	91	0	73
NBAC037	9	13	4	53.1	1.1	36.8	0.6	46.7	92	0	77
NBAC037	13	17	4	40.3	1.4	34.2	0.3	49.5	79	0	59
NBAC037	17	20	3	37.8	0.9	32.9	0.4	50.5	74	0	73
NBAC037	20	23	3	24.9	0.9	29.3	0.5	55.5	69	1	73
NBAC037	23	26	3	23.7	0.8	30.9	0.6	53.7	69	0	75
NBAC038	5	8	3	21.5	1.5	34.3	1.4	49.6	79	10	64
NBAC038	8	12	4	56.9	0.6	36.8	1.5	47.2	91	0	80
NBAC038	12	16	4	45.9	0.5	34.4	1.5	49.3	80	0	78
NBAC038	16	20	4	39.7	0.4	34.6	1.5	49.3	74	4	79
NBAC038	20	24	4	26.3	0.7	32.9	1.7	50.3	81	1	76
NBAC039	6	8	2	15.4	1.5	32.2	1.3	51.9	87	0	65
NBAC039	8	12	4	20.4	0.9	33.5	0.8	52.5	90	0	76
NBAC039	12	16	4	49.8	1.0	35.0	0.2	49.5	90	0	83
NBAC039	16	20	4	29.9	1.1	32.0	0.3	52.1	72	0	76
NBAC039	20	22	2	20.8	2.2	26.8	0.5	57.2	49	0	61
NBAC040	6	9	3	36.8	1.1	36.7	0.8	47.6	88	7	64

Hole ID	From (m)	To (m)	Interval (m)	-45um (%)	Fe2O3 (%)	Al2O3 (%)	TiO2 (%)	SiO2 (%)	Kaolinite (%)	Halloysite (m)	Brightness (ISO-B)
NBAC041	Hole Not Sampled										
NBAC042	7	9	2	69.3	1.4	37.4	0.3	46.5	98	0	81
NBAC042	9	10	1	43.0	2.3	36.7	0.3	47.0	97	0	66
NBAC042	10	11	1	39.3	3.3	36.1	0.3	46.2	97	0	54
NBAC043	10	14	4	45.8	0.4	37.9	0.6	47.3	92	6	81
NBAC043	14	18	4	51.1	0.3	38.2	0.4	46.5	97	1	88
NBAC043	18	22	4	54.8	0.6	37.6	0.8	47.1	96	0	86
NBAC043	22	27	5	37.7	1.0	33.5	0.7	50.0	67	12	76
NBAC044	Results Pending										
NBAC045	Results Pending										
NBAC046	Results Pending										
NBAC047	Results Pending										
NBAC048	Results Pending										
NBAC049	Results Pending										
NBAC050	Results Pending										
NBAC051	4	6	2	18.1	1.6	35.5	0.6	48.7	96	0	58
NBAC051	6	9	3	33.4	0.7	37.2	0.5	48.1	97	0	68
NBAC051	9	10	1	46.7	0.5	37.1	0.5	48.3	96	0	81
NBAC051	10	12	2	51.4	0.8	37.2	0.4	47.9	97	0	68
NBAC051	12	14	2	54.6	0.8	37.8	0.3	47.5	98	0	83
NBAC051	14	17	3	48.7	1.8	36.8	0.3	47.7	96	0	79
NBAC051	17	20	3	48.9	1.7	35.9	0.3	47.9	92	0	79
NBAC051	20	23	3	46.1	1.6	33.7	0.3	50.0	83	0	79
NBAC052	7	9	2	11.8	1.2	31.5	0.4	55.1	86	0	65
NBAC052	9	13	4	26.2	0.7	34.9	0.4	49.8	86	0	81
NBAC052	13	17	4	41.2	0.8	35.9	0.3	49.2	91	0	85
NBAC052	17	21	4	44.8	1.2	35.0	0.2	49.6	83	0	82
NBAC052	21	22	1	17.8	2.4	29.1	0.2	54.1	51	0	53
NBAC053	5	6	1	38.4	1.5	35.7	1.5	46.2	92	0	69
NBAC053	6	7	1	36.3	2.2	35.3	1.2	46.9	92	0	47
NBAC053	7	8	1	28.7	2.0	33.5	1.6	48.3	85	0	51
NBAC053	8	12	4	13.3	0.8	33.1	0.4	51.6	78	0	79
NBAC053	12	13	1	62.1	1.9	35.6	2.4	45.7	90	0	70
NBAC053	13	17	4	45.6	0.7	32.1	0.4	52.2	86	0	78
NBAC053	17	20	3	35.9	0.8	31.2	0.8	52.0	67	3	79
NBAC053	20	24	4	33.2	0.6	30.2	1.8	53.0	70	0	75
NBAC053	24	28	4	8.2	1.1	22.2	1.4	63.1	49	4	59
NBAC053	28	30	2	14.5	1.5	28.4	2.2	53.8	61	4	65
NBAC054	Hole Not Sampled										
NBAC055	3	5	2	7.4	2.8	31.0	0.7	53.5	79	3	44
NBAC055	5	8	3	33.2	0.3	37.5	0.3	48.2	79	17	86
NBAC055	8	11	3	49.9	0.3	36.4	0.4	48.6	65	23	87
NBAC055	11	15	4	42.5	0.4	33.0	0.4	51.5	62	9	85
NBAC055	15	18	3	37.1	0.7	32.3	0.3	52.4	60	10	81
NBAC055	18	20	2	21.3	3.2	27.7	0.5	54.6	45	7	44
NBAC055	20	21	1	17.6	2.6	25.8	1.0	56.6	41	0	48
NBAC055	21	23	2	19.2	8.4	22.7	1.5	52.6	41	0	24

Hole ID	From (m)	To (m)	Interval (m)	-45um (%)	Fe2O3 (%)	Al2O3 (%)	TiO2 (%)	SiO2 (%)	Kaolinite (%)	Halloysite (m)	Brightness (ISO-B)
NBAC056	6	8	2	33.2	0.7	37.2	0.5	47.6	96	0	76
NBAC056	8	10	2	22.4	0.9	35.8	0.5	49.0	95	0	71
NBAC056	10	14	4	30.8	0.5	35.6	0.4	49.9	96	0	81
NBAC056	14	18	4	36.8	0.6	31.9	0.4	53.3	72	7	77
NBAC056	18	20	2	31.9	0.8	33.1	0.4	51.5	75	2	77
NBAC056	20	21	1	13.9	2.4	23.2	0.5	59.9	29	1	48
NBAC057	7	8	1	22.5	2.5	32.7	0.6	51.2	85	0	50
NBAC057	8	9	1	26.4	1.1	34.8	0.6	50.2	87	0	68
NBAC057	9	10	1	25.7	1.8	32.8	0.6	51.6	86	0	59
NBAC057	10	13	3	42.2	1.0	33.6	0.6	50.6	80	0	77
NBAC057	13	15	2	41.6	1.1	34.0	0.5	49.6	82	0	78
NBAC057	15	17	2	36.9	1.5	33.8	0.6	50.0	80	0	67
NBAC057	17	19	2	34.8	2.5	32.6	0.6	50.3	73	0	61
NBAC057	19	20	1	34.8	6.3	29.4	0.6	50.2	61	0	38
NBAC057	20	21	1	35.1	4.8	30.6	0.6	49.8	66	0	48
NBAC057	21	24	3	32.7	3.6	31.1	0.7	50.6	68	0	54
NBAC057	24	25	1	35.9	3.4	29.9	0.7	51.8	57	0	53
NBAC057	25	27	2	32.8	2.2	31.5	0.6	52.4	60	0	66
NBAC057	27	31	4	31.1	4.7	30.6	0.6	49.6	58	4	44

APPENDIX 2

Noombenberry Project Location Map

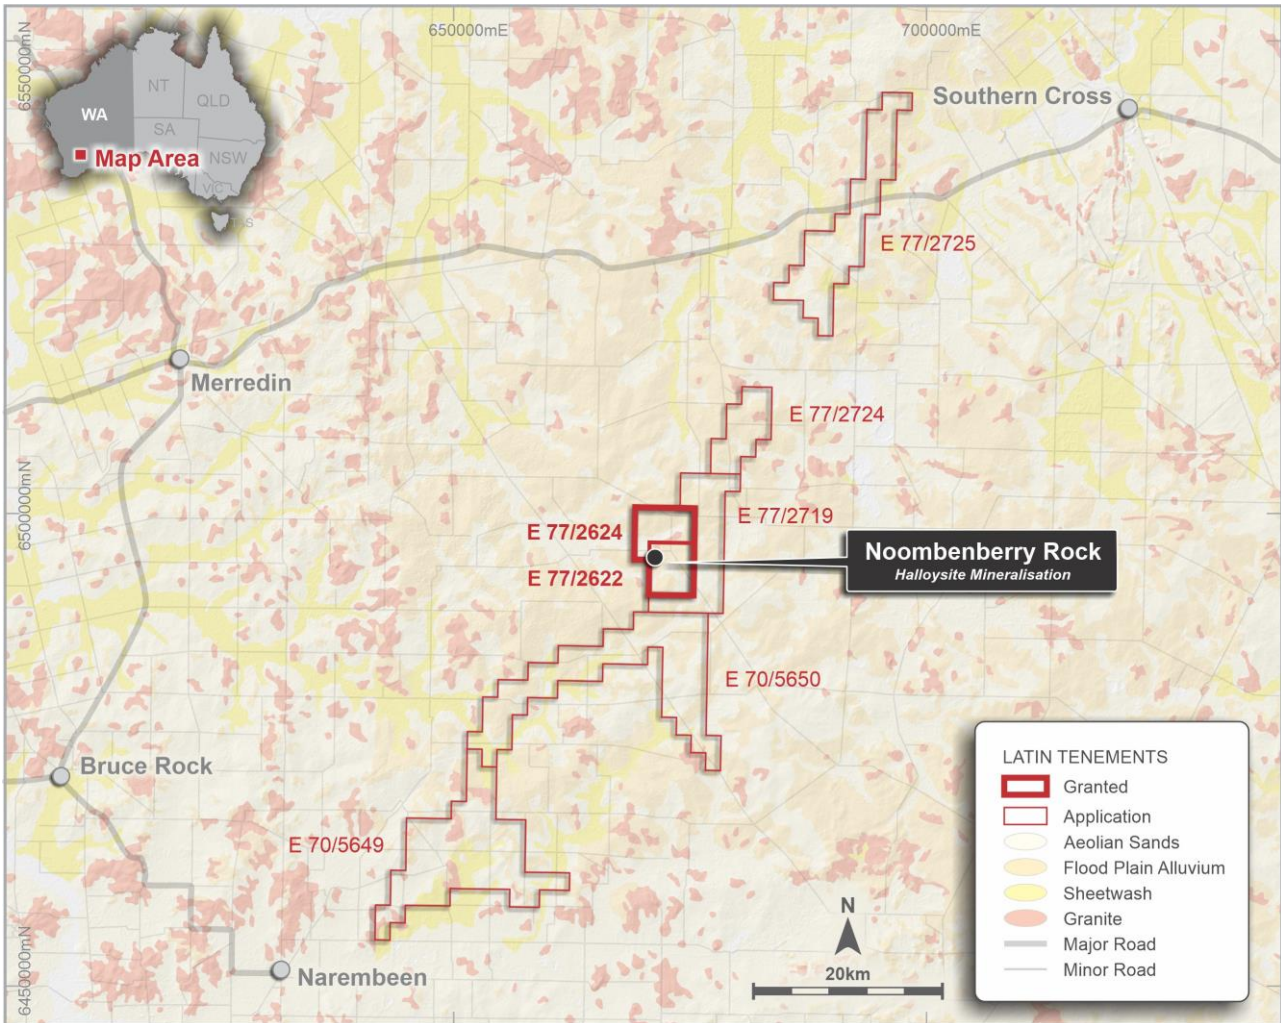

APPENDIX 3

JORC Code, 2012 Edition – Table 1 Section 1 Sampling Techniques and Data (Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> • <i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g., ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> • <i>2020-21 LRS: Aircore drilling consisted of vertical holes to industry standard completed by independent Drilling contractors generating individual 1m samples. A total of 197 holes for 4,430m were completed at the Noomberry Project in late 2020/ early 2021. Sample compositing was carried out on site by LRS’s representative’s</i> • <i>Aircore 1m samples were composited based on perceived reflectance levels. Composite intervals range from 1-4m</i> • <i>Outcrop grab samples collected via random chips collected from representative material</i>
<i>Drilling techniques</i>	<ul style="list-style-type: none"> • <i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> • <i>Latin resources have completed air-core drilling, using industry standard techniques.</i> • <i>All drill collars are surveyed using handheld GPS.</i>
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> 	<ul style="list-style-type: none"> • <i>Individual 1-meter samples are collected into plastic sample bag and are retained on site, with smaller samples recorded in drill logs.</i>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Weights of samples sent for detailed analysis are recorded and reported by the laboratory No indication of sample bias with respect to recovery has been established.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> LRS geological logging is completed for all holes and is representative across the ore body. The lithology, alteration, and characteristics of drill samples are logged on hard copy logs and entered in excel using standardised geological codes. Logging is both qualitative and quantitative depending on field being logged. All drill-holes are logged in full.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Spear sample compositing consisted of contiguous 1m drill samples up to 5m in total length, based on drill logs and visual estimation of whiteness of material. Sample composites were prepared with the aim of including kaolinised saprolite of similar quality within each composite, although in some cases narrow bands of discoloured kaolinised saprolite were included in the composite. Composite Sampling took place on site by LRS representatives Samples were processed by laboratory Bureau Veritas. Sample weights were recorded before any sampling or drying. Samples are dried at low temperature (60C) to avoid destruction of halloysite. The dried sample was then pushed through a 5.6mm screen prior to splitting. A small rotary splitter is used to split an 800g sample for sizing. The 800g split is then wet sieved at 180µm and 45µm. The +180 and +45µm fractions are filtered and dried with standard papers then photographed. The -45µm fraction is filtered and dried with 2micron paper. A small portion of the -45µm material is split for XRF, XRD and Brightness analysis and reserves are retained by LRS.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • <i>At CSIRO, Division of Land and Water, South Australia testing was conducted on selected -45µm samples by the method below.</i> • <i>The dried -45µm sample was analysed for quantitative elemental and mineralogical testing by XRD. A 2-gram subsample was micronised, slurried, spray dried and a spherical agglomerated sample prepared for XRD. Quantitative analysis of the XRD data was performed by CSIRO using SIROQUANT and Halloysite : Kaolinite proportions determined using profile fitting by TOPAS, calibrated by SEM point counting of a suite of 20 standards.</i> • <i>ISO Brightness and L*a*b* colour of the dried -45micron kaolin powder were determined according to TAPPI standard T 534 om-15 using by the University of South Australia, using a Hunter lab QE instrument.</i>
<p><i>Quality of assay data and laboratory tests</i></p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make</i> 	<ul style="list-style-type: none"> • <i>The analytical method and procedure were as recommended by the laboratory for exploration and are appropriate at the time of undertaking.</i> • <i>The Company has collected several individual field duplicate samples and has drilled and sampled several twin holes. This is considered appropriate for early-stage exploration. The laboratory inserts a range of standard samples in the sample stream the results of which are reported to the Company.</i> • <i>The laboratory uses a series of control samples to calibrate the XRD and XRF instrumentation. Analytical work was completed by an independent analytical laboratory.</i>

Criteria	JORC Code explanation	Commentary
	<p><i>and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <ul style="list-style-type: none"> <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i> 	
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> <i>Sample and assay data from aircore drilling have been compiled and reviewed by the LRS Exploration Manager, who was involved in the logging and sampling of the drilling at the time. No independent intercept verification has been undertaken.</i> <i>Primary data is on paper drill logs and entered in excel and stored in an access database.</i> <i>Hole and sample location are captured with a hand-held GPS</i> <i>Assay data and results is reported by the laboratory, unadjusted as contained in the original laboratory reports</i>
Location of data points	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> <i>Drill collar locations were captured using a handheld GPS with +/- 5m accuracy</i> <i>The grid system used is UTM GDA 94 Zone 50</i>
Data spacing and distribution	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> <i>Nominal first pass drill spacing is 400m x 400m, with off-set infill to a nominal 200m x 200m.</i>

Criteria	JORC Code explanation	Commentary
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this</i> 	<ul style="list-style-type: none"> <i>Sampling is preferentially across the strike or trend of mineralized outcrops.</i> <i>Drill holes are vertical as the predominant geological sequence is a flat lying weathering profile</i> <i>Drill intersections are reported as down hole widths</i>
<i>Sample security</i>	<p><i>should be assessed and reported if material.</i></p> <ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> <i>Samples are collected and stored on site, prior to being transported to the laboratory by LRS personnel and contractors</i>
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> <i>None undertaken at this stage</i>

Section 2 Reporting of Exploration Results
(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • <i>Exploration license applications E77/2624 and E77/2622 are granted exploration licenses.</i> • <i>E77/2719, E77/2725, E70/5650 and E70/5649 are tenement application lodged with WA DMIRS</i> • <i>The Company is not aware of any impediments to obtaining a license to operate, subject to carrying out appropriate environmental and clearance surveys.</i>
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> • <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> • <i>No historic exploration has been completed on the tenement areas</i>
<i>Geology</i>	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • <i>The Noombenberry Project area is dominated by Granite lithologies which have undergone variable weathering. The simplified geological succession comprises:</i> <ul style="list-style-type: none"> ○ <i>approximately 3-8m of surficial cover including sand/ soils and cemented (ferruginous) material</i> ○ <i>Variably weathered granite – kaolinitic clays and quartz fragments</i> ○ <i>Basement granite</i> • <i>Kaolin occurrences, such as that seen on the Noombenberry Project, developed in situ by weathering of the feldspar-rich basement.</i> • <i>The resultant kaolin deposits are sub-horizontal zone of kaolinised granite resting with a sharp contact on unweathered basement. The kaolinised zone is overlain by loosely consolidated Tertiary and Quaternary sediment and silcrete.</i> • <i>Halloysite is a rare derivative of kaolin where the mineral occurs as nanotubes. The kaolin encountered at the Noombenberry Project contain variable amounts of naturally occurring halloysite within the kaolinite saprolite.</i>

Criteria	JORC Code explanation	Commentary
<p><i>Drill hole Information</i></p>	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • <i>Drill holes are located by handheld GPS and details are reported in the text of this ASX release.</i> • <i>Drill hole and grab sample locations are reported in Table 1 where required.</i>
<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • <i>Reported summary intercepts are weighted averages based on length.</i> • <i>No maximum or minimum grade truncations have been applied.</i> • <i>No metal equivalent values have been quoted.</i> • <i>Significant intersections are calculated on a nominal >70 ISO-B brightness, or >5% halloysite</i>

Criteria	JORC Code explanation	Commentary
<p><i>Relationship between mineralisation widths and intercept lengths</i></p>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’).</i> 	<ul style="list-style-type: none"> • <i>Drilling is reported to have been carried out at right angles to targeted controlling structures and mineralised zones where possible.</i> • <i>Drilling intervals and interactions are reported as down hole widths. Insufficient information is available at this stage to report true widths</i>
<p><i>Diagrams</i></p>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • <i>The Company has released various maps, figures and sections showing the sample results geological context.</i>
<p><i>Balanced reporting</i></p>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • <i>All analytical results have been reported or appropriately referenced.</i>
<p><i>Other Substantive exploration data</i></p>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • <i>All information that is considered material has been reported, including drilling results, geological context and mineralisation controls etc</i>

Criteria	JORC Code explanation	Commentary
<i>Further work</i>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • <i>Latin will carry out follow-up drilling at Noomberry Project depending on the results of this initial drilling.</i>