

ASX ANNOUNCEMENT

11 March 2021

ASX: BSX

High Grade Massive Sulfide Nickel, Copper & PGEs confirmed at King Snake

Blackstone Minerals Limited ("Blackstone" or the "Company") is pleased to report that it has received several batches of assay results, including some of the maiden drill holes completed at King Snake.

King Snake has excellent potential to add to the Company's Massive Sulfide Vein (MSV) mining inventory and supports the restart of the existing 450ktpa concentrator. The first two drill holes at King Snake returned the following intercepts (refer Figures 2 and 3):

KS20-01A 0.60m @ 2.79% Ni, 3.81% Cu, 0.10% Co & 4.85g/t PGE¹ from 193.05m

KS20-02 5.88m @ 1.22% Ni, 0.49% Cu, 0.04% Co & 4.67g/t PGE¹ from 131.74m

incl. 1.81m @ 0.77% Ni, 0.44% Cu, 0.03% Co & 12.53g/t PGE¹ from 131.74m

1.18m @ 3.72% Ni, 0.84% Cu, 0.12% Co & 2.41g/t PGE¹ from 135.47m

¹ Platinum (Pt) + Palladium (Pd) + Gold (Au)

The ongoing exploration campaign at the King Snake prospect continues to intersect MSV mineralisation (refer ASX announcements dated 4 February 2021 and 16 February 2021). We look forward to providing the market with further assays as they become available.

Blackstone Minerals' Managing Director Scott Williamson commented:

"The first results from King Snake represent some of highest tenor massive sulfide intersections that Blackstone has achieved to date. The new discovery remains open and we are dedicating resources to ensure that we test the full extent of mineralisation at King Snake and build a mining inventory to be included as part of ongoing studies."

Additional assay results for the Ban Chang MSV prospect have also been received. The current reporting for Ban Chang captures the majority of assays that were outstanding for drilling completed in calendar year 2020. The results will underpin the Company's strategy to delineate a maiden resource in the first half of calendar year 2021 to supplement ongoing studies.

Significant intercepts from current reporting at Ban Chang include (refer Figures 4 and 5):

BC20-34	1.92m @ 1.03% Ni, 0.60% Cu, 0.06% Co & 0.44g/t PGE ¹ from 66.65m
incl.	0.91m @ 1.99% Ni, 0.92% Cu, 0.12% Co & 0.84g/t PGE ¹ from 66.65m
BC20-36	7.10m @ 0.66% Ni, 0.45% Cu, 0.06% Co & 0.18g/t PGE ¹ from 56.00m
incl.	0.85m @ 1.91% Ni, 0.60% Cu, 0.13% Co & 0.29g/t PGE ¹ from 58.45m
BC20-38	5.40m @ 0.60% Ni, 0.47% Cu, 0.05% Co & 0.20g/t PGE ¹ from 89.20m
incl.	2.22m @ 0.92% Ni, 0.53% Cu, 0.08% Co & 0.24g/t PGE ¹ from 91.38m
BC 20-39	3.07m @ 1.39% Ni, 0.79% Cu, 0.08% Co & 0.78g/t PGE ¹ from 63.80m
BC 20-44	4.72m @ 1.78% Ni, 0.83% Cu, 0.08% Co & 1.14/t PGE ¹ from 87.70m
incl.	0.35m @ 2.57% Ni, 0.32% Cu, 0.12% Co & 1.03/t PGE ¹ from 88.30m
	0.89m @ 3.72% Ni, 0.73% Cu, 0.18% Co & 1.78g/t PGE ¹ from 89.26m

¹ Platinum (Pt) + Palladium (Pd) + Gold (Au)

Figure 1 below highlights (in yellow) the prospects in the Ta Khoa district for which assays are being reported (refer Table 2, Table 3 & Appendix 1)

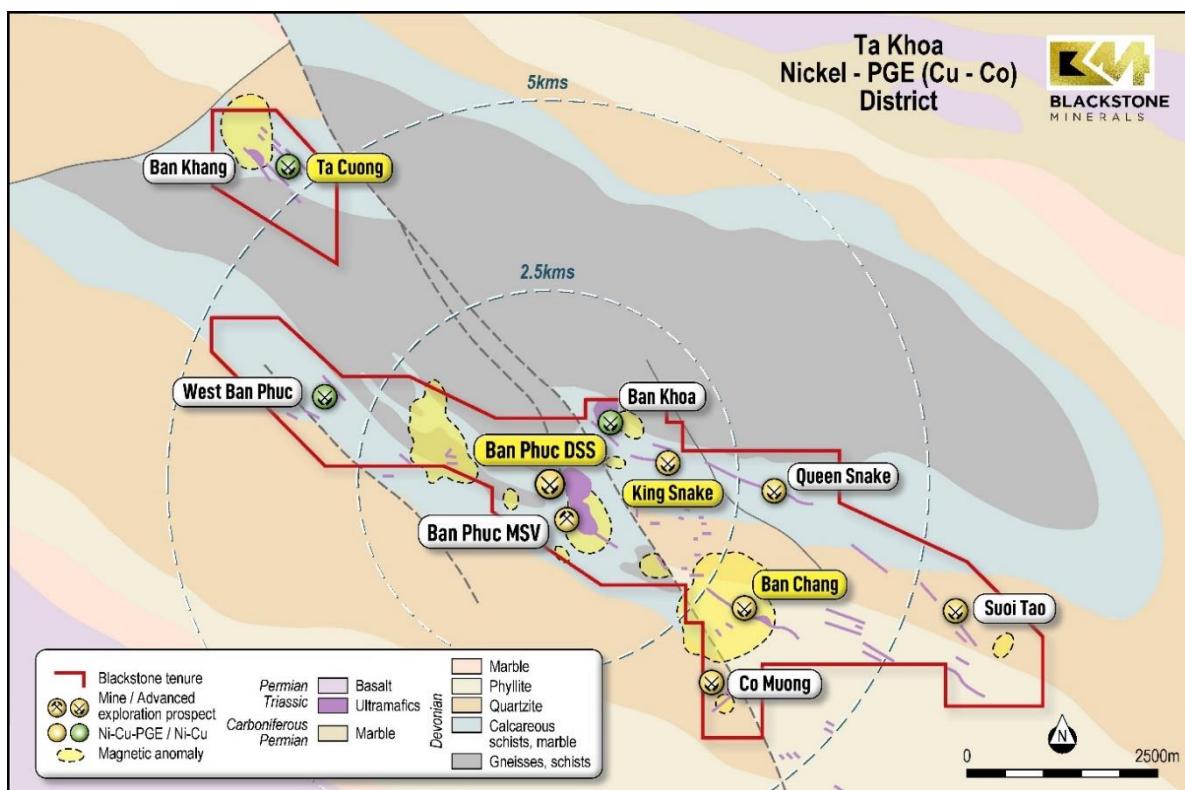


Figure 1. Ta Khoa Nickel-PGE (Cu-Co) district

King Snake

King Snake is a MSV prospect, located 1.5km north-east of the processing facility (refer Figure 1). At King Snake, MSV and high-grade brecciated Ni-Cu-Co-PGE sulfides and gossans are associated with tremolite-altered mafic-ultramafic rocks.

Results from Blackstone's maiden program at King Snake together with historic drill results have defined a strike length of over 800m at King Snake which includes MSV, semi-massive sulfide vein (SMSV) and disseminated sulfides (DSS) (refer Figure 2).

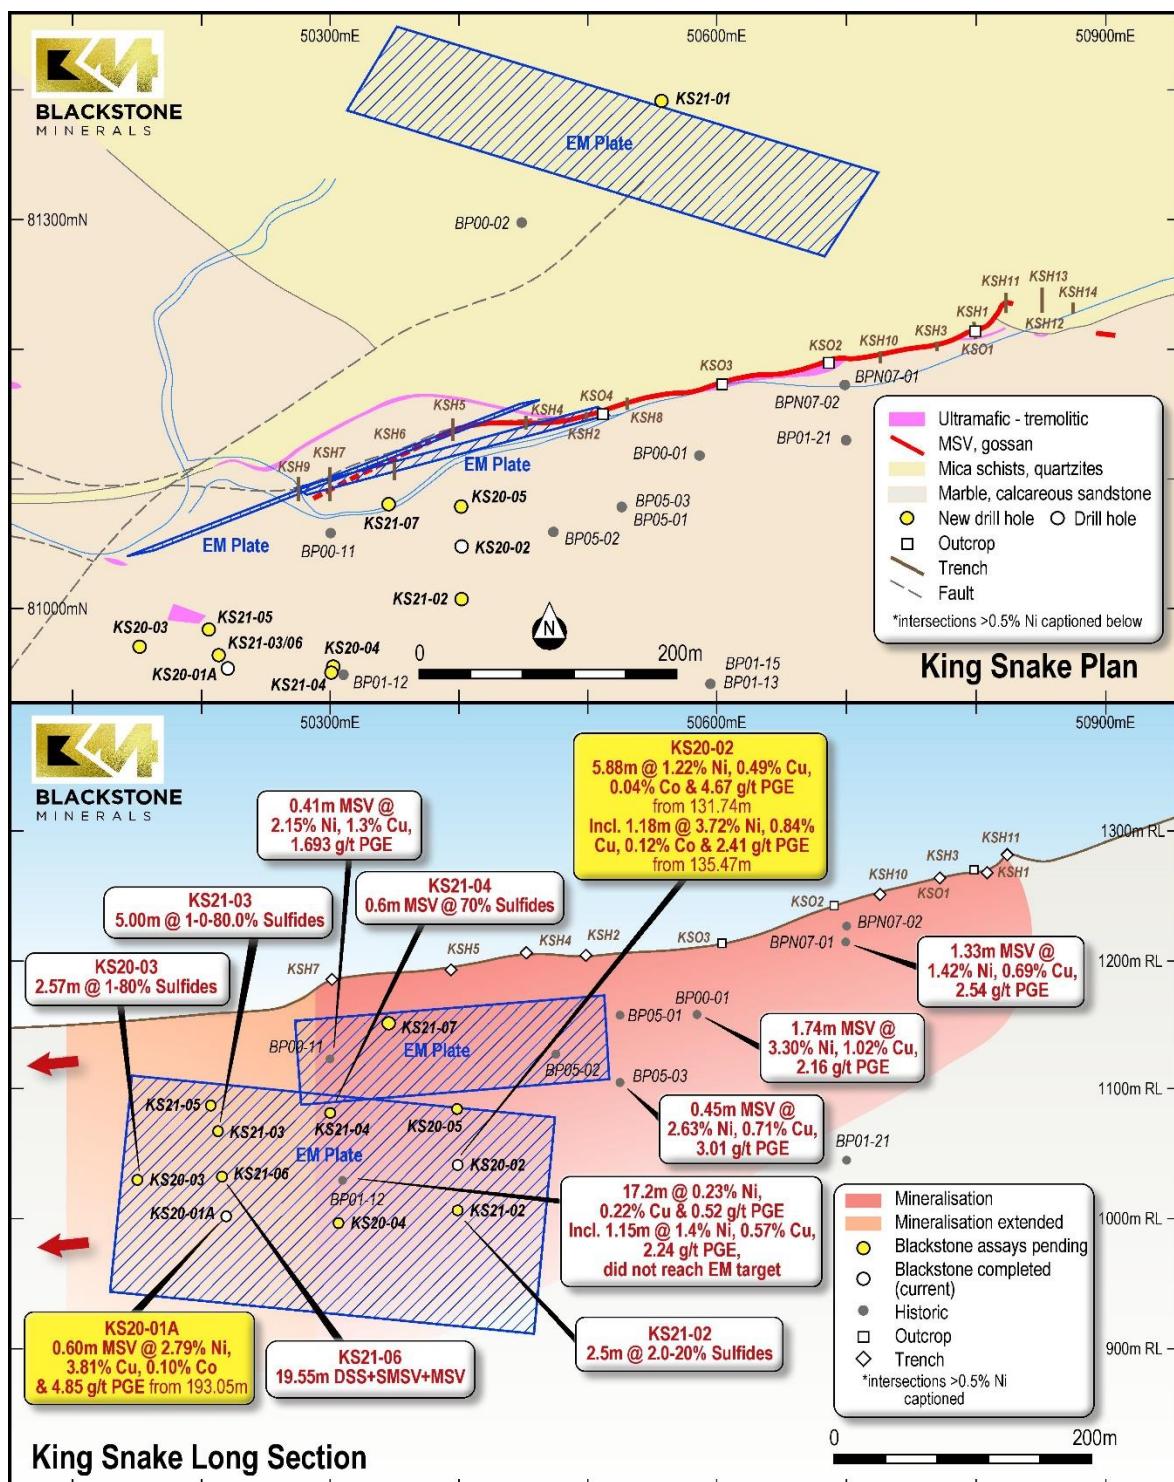


Figure 2. King Snake Plan View and Long Section showing new and historic drill holes

Blackstone's drilling at King Snake is focusing on new Electro-magnetic (EM) targets which extend down plunge to the west of historic drilling. Initial assay results from current reporting and visual inspection suggest greater thickness of sulfide mineralisation down plunge of historic drilling.

With resource estimation currently underway at Ban Chang, King Snake has become the Company's highest priority MSV exploration target. Multiple drill rigs are currently on site and will continue to test the extent of the mineralisation.

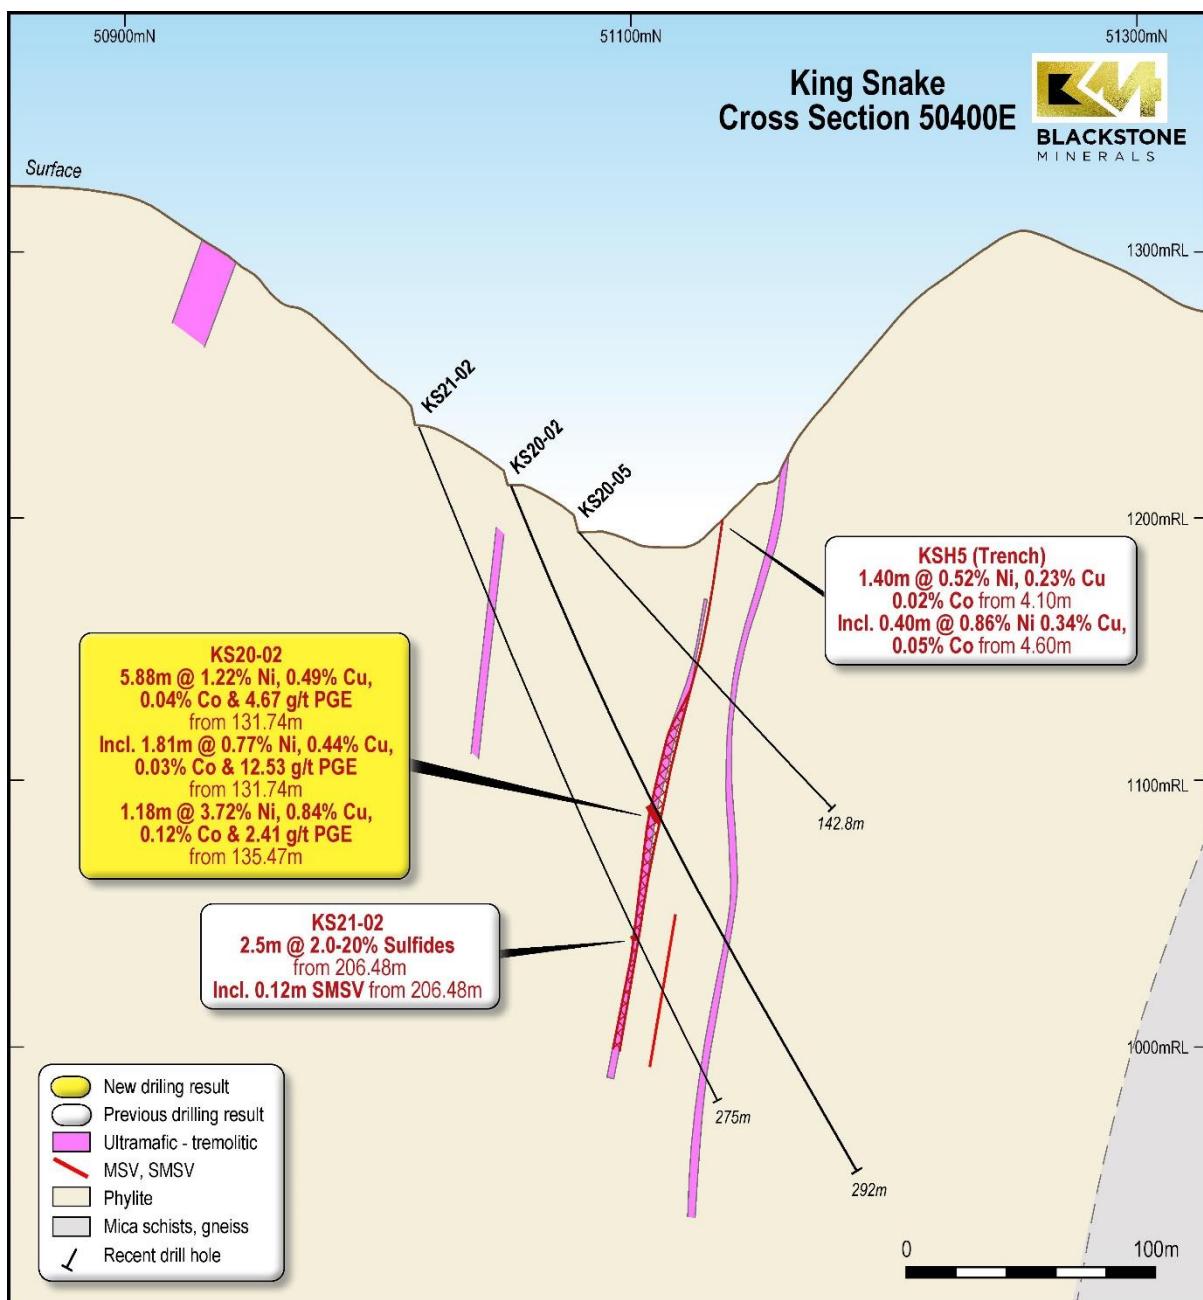


Figure 3. King Snake Cross Section 50400E showing KS20-02.

Ban Chang

Ban Chang is located 2.5km south-east of the existing processing facility and the Ban Phuc deposit adjacent to the Chim Van – Co Muong fault system. The prospect geology consists of a tremolitic dyke swarm within phyllites, sericite schists and quartzites of the Devonian Ban Cai Formation (refer Figure 1).

The known mineralization style is mainly veins and lenses of massive sulfide as well as DSS hosted within tremolite dykes. The dyke swarm is approximately 900m long and varies between 5m and 60m wide. The dykes and massive sulfide are interpreted to be hosted within a splay (and subsidiary structures) off the major regional Chim Van - Co Muong fault system.

Drilling at Ban Chang has identified multiple massive sulfide lenses concentrated particularly to the west, which are often associated with broader disseminated sulfide zones. This style of mineralisation potentially lends itself to a mechanised underground mining scenario and studies are currently underway for preliminary determination of suitable mining methods.

Visual inspection of more recent drilling at Ban Chang (refer Table 1) has confirmed multiple further occurrences of massive sulfide mineralisation and we look forward to updating the market as and when assay results become available.

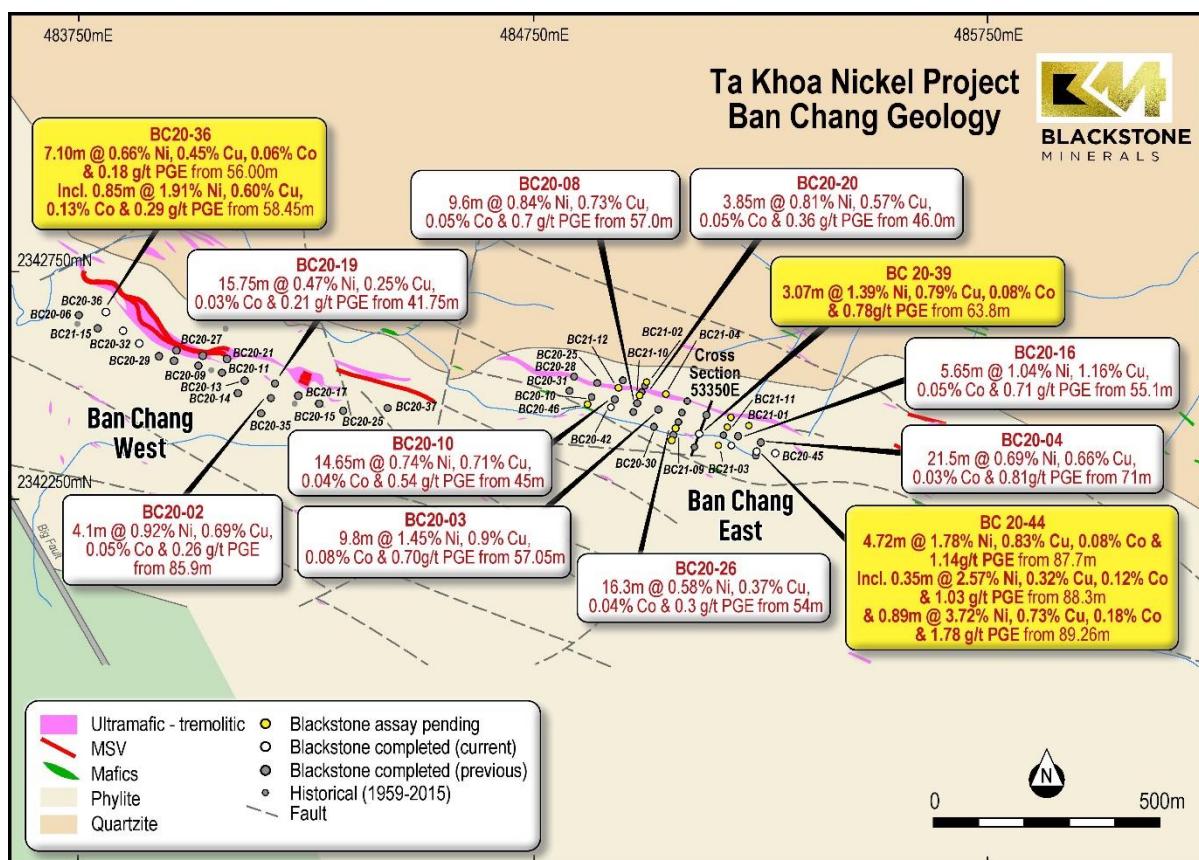


Figure 4. Ban Chang Plan View illustration results from current reporting and historic drilling

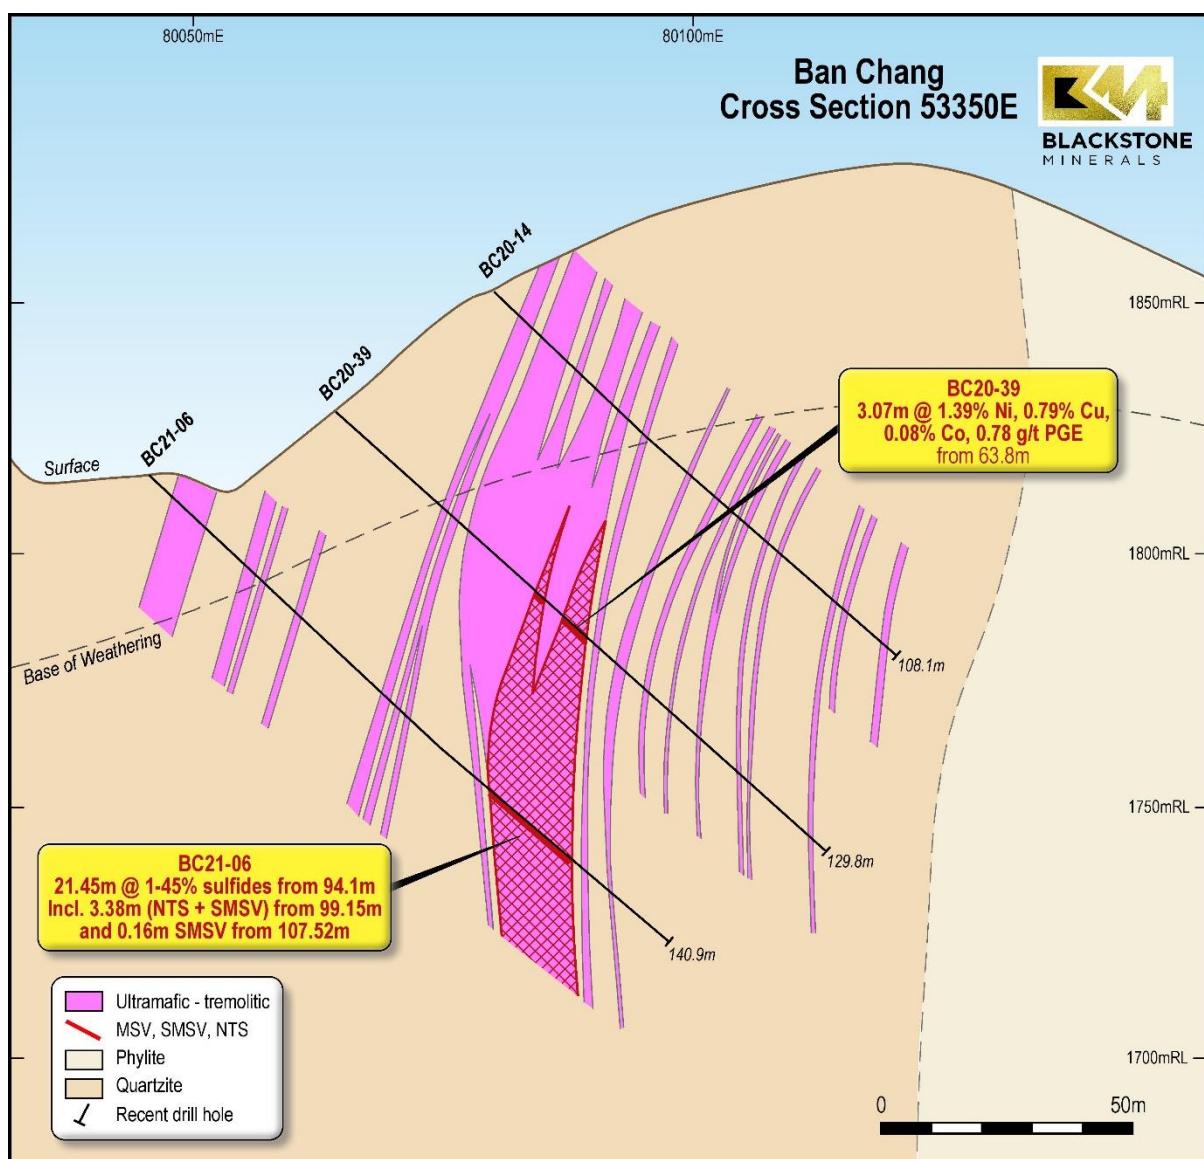


Figure 5. Ban Chang Cross Section showing drill hole BC20-39

Table 1. Sulfide mineralisation zones in BC21-06*

From (m)	To (m)	Width (m)	Sulfide (type)	Sulfide %
94.1	99.15	5.05	Disseminated Sulfide in Ultramafic Dyke	1-3
99.15	102.53	3.38	Net-textured Sulfide	25-45
102.53	107.52	4.99	Disseminated Sulfide in Ultramafic Dyke	6
107.52	107.68	0.16	Semi-massive Sulfide Vein	23
107.68	115.55	7.87	Disseminated Sulfide in Ultramafic Dyke	7

*In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of sulfide mineral abundance should never be considered a proxy or substitute for a laboratory analysis. Assay results are required to determine the widths and grade of the visible mineralisation reported in preliminary geological logging. The Company will update the market when laboratory analytical results become available.

Other Assay Results

Blackstone has received assay results for maiden drill holes at Ta Cuong, which were completed in the 2020 calendar year.

The Company recently announced the intersection of significant sulfide mineralisation in a previously untested area within the Ta Cuong prospect, the Taipan Discovery Zone (TDZ) (refer ASX announcement dated 25 February 2021). The discovery hole TC21-03 is currently being followed up with further drilling and we look forward to testing the strike and depth extent of the TDZ.

Whilst aggressively exploring for high-grade MSV opportunities, the Company has continued to perform infill drilling on the Ban Phuc DSS orebody. Drilling at Ban Phuc is in its final stages and it is expected that the market will be provided with an updated mineral resource estimate late in H1-2021.

About Blackstone

Blackstone Minerals Limited (ASX: BSX / OTCQX: BLSTF / FRA: B9S) flagship project, the Ta Khoa Nickel-Copper-PGE Project in Vietnam, is a district scale green nickel™ sulfide opportunity. The Company is focused on building an integrated upstream and downstream processing business in Vietnam that produces precursor Nickel:Cobalt:Manganese (NCM) products for Asia's growing Lithium-ion battery industry.

Upstream, at the Ta Khoa Nickel-Cu-PGE mine site in Northern Vietnam (refer Figure 6), Blackstone plans to explore both MSV and DSS targets throughout the project, initially within a 5km radius of the existing processing facility. Blackstone will conduct further geophysics using EM on the MSV and DSS targets and continue an aggressive drilling campaign.

By combining the Company's existing mineral inventory (Ban Phuc), exploration potential presented by high priority targets such as Ban Chang and King Snake and the ability to source third party concentrate, Blackstone will be able to increase the scale of its downstream business to meet the rising demand for downstream nickel products.

The Company has completed a Scoping Study which includes mining the Company's maiden resource at the Ban Phuc DSS ore body and the construction of one downstream refinery. The Company is now advancing the Ta Khoa Project through to a Pre-feasibility Study which will contemplate the option to mine higher grade MSV deposits, which has the potential to reduce upfront capital requirements by enabling the Company to restart the existing Ban Phuc Concentrator (450kt).



Figure 6. Ta Khoa Nickel-Cu-PGE Project Location

Authorised by the Managing Director on behalf of the Board of Blackstone Minerals Limited.

For more information please contact

Scott Williamson

Managing Director
+61 8 9425 5217
scott@blackstoneminerals.com.au

Dhanu Anandarasa

Manager Corporate Development
+61 8 9425 5217
dhanu@blackstoneminerals.com.au

Patrick Chang

Head of Corporate Development
+61 8 9425 5217
patrick@blackstoneminerals.com.au

Competent Person Statement

The information in this report that relates to Exploration Results and Exploration Targets is based on information compiled by Mr Andrew Radonjic, a Director and Technical Consultant of the company, who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Andrew Radonjic has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Andrew Radonjic consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to Mineral Resource Estimation in respect of the Ta Khoa Nickel Project is based on information compiled by BM Geological Services (BMGS) under the supervision of Andrew Bewsher, a director of BMGS and Member of the Australian Institute of Geoscientists with over 21 years of experience in the mining and exploration industry in Australia and Vietnam in a multitude of commodities including nickel, copper and precious metals. Mr Bewsher has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Bewsher consents to the inclusion of the Mineral Resource Estimate in this report on that information in the form and context in which it appears.

The Company confirms that all material assumptions and parameters underpinning the Mineral Resource Estimates as reported within the Scoping Study in market announcement dated 14 October 2020 continue to apply and have not materially changed, and that it is not aware of any new information or data that materially affects the information that has been included in this announcement.

Forward Looking Statements

This report contains certain forward-looking statements. The words "expect", "forecast", "should", "projected", "could", "may", "predict", "plan", "will" and other similar expressions are intended to identify forward looking statements. Indications of, and guidance on, future earnings, cash flow costs and financial position and performance are also forward-looking statements. Forward looking statements, opinions and estimates included in this announcement are based on assumptions and contingencies which are subject to change without notice, as are statements about market and industry trends, which are based on interpretations of current market conditions. Forward looking statements are provided as a general guide only and should not be relied on as a guarantee of future performance. Forward looking statements may be affected by a range of variables that could cause actual results or trends to differ materially. These variations, if materially adverse, may affect the timing or the feasibility of the development of the Ta Khoa Nickel Project.

Blackstone concluded it has a reasonable basis for providing these forward-looking statements and believes it has reasonable basis to expect it will be able to fund development of the project. However, a number of factors could cause actual results or expectations to differ materially from the results expressed or implied in the forward-looking statements. Given the uncertainties involved, investors should not make any investment decisions based solely on the results of this study. The project development

schedule assumes the completion of a Pre-Feasibility Study (PFS) by early 2021 and a DFS by late 2021. Development approvals and investment permits will be sought from the relevant Vietnamese authorities in early 2021. Delays in any one of these key activities could result in a delay to the commencement of construction (planned for early 2022). This could lead on to a delay to first production, planned for 2023. The Company's stakeholder and community engagement programs will reduce the risk of project delays. Please note these dates are indicative only.

The JORC-compliant Mineral Resource estimate forms the basis for the Scoping Study in the market announcement dated 14 October 2020. Over the life of mine considered in the Scoping Study, 83% of the processed Mineral Resource originates from Indicated Mineral Resources and 18% from Inferred Mineral Resources; 76% of the processed Mineral Resource during the payback period will be from Indicated Mineral Resources. The viability of the development scenario envisaged in the Scoping Study therefore does not depend on Inferred Mineral Resources. There is a low level of geological confidence associated with Inferred Mineral Resources and there is no certainty that further exploration work will result in the determination of Indicated Mineral Resources or that the production target itself will be realised. The Inferred Mineral Resources are not the determining factors in project viability.

Table 2

New Ban Chang, King Snake, Ta Cuong, Ban Phuc and Ban Khoa drill hole locations, orientations and mineralised intersections (down hole positions lengths are shown).

* PGE = Pt+Pd+Au.

Complete assay interval data in Table 2,

All coordinates UTM Zone48N WGS84, Surveys by Leica 1203+ total station system.

Project Area	Hole	East UTM 48N WGS84	North UTM 48N WGS84	RLm UTM 48N WGS84	Azimuth UTM (°)	Dip (°)	End of hole (metres)	From (m)	To (m)	Interval (m)	Ni (%)	Cu (%)	Co (%)	Pt+Pd+Au (g/t)	Pt (g/t)	Pd (g/t)	Au (g/t)	Recovery (%) **
King Snake	KS20-01A	430865	2343777	170	022	-60	380.3	193.05	193.6	0.6	2.79	3.81	0.10	4.85	3.52	1.01	0.32	100
	KS20-02	431082	2343791	209	022	-66	292.0	131.74	137.6	5.88	1.22	0.49	0.04	4.67	2.64	1.78	0.25	100
	inc	-	-	-	-	-	-	131.74	133.6	1.81	0.77	0.44	0.03	12.53	6.88	4.93	0.72	100
	and inc	-	-	-	-	-	-	135.0	135.3	0.25	1.28	0.32	0.05	2.69	2.22	0.32	0.15	100
	and inc	-	-	-	-	-	-	135.5	136.6	1.18	3.72	0.84	0.12	2.41	1.51	0.87	0.04	100
	and inc	-	-	-	-	-	-	137.1	137.6	0.47	1.66	1.23	0.06	2.50	1.53	0.83	0.15	100
Ban Chang E	BC20-31	433127	2341808	756	022	-50	120.8	-	-	-	No	significant	intersection	-	-	-	-	-
Ban Chang W	BC20-32	432190	2341912	626	022	-45	95.8	61.6	63.0	1.36	1.11	0.4	0.07	0.46	0.16	0.28	0.02	100
	inc	-	-	-	-	-	-	61.9	62.3	0.44	2.16	0.91	0.14	0.76	0.30	0.43	0.03	100
	and inc	-	-	-	-	-	-	62.6	63.0	0.35	1.10	0.12	0.07	0.24	0.01	0.22	0.02	100
	BC20-33	432063	2342093	556	227	-45	150.1	-	-	-	No	significant	intersection	-	-	-	-	-
	BC20-34	432153	2341939	631	022	-45	121.9	66.7	68.6	1.92	1.03	0.6	0.06	0.44	0.23	0.19	0.02	100
	inc	-	-	-	-	-	-	66.7	67.6	0.91	1.99	0.92	0.12	0.84	0.46	0.36	0.02	100
	BC20-35	432456	2341760	635	022	-50	135.4	109.7	110.3	0.65	0.99	3.0	0.06	0.90	0.31	0.32	0.27	100
	BC20-36	432115	2341979	626	022	-45	78.8	53.0	55.1	2.15	0.57	0.3	0.05	0.20	0.08	0.11	0.01	82
	inc	-	-	-	-	-	-	53.3	53.7	0.4	2.07	0.88	0.17	0.57	0.16	0.40	0.01	100
	BC20-36	-	-	-	-	-	-	56.0	63.1	7.1	0.66	0.5	0.06	0.18	0.08	0.07	0.03	100
	inc	-	-	-	-	-	-	58.5	59.3	0.85	1.91	0.60	0.13	0.29	0.14	0.11	0.04	100
Ban Chang E	BC20-37	432730	2341769	712	022	-45	102.0	-	-	-	No	significant	intersection	-	-	-	-	-
	BC20-38	433355	2341710	799	022	-47	140.4	89.2	94.6	5.4	0.60	0.5	0.05	0.20	0.07	0.11	0.02	100
	inc	-	-	-	-	-	-	91.4	93.6	2.22	0.92	0.53	0.08	0.24	0.09	0.14	0.01	100

Project Area	Hole	East UTM 48N WGS84	North UTM 48N WGS84	RLm UTM 48N WGS84	Azimuth UTM (°)	Dip (°)	End of hole (metres)	From (m)	To (m)	Interval (m)	Ni (%)	Cu (%)	Co (%)	Pt+Pd+Au (g/t)	Pt (g/t)	Pd (g/t)	Au (g/t)	Recovery (%) **
	BC20-39	433412	2341722	828	022	-45	129.8	63.8	66.9	3.07	1.39	0.8	0.08	0.78	0.25	0.50	0.03	100
	BC20-40	433270	2341757	791	022	-50	129.8	-	-	-	No	significant	intersection	-	-	-	-	-
	BC20-41	433482	2341685	843	022	-50	104.7	73.5	74.4	0.9	0.62	0.4	0.04	0.83	0.38	0.35	0.09	100
	BC20-42	433226	2341765	777	022	-51	106.4	-	-	-	No	significant	intersection	-	-	-	-	-
	BC20-43	433575	2341670	873	022	-45	120.0	-	-	-	No	significant	intersection	-	-	-	-	-
	BC20-44	433536	2341672	867	022	-51	120.2	87.7	92.4	4.72	1.78	0.8	0.08	1.14	0.51	0.47	0.16	100
	inc	-	-	-	-	-	-	88.3	88.7	0.35	2.57	0.32	0.12	1.03	0.78	0.21	0.04	100
	and inc	-	-	-	-	-	-	89.3	90.2	0.89	3.72	0.73	0.18	1.78	0.77	0.85	0.16	100
	BC21-06 ¹¹	433399	2341684	818	022	-46	141	-	-	-	Assays	Pending	-	-	-	-	-	-
Ta Cuong	TC20-01	426119	2347617	276	022	-59	198.6	118.0	122.2	4.15	0.64	0.36	0.04	0.59	0.41	0.15	0.04	100
	inc	-	-	-	-	-	-	118.6	120.8	2.25	1.00	0.50	0.06	0.84	0.61	0.18	0.04	100
	TC20-02	426041	2347576	327	022	-48	277.4	213.4	216.4	3.05	0.31	0.11	0.02	0.18	0.07	0.06	0.06	100
	TC20-03	426208	2347716	276	202	-55	203.7	119.8	123.5	3.7	0.35	0.23	0.02	0.43	0.24	0.16	0.03	100
	TC20-04	426107	2347793	287	202	-50	206.4	153.2	156.3	3.1	0.59	0.31	0.04	0.20	0.10	0.09	0.01	100
	inc	-	-	-	-	-	-	154.3	154.8	0.50	1.14	0.72	0.08	0.48	0.26	0.20	0.02	100
Ban Phuc	BP20-38 ²	430386	2343293	394	22	-60	342	18.0	235.3	217.3	0.62	0.11	0.02	0.13	0.05	0.06	0.02	97
	inc.	-	-	-	-	-	-	43.8	118.4	74.65	0.91	0.17	0.02	0.18	0.08	0.08	0.03	100
	BP20-39 ¹	430341	2342990	524	202	-72	174	6.3	172.4	166.1	0.75	0.16	0.01	0.29	0.12	0.13	0.04	99
	inc.	-	-	-	-	-	-	10.5	90.3	79.8	1.12	0.27	0.02	0.45	0.18	0.21	0.06	99
	BP20-40A ³	430331	2343288	425	202	-80	345	7.4	43.1	35.7	0.58	0.08	0.01	0.13	0.05	0.05	0.02	85
	inc	-	-	-	-	-	-	31.1	43.1	12	0.98	0.17	0.01	0.19	0.07	0.08	0.04	92
	and	-	-	-	-	-	-	205.7	217.5	11.8	0.34	0.00	0.01	0.06	0.03	0.02	0.00	100
	and	-	-	-	-	-	-	283.3	299.3	16	0.36	0.02	0.01	0.40	0.16	0.21	0.02	100
	BP20-41	430502	2343443	372	202	-59	290	145.5	169.0	23.5	0.38	0.04	0.01	0.08	0.03	0.04	0.01	97
	and	-	-	-	-	-	-	200.4	228.0	27.6	0.46	0.07	0.01	0.20	0.08	0.10	0.02	100

Project Area	Hole	East UTM 48N WGS84	North UTM 48N WGS84	RLm UTM 48N WGS84	Azimuth UTM (°)	Dip (°)	End of hole (metres)	From (m)	To (m)	Interval (m)	Ni (%)	Cu (%)	Co (%)	Pt+Pd+Au (g/t)	Pt (g/t)	Pd (g/t)	Au (g/t)	Recovery (%) **
	BP20-42	430269	2343403	406	202	-80	336	113.7	115.3	1.6	0.65	0.02	0.01	0.65	0.30	0.34	0.01	31
	and	-	-	-	-	-	-	193.2	195.2	2	0.72	0.02	0.01	0.55	0.29	0.25	0.01	100
	and	-	-	-	-	-	-	271.0	329.0	58	0.49	0.04	0.01	0.17	0.07	0.08	0.02	100
	BP20-43 ⁴	430456	2343083	431	22	-90	313	3.0	42.0	39.0	0.73	0.10	0.02	0.15	0.07	0.06	0.02	92
	and	-	-	-	-	-	-	108.0	186.3	78.3	0.41	0.06	0.01	0.10	0.04	0.04	0.01	100
	and	-	-	-	-	-	-	294.0	297.3	3.30	0.61	0.01	0.01	na	na	na	na	100
	BP20-44	430297	2343210	446	202	-74	302	65.0	112.9	47.9	0.31	0.01	0.01	0.06	0.03	0.02	0.00	95
	and	-	-	-	-	-	-	188.0	295.0	107	0.46	0.04	0.01	0.18	0.07	0.09	0.02	100
	BP20-45 ⁵	430512	2343473	366	202	-60	391	291.2	312.0	20.8	0.46	0.08	0.01	0.20	0.07	0.09	0.04	97
	and	-	-	-	-	-	-	340.3	350.0	9.70	0.34	0.01	0.01	0.05	0.02	0.03	0.01	88
	BP20-46	429968	2343727	285	22	-90	31	-	-	-	No	significant	intersection	-	-	-	-	-
	BP20-47	429881	2343513	317	22	-90	26	-	-	-	No	significant	intersection	-	-	-	-	-
	BP20-48 ⁶	430306	2343363	440	22	-63	299	3.5	135.0	131.5	0.55	0.05	0.01	na	na	na	na	76
	inc	-	-	-	-	-	-	3.5	18.0	14.50	1.20	0.09	0.02	na	na	na	na	41
	and inc	-	-	-	-	-	-	56.0	78.4	22.40	0.84	0.11	0.02	na	na	na	na	67
	and ⁷	-	-	-	-	-	-	144.0	145.9	1.90	0.54	0.06	0.01	na	na	na	na	100
	and ⁸	-	-	-	-	-	-	149.7	281.6	131.9	0.45	0.04	0.01	na	na	na	na	93
	BP20-49	430175	2343699	356	22	-90	45	-	-	-	No	significant	intersection	-	-	-	-	-
	BP20-50 ⁹	430080	2343727	323	22	-90	38	4.5	28.2	23.7	0.35	0.06	0.01	0.06	0.02	0.03	0.00	96
	BP20-51	430115	2343284	377	202	-62	100	24.0	67.0	43.00	0.37	0.01	0.01	0.15	0.06	0.08	0.01	100
	BP20-52 ¹⁰	430408	2343217	442	202	-71	324	72.5	191.6	119.1	0.40	0.03	0.01	0.07	0.03	0.03	0.01	99
	inc	-	-	-	-	-	-	102.8	138.5	35.65	0.65	0.09	0.01	0.17	0.07	0.08	0.02	100

1. Reported previously. 2. 5.5m of core reserved for Geotech analysis 225.5-231m. 3. 2.25 m of core loss from 8-14 m. 4. 0.8 m of core loss from 17 m. 5. 0.8 m of core loss at 293m & 0.21m from 297.89m. 6. 4.15 m core loss sporadically over the 131m interval, followed by 8.5m reserved for metallurgical sampling. 7. Followed by 3.8 m reserved for metallurgical sampling. 8. 2.95 m of core loss from the interval. 9. 1.05 m of core loss over the interval. 10. 0.6 m of core loss at 151m. 11. Assays pending.

** Recoveries and metal weighted averages all adjusted to allow for core loss or alternative testing.

Table 3

Drill hole assays, preparation by SGS, Hai Phong, assays by ALS Geochemistry, Perth (*see Appendix One for assay methods*). Note: na denotes assay result not available (element was not determined), < - below the detection of the test performed.

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BC20-31	3	4	1	100	586	52	66	na	na	na
BC20-31	16.6	17.3	0.7	100	468	87	73	na	na	na
BC20-31	27.95	29	1.05	100	608	79	64	na	na	na
BC20-31	29	29.9	0.9	100	561	93	66	na	na	na
BC20-31	40.3	40.6	0.3	100	229	1260	20	na	na	na
BC20-31	44.4	44.7	0.3	100	429	285	23	na	na	na
BC20-31	52.6	53.6	1	100	280	69	55	na	na	na
BC20-31	53.6	54.6	1	100	269	65	51	na	na	na
BC20-31	54.6	55.6	1	100	169	110	54	na	na	na
BC20-31	55.6	56.6	1	100	218	52	52	na	na	na
BC20-31	56.6	57.6	1	100	260	26	58	na	na	na
BC20-31	57.6	58.6	1	100	227	20	43	na	na	na
BC20-31	58.6	59.45	0.85	100	256	41	52	na	na	na
BC20-31	64.8	65.8	1	100	292	59	48	na	na	na
BC20-31	65.8	66.8	1	100	548	50	64	na	na	na
BC20-31	66.8	67.5	0.7	100	393	78	53	na	na	na
BC20-31	88.05	89.05	1	100	90	49	46	na	na	na
BC20-31	89.05	90.05	1	100	84	71	53	na	na	na
BC20-31	90.05	91.2	1.15	100	96	33	51	na	na	na
BC20-31	98	99	1	100	54	37	33	na	na	na
BC20-31	99	100	1	100	9	2	9	na	na	na
BC20-31	100	101	1	100	8	9	12	na	na	na
BC20-31	101	102	1	100	16	44	19	na	na	na
BC20-31	102	103.5	1.5	100	42	29	28	na	na	na
BC20-31	105.55	106.55	1	100	471	91	53	na	na	na
BC20-31	106.55	108.05	1.5	100	323	46	45	na	na	na
BC20-32	1.4	2.3	0.9	100	541	254	64	na	na	na
BC20-32	16.2	17.2	1	100	377	105	38	na	na	na
BC20-32	17.2	18.2	1	80	289	85	44	na	na	na
BC20-32	18.2	19.3	1.1	100	398	166	48	na	na	na
BC20-32	19.3	20.3	1	100	435	160	50	na	na	na
BC20-32	20.3	21.3	1	100	484	135	51	na	na	na
BC20-32	21.3	22.2	0.9	100	484	105	48	na	na	na
BC20-32	22.2	23.3	1.1	100	554	97	67	na	na	na
BC20-32	23.3	24.3	1	100	561	97	61	na	na	na
BC20-32	24.3	25.3	1	100	406	82	57	na	na	na
BC20-32	25.3	26.3	1	100	487	75	56	na	na	na
BC20-32	26.3	27.3	1	100	403	64	54	na	na	na
BC20-32	27.3	28.3	1	100	429	81	58	na	na	na
BC20-32	28.3	29.25	0.95	100	425	81	56	na	na	na
BC20-32	29.25	30	0.75	100	457	71	56	na	na	na
BC20-32	30	31.1	1.1	41	499	89	45	na	na	na
BC20-32	33.9	35.05	1.15	100	466	87	52	na	na	na
BC20-32	52.8	53.8	1	100	820	77	87	na	na	na
BC20-32	60.6	61.59	0.99	100	799	490	50	<	0.002	0.002
BC20-32	61.59	61.86	0.27	100	5520	3750	332	0.327	0.318	0.012
BC20-32	61.86	62.3	0.44	100	21600	9120	1370	0.302	0.432	0.025
BC20-32	62.3	62.6	0.3	100	966	2000	70	<	0.087	0.014
BC20-32	62.6	62.95	0.35	100	11000	1180	653	0.005	0.215	0.016
BC20-32	62.95	63.45	0.5	100	630	1540	46	<	0.012	0.007
BC20-32	63.45	64.4	0.95	100	927	190	94	<	0.001	<
BC20-32	64.4	65.4	1	100	433	80	81	<	<	<
BC20-32	65.4	66.2	0.8	100	2020	39	85	<	<	<
BC20-33	23	24	1	100	389	78	54	na	na	na
BC20-33	24	25.3	1.3	100	503	115	70	na	na	na
BC20-33	34.8	36	1.2	100	561	61	66	na	na	na
BC20-33	36	37	1	100	601	57	66	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BC20-33	37	38.5	1.5	100	457	39	62	na	na	na
BC20-33	78.15	79.45	1.3	100	142	98	45	na	na	na
BC20-33	90	91	1	100	288	52	49	na	na	na
BC20-33	91	92.35	1.35	100	285	51	46	na	na	na
BC20-33	109	110.2	1.2	100	392	57	58	na	na	na
BC20-33	114.1	115	0.9	100	57	19	44	na	na	na
BC20-33	115	116.2	1.2	100	81	12	46	na	na	na
BC20-33	116.2	117.15	0.95	100	44	45	36	na	na	na
BC20-33	118.1	119.3	1.2	100	446	38	60	na	na	na
BC20-33	119.3	120.55	1.25	100	310	59	53	na	na	na
BC20-33	144	145	1	100	302	109	50	na	na	na
BC20-33	145	146	1	100	587	141	72	na	na	na
BC20-33	149	150.05	1.05	100	512	76	66	na	na	na
BC20-34	3	4.1	1.1	100	356	122	97	na	na	na
BC20-34	14.8	16	1.2	100	57	21	7	na	na	na
BC20-34	18.3	19.3	1	100	125	49	22	na	na	na
BC20-34	19.3	20.1	0.8	100	314	74	46	na	na	na
BC20-34	20.75	21.75	1	55	202	95	24	na	na	na
BC20-34	21.75	22.75	1	55	398	85	59	na	na	na
BC20-34	22.75	23.75	1	100	327	68	56	na	na	na
BC20-34	38.7	40.05	1.35	100	798	97	74	na	na	na
BC20-34	53.8	54.78	0.98	100	321	102	75	na	na	na
BC20-34	65	65.65	0.65	100	1580	122	164	<	0.001	0.002
BC20-34	65.65	66.65	1	100	875	557	68	<	0.005	0.007
BC20-34	66.65	67.56	0.91	100	19850	9230	1210	0.461	0.359	0.018
BC20-34	67.56	68.57	1.01	100	1630	3020	129	0.019	0.035	0.022
BC20-34	68.57	69.5	0.93	100	915	964	45	<	0.017	0.005
BC20-34	77.1	78.15	1.05	100	505	86	67	na	na	na
BC20-34	78.76	79.63	0.87	100	479	95	68	na	na	na
BC20-34	97.4	98.4	1	100	202	55	48	na	na	na
BC20-34	99.65	100.9	1.25	100	493	105	61	na	na	na
BC20-34	103.15	104.55	1.4	100	411	60	60	na	na	na
BC20-34	118.1	119.7	1.6	100	172	81	42	na	na	na
BC20-35	30.2	31	0.8	100	189	74	46	na	na	na
BC20-35	35.15	36.15	1	100	466	57	58	na	na	na
BC20-35	39.6	40.8	1.2	100	508	89	56	na	na	na
BC20-35	44.6	45.8	1.2	100	368	235	62	na	na	na
BC20-35	48.5	49	0.5	100	432	93	62	na	na	na
BC20-35	52.4	53	0.6	100	190	58	33	na	na	na
BC20-35	54.9	55.9	1	100	359	71	55	na	na	na
BC20-35	65.4	66.2	0.8	100	543	46	59	na	na	na
BC20-35	88.95	89.5	0.55	100	177	65	60	na	na	na
BC20-35	93.5	94.25	0.75	100	358	135	59	na	na	na
BC20-35	104.65	105.4	0.75	100	310	65	56	na	na	na
BC20-35	108.2	109.45	1.25	100	659	2470	36	<	0.006	0.012
BC20-35	109.45	109.7	0.25	100	1670	9810	124	0.008	0.05	0.136
BC20-35	109.7	110.35	0.65	100	9880	29700	594	0.313	0.321	0.265
BC20-35	110.35	111.25	0.9	100	1120	2440	76	<	0.017	0.034
BC20-35	118.5	119.2	0.7	100	69	41	47	na	na	na
BC20-35	119.2	120	0.8	100	80	37	50	na	na	na
BC20-35	123.5	124.5	1	100	5	16	10	na	na	na
BC20-35	124.5	125.3	0.8	100	7	11	9	na	na	na
BC20-35	128.1	129.3	1.2	100	190	40	33	na	na	na
BC20-36	3.6	5.15	1.55	70	218	80	36	na	na	na
BC20-36	10	10.6	0.6	100	605	110	86	na	na	na
BC20-36	18.4	19.2	0.8	100	107	25	32	na	na	na
BC20-36	19.2	19.9	0.7	100	222	58	55	na	na	na
BC20-36	22	23.2	1.2	100	166	22	26	na	na	na
BC20-36	25.65	27.05	1.4	100	347	121	64	na	na	na
BC20-36	32	33.1	1.1	100	295	68	34	na	na	na
BC20-36	40.8	41.8	1	90	539	70	44	na	na	na
BC20-36	51.85	52.95	1.1	55	713	216	37	<	0.003	0.003
BC20-36	52.95	53.25	0.3	100	6540	8320	385	0.188	0.164	0.02
BC20-36	53.25	53.65	0.4	100	20700	8750	1730	0.156	0.398	0.013
BC20-36	53.65	55.1	1.45	74	1330	1010	125	0.032	0.014	0.012

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BC20-36	56	56.35	0.35	100	1660	475	206	<	0.003	0.005
BC20-36	56.35	57.2	0.85	100	993	481	135	<	0.008	0.006
BC20-36	57.2	58	0.8	100	1700	529	212	0.034	0.007	0.012
BC20-36	58	58.45	0.45	100	6340	5310	655	0.189	0.081	0.059
BC20-36	58.45	59.3	0.85	100	19050	6000	1285	0.136	0.108	0.042
BC20-36	59.3	59.65	0.35	100	3600	12350	372	0.154	0.077	0.109
BC20-36	59.65	60.7	1.05	100	6340	5390	626	0.05	0.063	0.022
BC20-36	60.7	61.95	1.25	100	7430	4690	678	0.057	0.062	0.016
BC20-36	61.95	62.7	0.75	100	7890	6570	749	0.102	0.072	0.053
BC20-36	62.7	63.1	0.4	100	4610	6920	656	0.142	0.414	0.027
BC20-36	63.1	64.6	1.5	100	863	1560	76	na	na	na
BC20-36	64.6	65.6	1	100	1050	773	84	na	na	na
BC20-36	77.3	78	0.7	100	126	57	34	na	na	na
BC20-37	5.4	6.1	0.7	100	195	51	16	na	na	na
BC20-37	23	24	1	100	705	131	67	na	na	na
BC20-37	43.6	44.6	1	100	136	23	32	na	na	na
BC20-37	45.1	46.5	1.4	100	249	93	55	na	na	na
BC20-37	56.5	57.5	1	100	220	148	48	na	na	na
BC20-37	57.5	58.5	1	100	308	122	58	na	na	na
BC20-37	58.5	59.5	1	100	299	77	51	na	na	na
BC20-37	62.2	63.55	1.35	100	350	92	51	na	na	na
BC20-37	67	67.7	0.7	100	527	72	65	na	na	na
BC20-37	75	76	1	100	554	52	60	na	na	na
BC20-37	80.9	82	1.1	100	35	51	39	na	na	na
BC20-37	82	83	1	100	42	52	40	na	na	na
BC20-37	83	84	1	100	39	25	37	na	na	na
BC20-37	84	85	1	100	11	20	19	na	na	na
BC20-37	85	86.1	1.1	100	7	4	22	na	na	na
BC20-38	9.3	10.5	1.2	100	246	128	46	na	na	na
BC20-38	19.8	20.7	0.9	100	299	104	45	na	na	na
BC20-38	24.2	25.5	1.3	100	458	112	57	na	na	na
BC20-38	43.75	44.25	0.5	100	305	57	56	na	na	na
BC20-38	44.65	45.6	0.95	100	411	81	62	na	na	na
BC20-38	49.6	50.6	1	100	359	76	56	na	na	na
BC20-38	50.6	51.7	1.1	100	223	62	48	na	na	na
BC20-38	58	59.1	1.1	100	240	92	51	na	na	na
BC20-38	61	61.6	0.6	100	405	84	60	na	na	na
BC20-38	66.25	67	0.75	100	426	106	61	na	na	na
BC20-38	67	67.95	0.95	100	619	81	71	na	na	na
BC20-38	73.8	75.5	1.7	100	365	177	60	na	na	na
BC20-38	80.05	80.8	0.75	100	252	72	51	<	0.001	0.001
BC20-38	80.8	82	1.2	100	155	451	29	<	<	0.006
BC20-38	82	82.5	0.5	100	81	326	49	<	<	0.001
BC20-38	82.5	83.8	1.3	100	530	1610	36	<	0.01	0.01
BC20-38	83.8	84.7	0.9	100	488	2540	74	<	0.004	0.016
BC20-38	84.7	85.35	0.65	100	617	854	67	<	0.011	0.01
BC20-38	85.35	86.35	1	100	1160	1465	98	0.008	0.013	0.011
BC20-38	86.35	87.35	1	100	1570	642	131	0.014	0.029	0.008
BC20-38	87.35	88.35	1	100	1135	1925	116	0.011	0.05	0.052
BC20-38	88.35	89.2	0.85	100	2070	1990	208	0.028	0.047	0.013
BC20-38	89.2	90.28	1.08	100	3360	3680	307	0.035	0.093	0.021
BC20-38	90.28	91.38	1.1	100	3450	2910	302	0.055	0.068	0.008
BC20-38	91.38	92.5	1.12	100	8920	5870	749	0.075	0.175	0.012
BC20-38	92.5	93.6	1.1	100	9530	4690	776	0.1	0.095	0.016
BC20-38	93.6	94.6	1	100	4750	6440	391	0.107	0.142	0.026
BC20-38	94.6	95.6	1	100	2330	1800	181	0.016	0.036	0.006
BC20-38	95.6	96.3	0.7	100	777	2430	93	0.049	0.02	0.023
BC20-38	96.3	97.8	1.5	100	1170	1785	79	<	0.01	0.006
BC20-38	97.8	99	1.2	100	348	135	57	<	0.001	<
BC20-38	102.65	103.7	1.05	100	401	97	56	na	na	na
BC20-38	125.4	126.4	1	100	395	66	54	na	na	na
BC20-38	128.8	130.2	1.4	100	315	102	58	na	na	na
BC20-38	134.2	135.4	1.2	100	132	55	49	na	na	na
BC20-38	135.4	136.5	1.1	100	334	89	67	na	na	na
BC20-39	28.1	29.3	1.2	100	369	95	61	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BC20-39	30.45	31.4	0.95	100	418	84	60	na	na	na
BC20-39	33.4	34.4	1	100	81	51	16	<	0.002	0.002
BC20-39	34.4	35.4	1	100	166	86	26	<	0.002	0.002
BC20-39	35.4	36.4	1	100	352	107	50	0.005	0.003	0.001
BC20-39	36.4	37.4	1	100	346	88	50	<	0.002	0.001
BC20-39	37.4	38.4	1	100	177	78	48	<	0.001	0.001
BC20-39	38.4	39.4	1	100	464	98	70	<	0.001	0.001
BC20-39	39.4	40.5	1.1	100	248	150	57	<	0.001	0.003
BC20-39	40.5	41.5	1	100	761	171	68	<	0.003	0.002
BC20-39	41.5	42.5	1	100	133	90	46	<	<	0.002
BC20-39	42.5	43.5	1	100	1160	216	90	0.008	0.007	<
BC20-39	43.5	44.5	1	100	1615	1160	110	0.031	0.038	0.004
BC20-39	44.5	45.87	1.37	100	3020	3670	197	0.061	0.072	0.012
BC20-39	45.87	46.9	1.03	100	1550	382	92	0.03	0.022	0.023
BC20-39	46.9	48	1.1	100	1385	385	91	0.014	0.011	0.006
BC20-39	48	49	1	100	1615	886	115	0.022	0.023	0.051
BC20-39	49	50	1	100	2220	1150	171	0.046	0.058	0.029
BC20-39	50	51	1	100	1565	553	116	0.033	0.04	0.009
BC20-39	51	52	1	100	1590	1145	114	0.028	0.034	0.004
BC20-39	52	53	1	100	1705	856	121	0.037	0.049	0.007
BC20-39	53	54	1	100	2120	2050	132	0.071	0.06	0.02
BC20-39	54	55	1	100	2210	1485	146	0.052	0.065	0.032
BC20-39	55	56	1	100	1890	1285	134	0.039	0.053	0.012
BC20-39	56	57	1	100	1920	1315	124	0.038	0.049	0.023
BC20-39	57	58	1	100	2130	1770	134	0.033	0.059	0.086
BC20-39	58	59	1	100	1875	2500	124	0.036	0.055	0.159
BC20-39	59	60	1	100	1910	906	118	0.04	0.055	0.063
BC20-39	60	61	1	100	3200	2210	185	0.068	0.111	0.097
BC20-39	61	62	1	100	3530	3900	210	0.116	0.127	0.107
BC20-39	62	63	1	100	4110	4560	233	0.162	0.17	0.122
BC20-39	63	63.8	0.8	100	4080	1825	232	0.135	0.145	0.029
BC20-39	63.8	65	1.2	100	12550	8000	723	0.239	0.588	0.039
BC20-39	65	65.8	0.8	100	16200	7910	869	0.282	0.304	0.031
BC20-39	65.8	66.55	0.75	100	13150	9850	733	0.269	0.51	0.025
BC20-39	66.55	66.87	0.32	100	14850	3200	786	0.193	0.624	0.034
BC20-39	66.87	67.42	0.55	100	665	3900	49	0.005	0.013	0.007
BC20-39	67.42	68.63	1.21	100	141	312	28	na	na	na
BC20-39	68.63	69.55	0.92	100	592	301	57	na	na	na
BC20-39	74.5	75.25	0.75	100	58	37	44	na	na	na
BC20-39	75.25	76.49	1.24	100	632	83	61	na	na	na
BC20-39	82.25	83.4	1.15	100	214	80	40	na	na	na
BC20-39	96.1	96.9	0.8	100	501	63	60	na	na	na
BC20-39	106.7	108.05	1.35	100	72	43	32	na	na	na
BC20-40	29.15	30	0.85	100	510	47	69	na	na	na
BC20-40	30	31	1	100	584	94	76	na	na	na
BC20-40	31	32	1	100	396	50	62	na	na	na
BC20-40	32	33.3	1.3	100	322	91	50	na	na	na
BC20-40	39.8	41	1.2	100	433	66	59	na	na	na
BC20-40	41	42.3	1.3	100	587	73	70	na	na	na
BC20-40	69	70.1	1.1	100	370	100	57	na	na	na
BC20-40	80.1	80.8	0.7	100	553	70	60	na	na	na
BC20-40	82.05	83.05	1	100	639	67	72	na	na	na
BC20-40	106.6	107.8	1.2	100	108	50	45	na	na	na
BC20-40	115.2	116	0.8	100	376	90	48	na	na	na
BC20-40	116	117	1	100	485	53	55	na	na	na
BC20-40	117	118	1	100	371	122	50	na	na	na
BC20-40	118	119	1	100	429	89	58	na	na	na
BC20-40	119	120.1	1.1	100	489	80	62	na	na	na
BC20-40	125.45	126.1	0.65	100	759	77	74	na	na	na
BC20-41	25	26.15	1.15	100	468	77	64	na	na	na
BC20-41	38.64	39.6	0.96	100	482	45	51	na	na	na
BC20-41	46.1	47	0.9	100	345	70	57	na	na	na
BC20-41	53.85	55.15	1.3	100	256	61	53	na	na	na
BC20-41	64	64.95	0.95	100	476	46	42	na	na	na
BC20-41	71	71.9	0.9	100	1105	2620	34	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BC20-41	71.9	72.5	0.6	100	2050	3960	116	0.272	0.317	0.271
BC20-41	72.5	73.5	1	100	3730	5250	212	0.504	0.462	0.23
BC20-41	73.5	74.4	0.9	100	6210	4420	353	0.384	0.351	0.094
BC20-41	74.4	75.3	0.9	100	1805	1875	141	0.073	0.064	0.062
BC20-41	75.3	76.3	1	100	1880	2760	143	0.068	0.066	0.13
BC20-41	76.3	77.3	1	100	2050	3100	156	0.125	0.091	0.138
BC20-41	77.3	78.3	1	100	2500	7840	165	0.448	0.232	0.393
BC20-41	78.3	79.3	1	100	2560	4230	165	0.367	0.315	0.173
BC20-41	79.3	80.3	1	100	1640	1950	122	0.125	0.163	0.082
BC20-41	80.3	81.3	1	100	1015	677	104	0.008	0.03	0.005
BC20-41	81.3	82.3	1	100	450	1240	41	na	na	na
BC20-41	82.3	83.3	1	100	57	105	14	na	na	na
BC20-41	87.55	88.25	0.7	100	37	35	41	na	na	na
BC20-41	95.7	96.8	1.1	100	202	119	41	na	na	na
BC20-41	96.8	98	1.2	100	127	42	46	na	na	na
BC20-41	98.45	99.8	1.35	100	569	76	67	na	na	na
BC20-41	103.25	103.9	0.65	100	472	83	56	na	na	na
BC20-42	73.65	74	0.35	100	2140	5910	139	na	na	na
BC20-42	79.35	79.85	0.5	100	697	3860	59	na	na	na
BC20-42	84.05	85.9	1.85	100	204	75	54	na	na	na
BC20-42	87.35	87.65	0.3	100	277	115	36	na	na	na
BC20-42	89.7	91.9	2.2	100	194	134	43	na	na	na
BC20-42	93.55	93.95	0.4	100	320	103	47	na	na	na
BC20-42	94.6	95.45	0.85	100	840	1175	75	na	na	na
BC20-43	24.5	25	0.5	100	1170	132	369	na	na	na
BC20-43	26.3	26.5	0.2	100	651	115	180	na	na	na
BC20-43	54.1	55	0.9	100	417	110	63	na	na	na
BC20-43	58.4	59.2	0.8	100	466	113	58	na	na	na
BC20-44	67.05	68	0.95	100	179	30	19	na	na	na
BC20-44	68	69.15	1.15	100	431	86	62	na	na	na
BC20-44	69.15	70.35	1.2	100	444	109	61	na	na	na
BC20-44	85.4	86.7	1.3	100	306	394	55	0.061	0.007	0.004
BC20-44	86.7	87.7	1	100	619	4490	23	<	0.009	0.038
BC20-44	87.7	87.9	0.2	100	12950	3130	568	0.246	0.168	0.121
BC20-44	87.9	88.3	0.4	100	1560	4650	74	<	0.04	0.095
BC20-44	88.3	88.65	0.35	100	25700	3240	1170	0.777	0.214	0.043
BC20-44	88.65	89.26	0.61	100	16650	17950	755	0.623	0.451	0.037
BC20-44	89.26	90.15	0.89	100	37200	7270	1795	0.773	0.85	0.16
BC20-44	90.15	91.14	0.99	100	19750	16400	884	0.625	0.812	0.434
BC20-44	91.14	92.11	0.97	100	5410	1505	251	0.276	0.154	0.056
BC20-44	92.11	92.42	0.31	100	12100	2050	541	0.43	0.298	0.107
BC20-44	92.42	93.6	1.18	100	5690	1245	268	0.279	0.142	0.03
BC20-44	93.6	94.9	1.3	100	4810	1825	266	1.135	0.224	0.048
BC20-44	94.9	96.1	1.2	100	3860	2840	223	0.164	0.131	0.026
BC20-44	96.1	96.55	0.45	100	903	558	99	0.007	0.006	0.001
BC20-44	96.55	96.85	0.3	100	7490	21700	429	0.089	0.778	1.79
BC20-44	96.85	98.25	1.4	100	749	748	97	<	0.001	0.002
BC20-44	98.25	98.45	0.2	100	2300	51600	177	0.03	0.044	0.062
BC20-44	98.45	99.48	1.03	100	337	375	84	<	<	<
BC20-44	99.48	99.68	0.2	100	9260	8490	417	0.027	0.021	0.019
BC20-44	99.68	100.7	1.02	100	746	2760	40	0.01	0.042	0.013
BC20-44	100.7	101.5	0.8	100	818	1850	51	0.01	0.012	0.006
BC20-44	101.5	102.45	0.95	100	452	1270	30	0.01	0.005	0.002
BC20-44	102.45	102.85	0.4	100	514	1010	66	<	0.002	<
BC20-44	102.85	104.4	1.55	100	460	1480	34	<	0.008	0.003
BC20-44	104.4	104.6	0.2	100	8950	9100	563	0.021	0.175	0.2
BC20-44	104.6	105.2	0.6	100	499	1460	41	<	0.004	0.002
BC20-45	53	54.3	1.3	100	228	66	54	na	na	na
BC20-45	55.4	55.9	0.5	100	247	63	54	na	na	na
BC20-45	60.85	61.85	1	100	405	99	59	na	na	na
BC20-45	65.5	66.2	0.7	100	465	98	58	na	na	na
BC20-45	71.3	72.4	1.1	100	483	87	53	na	na	na
BC20-45	73.1	74.2	1.1	100	409	60	65	na	na	na
BC20-45	74.2	75.4	1.2	100	521	72	69	na	na	na
BC20-45	96.1	97.45	1.35	100	312	72	56	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BC20-45	106.4	107.6	1.2	100	58	32	40	na	na	na
BC20-45	111.75	112.7	0.95	100	322	83	55	na	na	na
BP20-38	9.4	10.55	1.15	100	2570	89	102	0.026	0.021	0.001
BP20-38	10.55	12	1.45	100	2900	13	109	0.027	0.031	0.002
BP20-38	12	14	2	100	2990	7	112	0.009	0.01	0.001
BP20-38	14	16	2	100	2550	45	118	0.013	0.015	0.002
BP20-38	16	18	2	100	3220	247	130	0.021	0.02	0.003
BP20-38	18	20.1	2.1	100	8680	1810	200	0.097	0.083	0.03
BP20-38	20.1	22	1.9	100	9190	1400	168	0.216	0.246	0.037
BP20-38	22	24	2	100	3250	84	117	0.054	0.105	0.005
BP20-38	24	26	2	100	8060	1410	201	0.076	0.079	0.037
BP20-38	26	27.5	1.5	100	10750	2950	216	0.08	0.058	0.054
BP20-38	27.5	29.2	1.7	100	7590	1560	194	0.049	0.049	0.023
BP20-38	29.2	29.65	0.45	100	4170	517	139	0.025	0.025	0.014
BP20-38	29.65	31	1.35	100	5870	1180	146	0.032	0.036	0.019
BP20-38	31	33.4	2.4	100	10000	1830	194	0.045	0.066	0.041
BP20-38	33.4	35.5	2.1	100	3410	103	109	0.024	0.027	0.003
BP20-38	35.5	37.5	2	100	2960	87	105	0.012	0.026	0.003
BP20-38	37.5	39	1.5	100	3440	207	111	0.026	0.031	0.006
BP20-38	39	40.45	1.45	100	4640	407	132	0.028	0.028	0.014
BP20-38	40.45	42.7	2.25	100	5910	807	151	0.014	0.017	0.022
BP20-38	42.7	43.75	1.05	100	3540	504	181	0.013	0.013	0.01
BP20-38	43.75	45.8	2.05	100	6530	1490	241	0.056	0.051	0.02
BP20-38	45.8	47.8	2	100	8880	2350	227	0.176	0.067	0.024
BP20-38	47.8	49.8	2	100	14950	2450	314	0.088	0.114	0.019
BP20-38	49.8	51.3	1.5	100	7080	1250	176	0.039	0.058	0.015
BP20-38	51.3	53.2	1.9	100	5980	2380	160	0.041	0.039	0.023
BP20-38	53.2	55.2	2	100	2310	542	98	0.009	0.012	0.006
BP20-38	55.2	56.5	1.3	100	4760	765	146	0.031	0.033	0.013
BP20-38	56.5	57.85	1.35	100	4380	580	141	0.026	0.027	0.011
BP20-38	57.85	60	2.15	100	2460	250	103	0.008	0.011	0.004
BP20-38	60	60.9	0.9	100	7710	1550	166	0.054	0.061	0.022
BP20-38	60.9	62.4	1.5	100	4970	954	140	0.036	0.041	0.013
BP20-38	62.4	64.4	2	100	4660	537	138	0.025	0.029	0.015
BP20-38	64.4	66.7	2.3	100	10250	1720	209	0.05	0.059	0.02
BP20-38	66.7	68.5	1.8	100	11800	1890	218	0.213	0.128	0.037
BP20-38	68.5	69.9	1.4	100	3630	243	122	0.016	0.019	0.008
BP20-38	69.9	72.5	2.6	100	6250	755	157	0.033	0.048	0.028
BP20-38	72.5	73.35	0.85	100	4790	316	135	0.025	0.031	0.011
BP20-38	73.35	75	1.65	100	13700	2160	247	0.074	0.127	0.035
BP20-38	75	77	2	100	8620	1290	176	0.083	0.08	0.029
BP20-38	77	78	1	100	11450	1780	212	0.112	0.125	0.022
BP20-38	78	80	2	100	12550	2240	231	0.134	0.124	0.041
BP20-38	80	82	2	100	10800	1990	218	0.088	0.108	0.048
BP20-38	82	84	2	100	10250	2220	222	0.055	0.103	0.036
BP20-38	84	85.8	1.8	100	13150	2450	236	0.13	0.14	0.045
BP20-38	85.8	87.9	2.1	100	6770	1050	163	0.049	0.064	0.02
BP20-38	87.9	90	2.1	100	15700	2800	276	0.197	0.135	0.055
BP20-38	90	92	2	100	19300	2700	328	0.136	0.148	0.036
BP20-38	92	93	1	100	17900	2920	311	0.132	0.159	0.043
BP20-38	93	95	2	100	11250	2160	219	0.156	0.108	0.025
BP20-38	95	97	2	100	11550	3030	238	0.066	0.121	0.044
BP20-38	97	98.1	1.1	100	7470	1110	189	0.133	0.068	0.016
BP20-38	98.1	99.9	1.8	100	10450	2290	252	0.082	0.1	0.032
BP20-38	99.9	102.4	2.5	100	10450	2450	222	0.087	0.093	0.05
BP20-38	102.4	104.2	1.8	100	13850	3000	272	0.131	0.119	0.041
BP20-38	104.2	106.55	2.35	100	8380	1760	196	0.049	0.069	0.031
BP20-38	106.55	107.55	1	100	7230	1340	173	0.037	0.059	0.031
BP20-38	107.55	109.2	1.65	100	9100	1370	224	0.064	0.075	0.024
BP20-38	109.2	111	1.8	100	9180	2160	232	0.065	0.077	0.037
BP20-38	111	112.9	1.9	100	5910	1810	178	0.042	0.047	0.042
BP20-38	112.9	114.5	1.6	100	6170	1630	210	0.04	0.045	0.025
BP20-38	114.5	115.5	1	100	5670	1130	191	0.031	0.043	0.022
BP20-38	115.5	117.05	1.55	100	6790	1690	213	0.043	0.057	0.026
BP20-38	117.05	118.4	1.35	100	10500	2160	269	0.068	0.088	0.059

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-38	118.4	120	1.6	100	5030	518	147	0.043	0.036	0.011
BP20-38	120	122	2	100	3440	152	125	0.015	0.016	0.007
BP20-38	122	124	2	100	2890	148	117	0.006	0.009	0.004
BP20-38	124	124.8	0.8	100	5550	806	125	0.099	0.093	0.019
BP20-38	124.8	126.65	1.85	100	5670	430	135	0.039	0.043	0.027
BP20-38	126.65	127.6	0.95	100	3950	260	111	0.02	0.025	0.01
BP20-38	127.6	129.7	2.1	100	7910	970	158	0.093	0.107	0.03
BP20-38	129.7	130.9	1.2	100	7310	528	181	0.057	0.07	0.014
BP20-38	130.9	131.8	0.9	100	7120	723	150	0.067	0.084	0.015
BP20-38	131.8	133.85	2.05	100	8950	1590	208	0.093	0.103	0.039
BP20-38	133.85	135	1.15	100	7390	679	176	0.073	0.08	0.018
BP20-38	135	137	2	100	9520	1800	225	0.076	0.089	0.038
BP20-38	137	138.9	1.9	100	6050	923	171	0.048	0.052	0.019
BP20-38	138.9	139.6	0.7	100	4660	4130	135	0.013	0.024	0.049
BP20-38	141.6	142.7	1.1	100	1555	358	80	0.008	0.014	0.002
BP20-38	142.7	144.6	1.9	100	2340	701	104	0.036	0.042	0.002
BP20-38	144.6	146.6	2	100	7810	1530	238	0.051	0.057	0.015
BP20-38	146.6	148.6	2	100	5970	1150	180	0.043	0.049	0.025
BP20-38	148.6	150	1.4	48	3120	33	121	0.014	0.015	0.005
BP20-38	150	152	2	100	5320	1680	174	0.054	0.037	0.034
BP20-38	152	154	2	100	2280	257	92	0.007	0.009	0.007
BP20-38	154	156	2	100	6070	403	177	0.037	0.043	0.011
BP20-38	156	157.5	1.5	100	5390	702	191	0.032	0.036	0.02
BP20-38	157.5	159	1.5	100	9360	1920	247	0.072	0.092	0.06
BP20-38	159	161	2	100	4540	328	169	0.039	0.044	0.009
BP20-38	161	163	2	100	2320	392	153	0.01	0.01	0.021
BP20-38	163	165	2	100	2240	205	143	0.009	0.01	0.007
BP20-38	165	167.5	2.5	100	2340	407	136	0.006	0.006	0.005
BP20-38	167.5	169.5	2	100	3120	567	145	0.01	0.011	0.01
BP20-38	169.5	171.5	2	100	4550	889	132	0.023	0.021	0.016
BP20-38	171.5	173.5	2	100	4820	488	122	0.023	0.025	0.019
BP20-38	173.5	175.15	1.65	100	4290	554	114	0.022	0.03	0.014
BP20-38	175.15	177.2	2.05	100	3580	498	106	0.072	0.065	0.016
BP20-38	177.2	179.1	1.9	100	5510	920	124	0.052	0.068	0.026
BP20-38	179.1	181	1.9	100	5080	603	116	0.092	0.113	0.019
BP20-38	181	183	2	100	4310	462	108	0.056	0.056	0.012
BP20-38	183	185	2	100	8080	2810	176	0.114	0.117	0.064
BP20-38	185	187.4	2.4	100	4170	332	146	0.019	0.023	0.014
BP20-38	187.4	187.9	0.5	100	5010	768	146	0.053	0.056	0.026
BP20-38	187.9	189.9	2	100	3870	246	141	0.023	0.024	0.008
BP20-38	189.9	191.9	2	100	2910	41	111	0.025	0.047	0.004
BP20-38	191.9	193.5	1.6	100	3130	92	101	0.021	0.02	0.005
BP20-38	193.5	194.05	0.55	100	7510	820	143	0.077	0.079	0.022
BP20-38	194.05	195.9	1.85	100	3660	162	103	0.137	0.105	0.012
BP20-38	195.9	197	1.1	100	3080	78	105	0.033	0.026	0.005
BP20-38	197	198.65	1.65	100	6740	853	156	0.096	0.102	0.024
BP20-38	198.65	200	1.35	100	4320	193	116	0.026	0.033	0.007
BP20-38	200	202	2	100	2490	109	108	0.027	0.03	0.005
BP20-38	202	204	2	100	3680	21	119	0.064	0.088	0.004
BP20-38	204	206	2	100	4530	330	126	0.036	0.037	0.01
BP20-38	206	208	2	100	4480	286	128	0.075	0.094	0.009
BP20-38	208	210	2	100	3340	345	130	0.023	0.033	0.008
BP20-38	210	212.3	2.3	100	3360	163	106	0.027	0.031	0.011
BP20-38	212.3	214.6	2.3	100	3190	785	99	0.009	0.004	0.014
BP20-38	214.6	216.6	2	92	3340	21	79	0.107	0.086	0.006
BP20-38	216.6	218.6	2	100	4240	487	131	0.033	0.029	0.013
BP20-38	218.6	220.25	1.65	100	4300	575	135	0.035	0.032	0.004
BP20-38	220.25	221.5	1.25	100	5180	2190	285	0.01	0.025	0.004
BP20-38	221.5	223.5	2	100	447	558	43	<	0.005	0.003
BP20-38	223.5	225.5	2	100	105	222	15	<	<	0.003
BP20-38	231	232.9	1.9	100	700	80	35	0.006	0.005	0.003
BP20-38	232.9	235	2.1	100	5740	953	191	0.038	0.046	0.005
BP20-38	235	237.3	2.3	100	6480	1460	209	0.044	0.063	0.006
BP20-38	237.3	239	1.7	100	86	46	16	<	0.001	0.002
BP20-40A	7.4	8	0.6	100	4110	530	85	0.021	0.022	0.007

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-40A	8.4	9	0.6	100	4270	900	83	0.029	0.026	0.009
BP20-40A	9.5	10	0.5	100	4280	584	93	0.024	0.03	0.007
BP20-40A	10.45	11	0.55	100	4400	640	90	0.033	0.03	0.007
BP20-40A	11.4	12	0.6	100	4400	660	94	0.027	0.03	0.007
BP20-40A	12.5	14.5	2	75	4400	1010	144	0.04	0.035	0.018
BP20-40A	14.5	16.5	2	100	5270	312	130	0.077	0.059	0.007
BP20-40A	16.5	18.5	2	100	4040	238	107	0.071	0.072	0.006
BP20-40A	18.5	20.5	2	100	4650	215	116	0.078	0.083	0.011
BP20-40A	20.5	22.5	2	100	4070	655	96	0.055	0.038	0.012
BP20-40A	22.5	24.5	2	100	3710	330	97	0.044	0.062	0.013
BP20-40A	24.5	25.8	1.3	100	4160	430	101	0.089	0.081	0.029
BP20-40A	25.8	27.1	1.3	31	2410	245	61	0.033	0.05	0.004
BP20-40A	27.1	29.1	2	100	3720	77	101	0.029	0.032	0.003
BP20-40A	29.1	31.1	2	100	3980	85	107	0.01	0.022	0.008
BP20-40A	31.1	33.1	2	100	7200	940	137	0.036	0.039	0.03
BP20-40A	33.1	35.1	2	100	4870	753	100	0.025	0.029	0.014
BP20-40A	35.1	37.1	2	70	12350	2370	129	0.057	0.063	0.045
BP20-40A	37.1	39.1	2	100	18900	3820	176	0.135	0.139	0.078
BP20-40A	39.1	41.1	2	100	11500	2080	131	0.075	0.076	0.064
BP20-40A	41.1	43.1	2	100	4110	218	96	0.099	0.106	0.012
BP20-40A	43.1	45.1	2	100	2780	115	70	0.007	0.028	0.003
BP20-40A	45.1	48.5	3.4	100	2540	29	81	0.011	0.008	0.002
BP20-40A	48.5	50.2	1.7	100	1120	40	46	<	0.006	0.004
BP20-40A	82	84	2	100	2890	18	76	<	0.001	0.006
BP20-40A	84	86	2	100	3190	32	83	<	0.001	0.001
BP20-40A	86	88	2	100	3140	28	82	<	0.001	0.001
BP20-40A	88	90	2	100	3070	19	82	0.005	0.001	0.001
BP20-40A	90	92	2	100	3170	20	83	<	0.001	<
BP20-40A	92	94	2	100	2920	16	74	<	0.001	0.001
BP20-40A	94	96	2	100	3080	13	80	0.011	0.007	0.001
BP20-40A	96	98.8	2.8	100	2930	17	75	<	0.001	0.002
BP20-40A	98.8	100.8	2	100	2950	12	80	<	0.002	0.002
BP20-40A	100.8	102.8	2	100	3380	15	94	0.008	0.001	0.003
BP20-40A	102.8	104.3	1.5	100	3280	16	91	<	0.001	0.003
BP20-40A	104.3	107	2.7	75	2160	67	54	<	0.006	0.002
BP20-40A	107	109	2	100	3200	31	82	0.014	0.008	0.003
BP20-40A	109	111	2	100	3310	19	88	0.005	0.002	0.002
BP20-40A	111	114	3	100	3200	22	84	0.008	0.004	0.003
BP20-40A	114	115.9	1.9	100	108	241	37	<	0.001	0.001
BP20-40A	115.9	118	2.1	100	3670	13	98	<	0.001	0.003
BP20-40A	118	120	2	100	3540	18	97	0.005	0.004	0.004
BP20-40A	120	122	2	100	3340	23	91	0.008	0.002	0.007
BP20-40A	122	124	2	100	3410	97	91	<	0.001	0.005
BP20-40A	124	126	2	100	3220	28	89	<	0.001	0.005
BP20-40A	126	129	3	94	3140	32	81	0.006	0.002	0.004
BP20-40A	129	131	2	100	3210	44	87	<	0.001	0.004
BP20-40A	131	133	2	100	2880	84	86	0.006	0.001	0.001
BP20-40A	133	135	2	100	3180	30	86	<	0.002	0.004
BP20-40A	135	137	2	100	1560	70	73	<	<	0.001
BP20-40A	137	139	2	100	3450	24	92	<	0.001	0.005
BP20-40A	139	141	2	100	2770	36	73	<	0.001	0.004
BP20-40A	141	143	2	100	3290	18	87	<	0.001	0.004
BP20-40A	143	145	2	100	3120	18	84	0.005	0.001	0.004
BP20-40A	145	147	2	100	3240	30	86	<	0.002	0.005
BP20-40A	147	149	2	100	3510	25	91	0.047	0.007	0.005
BP20-40A	149	150.4	1.4	100	132	97	43	<	<	0.001
BP20-40A	150.4	152.4	2	100	3430	19	93	0.022	0.001	0.006
BP20-40A	152.4	156.1	3.7	100	3410	20	94	<	0.001	0.006
BP20-40A	156.1	157	0.9	100	2620	47	71	0.005	0.001	0.002
BP20-40A	157	159	2	100	2540	43	68	<	0.002	0.003
BP20-40A	159	161	2	100	2930	24	80	<	0.001	0.004
BP20-40A	161	163	2	100	3160	21	87	<	0.001	0.005
BP20-40A	163	165	2	100	3340	23	93	<	0.001	0.004
BP20-40A	165	167	2	100	2820	28	74	0.007	0.002	0.006
BP20-40A	167	170.1	3.1	100	2950	26	81	<	0.001	0.004

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-40A	170.1	171.1	1	100	614	285	57	<	0.002	<
BP20-40A	171.1	173.6	2.5	100	3860	86	91	0.028	0.03	0.004
BP20-40A	173.6	174.1	0.5	100	907	141	49	<	0.002	<
BP20-40A	174.1	176.1	2	100	1300	149	65	<	0.002	<
BP20-40A	176.1	178.1	2	100	2170	144	67	0.042	0.068	0.001
BP20-40A	178.1	180.1	2	100	2640	24	83	<	0.008	0.002
BP20-40A	180.1	182.1	2	100	2840	11	90	<	0.003	0.003
BP20-40A	182.1	184	1.9	100	2500	10	82	<	0.002	0.002
BP20-40A	184	185.5	1.5	100	2620	13	85	0.006	0.002	0.001
BP20-40A	185.5	187	1.5	100	481	767	34	<	0.001	0.002
BP20-40A	187	189	2	100	2840	28	82	0.011	0.042	0.004
BP20-40A	189	191	2	100	3200	29	89	0.071	0.077	0.004
BP20-40A	191	193	2	100	3010	19	87	0.007	0.015	0.004
BP20-40A	193	195	2	100	3320	26	92	0.015	0.012	0.004
BP20-40A	195	197	2	100	2690	29	84	<	0.003	0.003
BP20-40A	197	200.6	3.6	100	1620	30	54	<	<	0.002
BP20-40A	200.6	202.6	2	100	2380	34	70	<	<	0.001
BP20-40A	202.6	205.7	3.1	100	1250	15	42	<	<	0.003
BP20-40A	205.7	207.7	2	100	3530	43	78	0.055	0.044	0.016
BP20-40A	207.7	209.7	2	100	3400	36	90	0.093	0.09	0.004
BP20-40A	209.7	211.7	2	100	3250	16	92	<	0.001	0.002
BP20-40A	211.7	213.7	2	100	3440	19	93	0.021	0.002	0.002
BP20-40A	213.7	215.7	2	100	3490	16	98	0.013	0.001	0.002
BP20-40A	215.7	217.5	1.8	100	3250	14	98	0.01	0.002	0.003
BP20-40A	217.5	218.9	1.4	100	2820	49	82	<	0.001	0.004
BP20-40A	218.9	219.4	0.5	100	1250	23	41	<	0.001	0.001
BP20-40A	219.4	220.8	1.4	100	2950	68	69	0.055	0.006	0.003
BP20-40A	220.8	222.8	2	100	2200	48	61	<	0.003	<
BP20-40A	222.8	224.8	2	100	2910	23	86	<	0.001	0.001
BP20-40A	224.8	226.8	2	100	3000	16	88	<	0.001	0.001
BP20-40A	226.8	228.62	1.82	100	3000	14	91	<	<	0.002
BP20-40A	228.62	230.8	2.18	100	2870	7	88	<	0.001	<
BP20-40A	230.8	232.8	2	100	2830	9	85	<	<	<
BP20-40A	232.8	234.8	2	100	3020	12	91	<	0.001	<
BP20-40A	234.8	236.8	2	100	3100	10	92	<	0.001	<
BP20-40A	236.8	238.8	2	100	2740	15	83	<	<	0.007
BP20-40A	238.8	240.8	2	100	2730	11	84	<	0.001	<
BP20-40A	240.8	242.8	2	100	2810	11	85	<	0.001	0.004
BP20-40A	242.8	244.8	2	100	2680	11	84	<	0.001	0.003
BP20-40A	244.8	246.8	2	100	2630	10	83	<	<	0.001
BP20-40A	246.8	248.8	2	100	2580	9	80	<	0.002	0.002
BP20-40A	248.8	250.5	1.7	100	2270	11	72	<	0.002	<
BP20-40A	250.5	251.3	0.8	100	805	4	33	<	<	0.003
BP20-40A	251.3	253.3	2	100	2410	8	79	<	0.001	0.002
BP20-40A	253.3	255.2	1.9	100	2190	70	81	<	0.001	0.003
BP20-40A	255.2	257.3	2.1	100	2540	16	80	<	0.002	0.004
BP20-40A	257.3	259.3	2	100	2590	6	84	<	<	0.002
BP20-40A	259.3	261.3	2	100	2500	5	78	<	0.001	0.002
BP20-40A	261.3	263.3	2	100	2660	3	79	<	<	0.003
BP20-40A	263.3	265.3	2	100	2640	84	81	<	0.003	0.002
BP20-40A	265.3	267.3	2	100	2510	135	80	<	0.001	0.001
BP20-40A	267.3	269.3	2	100	2650	25	83	0.012	0.001	0.002
BP20-40A	269.3	271.3	2	100	2630	4	92	<	0.003	0.002
BP20-40A	271.3	273.3	2	100	2700	2	83	0.047	0.023	0.004
BP20-40A	273.3	275.3	2	100	2840	2	124	0.042	0.071	0.005
BP20-40A	275.3	277.3	2	100	2660	7	88	<	0.002	0.002
BP20-40A	277.3	279.3	2	100	2520	5	77	<	0.002	0.002
BP20-40A	279.3	281.3	2	100	2510	6	86	0.021	0.003	0.002
BP20-40A	281.3	283.3	2	100	2680	5	82	<	0.002	0.002
BP20-40A	283.3	285.3	2	100	3770	253	102	0.144	0.216	0.023
BP20-40A	285.3	287.3	2	100	3510	107	90	0.452	0.461	0.023
BP20-40A	287.3	289.3	2	100	3160	159	76	0.075	0.078	0.018
BP20-40A	289.3	291.3	2	100	3010	40	87	0.056	0.053	0.009
BP20-40A	291.3	293.3	2	100	3650	237	107	0.095	0.151	0.029
BP20-40A	293.3	295.3	2	100	2940	3	107	0.051	0.092	0.009

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-40A	295.3	297.3	2	100	3680	375	127	0.079	0.141	0.017
BP20-40A	297.3	299.3	2	100	5000	656	108	0.363	0.503	0.032
BP20-40A	301.3	303.3	2	100	2310	40	98	0.02	0.013	0.003
BP20-40A	305.3	307.3	2	100	2710	28	96	0.036	0.044	0.006
BP20-40A	309.3	311.3	2	100	1690	245	62	<	0.001	0.003
BP20-40A	311.3	313.3	2	100	2580	125	96	<	0.001	0.003
BP20-40A	313.3	315.3	2	100	2750	3	80	<	0.001	0.007
BP20-40A	315.3	317.3	2	100	2740	5	69	<	0.002	0.005
BP20-40A	319.3	321.3	2	100	2870	12	89	0.01	0.014	0.004
BP20-40A	323.3	325.3	2	100	5660	586	143	0.053	0.073	0.041
BP20-40A	327.3	329.3	2	100	4230	538	110	0.047	0.057	0.011
BP20-40A	329.3	331.3	2	100	3300	139	108	0.033	0.04	0.009
BP20-40A	331.3	333.3	2	100	6540	819	131	0.098	0.13	0.029
BP20-40A	333.3	335.3	2	100	3830	299	109	0.053	0.072	0.01
BP20-40A	337.3	339.5	2.2	100	3290	717	135	0.046	0.056	0.003
BP20-41	126.3	127.3	1	100	41	25	13	<	0.001	0.002
BP20-41	127.3	127.45	0.15	100	69	1150	55	<	<	0.021
BP20-41	127.45	128.5	1.05	100	44	31	14	<	<	0.001
BP20-41	137.1	138.05	0.95	100	53	97	14	<	<	0.003
BP20-41	138.05	138.2	0.15	100	89	666	58	0.006	<	0.023
BP20-41	138.2	139	0.8	100	59	46	10	<	0.001	0.01
BP20-41	139	141	2	100	83	150	24	<	0.001	0.008
BP20-41	141	143.5	2.5	70	111	111	16	<	0.001	0.003
BP20-41	143.5	145.5	2	100	289	146	19	<	0.001	0.005
BP20-41	145.5	148	2.5	85	2210	103	101	0.011	0.01	0.002
BP20-41	148	150	2	100	3410	28	126	0.031	0.029	0.006
BP20-41	150	152	2	100	4180	7	120	0.046	0.055	0.009
BP20-41	152	154	2	100	2960	5	98	0.011	0.022	0.007
BP20-41	154	155.9	1.9	100	3040	82	92	0.016	0.018	0.006
BP20-41	155.9	157.8	1.9	100	3810	649	151	0.018	0.016	0.011
BP20-41	157.8	159.8	2	100	7070	1315	217	0.04	0.045	0.012
BP20-41	159.8	161.2	1.4	100	3400	279	128	0.008	0.01	0.009
BP20-41	161.2	163.3	2.1	100	4410	1055	161	0.023	0.027	0.017
BP20-41	163.3	165	1.7	100	3850	735	114	0.067	0.055	0.022
BP20-41	165	167	2	100	3480	93	104	0.028	0.037	0.007
BP20-41	167	169	2	100	3970	121	105	0.099	0.116	0.014
BP20-41	169	171	2	100	2990	10	103	0.008	0.015	0.005
BP20-41	171	173	2	100	2940	2	70	0.006	0.008	0.003
BP20-41	173	175	2	100	2770	3	105	<	0.006	0.002
BP20-41	175	177	2	100	2770	35	101	<	0.004	0.002
BP20-41	177	179	2	100	2530	82	96	<	0.002	0.003
BP20-41	179	181	2	100	2870	2	99	<	0.004	0.004
BP20-41	181	183.2	2.2	100	2820	3	102	0.008	0.005	0.002
BP20-41	183.2	185.4	2.2	100	2650	2	85	<	0.007	0.002
BP20-41	185.4	187.5	2.1	100	3170	12	122	0.066	0.057	0.006
BP20-41	187.5	189.2	1.7	100	2820	160	134	0.032	0.025	0.009
BP20-41	189.2	191.5	2.3	100	2390	1505	193	0.015	0.014	0.017
BP20-41	191.5	193.5	2	100	2310	307	139	0.008	0.01	0.005
BP20-41	193.5	195.5	2	100	3660	771	173	0.017	0.018	0.013
BP20-41	195.5	197.3	1.8	100	4000	903	167	0.017	0.021	0.015
BP20-41	197.3	199.4	2.1	100	3310	886	145	0.019	0.026	0.017
BP20-41	199.4	200.4	1	100	2880	566	126	0.025	0.032	0.016
BP20-41	200.4	202.2	1.8	100	3720	658	159	0.025	0.025	0.011
BP20-41	202.2	204.2	2	100	4400	1025	189	0.03	0.038	0.019
BP20-41	204.2	206.05	1.85	100	5340	1095	230	0.045	0.057	0.01
BP20-41	206.05	208	1.95	100	4250	844	162	0.015	0.022	0.029
BP20-41	208	209.8	1.8	100	4000	463	149	0.022	0.026	0.017
BP20-41	209.8	211.3	1.5	100	4110	551	141	0.017	0.019	0.031
BP20-41	211.3	212.8	1.5	100	8420	1285	169	0.33	0.463	0.047
BP20-41	212.8	214.9	2.1	100	4950	230	130	0.059	0.071	0.021
BP20-41	214.9	215.6	0.7	100	3020	397	96	0.038	0.032	0.01
BP20-41	215.6	217.8	2.2	100	6090	3190	90	0.209	0.264	0.033
BP20-41	217.8	218.5	0.7	100	11850	424	154	0.827	0.704	0.037
BP20-41	218.5	220	1.5	100	4410	53	112	0.049	0.064	0.008
BP20-41	220	222	2	100	4180	71	109	0.045	0.048	0.009

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-41	222	224	2	100	2840	28	88	0.017	0.021	0.004
BP20-41	224	226	2	100	3050	2	76	0.035	0.017	0.003
BP20-41	226	228	2	100	3230	2	89	0.042	0.037	0.005
BP20-41	228	230	2	100	2970	1	98	<	0.004	0.003
BP20-41	230	232	2	100	2950	1	94	<	0.002	0.003
BP20-41	232	234	2	100	2770	2	82	<	0.001	0.002
BP20-41	234	236	2	100	2870	1	95	<	0.002	0.004
BP20-41	236	238	2	100	2840	1	77	<	0.001	0.002
BP20-41	238	239.9	1.9	100	2910	<1	69	0.01	0.005	0.003
BP20-41	239.9	240.8	0.9	100	2550	1	64	<	0.001	0.004
BP20-41	240.8	242.8	2	90	2310	45	76	<	0.001	0.002
BP20-41	242.8	244.8	2	90	2800	39	91	<	0.001	0.003
BP20-41	244.8	246.2	1.4	100	2440	26	78	<	0.002	0.002
BP20-41	246.2	248	1.8	100	2580	50	84	0.01	0.001	0.003
BP20-41	248	250	2	100	2350	16	80	0.009	0.003	0.002
BP20-41	250	251.3	1.3	100	2620	71	86	0.032	0.001	0.002
BP20-41	251.3	252.7	1.4	100	841	44	28	<	0.001	0.003
BP20-41	252.7	254	1.3	100	825	18	32	0.008	<	<
BP20-41	254	256	2	100	204	6	11	<	<	0.001
BP20-41	256	257.7	1.7	100	272	6	20	<	0.001	<
BP20-41	257.7	259	1.3	100	1960	73	64	0.005	0.003	0.002
BP20-41	259	260.5	1.5	100	2690	37	88	0.007	0.001	0.002
BP20-41	260.5	262.6	2.1	100	2730	6	84	0.069	0.079	0.003
BP20-41	262.6	263.8	1.2	100	2860	9	93	0.153	0.198	0.002
BP20-41	263.8	266	2.2	100	2700	9	81	0.01	0.002	0.001
BP20-41	266	267.5	1.5	100	2390	60	78	0.005	0.002	0.005
BP20-41	267.5	269	1.5	100	2340	26	72	<	0.001	0.009
BP20-41	269	270	1	100	2350	113	60	0.018	0.026	0.036
BP20-41	270	272	2	100	2630	27	83	<	0.001	0.001
BP20-41	272	274	2	100	2510	14	92	<	0.002	0.003
BP20-41	274	276	2	100	2790	3	93	<	0.001	0.003
BP20-41	276	278	2	100	2770	4	86	<	<	0.001
BP20-41	278	279	1	100	2720	2	81	<	0.001	0.001
BP20-41	279	281	2	100	2120	13	70	<	<	<
BP20-41	281	282.8	1.8	100	2680	6	84	0.021	<	0.001
BP20-41	282.8	285	2.2	100	2440	29	81	<	0.001	0.001
BP20-42	102	103.2	1.2	100	2930	26	75	<	<	0.003
BP20-42	103.2	104.5	1.3	100	2730	16	74	<	0.001	0.002
BP20-42	104.5	106.6	2.1	100	2960	15	80	<	0.002	0.002
BP20-42	106.6	108.3	1.7	100	3020	37	79	0.012	0.005	0.003
BP20-42	108.3	110.2	1.9	100	2990	26	76	0.021	0.011	0.004
BP20-42	110.2	111.7	1.5	77	2300	37	62	0.011	0.011	0.008
BP20-42	111.7	113.1	1.4	100	148	67	34	<	<	<
BP20-42	113.1	113.7	0.6	100	176	13	19	<	<	<
BP20-42	113.7	115.3	1.6	31	6510	156	101	0.298	0.342	0.013
BP20-42	115.3	117.65	2.35	100	117	20	23	<	<	0.001
BP20-42	117.65	119.7	2.05	100	3250	33	79	0.041	0.037	0.006
BP20-42	119.7	121.7	2	100	2960	28	75	<	<	0.005
BP20-42	121.7	123.7	2	100	3080	23	76	<	0.015	0.005
BP20-42	123.7	125.7	2	100	3330	21	83	<	<	0.003
BP20-42	125.7	128	2.3	100	3240	20	82	<	0.003	0.002
BP20-42	128	128.7	0.7	100	455	11	37	<	<	0.001
BP20-42	128.7	130.7	2	100	3320	21	84	0.016	0.003	0.003
BP20-42	130.7	132.7	2	100	3330	18	85	0.009	<	0.002
BP20-42	132.7	134.7	2	100	3340	16	85	0.005	<	0.001
BP20-42	134.7	136.7	2	100	3220	14	87	0.008	0.002	0.001
BP20-42	136.7	138.7	2	100	3020	11	82	0.008	0.001	0.001
BP20-42	138.7	140.7	2	100	3280	13	88	0.015	0.001	0.001
BP20-42	140.7	142.9	2.2	100	3320	10	90	<	0.001	0.002
BP20-42	142.9	144.7	1.8	100	3310	7	93	0.01	0.001	0.001
BP20-42	144.7	146.7	2	100	3020	9	87	0.009	0.001	0.002
BP20-42	146.7	148.6	1.9	100	3170	440	75	0.028	0.012	0.004
BP20-42	148.6	151	2.4	100	3640	1730	65	0.073	0.083	0.009
BP20-42	151	151.7	0.7	100	2140	20	46	0.101	0.096	0.007
BP20-42	151.7	153.7	2	100	2640	14	73	0.03	0.013	0.003

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-42	153.7	155.7	2	100	2810	13	77	0.034	0.009	0.002
BP20-42	155.7	158.2	2.5	100	2910	15	79	0.014	0.004	0.002
BP20-42	158.2	159.2	1	100	2620	39	69	0.027	0.002	0.002
BP20-42	159.2	161.2	2	100	3020	22	89	0.009	0.001	0.002
BP20-42	161.2	163.2	2	100	3340	21	99	0.025	<	0.003
BP20-42	163.2	165.2	2	100	3260	24	87	0.094	0.02	0.002
BP20-42	165.2	167.2	2	100	3120	26	88	0.091	0.017	0.002
BP20-42	167.2	169.2	2	100	3260	18	93	0.012	0.001	0.001
BP20-42	169.2	171	1.8	100	3280	13	95	0.008	<	0.002
BP20-42	171	173.2	2.2	100	3050	20	84	<	<	0.001
BP20-42	173.2	175.2	2	100	3140	18	87	<	<	0.001
BP20-42	175.2	177.2	2	100	2980	17	81	<	<	0.001
BP20-42	177.2	179.2	2	100	2880	13	81	<	<	0.001
BP20-42	179.2	181.2	2	100	2820	12	81	<	<	0.001
BP20-42	181.2	183.2	2	100	2830	12	79	<	<	0.002
BP20-42	183.2	185.2	2	100	2790	12	80	0.018	<	<
BP20-42	185.2	187.2	2	100	2750	12	80	<	<	0.001
BP20-42	187.2	189.2	2	100	2600	11	77	0.046	<	<
BP20-42	189.2	191.2	2	100	2840	9	83	0.019	0.002	0.001
BP20-42	191.2	193.2	2	100	2880	10	83	<	<	0.002
BP20-42	193.2	195.2	2	100	7160	183	107	0.29	0.251	0.013
BP20-42	195.2	197.2	2	100	2980	20	80	0.014	0.026	0.002
BP20-42	197.2	199.2	2	100	2830	9	79	0.005	0.001	0.001
BP20-42	199.2	201.2	2	100	2820	8	79	<	0.002	<
BP20-42	201.2	203.2	2	100	2860	9	79	<	<	0.001
BP20-42	203.2	205.2	2	100	2820	7	81	<	<	0.001
BP20-42	205.2	207.2	2	100	2780	10	81	<	<	0.001
BP20-42	207.2	209.2	2	100	2820	10	82	0.009	<	0.002
BP20-42	209.2	211.35	2.15	100	2790	9	80	<	<	<
BP20-42	211.35	213.2	1.85	100	2810	9	80	0.006	0.002	<
BP20-42	213.2	215.2	2	100	2680	9	80	<	0.004	0.004
BP20-42	215.2	217.2	2	100	2720	8	79	0.046	<	<
BP20-42	217.2	219.2	2	100	2780	9	82	0.024	<	0.001
BP20-42	219.2	221.2	2	100	2680	9	80	<	0.001	0.001
BP20-42	221.2	223.2	2	100	2680	9	77	<	<	0.002
BP20-42	223.2	225	1.8	100	2740	11	82	0.011	0.002	0.001
BP20-42	225	227.4	2.4	100	2930	10	87	<	<	<
BP20-42	227.4	229.5	2.1	100	2830	11	84	0.015	<	0.001
BP20-42	229.5	231.5	2	100	2810	10	85	<	<	0.001
BP20-42	231.5	233.5	2	100	2840	11	87	<	<	0.004
BP20-42	233.5	235.5	2	100	2770	9	84	<	<	0.01
BP20-42	235.5	237.5	2	100	2800	10	88	<	0.001	0.003
BP20-42	237.5	239.5	2	100	2850	12	91	0.027	0.005	0.003
BP20-42	239.5	240.35	0.85	100	2600	13	84	<	0.002	0.002
BP20-42	240.35	241	0.65	100	292	6	15	<	<	0.002
BP20-42	241	242.7	1.7	100	2660	12	91	<	<	0.002
BP20-42	242.7	244.2	1.5	100	2780	12	92	<	<	0.004
BP20-42	244.2	245	0.8	100	1350	17	52	<	0.001	0.002
BP20-42	245	247	2	100	2530	19	86	<	0.001	0.002
BP20-42	247	249	2	100	2800	21	86	0.009	0.012	0.004
BP20-42	249	251	2	100	2810	20	85	0.04	0.016	0.004
BP20-42	251	253	2	100	2710	16	84	0.028	0.001	0.021
BP20-42	253	255	2	100	2670	15	84	<	<	0.002
BP20-42	255	257	2	100	2710	13	88	0.011	0.001	0.001
BP20-42	257	259	2	100	2690	13	87	<	0.002	0.001
BP20-42	259	261	2	100	2600	11	85	0.005	0.001	0.001
BP20-42	261	263	2	100	2520	11	84	0.006	0.001	0.001
BP20-42	263	265	2	100	2570	10	85	<	<	0.001
BP20-42	265	267	2	100	2810	6	90	<	0.001	0.002
BP20-42	267	269	2	100	2230	28	80	0.005	0.001	0.002
BP20-42	269	271	2	100	2810	11	86	0.012	0.005	0.01
BP20-42	271	273	2	100	4080	97	106	0.102	0.122	0.017
BP20-42	273	275	2	100	3890	90	100	0.087	0.1	0.015
BP20-42	275	277	2	100	9390	1370	151	0.356	0.402	0.084
BP20-42	277	279	2	100	7360	891	137	0.216	0.273	0.049

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-42	279	281	2	100	7420	547	128	0.08	0.142	0.037
BP20-42	281	283	2	100	3890	351	122	0.038	0.047	0.015
BP20-42	283	285	2	100	5120	690	142	0.057	0.091	0.019
BP20-42	285	287	2	100	16100	3200	259	0.298	0.355	0.05
BP20-42	287	289	2	100	12700	2710	201	0.228	0.276	0.034
BP20-42	289	291	2	100	11100	2350	210	0.193	0.211	0.052
BP20-42	291	293	2	100	5880	331	103	0.083	0.075	0.022
BP20-42	293	295	2	100	3200	4	96	0.013	0.026	0.004
BP20-42	295	297	2	100	2840	3	79	<	0.013	0.003
BP20-42	297	299	2	100	2760	3	90	0.073	0.007	0.003
BP20-42	299	301	2	100	2860	5	86	0.02	0.017	0.003
BP20-42	301	303	2	100	2840	7	84	0.008	0.006	0.002
BP20-42	303	305	2	100	2790	4	94	0.01	0.012	0.003
BP20-42	305	307	2	100	3060	3	121	0.024	0.025	0.004
BP20-42	307	309	2	100	2740	5	95	0.008	0.011	0.003
BP20-42	309	311	2	100	2940	7	93	0.024	0.031	0.003
BP20-42	311	313	2	100	2890	13	99	0.016	0.013	0.003
BP20-42	313	315	2	100	2980	12	105	0.009	0.006	0.002
BP20-42	315	317	2	100	2980	16	90	0.007	0.007	0.003
BP20-42	317	319	2	100	2930	14	101	0.012	0.006	0.002
BP20-42	319	321	2	100	2640	12	128	<	0.002	0.002
BP20-42	321	323	2	100	2780	23	94	0.006	0.004	0.003
BP20-42	323	325	2	100	3060	5	101	0.042	0.027	0.002
BP20-42	325	327	2	100	4790	178	126	0.115	0.116	0.006
BP20-42	327	329	2	100	3130	6	111	0.01	0.01	0.003
BP20-42	329	330.6	1.6	100	2840	48	107	0.011	0.013	0.003
BP20-42	330.6	332.6	2	100	57	38	13	<	<	0.001
BP20-43	3	6	3	100	3520	236	110	0.031	0.034	0.008
BP20-43	6	8	2	100	5130	621	139	0.035	0.048	0.011
BP20-43	8	10	2	100	6580	1170	162	0.091	0.068	0.014
BP20-43	10	12	2	100	7460	1140	185	0.062	0.059	0.02
BP20-43	12	14	2	75	6130	1050	139	0.079	0.057	0.016
BP20-43	14	17	3	100	9350	1600	184	0.065	0.08	0.023
BP20-43	17.8	20	2.2	100	8040	1010	159	0.066	0.061	0.016
BP20-43	20	22	2	100	7210	851	175	0.064	0.067	0.042
BP20-43	22	24	2	80	6540	713	133	0.057	0.062	0.022
BP20-43	24	26	2	80	11050	891	213	0.083	0.085	0.048
BP20-43	26	28	2	100	9150	1000	199	0.076	0.067	0.039
BP20-43	28	30	2	100	9210	886	164	0.077	0.068	0.02
BP20-43	30	32	2	100	9150	2070	212	0.155	0.075	0.03
BP20-43	32	34	2	100	9160	1050	158	0.056	0.064	0.029
BP20-43	34	36	2	100	8780	1380	161	0.104	0.084	0.046
BP20-43	36	38	2	100	7040	606	158	0.051	0.047	0.014
BP20-43	38	40	2	100	8580	1230	172	0.061	0.062	0.034
BP20-43	40	42	2	100	3690	317	122	0.024	0.025	0.016
BP20-43	42	44	2	100	2200	3	98	<	0.003	<
BP20-43	44	46	2	100	2400	6	158	<	0.006	<
BP20-43	46	48	2	100	2180	4	113	<	0.004	<
BP20-43	48	50	2	100	2120	1	94	<	0.002	0.004
BP20-43	50	52.3	2.3	100	2240	1	97	<	0.001	0.004
BP20-43	52.3	54.3	2	100	2280	1	108	<	0.002	0.001
BP20-43	54.3	56.3	2	100	2310	2	103	0.007	0.004	0.002
BP20-43	56.3	58.3	2	100	2250	12	104	0.005	0.004	0.002
BP20-43	58.3	60.3	2	100	2220	93	99	<	0.001	0.001
BP20-43	60.3	62.3	2	100	2060	83	76	0.006	0.004	0.001
BP20-43	62.3	64.3	2	100	2520	7	104	<	0.001	0.001
BP20-43	64.3	66.3	2	100	2530	63	99	0.009	0.013	0.001
BP20-43	66.3	68.3	2	100	2590	6	111	<	0.001	<
BP20-43	68.3	70.3	2	100	2410	9	97	<	<	0.003
BP20-43	70.3	72.3	2	100	2460	29	103	<	0.004	0.002
BP20-43	72.3	74.3	2	100	2500	23	110	<	0.001	0.001
BP20-43	74.3	76.3	2	100	2360	52	107	0.005	<	0.001
BP20-43	76.3	78.3	2	100	2270	52	98	0.005	<	0.001
BP20-43	78.3	80.3	2	100	2330	61	109	0.007	0.001	0.001
BP20-43	80.3	82.3	2	100	2340	68	103	<	0.001	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-43	82.3	84.3	2	100	2340	47	104	<	<	0.001
BP20-43	84.3	86.3	2	100	2310	51	101	<	<	0.001
BP20-43	86.3	88.3	2	100	2290	784	100	<	<	0.002
BP20-43	88.3	90.3	2	100	3180	378	122	<	<	0.001
BP20-43	90.3	92.3	2	100	2350	173	104	0.005	<	0.001
BP20-43	92.3	94.3	2	100	2430	110	107	<	<	0.001
BP20-43	94.3	96.3	2	100	2470	98	113	<	<	0.002
BP20-43	96.3	98.3	2	100	2110	153	96	<	<	0.001
BP20-43	98.3	100.3	2	100	2300	99	104	<	<	0.001
BP20-43	100.3	103	2.7	100	2400	104	105	<	<	0.001
BP20-43	103	106	3	100	2830	150	108	0.005	0.006	0.001
BP20-43	106	108	2	100	1700	874	71	<	0.011	0.002
BP20-43	108	110	2	100	3440	167	106	0.063	0.069	0.003
BP20-43	110	112	2	100	4740	389	135	0.031	0.036	0.004
BP20-43	112	114	2	100	3470	261	125	0.033	0.035	0.003
BP20-43	114	116	2	100	5230	565	150	0.061	0.069	0.008
BP20-43	116	118	2	100	4120	308	111	0.048	0.051	0.006
BP20-43	118	120	2	100	3210	380	114	0.016	0.023	0.003
BP20-43	120	122	2	100	5580	915	176	0.049	0.046	0.004
BP20-43	122	124	2	100	5250	668	147	0.06	0.057	0.003
BP20-43	124	126	2	100	4680	640	137	0.058	0.058	0.003
BP20-43	126	128	2	100	2750	167	105	0.041	0.036	0.002
BP20-43	128	130	2	100	3750	301	122	0.021	0.022	0.003
BP20-43	130	132	2	100	3130	240	117	0.008	0.007	0.002
BP20-43	132	134	2	100	2730	153	101	0.009	0.006	0.001
BP20-43	134	136	2	100	3060	269	112	0.008	0.005	0.002
BP20-43	136	138	2	100	3900	558	130	0.018	0.016	0.004
BP20-43	138	140	2	100	3550	498	133	0.029	0.019	0.008
BP20-43	140	142	2	100	2740	279	112	0.008	0.007	0.002
BP20-43	142	144	2	100	4760	312	138	0.082	0.095	0.004
BP20-43	144	146	2	100	2700	63	103	0.015	0.018	0.002
BP20-43	146	148	2	100	2620	61	102	0.005	0.002	0.001
BP20-43	148	149.2	1.2	100	2920	74	109	<	0.008	0.004
BP20-43	149.2	150.2	1	100	6200	357	181	0.1	0.082	0.006
BP20-43	150.2	152	1.8	100	5720	510	171	0.109	0.1	0.006
BP20-43	152	154	2	100	3870	353	123	0.056	0.044	0.003
BP20-43	154	156	2	100	1930	1830	112	0.016	0.012	0.002
BP20-43	156	158	2	100	2730	3350	166	0.017	0.025	0.007
BP20-43	158	160	2	100	3170	154	100	0.015	0.031	0.001
BP20-43	160	162	2	100	4150	221	123	0.041	0.058	0.008
BP20-43	162	164	2	100	2780	115	89	0.02	0.02	0.003
BP20-43	164	166	2	100	5520	650	131	0.031	0.034	0.003
BP20-43	166	168	2	100	2400	757	130	0.013	0.018	<
BP20-43	168	170	2	100	1270	768	88	0.013	0.01	<
BP20-43	170	172	2	100	1330	706	81	0.01	0.009	<
BP20-43	172	174	2	100	3050	1550	158	0.023	0.02	0.006
BP20-43	174	176	2	100	4570	1580	158	0.034	0.038	0.048
BP20-43	176	178	2	100	4830	708	113	0.034	0.04	0.01
BP20-43	178	180	2	100	2940	524	72	0.012	0.02	0.009
BP20-43	180	182	2	100	7010	631	143	0.149	0.094	0.027
BP20-43	182	184	2	100	9470	1180	154	0.128	0.155	0.058
BP20-43	184	186.3	2.3	100	13150	1340	151	0.231	0.257	0.092
BP20-43	186.3	189.3	3	100	2950	39	78	na	na	na
BP20-43	189.3	192.3	3	100	2740	27	77	na	na	na
BP20-43	192.3	195.3	3	100	2710	125	84	na	na	na
BP20-43	195.3	198.3	3	100	3270	63	82	na	na	na
BP20-43	198.3	201.3	3	100	2730	44	74	na	na	na
BP20-43	201.3	203.3	2	100	2810	68	82	na	na	na
BP20-43	203.3	205.6	2.3	100	2620	79	74	na	na	na
BP20-43	205.6	208.1	2.5	100	1490	156	41	na	na	na
BP20-43	208.1	210.6	2.5	100	1980	36	57	na	na	na
BP20-43	210.6	213.5	2.9	100	3000	22	83	na	na	na
BP20-43	213.5	214.7	1.2	100	1510	26	46	na	na	na
BP20-43	214.7	217.7	3	100	2760	19	78	na	na	na
BP20-43	217.7	220.7	3	100	2660	23	76	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-43	220.7	223.5	2.8	100	2510	24	67	na	na	na
BP20-43	223.5	224.2	0.7	100	62	3	9	na	na	na
BP20-43	224.2	227.2	3	100	2820	12	83	na	na	na
BP20-43	227.2	230.2	3	100	3130	16	88	na	na	na
BP20-43	230.2	232.7	2.5	100	3220	8	86	na	na	na
BP20-43	232.7	234.7	2	100	2790	45	76	na	na	na
BP20-43	234.7	237.1	2.4	100	249	17	20	na	na	na
BP20-43	237.1	239.5	2.4	100	658	43	38	na	na	na
BP20-43	239.5	242.5	3	100	2210	27	77	na	na	na
BP20-43	242.5	245.5	3	100	2790	8	80	na	na	na
BP20-43	245.5	249.3	3.8	100	2900	11	78	na	na	na
BP20-43	249.3	252.4	3.1	100	458	197	34	na	na	na
BP20-43	252.4	255.4	3	100	2700	134	74	na	na	na
BP20-43	255.4	258.4	3	100	2840	35	73	na	na	na
BP20-43	258.4	261.4	3	100	2820	37	76	na	na	na
BP20-43	261.4	264.4	3	100	2900	32	78	na	na	na
BP20-43	264.4	267.5	3.1	100	2830	56	76	na	na	na
BP20-43	267.5	268.2	0.7	100	1350	25	62	na	na	na
BP20-43	268.2	270.4	2.2	100	2290	68	68	na	na	na
BP20-43	270.4	271.2	0.8	100	940	1	41	na	na	na
BP20-43	271.2	273	1.8	100	2700	76	80	na	na	na
BP20-43	273	276	3	100	2860	31	86	na	na	na
BP20-43	276	279	3	100	2980	24	77	na	na	na
BP20-43	279	282	3	100	2600	49	75	na	na	na
BP20-43	282	285	3	100	2630	28	79	na	na	na
BP20-43	285	288	3	100	1940	221	64	na	na	na
BP20-43	288	291	3	100	2810	7	95	na	na	na
BP20-43	291	294	3	100	3820	116	92	na	na	na
BP20-43	294	297.3	3.3	100	6120	101	143	na	na	na
BP20-43	297.3	298	0.7	100	1340	582	80	na	na	na
BP20-43	298	300	2	100	141	175	16	na	na	na
BP20-44	65	67	2	100	3030	18	79	0.007	0.005	0.001
BP20-44	67	69	2	100	3340	20	86	0.022	0.007	0.003
BP20-44	69	71	2	100	3140	14	86	0.021	0.008	0.003
BP20-44	71	73	2	100	3040	16	84	0.033	0.02	0.001
BP20-44	73	75.1	2.1	100	4760	47	93	0.109	0.061	0.002
BP20-44	75.1	77.2	2.1	100	3910	60	82	0.103	0.037	0.005
BP20-44	77.2	78.25	1.05	100	1350	158	45	0.02	0.01	0.001
BP20-44	78.25	79	0.75	100	5820	614	97	0.412	0.396	0.014
BP20-44	79	80.45	1.45	100	999	148	60	0.016	0.019	<
BP20-44	80.45	81.7	1.25	100	3350	37	82	0.107	0.087	0.003
BP20-44	81.7	84.1	2.4	100	2140	49	64	0.012	0.013	0.002
BP20-44	84.1	86	1.9	100	2820	53	78	0.007	0.007	0.002
BP20-44	86	88	2	100	2690	35	64	0.032	0.009	0.002
BP20-44	88	90	2	100	3060	46	78	0.024	0.01	0.004
BP20-44	90	92	2	100	3570	48	77	0.064	0.052	0.004
BP20-44	92	93.5	1.5	100	3770	49	83	0.035	0.028	0.006
BP20-44	93.5	95	1.5	67	848	44	35	<	0.006	0.002
BP20-44	95	96.4	1.4	100	4790	154	86	0.123	0.091	0.005
BP20-44	96.4	97.1	0.7	100	1470	83	48	<	0.003	0.001
BP20-44	97.1	97.65	0.55	100	861	146	48	<	0.002	0.001
BP20-44	97.65	99.1	1.45	100	3520	76	63	0.035	0.038	0.006
BP20-44	99.1	101	1.9	100	3270	37	80	0.005	0.002	0.006
BP20-44	101	103.05	2.05	100	3260	25	80	<	0.001	0.008
BP20-44	103.05	103.85	0.8	65	4120	66	90	0.008	0.005	0.005
BP20-44	103.85	106	2.15	100	3000	34	74	<	0.001	0.003
BP20-44	106	108.2	2.2	100	3250	22	82	<	0.002	0.003
BP20-44	108.2	110	1.8	72	3040	32	72	<	0.002	0.003
BP20-44	110	111.55	1.55	100	2630	32	67	<	0.001	0.002
BP20-44	111.55	112.9	1.35	100	3280	31	87	<	0.002	0.002
BP20-44	112.9	113.85	0.95	100	144	223	49	<	<	0.001
BP20-44	113.85	116.28	2.43	75	3090	62	70	<	0.002	0.005
BP20-44	118.3	120.48	2.18	100	3310	13	82	0.011	0.003	0.017
BP20-44	120.48	122.3	1.82	100	3500	19	84	0.015	0.005	0.004
BP20-44	122.3	124.3	2	100	3370	19	79	0.008	0.002	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-44	126.3	128.3	2	100	3490	18	84	<	<	0.003
BP20-44	128.3	130.3	2	100	3480	24	86	0.013	<	0.002
BP20-44	130.3	132.3	2	100	3560	22	87	<	0.002	0.002
BP20-44	134.3	136.3	2	100	3180	20	81	<	0.001	0.001
BP20-44	136.3	138.3	2	100	3370	10	86	<	0.001	0.001
BP20-44	140.3	142.3	2	100	3140	13	83	0.02	<	0.001
BP20-44	142.3	144.3	2	100	3280	17	88	0.016	<	<
BP20-44	144.3	146.3	2	100	3150	11	83	0.005	0.001	0.002
BP20-44	146.3	148.3	2	100	3140	15	81	0.008	0.002	0.001
BP20-44	148.3	150.3	2	100	3080	11	84	0.007	0.001	<
BP20-44	152.3	154.3	2	100	3090	10	84	<	<	<
BP20-44	154.3	156.3	2	100	2980	10	80	<	<	<
BP20-44	156.3	158.3	2	100	3070	13	84	<	0.001	0.001
BP20-44	158.3	159.3	1	100	2810	77	72	<	0.001	0.002
BP20-44	161.3	163.3	2	100	3020	11	84	<	<	0.001
BP20-44	163.3	165.3	2	100	3070	19	85	0.012	0.001	<
BP20-44	165.3	167	1.7	100	3110	15	85	0.007	0.002	0.001
BP20-44	167	169	2	100	3160	7	88	0.012	0.006	0.001
BP20-44	171	173	2	100	2660	20	80	0.006	0.001	0.001
BP20-44	173	174.65	1.65	100	2780	8	84	<	<	0.001
BP20-44	174.65	175.8	1.15	100	1870	15	54	<	0.001	0.001
BP20-44	175.8	177.6	1.8	100	2460	26	71	0.039	0.033	0.002
BP20-44	177.6	179.6	2	100	2920	15	86	<	0.001	0.001
BP20-44	179.6	181.6	2	100	2780	24	84	0.007	0.004	0.001
BP20-44	183.6	185.6	2	100	2920	26	81	0.026	0.031	0.003
BP20-44	185.6	186.6	1	100	3020	14	84	<	0.002	0.003
BP20-44	186.6	188	1.4	100	3130	34	80	0.042	0.044	0.006
BP20-44	188	190	2	100	4910	163	85	0.038	0.059	0.017
BP20-44	190	192	2	100	5710	608	129	0.053	0.076	0.022
BP20-44	192	193.9	1.9	100	8330	1465	190	0.147	0.167	0.02
BP20-44	193.9	194.8	0.9	100	13200	1865	175	0.248	0.308	0.049
BP20-44	194.8	195.85	1.05	100	4830	544	92	0.037	0.06	0.021
BP20-44	195.85	197	1.15	100	8690	1585	132	0.121	0.183	0.055
BP20-44	197	198.9	1.9	100	10250	1830	156	0.116	0.171	0.062
BP20-44	198.9	199.5	0.6	100	1490	249	57	0.006	0.011	0.008
BP20-44	199.5	201	1.5	100	4790	291	130	0.065	0.083	0.017
BP20-44	201	203.1	2.1	100	2530	21	82	0.039	0.031	0.002
BP20-44	203.1	205	1.9	100	2340	67	73	0.045	0.032	0.008
BP20-44	205	206.9	1.9	100	2970	11	101	0.042	0.041	0.003
BP20-44	206.9	209	2.1	100	1920	26	73	0.006	0.014	0.005
BP20-44	209	210.4	1.4	100	3060	26	92	0.063	0.034	0.006
BP20-44	210.4	211.8	1.4	100	3370	23	93	0.022	0.016	0.006
BP20-44	211.8	212.9	1.1	100	14450	2180	125	0.193	0.33	0.131
BP20-44	212.9	214.1	1.2	100	6790	584	105	0.185	0.28	0.057
BP20-44	214.1	215.7	1.6	100	15600	2770	143	0.417	0.653	0.18
BP20-44	215.7	216.75	1.05	100	7190	879	106	0.357	0.537	0.073
BP20-44	216.75	219	2.25	100	4560	203	97	0.239	0.336	0.026
BP20-44	219	219.5	0.5	100	8640	852	105	0.385	0.463	0.125
BP20-44	219.5	221	1.5	100	3160	20	92	0.015	0.013	0.005
BP20-44	221	223	2	100	2920	10	93	0.009	0.024	0.005
BP20-44	223	225	2	100	2830	3	96	0.009	<	0.001
BP20-44	225	227	2	100	2900	3	100	0.016	0.003	0.001
BP20-44	227	229.3	2.3	100	3630	72	104	0.064	0.125	0.008
BP20-44	229.3	231.7	2.4	100	3240	53	103	0.016	0.027	0.007
BP20-44	231.7	232.2	0.5	100	7340	319	150	0.208	0.239	0.024
BP20-44	232.2	234.2	2	100	3050	12	99	0.012	0.019	0.003
BP20-44	234.2	236.2	2	100	2600	4	91	<	<	0.001
BP20-44	236.2	238.2	2	100	2740	3	96	0.023	0.014	0.002
BP20-44	238.2	240.2	2	100	2890	3	95	0.021	0.044	0.003
BP20-44	240.2	242.2	2	100	3250	46	101	0.024	0.031	0.005
BP20-44	242.2	244	1.8	100	3880	60	104	0.029	0.031	0.008
BP20-44	244	245.8	1.8	100	2750	50	96	0.018	0.031	0.007
BP20-44	245.8	247.2	1.4	100	4270	211	99	0.139	0.142	0.016
BP20-44	247.2	249.4	2.2	100	3110	13	99	0.009	0.003	0.003
BP20-44	249.4	251	1.6	100	2830	4	91	<	<	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-44	251	253	2	100	2790	6	87	0.042	0.01	0.001
BP20-44	253	255	2	100	2710	6	91	0.006	0.006	0.002
BP20-44	255	256.6	1.6	100	2950	38	107	0.017	0.017	0.004
BP20-44	256.6	259.1	2.5	100	7940	869	153	0.124	0.209	0.026
BP20-44	259.1	261.4	2.3	100	3520	180	108	0.05	0.067	0.012
BP20-44	261.4	261.95	0.55	100	6790	325	136	0.135	0.249	0.015
BP20-44	261.95	263.25	1.3	100	2970	7	93	0.008	0.009	0.002
BP20-44	263.25	264.5	1.25	100	7390	407	150	0.114	0.13	0.018
BP20-44	264.5	265.2	0.7	100	3330	19	99	0.034	0.042	0.004
BP20-44	265.2	267.18	1.98	100	10750	1240	168	0.173	0.265	0.034
BP20-44	267.18	269	1.82	100	12200	1965	195	0.201	0.261	0.074
BP20-44	269	270.1	1.1	100	12300	2100	214	0.233	0.285	0.116
BP20-44	270.1	271	0.9	100	8170	430	136	0.111	0.182	0.041
BP20-44	271	273	2	100	3570	10	130	0.046	0.057	0.005
BP20-44	273	275	2	100	2790	11	76	<	0.004	0.003
BP20-44	275	277	2	100	3730	10	97	0.103	0.057	0.006
BP20-44	277	279	2	100	2810	5	90	0.009	0.012	0.015
BP20-44	279	281.09	2.09	100	2780	7	84	0.021	0.023	0.004
BP20-44	281.09	283	1.91	100	2770	7	77	0.016	0.026	0.005
BP20-44	283	285	2	100	2710	5	76	0.02	0.036	0.004
BP20-44	285	287	2	100	4020	549	124	0.076	0.077	0.011
BP20-44	287	289	2	100	2720	8	89	0.008	0.01	0.002
BP20-44	289	291	2	100	3900	472	125	0.039	0.054	0.013
BP20-44	291	292.8	1.8	100	2830	184	107	0.025	0.025	0.007
BP20-44	292.8	295	2.2	100	2370	255	112	0.018	0.022	0.003
BP20-44	295	296.54	1.54	100	151	73	20	<	0.001	0.001
BP20-45	176.3	177.7	1.4	100	51	41	15	<	0.002	<
BP20-45	177.7	177.9	0.2	100	87	887	61	<	0.003	0.003
BP20-45	177.9	179.9	2	100	53	64	15	<	0.002	<
BP20-45	179.9	288	1.4	100	63	42	14	<	0.002	0.001
BP20-45	288	290.1	0.5	100	505	178	27	0.007	0.007	0.001
BP20-45	290.1	292.8	2.3	100	2890	127	98	0.049	0.061	0.003
BP20-45	292.8	293.9	2.1	100	2340	398	73	0.04	0.051	0.003
BP20-45	293.9	296	1.9	100	4000	451	107	0.075	0.091	0.01
BP20-45	296	297.9	1.9	100	4210	92	116	0.146	0.161	0.01
BP20-45	297.9	300.5	2.4	100	3770	25	118	0.12	0.128	0.006
BP20-45	300.5	302.8	2.3	100	6840	2750	159	0.041	0.056	0.134
BP20-45	302.8	304.4	1.6	100	1950	1165	55	0.02	0.021	0.027
BP20-45	304.4	306.2	1.8	100	7610	1970	195	0.094	0.122	0.078
BP20-45	306.2	308.1	1.9	100	9030	2110	176	0.086	0.113	0.125
BP20-45	308.1	310	1.9	100	6110	426	90	0.046	0.06	0.05
BP20-45	310	312	2	100	2790	5	77	<	0.002	0.004
BP20-45	312	314	2	100	2460	79	95	0.005	0.003	0.001
BP20-45	314	315.85	1.85	100	319	38	50	<	<	<
BP20-45	315.85	317.95	2.1	100	319	38	50	<	<	<
BP20-45	317.95	320.44	2.49	84	607	348	55	0.005	0.004	0.001
BP20-45	320.44	321.3	0.86	100	1580	4	76	<	0.004	<
BP20-45	321.3	322.7	1.4	100	2600	4	97	<	0.001	0.003
BP20-45	322.7	325.9	3.2	91	2770	2	88	<	0.003	0.005
BP20-45	325.9	327.3	1.4	73	2830	1180	99	0.006	0.009	0.006
BP20-45	327.3	330.6	2.15	77	3730	310	183	0.018	0.021	0.001
BP20-45	330.6	332.75	0.8	100	1350	275	103	<	0.006	<
BP20-45	332.75	333.55	1.35	100	2940	156	129	0.019	0.016	0.001
BP20-45	333.55	334.9	1.8	100	561	277	53	<	0.001	0.002
BP20-45	334.9	336.7	45	100	2460	160	110	0.019	0.014	<
BP20-45	336.7	339.8	2.7	93	4470	56	133	0.026	0.027	0.017
BP20-45	339.8	343	2	85	3490	52	145	0.019	0.026	0.007
BP20-45	343	345	3.1	97	2910	109	118	0.019	0.025	0.003
BP20-45	345	348.1	1	100	2760	217	122	0.02	0.025	0.001
BP20-45	348.1	350	0.9	100	2870	178	129	0.016	0.023	0.001
BP20-45	350	352.3	2.3	100	2290	231	110	0.016	0.019	<
BP20-45	352.3	354	1.7	64	139	170	22	<	0.003	<
BP20-46	5	7	2	100	2590	9	91	<	0.015	0.001
BP20-46	7	9	2	100	2560	26	87	0.009	0.026	0.002
BP20-46	9	11.5	2.5	84	3040	368	102	0.021	0.054	0.012
BP20-46	11.5	14	2.5	64	2650	47	97	0.017	0.029	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-46	14	16	2	50	2310	5	76	<	0.003	<
BP20-46	16	17.5	1.5	100	2080	233	98	0.01	0.012	0.001
BP20-46	17.5	18.3	0.8	100	203	176	20	<	0.003	<
BP20-47	5.5	7.5	2	100	68	28	11	<	0.001	<
BP20-47	7.5	9.4	1.9	100	127	26	14	<	0.001	0.001
BP20-47	9.4	11.5	2.1	100	71	28	13	<	0.001	<
BP20-47	11.5	13	1.5	100	108	28	17	<	0.001	<
BP20-48	3.5	6	2.5	100	11800	3310	202	na	na	na
BP20-48	6	9	3	77	14700	212	207	na	na	na
BP20-48	9	12	3	60	12900	608	179	na	na	na
BP20-48	12	15	3	83	8320	253	127	na	na	na
BP20-48	15	18	3	47	12250	458	194	na	na	na
BP20-48	18	21	3	43	9030	289	153	na	na	na
BP20-48	21	23.7	2.7	59	3290	211	84	na	na	na
BP20-48	24.6	26.8	2.2	100	5050	23	154	na	na	na
BP20-48	27	30	3	70	5940	75	138	na	na	na
BP20-48	30	32	2	100	5010	67	149	na	na	na
BP20-48	32	34	2	78	5330	30	159	na	na	na
BP20-48	34	37	3	63	4280	97	136	na	na	na
BP20-48	37	39	2	75	3880	108	141	na	na	na
BP20-48	39.6	42	2.4	58	4300	721	135	na	na	na
BP20-48	42	43.6	1.6	100	4770	539	156	na	na	na
BP20-48	44	46	2	90	3960	550	132	na	na	na
BP20-48	46	48	2	100	3340	38	112	na	na	na
BP20-48	48	50	2	100	3750	278	122	na	na	na
BP20-48	50	52	2	100	3660	135	116	na	na	na
BP20-48	52	54	2	100	4380	347	124	na	na	na
BP20-48	54	56	2	100	4640	277	111	na	na	na
BP20-48	56	58	2	75	8560	1390	133	na	na	na
BP20-48	58	60	2	100	8950	2020	186	na	na	na
BP20-48	60	62.6	2.6	58	9370	1390	197	na	na	na
BP20-48	63	65.3	2.3	70	5730	515	128	na	na	na
BP20-48	65.3	68	2.7	65	7070	762	160	na	na	na
BP20-48	68	69.5	1.5	73	8980	1925	188	na	na	na
BP20-48	70	73	3	73	7840	609	171	na	na	na
BP20-48	73	75	2	100	7370	382	165	na	na	na
BP20-48	75	77	2	100	9820	1480	198	na	na	na
BP20-48	77	79.3	2.3	100	11350	1145	202	na	na	na
BP20-48	79.3	81	1.7	100	3730	206	70	na	na	na
BP20-48	81	83	2	100	3100	24	85	na	na	na
BP20-48	83	85	2	85	2440	120	67	na	na	na
BP20-48	85	87.5	2.5	100	3370	5	86	na	na	na
BP20-48	87.5	90.1	2.6	100	2930	10	74	na	na	na
BP20-48	90.4	92.4	2	100	2630	9	90	na	na	na
BP20-48	92.4	94.4	2	100	2620	13	73	na	na	na
BP20-48	94.4	96.4	2	100	2710	10	81	na	na	na
BP20-48	96.4	98.4	2	100	2760	10	90	na	na	na
BP20-48	98.4	100.4	2	100	2580	28	73	na	na	na
BP20-48	100.4	102.4	2	100	2580	9	101	na	na	na
BP20-48	102.4	104.4	2	95	2570	31	75	na	na	na
BP20-48	104.4	106.34	1.94	100	2380	222	79	na	na	na
BP20-48	106.34	108.4	2.06	78	2370	10	85	na	na	na
BP20-48	108.4	110.5	2.1	100	3870	51	96	na	na	na
BP20-48	111	113	2	100	7930	601	106	na	na	na
BP20-48	113	115	2	100	7610	1440	137	na	na	na
BP20-48	115	116.9	1.9	100	3060	68	89	na	na	na
BP20-48	117.6	119.45	1.85	100	3150	57	77	na	na	na
BP20-48	119.8	122.5	2.7	90	2990	62	80	na	na	na
BP20-48	122.8	124.8	2	100	2770	43	82	na	na	na
BP20-48	124.8	126.66	1.86	100	2590	21	73	na	na	na
BP20-48	126.66	129	2.34	100	2370	33	84	na	na	na
BP20-48	129	131.5	2.5	100	1980	62	78	na	na	na
BP20-48	131.5	133.5	2	90	2700	76	77	na	na	na
BP20-48	133.5	135.5	2	100	10800	3440	111	na	na	na
BP20-48	144	145.9	1.9	100	5370	584	112	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-48	149.7	150.4	0.7	100	10500	1040	185	na	na	na
BP20-48	150.4	151.8	1.4	100	8170	972	158	na	na	na
BP20-48	151.8	152.4	0.6	100	11300	888	190	na	na	na
BP20-48	152.4	153.2	0.8	100	11000	1975	211	na	na	na
BP20-48	153.2	155.8	2.6	100	11850	1185	211	na	na	na
BP20-48	155.8	157	1.2	100	12750	2530	222	na	na	na
BP20-48	157	159.15	2.15	100	6730	423	142	na	na	na
BP20-48	159.15	161.3	2.15	100	6420	502	162	na	na	na
BP20-48	161.3	163.3	2	100	7400	1070	133	na	na	na
BP20-48	163.3	165.3	2	100	5350	425	140	na	na	na
BP20-48	165.3	167.5	2.2	100	5820	251	113	na	na	na
BP20-48	167.5	170	2.5	100	9180	1330	154	na	na	na
BP20-48	170	172	2	100	11350	1250	230	na	na	na
BP20-48	172	174	2	100	6470	1070	155	na	na	na
BP20-48	174	176	2	100	3060	12	84	na	na	na
BP20-48	176	178	2	100	3570	8	105	na	na	na
BP20-48	178	180	2	100	6020	263	105	na	na	na
BP20-48	180	182	2	100	2880	1	76	na	na	na
BP20-48	182	184	2	100	2500	1	69	na	na	na
BP20-48	184	186	2	100	2830	2	74	na	na	na
BP20-48	186	188	2	100	2890	2	71	na	na	na
BP20-48	188	190	2	100	3000	3	77	na	na	na
BP20-48	190	192	2	100	2950	2	64	na	na	na
BP20-48	192	194	2	100	2770	1	65	na	na	na
BP20-48	194	196	2	100	3240	<1	82	na	na	na
BP20-48	196	197.4	1.4	100	2960	2	76	na	na	na
BP20-48	197.4	199.4	2	100	2520	1	53	na	na	na
BP20-48	199.4	201.4	2	100	2950	1	59	na	na	na
BP20-48	201.4	203	1.6	100	2760	6	49	na	na	na
BP20-48	203	205	2	90	2490	12	48	na	na	na
BP20-48	205	206.8	1.8	100	3160	33	69	na	na	na
BP20-48	206.9	210	3.1	95	3260	392	95	na	na	na
BP20-48	210	211	1	100	15850	7780	1170	na	na	na
BP20-48	211	212.67	1.67	100	18300	3080	1360	na	na	na
BP20-48	212.67	213.5	0.83	100	2760	5630	163	na	na	na
BP20-48	213.5	215.5	2	100	4590	58	109	na	na	na
BP20-48	215.5	217.5	2	100	5210	37	108	na	na	na
BP20-48	217.5	219.5	2	100	3760	60	72	na	na	na
BP20-48	219.5	221.5	2	100	4070	3	161	na	na	na
BP20-48	221.5	223.5	2	100	3640	1	114	na	na	na
BP20-48	223.5	225.39	1.89	100	3220	1	122	na	na	na
BP20-48	225.39	227.5	2.11	100	3570	3	170	na	na	na
BP20-48	227.5	229.5	2	100	3900	6	235	na	na	na
BP20-48	229.5	231.5	2	100	3590	<1	108	na	na	na
BP20-48	231.5	233.5	2	100	3540	<1	85	na	na	na
BP20-48	233.5	235.5	2	100	3120	3	86	na	na	na
BP20-48	235.5	237.5	2	100	3000	2	89	na	na	na
BP20-48	237.5	239.5	2	100	2910	13	83	na	na	na
BP20-48	239.5	241.5	2	100	3930	3	159	na	na	na
BP20-48	241.5	243.8	2.3	100	3060	3	89	na	na	na
BP20-48	243.8	245.5	1.7	100	3380	4	104	na	na	na
BP20-48	245.5	247.5	2	100	3910	5	88	na	na	na
BP20-48	247.5	249.5	2	100	3090	6	83	na	na	na
BP20-48	249.5	251.5	2	100	3170	9	76	na	na	na
BP20-48	251.5	253.7	2.2	100	2910	39	81	na	na	na
BP20-48	253.7	255.5	1.8	100	2920	70	91	na	na	na
BP20-48	255.5	257.5	2	100	2890	31	80	na	na	na
BP20-48	257.5	259.5	2	100	2910	11	89	na	na	na
BP20-48	259.5	261.5	2	100	3100	4	111	na	na	na
BP20-48	261.5	263.5	2	100	3810	4	75	na	na	na
BP20-48	263.5	265.5	2	100	3710	5	98	na	na	na
BP20-48	265.5	267.95	2.45	100	3330	27	109	na	na	na
BP20-48	268.2	271.5	3.3	60	2460	359	91	na	na	na
BP20-48	273.5	276.6	3.1	55	4160	312	112	na	na	na
BP20-48	277	279.4	2.4	75	3280	141	89	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-48	279.6	281.6	2	80	2380	10	63	na	na	na
BP20-48	282.8	284.9	2.1	55	771	50	28	na	na	na
BP20-48	284.9	286.3	1.4	36	478	55	21	na	na	na
BP20-49	11	13	2	50	2350	106	56	0.008	0.018	<
BP20-49	13	15	2	75	1960	135	55	0.014	0.014	0.003
BP20-49	15	17	2	75	1790	197	41	0.007	0.012	0.001
BP20-49	17	19	2	75	1490	101	39	0.007	0.012	0.001
BP20-49	19	20.4	1.4	70	1470	87	38	0.009	0.01	<
BP20-49	20.4	22	1.6	70	175	33	10	<	0.003	<
BP20-50	4.5	6.5	2	100	2730	12	87	0.005	0.019	0.003
BP20-50	7.15	9	1.85	100	4700	984	226	0.031	0.032	0.007
BP20-50	9	11	2	100	4780	938	167	0.037	0.036	0.004
BP20-50	11	13	2	100	4280	759	123	0.036	0.041	0.003
BP20-50	13	15.1	2.1	100	2960	600	102	0.02	0.018	0.004
BP20-50	15.5	17	1.5	100	2750	658	79	0.012	0.021	0.005
BP20-50	17	18.3	1.3	100	2690	775	102	0.013	0.019	0.005
BP20-50	18.3	19.3	1	100	3930	780	136	0.029	0.036	0.002
BP20-50	19.3	20.5	1.2	100	4260	780	167	0.029	0.033	0.002
BP20-50	20.5	22.5	2	100	4250	740	155	0.034	0.042	0.003
BP20-50	22.5	25	2.5	100	3940	832	171	0.039	0.04	0.004
BP20-50	26	28.2	2.2	100	3080	407	92	0.012	0.026	0.01
BP20-50	28.2	29.2	1	100	2500	160	81	0.018	0.018	0.007
BP20-50	29.9	30.9	1	100	392	118	38	0.008	0.007	<
BP20-51	15	16.6	1.6	100	2950	17	85	0.005	0.02	0.001
BP20-51	16.6	18.6	2	100	2850	15	80	0.008	0.02	0.001
BP20-51	18.6	20	1.4	100	3100	17	86	0.023	0.015	0.001
BP20-51	20	22	2	100	3130	18	91	0.012	0.027	0.001
BP20-51	22	24	2	100	2990	15	75	0.014	0.022	0.002
BP20-51	24	26	2	100	3020	15	77	0.017	0.025	0.005
BP20-51	26	28	2	100	3300	11	84	0.024	0.029	0.006
BP20-51	28	30	2	100	3540	10	106	0.027	0.051	0.007
BP20-51	30	32	2	100	3590	10	100	0.03	0.044	0.005
BP20-51	32	34	2	100	3680	28	92	0.049	0.081	0.009
BP20-51	34	35.5	1.5	100	3480	81	87	0.055	0.086	0.01
BP20-51	35.5	36.8	1.3	100	4450	4	128	0.133	0.141	0.016
BP20-51	36.8	38.1	1.3	100	3810	24	127	0.091	0.12	0.014
BP20-51	38.1	39	0.9	100	3360	14	81	0.026	0.045	0.005
BP20-51	39	41.05	2.05	100	3600	13	115	0.052	0.085	0.01
BP20-51	41.05	42.7	1.65	100	3050	9	92	0.051	0.034	0.004
BP20-51	42.7	45	2.3	100	2990	10	87	0.015	0.024	0.003
BP20-51	45	47	2	100	3780	45	119	0.073	0.179	0.01
BP20-51	47	49	2	100	8430	999	165	0.394	0.502	0.042
BP20-51	49	51	2	100	4130	199	125	0.087	0.143	0.012
BP20-51	51	53	2	100	3110	7	99	0.043	0.086	0.005
BP20-51	53	55	2	100	2730	9	73	0.006	0.007	0.002
BP20-51	55	57	2	100	2910	5	120	0.013	0.015	0.006
BP20-51	57	59	2	100	2180	17	81	0.018	0.03	0.005
BP20-51	59	61	2	100	4930	96	120	0.066	0.099	0.016
BP20-51	61	63	2	100	2840	8	78	0.022	0.014	0.004
BP20-51	63	65	2	100	3760	13	107	0.028	0.052	0.009
BP20-51	65	67	2	100	3450	7	100	0.046	0.031	0.005
BP20-51	67	69	2	100	2970	10	76	0.023	0.028	0.002
BP20-51	69	71.7	2.7	100	2710	41	82	0.025	0.015	0.005
BP20-51	71.7	73	1.3	100	3630	104	85	0.072	0.06	0.013
BP20-51	73	75	2	100	2970	746	99	0.033	0.033	0.006
BP20-51	75	76.3	1.3	100	2670	759	81	0.008	0.019	0.004
BP20-51	76.3	78	1.7	100	2220	154	72	0.015	0.011	0.001
BP20-51	78	79.2	1.2	100	2210	191	64	0.023	0.017	0.002
BP20-51	79.2	80.5	1.3	100	2590	451	90	0.056	0.055	0.006
BP20-51	80.5	81.8	1.3	100	1500	78	49	0.016	0.01	0.008
BP20-51	81.8	83.8	2	100	66	160	20	<	<	<
BP20-52	71.5	72.5	1	100	2380	13	105	<	0.007	0.003
BP20-52	72.5	74.7	2.2	100	4160	184	112	0.042	0.071	0.006
BP20-52	74.7	77	2.3	100	3750	126	101	0.051	0.058	0.009
BP20-52	77	79	2	100	2840	21	76	0.013	0.026	0.007

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-52	79	81	2	100	2730	146	78	0.017	0.028	0.004
BP20-52	81	83	2	100	3720	203	101	0.026	0.067	0.006
BP20-52	83	85	2	100	3490	141	100	0.028	0.051	0.005
BP20-52	85	86.9	1.9	100	3730	140	111	0.07	0.076	0.004
BP20-52	86.9	88.95	2.05	100	1230	1000	83	0.019	0.016	0.004
BP20-52	88.95	91	2.05	100	2370	59	81	0.014	0.023	0.004
BP20-52	91	93	2	100	3000	28	91	0.049	0.035	0.006
BP20-52	93	95	2	100	2730	93	92	0.014	0.028	0.006
BP20-52	95	97	2	100	2530	37	102	0.006	0.004	0.003
BP20-52	97	99.8	2.8	100	2670	239	79	0.01	0.017	0.002
BP20-52	99.8	100.6	0.8	100	2200	26	112	0.007	0.01	0.008
BP20-52	100.6	102.85	2.25	100	2620	161	123	0.019	0.022	0.007
BP20-52	102.85	104	1.15	100	3550	217	123	0.044	0.048	0.012
BP20-52	104	106.2	2.2	100	5110	643	136	0.053	0.063	0.014
BP20-52	106.2	107.65	1.45	100	6900	876	162	0.078	0.073	0.024
BP20-52	107.65	109	1.35	100	3820	167	113	0.042	0.062	0.014
BP20-52	109	109.8	0.8	100	7130	1220	131	0.139	0.197	0.058
BP20-52	109.8	111	1.2	100	5320	709	149	0.045	0.057	0.029
BP20-52	111	112.8	1.8	100	4680	337	115	0.032	0.045	0.021
BP20-52	112.8	114.8	2	100	5470	540	107	0.06	0.074	0.03
BP20-52	114.8	116.4	1.6	100	6570	695	116	0.076	0.086	0.044
BP20-52	116.4	118.4	2	100	5350	258	116	0.039	0.078	0.023
BP20-52	118.4	120	1.6	100	5400	463	118	0.053	0.07	0.021
BP20-52	120	121	1	100	7740	1680	170	0.08	0.094	0.038
BP20-52	121	123.45	2.45	100	5080	752	132	0.045	0.044	0.015
BP20-52	123.45	124.9	1.45	100	5260	486	121	0.032	0.04	0.014
BP20-52	124.9	125.8	0.9	100	6840	792	132	0.027	0.036	0.019
BP20-52	125.8	128	2.2	100	9950	1870	149	0.122	0.147	0.046
BP20-52	128	130.5	2.5	100	4210	20	103	0.026	0.027	0.004
BP20-52	130.5	132.5	2	100	12400	2600	158	0.118	0.135	0.051
BP20-52	132.5	134.45	1.95	100	17150	3650	155	0.126	0.133	0.056
BP20-52	134.45	136.5	2.05	100	3550	19	93	0.01	0.014	0.002
BP20-52	136.5	138.5	2	100	4030	119	101	0.19	0.127	0.008
BP20-52	138.5	140.5	2	100	3180	28	83	0.007	0.002	0.003
BP20-52	140.5	142.5	2	100	3470	20	84	0.051	0.041	0.006
BP20-52	142.5	144.6	2.1	100	2880	54	88	0.005	0.004	0.003
BP20-52	144.6	146.3	1.7	100	3320	12	70	0.021	0.002	0.001
BP20-52	146.3	148.75	2.45	100	950	13	42	<	0.001	0.002
BP20-52	148.75	149.8	1.05	100	2970	28	79	0.007	0.003	0.002
BP20-52	149.8	151	1.2	100	1350	20	40	<	0.002	0.001
BP20-52	151.6	153.45	1.85	100	2370	21	62	<	0.003	0.001
BP20-52	153.45	154.6	1.15	100	2980	9	87	0.005	0.002	0.001
BP20-52	154.6	155.4	0.8	100	1630	25	48	0.012	0.002	0.001
BP20-52	155.4	156	0.6	100	2920	6	88	<	0.001	0.001
BP20-52	156	157	1	100	2610	72	64	0.006	0.001	0.001
BP20-52	157	159	2	100	2840	101	81	0.009	0.002	0.001
BP20-52	159	161	2	100	3030	19	86	<	0.001	0.001
BP20-52	161	163	2	100	3080	11	89	0.01	0.001	<
BP20-52	163	165	2	100	3210	11	91	0.012	0.002	<
BP20-52	165	167	2	100	3020	27	81	<	0.002	0.001
BP20-52	167	169	2	100	3350	10	89	0.025	0.002	0.001
BP20-52	169	171	2	100	3220	17	86	<	0.001	0.004
BP20-52	171	173	2	100	3090	43	80	0.04	0.001	0.001
BP20-52	173	175	2	100	3410	18	87	<	0.001	0.001
BP20-52	175	177	2	100	3420	20	85	<	0.002	0.001
BP20-52	177	179	2	100	3320	12	82	<	<	0.002
BP20-52	179	181.2	2.2	100	3490	12	87	<	0.001	0.003
BP20-52	181.2	183.4	2.2	100	3210	14	81	<	<	0.003
BP20-52	183.4	184	0.6	100	3290	78	72	0.008	0.003	0.004
BP20-52	184	186.1	2.1	100	3450	17	87	<	<	0.003
BP20-52	186.1	186.7	0.6	100	3020	22	77	<	<	0.003
BP20-52	186.7	189.1	2.4	100	3550	26	83	<	0.001	0.003
BP20-52	189.1	191.6	2.5	100	3540	24	86	0.005	0.002	0.007
BP20-52	191.6	193.6	2	100	296	987	44	<	0.002	0.028
BP20-52	193.6	195.6	2	100	131	164	35	<	<	<

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-52	195.6	197.6	2	100	192	61	31	<	<	0.002
BP20-52	197.6	199.6	2	100	161	62	33	<	<	0.001
BP20-52	199.6	201.6	2	100	1380	67	50	<	<	0.002
BP20-52	201.6	203.6	2	100	180	20	36	<	<	0.002
BP20-52	203.6	205.3	1.7	100	1140	17	51	<	<	0.001
BP20-52	205.3	206.9	1.6	100	3410	33	90	<	<	0.003
BP20-52	206.9	208.9	2	100	225	12	41	<	<	<
BP20-52	208.9	210.5	1.6	100	163	13	42	<	<	0.002
BP20-52	210.5	211.3	0.8	100	207	19	50	<	<	<
BP20-52	211.3	213.5	2.2	100	1680	20	58	<	<	0.002
BP20-52	213.5	215.5	2	100	3580	27	98	0.006	0.001	0.006
BP20-52	215.5	217.5	2	100	2760	25	94	<	<	0.003
BP20-52	217.5	219.5	2	100	2760	32	78	0.005	0.001	0.003
BP20-52	219.5	220.4	0.9	100	2660	33	70	<	0.001	0.005
BP20-52	220.4	222.4	2	100	381	22	38	<	<	0.001
BP20-52	222.4	224.4	2	100	1890	52	66	<	<	0.002
BP20-52	224.4	226.5	2.1	100	93	66	36	<	<	<
BP20-52	226.5	228.5	2	100	2710	34	72	0.008	0.002	0.005
BP20-52	228.5	230.5	2	100	2690	22	75	<	0.003	0.003
BP20-52	230.5	232.7	2.2	100	3150	43	84	0.016	0.003	0.002
BP20-52	232.7	235	2.3	100	3080	9	90	<	<	0.002
BP20-52	235	237	2	100	2980	20	84	<	<	0.002
BP20-52	270	272	2	100	2810	11	85	0.078	0.004	0.001
BP20-52	272	274	2	100	2890	11	92	0.061	0.003	0.002
BP20-52	274	276	2	100	2810	23	85	0.021	0.004	0.002
BP20-52	276	277.4	1.4	100	391	4	49	0.02	0.001	0.003
BP20-52	277.4	279.5	2.1	100	2560	11	78	0.023	0.001	0.001
BP20-52	279.5	281.5	2	100	2800	5	88	0.014	0.013	0.002
BP20-52	281.5	283.5	2	100	2780	6	89	0.013	0.005	0.004
BP20-52	283.5	285	1.5	100	2640	1	82	0.012	0.006	0.009
BP20-52	285	286.2	1.2	100	2660	2	82	0.026	0.008	0.004
BP20-52	286.2	288.6	2.4	100	2800	6	85	<	<	0.001
BP20-52	288.6	291.1	2.5	100	2730	5	82	0.005	0.001	0.001
BP20-52	291.1	293.2	2.1	100	2640	3	76	0.005	0.001	0.001
BP20-52	293.2	295	1.8	100	2610	5	75	0.01	0.004	0.001
BP20-52	295	297	2	100	2430	69	87	<	<	0.005
BP20-52	297	299	2	100	2860	7	74	0.013	0.022	0.016
BP20-52	299	301	2	100	2870	5	73	<	<	0.015
BP20-52	301	303	2	100	2820	6	98	0.005	<	0.015
BP20-52	303	305	2	100	3070	15	82	<	0.008	0.034
BP20-52	305	307	2	100	2950	13	89	0.015	0.041	0.005
BP20-52	307	309	2	100	2410	44	62	0.007	0.025	0.005
BP20-52	309	310.3	1.3	100	2890	5	89	0.005	0.014	0.005
BP20-52	310.3	312.5	2.2	100	5670	124	136	0.043	0.076	0.009
BP20-52	312.5	313.05	0.55	100	3380	182	93	0.028	0.04	0.001
KS20-01A	172	173	1	100	183	151	34	na	na	na
KS20-01A	173	175.25	2.25	100	462	186	63	na	na	na
KS20-01A	175.25	176	0.75	100	755	85	55	na	na	na
KS20-01A	176	177.3	1.3	100	784	417	71	na	na	na
KS20-01A	177.3	178.5	1.2	100	1925	1060	116	na	na	na
KS20-01A	178.5	180.8	2.3	100	661	501	43	na	na	na
KS20-01A	180.8	181.3	0.5	100	4290	1250	242	na	na	na
KS20-01A	181.3	183.2	1.9	100	931	960	50	na	na	na
KS20-01A	183.2	185	1.8	100	231	264	20	na	na	na
KS20-01A	185	187	2	100	193	420	18	na	na	na
KS20-01A	187	187.2	0.2	100	3240	2220	120	na	na	na
KS20-01A	187.2	188	0.8	100	37	42	12	na	na	na
KS20-01A	191.6	193.05	1.45	100	270	938	22	<	0.007	0.019
KS20-01A	193.05	193.65	0.6	100	27900	38100	1020	3.52	1.005	0.321
KS20-01A	193.65	194	0.35	100	891	646	32	0.502	0.264	0.21
KS20-01A	237	238.5	1.5	100	259	137	40	na	na	na
KS20-01A	238.5	240	1.5	100	400	61	54	na	na	na
KS20-01A	240	242	2	100	388	41	56	na	na	na
KS20-01A	242	244	2	100	467	52	57	na	na	na
KS20-01A	244	246	2	100	480	67	58	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
KS20-01A	246	247.5	1.5	100	364	102	36	na	na	na
KS20-01A	247.5	248.5	1	100	41	47	13	na	na	na
KS20-02	33.8	34.65	0.85	100	492	71	45	na	na	na
KS20-02	36.95	37.6	0.65	100	645	52	68	na	na	na
KS20-02	45.35	46.4	1.05	100	635	5	49	na	na	na
KS20-02	53.7	55.6	1.9	100	382	154	63	na	na	na
KS20-02	82.45	84.1	1.65	100	152	58	39	na	na	na
KS20-02	104	105.95	1.95	100	74	89	45	na	na	na
KS20-02	105.95	106.2	0.25	100	105	408	130	na	na	na
KS20-02	106.2	106.8	0.6	100	15	57	17	na	na	na
KS20-02	106.8	106.9	0.1	100	188	479	275	na	na	na
KS20-02	106.9	108.75	1.85	100	31	66	25	na	na	na
KS20-02	129	130.2	1.2	100	218	6130	11	0.145	0.048	0.142
KS20-02	130.2	131.54	1.34	100	755	213	69	0.009	0.008	0.006
KS20-02	131.54	131.74	0.2	100	1280	614	80	0.44	0.155	0.125
KS20-02	131.74	133.55	1.81	100	7660	4400	285	6.88	4.93	0.722
KS20-02	133.55	135	1.45	100	1065	2060	30	0.014	0.02	0.011
KS20-02	135	135.25	0.25	100	12750	3210	461	2.22	0.318	0.147
KS20-02	135.25	135.47	0.22	100	1450	1070	56	0.043	0.019	0.005
KS20-02	135.47	136.65	1.18	100	37200	8380	1210	1.505	0.87	0.037
KS20-02	136.65	137.15	0.5	100	2300	1830	79	<	0.03	0.008
KS20-02	137.15	137.62	0.47	100	16600	12250	581	1.525	0.83	0.145
KS20-02	137.62	138.4	0.78	100	2000	1440	70	<	0.037	0.02
KS20-02	152.2	153.9	1.7	100	903	133	77	na	na	na
KS20-02	179.35	180	0.65	100	3550	239	151	na	na	na
KS20-02	189.7	190.8	1.1	100	1330	149	72	na	na	na
KS20-02	190.8	191.95	1.15	100	2450	525	132	na	na	na
TC20-01	22.7	23.7	1	100	408	111	60	na	na	na
TC20-01	23.7	24.7	1	100	444	85	60	na	na	na
TC20-01	24.7	25.5	0.8	100	460	156	58	na	na	na
TC20-01	28.9	30.4	1.5	100	151	101	47	na	na	na
TC20-01	30.4	31.6	1.2	100	540	91	57	na	na	na
TC20-01	31.6	32.9	1.3	100	439	151	54	na	na	na
TC20-01	40.8	41.05	0.25	100	151	509	67	na	na	na
TC20-01	57.1	58.2	1.1	100	35	49	40	na	na	na
TC20-01	58.2	59.3	1.1	100	39	96	50	na	na	na
TC20-01	59.3	60.1	0.8	100	39	70	40	na	na	na
TC20-01	60.1	61.6	1.5	100	58	45	35	na	na	na
TC20-01	68.65	69.6	0.95	100	506	<1	44	na	na	na
TC20-01	69.6	70.6	1	100	770	15	67	na	na	na
TC20-01	70.6	71.6	1	100	1490	50	71	na	na	na
TC20-01	71.6	72.4	0.8	100	975	20	74	na	na	na
TC20-01	73.75	74.8	1.05	100	16	15	35	na	na	na
TC20-01	74.8	75.8	1	100	12	19	36	na	na	na
TC20-01	75.8	76.8	1	100	9	10	31	na	na	na
TC20-01	76.8	77.8	1	100	7	12	33	na	na	na
TC20-01	77.8	78.8	1	100	11	40	34	na	na	na
TC20-01	78.8	79.8	1	100	6	21	35	na	na	na
TC20-01	83.4	84.4	1	100	80	38	36	na	na	na
TC20-01	84.4	85.4	1	100	82	59	41	na	na	na
TC20-01	85.4	86.4	1	100	176	57	52	na	na	na
TC20-01	86.4	87.4	1	100	195	83	55	na	na	na
TC20-01	87.4	88.4	1	100	172	55	48	na	na	na
TC20-01	99.4	100.45	1.05	100	120	67	19	<	0.003	0.002
TC20-01	100.45	100.6	0.15	100	89	737	53	<	<	0.004
TC20-01	100.6	101.6	1	100	62	35	8	<	0.001	0.002
TC20-01	117	118	1	100	976	1540	38	<	0.015	0.006
TC20-01	118	118.55	0.55	100	2890	2670	198	<	0.113	0.003
TC20-01	118.55	119.6	1.05	100	8730	5400	555	0.835	0.209	0.045
TC20-01	119.6	120.8	1.2	100	11200	4710	727	0.414	0.163	0.039
TC20-01	120.8	122.15	1.35	100	1820	1730	126	0.239	0.099	0.048
TC20-01	122.15	123	0.85	100	554	442	40	<	0.004	<
TC20-01	123	123.8	0.8	100	136	103	22	<	0.001	<
TC20-01	123.8	125.35	1.55	100	431	101	64	0.009	0.009	<
TC20-01	146.5	148	1.5	100	11	13	37	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
TC20-01	159.2	160.2	1	100	25	21	31	na	na	na
TC20-01	174.2	175.4	1.2	100	29	39	37	na	na	na
TC20-01	175.4	176.45	1.05	100	15	23	35	na	na	na
TC20-01	192.9	193.9	1	100	111	29	46	na	na	na
TC20-01	193.9	194.9	1	100	102	42	47	na	na	na
TC20-01	194.9	195.9	1	100	91	42	48	na	na	na
TC20-01	195.9	196.85	0.95	100	99	43	48	na	na	na
TC20-02	12.7	13.8	1.1	100	288	115	47	na	na	na
TC20-02	13.8	14.9	1.1	100	162	44	42	na	na	na
TC20-02	14.9	15.9	1	80	277	48	50	na	na	na
TC20-02	20.9	21.6	0.7	100	189	114	42	na	na	na
TC20-02	22.2	23.2	1	100	171	83	47	na	na	na
TC20-02	23.2	24.2	1	100	110	53	36	na	na	na
TC20-02	24.2	25.2	1	100	101	88	40	na	na	na
TC20-02	25.2	26.5	1.3	100	157	88	41	na	na	na
TC20-02	26.5	27.75	1.25	100	636	106	70	na	na	na
TC20-02	35.3	36.45	1.15	100	152	89	39	na	na	na
TC20-02	37	38.3	1.3	100	390	106	46	na	na	na
TC20-02	38.3	39.65	1.35	100	492	93	82	na	na	na
TC20-02	40.75	41.6	0.85	100	425	148	38	na	na	na
TC20-02	42	42.8	0.8	100	196	125	35	na	na	na
TC20-02	45.05	46	0.95	100	441	105	54	na	na	na
TC20-02	46	47	1	100	277	183	44	na	na	na
TC20-02	48.3	49.2	0.9	100	330	64	57	na	na	na
TC20-02	49.2	50.1	0.9	100	149	161	48	na	na	na
TC20-02	50.1	51.2	1.1	100	229	44	45	na	na	na
TC20-02	51.2	52.3	1.1	100	182	117	45	na	na	na
TC20-02	54.5	55.85	1.35	100	207	90	50	na	na	na
TC20-02	56.55	57.5	0.95	100	570	63	76	na	na	na
TC20-02	63.5	64.5	1	100	177	104	58	na	na	na
TC20-02	64.5	65.5	1	100	43	33	35	na	na	na
TC20-02	65.5	66.5	1	100	37	25	31	na	na	na
TC20-02	66.5	67.85	1.35	100	65	34	35	na	na	na
TC20-02	117.5	119.15	1.65	100	379	55	64	na	na	na
TC20-02	119.5	120.5	1	100	135	124	52	na	na	na
TC20-02	120.5	121.5	1	100	134	75	47	na	na	na
TC20-02	121.5	122.5	1	100	46	109	52	na	na	na
TC20-02	122.5	123.5	1	100	40	63	41	na	na	na
TC20-02	123.5	124.5	1	100	50	29	45	na	na	na
TC20-02	124.5	125.6	1.1	100	48	33	42	na	na	na
TC20-02	125.6	126.7	1.1	100	45	58	43	na	na	na
TC20-02	126.7	127.9	1.2	100	55	34	41	na	na	na
TC20-02	127.9	129.1	1.2	100	330	45	61	na	na	na
TC20-02	133.25	134.55	1.3	100	292	70	55	na	na	na
TC20-02	141.6	142.6	1	100	76	100	34	na	na	na
TC20-02	142.6	143.6	1	100	124	62	42	na	na	na
TC20-02	143.6	144.4	0.8	100	237	63	50	na	na	na
TC20-02	149.1	150	0.9	100	380	66	55	na	na	na
TC20-02	150	151	1	100	517	137	67	na	na	na
TC20-02	151	152	1	100	676	177	72	na	na	na
TC20-02	152	153	1	100	613	282	76	na	na	na
TC20-02	155.6	157.1	1.5	100	43	25	45	na	na	na
TC20-02	159.95	161.2	1.25	100	1125	61	81	na	na	na
TC20-02	162.1	163.15	1.05	100	536	58	68	na	na	na
TC20-02	167.3	168.45	1.15	100	128	39	43	na	na	na
TC20-02	171.6	172.9	1.3	100	20	16	33	na	na	na
TC20-02	172.9	174.05	1.15	100	49	116	36	na	na	na
TC20-02	185.7	186.75	1.05	100	108	130	16	<	0.002	0.004
TC20-02	186.75	187.8	1.05	100	59	118	35	<	<	0.001
TC20-02	187.8	189.1	1.3	100	422	627	56	<	0.006	0.001
TC20-02	189.1	191	1.9	100	1210	1020	96	0.047	0.035	0.002
TC20-02	191	193	2	100	1400	698	112	0.038	0.028	0.005
TC20-02	193	194.2	1.2	100	1980	1775	147	0.113	0.067	0.022
TC20-02	194.2	196	1.8	100	2390	984	161	0.188	0.094	0.042
TC20-02	196	197.75	1.75	100	1475	680	113	0.032	0.028	0.044

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
TC20-02	197.75	199.35	1.6	100	481	641	53	<	0.004	0.003
TC20-02	199.35	201	1.65	100	1625	1140	119	0.006	0.028	0.002
TC20-02	201	201.7	0.7	100	2050	1545	152	<	0.022	0.004
TC20-02	201.7	203	1.3	100	2390	468	144	0.024	0.022	0.025
TC20-02	203	205	2	100	1485	184	124	0.017	0.007	0.011
TC20-02	205	207	2	100	2080	174	136	0.022	0.015	0.043
TC20-02	207	209.3	2.3	100	1430	103	120	0.01	0.006	0.015
TC20-02	209.3	211.45	2.15	100	1350	302	119	0.016	0.013	0.027
TC20-02	211.45	213.4	1.95	100	2780	1060	163	0.058	0.044	0.07
TC20-02	213.4	214.3	0.9	100	3480	1260	187	0.084	0.064	0.073
TC20-02	214.3	214.8	0.5	100	2760	966	149	0.054	0.05	0.037
TC20-02	214.8	216.45	1.65	100	3060	1075	175	0.06	0.056	0.051
TC20-02	216.45	218.5	2.05	100	2060	316	126	0.03	0.027	0.045
TC20-02	218.5	220.5	2	100	1365	188	113	<	0.002	0.005
TC20-02	220.5	222.5	2	100	1275	615	117	<	0.003	0.005
TC20-02	222.5	224.5	2	100	1470	215	120	0.01	0.009	0.003
TC20-02	224.5	226.5	2	100	1910	486	129	0.019	0.019	0.006
TC20-02	226.5	228.5	2	100	1280	105	121	<	0.004	0.003
TC20-02	228.5	230.5	2	100	1270	95	122	<	0.003	0.001
TC20-02	230.5	232.5	2	100	1275	106	116	0.006	0.007	0.001
TC20-02	232.5	234	1.5	100	1180	136	112	0.008	0.007	0.001
TC20-02	234	235.7	1.7	100	1540	374	123	0.021	0.019	0.004
TC20-02	235.7	236.8	1.1	100	3670	1660	193	0.109	0.098	0.013
TC20-02	236.8	237.4	0.6	100	1505	672	99	0.057	0.034	0.004
TC20-02	237.4	238.6	1.2	100	1365	2580	99	0.018	0.026	0.003
TC20-02	238.6	239.6	1	100	170	277	18	<	0.003	0.002
TC20-02	253.3	254.4	1.1	100	85	45	38	na	na	na
TC20-02	256.8	257.8	1	100	22	29	31	na	na	na
TC20-02	258.25	259.6	1.35	100	48	54	43	na	na	na
TC20-02	266.05	267.4	1.35	100	107	49	50	na	na	na
TC20-02	270.9	271.9	1	100	117	42	45	na	na	na
TC20-02	272.4	273.5	1.1	100	107	41	49	na	na	na
TC20-02	273.5	274.6	1.1	100	94	61	47	na	na	na
TC20-03	11	13	2	100	56	37	33	na	na	na
TC20-03	13	15	2	100	83	21	33	na	na	na
TC20-03	15	17	2	80	59	63	36	na	na	na
TC20-03	17	19	2	100	111	77	42	na	na	na
TC20-03	19	21.05	2.05	100	81	27	40	na	na	na
TC20-03	23.3	25	1.7	100	63	56	36	na	na	na
TC20-03	25	26.6	1.6	100	157	32	46	na	na	na
TC20-03	35.5	36.5	1	100	102	32	48	na	na	na
TC20-03	36.5	37.4	0.9	100	103	27	47	na	na	na
TC20-03	50.9	52	1.1	100	14	30	24	na	na	na
TC20-03	52	53.1	1.1	100	43	57	21	na	na	na
TC20-03	54.5	55.5	1	100	16	14	34	na	na	na
TC20-03	55.5	56.75	1.25	100	9	14	34	na	na	na
TC20-03	70	71.4	1.4	100	90	46	46	na	na	na
TC20-03	72.8	74.3	1.5	100	90	44	42	na	na	na
TC20-03	74.3	75.7	1.4	100	149	52	49	na	na	na
TC20-03	80.7	82.15	1.45	100	16	24	34	na	na	na
TC20-03	102.7	103.45	0.75	100	677	77	65	na	na	na
TC20-03	108.15	108.85	0.7	100	435	146	72	na	na	na
TC20-03	114.8	115.8	1	100	182	391	11	<	0.006	0.006
TC20-03	115.8	116.8	1	100	760	1750	24	<	0.037	0.008
TC20-03	116.8	118.5	1.7	100	1390	1830	45	<	0.031	0.003
TC20-03	118.5	119.8	1.3	100	1430	3460	67	<	0.039	0.022
TC20-03	119.8	120.6	0.8	100	3090	2850	185	0.17	0.303	0.023
TC20-03	120.6	121	0.4	100	5220	4760	293	0.188	0.227	0.021
TC20-03	121	122	1	100	1140	746	76	0.265	0.062	0.033
TC20-03	122	123.5	1.5	100	4710	2320	254	0.286	0.134	0.025
TC20-03	123.5	124.2	0.7	100	2660	4240	131	<	0.087	0.005
TC20-03	124.2	125.2	1	100	866	1380	35	na	na	na
TC20-03	156.15	157.2	1.05	100	11	15	39	na	na	na
TC20-03	157.2	158.2	1	100	36	43	32	na	na	na
TC20-03	158.2	159.2	1	100	21	32	34	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
TC20-03	159.2	160.2	1	100	8	21	38	na	na	na
TC20-03	160.2	161.2	1	100	18	25	32	na	na	na
TC20-04	41	42.5	1.5	100	1470	81	112	na	na	na
TC20-04	42.5	44.5	2	100	1320	178	103	na	na	na
TC20-04	44.5	47	2.5	100	1330	116	106	na	na	na
TC20-04	47	49	2	100	1450	121	120	na	na	na
TC20-04	49	51.05	2.05	100	1210	184	105	na	na	na
TC20-04	51.05	52.5	1.45	100	1070	294	85	na	na	na
TC20-04	52.5	53.5	1	100	882	140	64	na	na	na
TC20-04	53.5	54.5	1	100	1340	205	103	na	na	na
TC20-04	54.5	55.5	1	100	1350	148	95	na	na	na
TC20-04	55.5	56.55	1.05	100	837	1230	78	na	na	na
TC20-04	56.55	57.5	0.95	100	395	504	51	na	na	na
TC20-04	64.9	66	1.1	100	99	72	31	na	na	na
TC20-04	66.6	68.6	2	100	1220	175	84	na	na	na
TC20-04	68.6	70.6	2	100	1460	115	104	na	na	na
TC20-04	70.6	72.6	2	100	1390	117	102	na	na	na
TC20-04	72.6	74.6	2	100	1420	85	102	na	na	na
TC20-04	74.6	76.6	2	100	1420	119	102	na	na	na
TC20-04	76.6	78.6	2	100	1460	148	106	na	na	na
TC20-04	78.6	80.6	2	100	1390	82	95	na	na	na
TC20-04	80.6	82.6	2	100	1450	82	103	na	na	na
TC20-04	82.6	84.6	2	100	1370	130	104	na	na	na
TC20-04	84.6	86.6	2	100	1340	104	106	na	na	na
TC20-04	86.6	88.6	2	100	1350	158	106	na	na	na
TC20-04	88.6	90.6	2	100	1370	154	106	na	na	na
TC20-04	90.6	92.6	2	100	1370	179	102	na	na	na
TC20-04	92.6	94.7	2.1	100	1610	238	109	na	na	na
TC20-04	94.7	96.7	2	100	2540	452	137	na	na	na
TC20-04	96.7	99	2.3	100	1420	139	101	na	na	na
TC20-04	99	101.5	2.5	100	2300	374	126	na	na	na
TC20-04	101.5	103.5	2	100	1080	389	88	na	na	na
TC20-04	103.5	105.5	2	100	1440	292	119	na	na	na
TC20-04	105.5	107.5	2	100	1410	204	127	na	na	na
TC20-04	107.5	109.5	2	100	1340	258	117	na	na	na
TC20-04	109.5	111.5	2	100	1290	177	121	na	na	na
TC20-04	111.5	113.5	2	100	1310	261	107	na	na	na
TC20-04	113.5	115.5	2	100	1370	420	120	na	na	na
TC20-04	115.5	117.5	2	100	1430	196	118	na	na	na
TC20-04	117.5	119.5	2	100	1320	122	115	na	na	na
TC20-04	119.5	121.5	2	100	1370	257	121	na	na	na
TC20-04	121.5	123.5	2	100	1320	130	115	na	na	na
TC20-04	123.5	125.5	2	100	1280	182	111	na	na	na
TC20-04	125.5	127.6	2.1	100	1280	78	110	na	na	na
TC20-04	128	129	1	100	2330	582	141	na	na	na
TC20-04	129.4	131.5	2.1	100	1420	202	116	na	na	na
TC20-04	131.5	133.5	2	100	1410	176	118	na	na	na
TC20-04	133.5	135.5	2	100	1420	196	113	na	na	na
TC20-04	135.5	137.5	2	100	1820	295	112	na	na	na
TC20-04	137.5	139.5	2	100	1570	300	111	na	na	na
TC20-04	139.5	141.5	2	100	1380	234	119	na	na	na
TC20-04	141.5	143.5	2	100	1160	275	98	na	na	na
TC20-04	143.5	145.5	2	100	1150	154	109	na	na	na
TC20-04	145.5	148	2.5	100	1350	233	109	na	na	na
TC20-04	148	149.5	1.5	100	1760	356	112	na	na	na
TC20-04	149.5	151	1.5	100	2330	462	131	na	na	na
TC20-04	151	152.2	1.2	100	2140	718	120	0.028	0.031	0.009
TC20-04	152.2	153.2	1	100	1790	876	129	<	0.021	0.006
TC20-04	153.2	154.26	1.06	100	4590	2250	309	0.052	0.069	0.005
TC20-04	154.26	154.76	0.5	100	11350	7220	768	0.256	0.196	0.024
TC20-04	154.76	156.3	1.54	100	5120	2420	339	0.082	0.072	0.014
TC20-04	156.3	157.3	1	100	2110	1310	156	0.033	0.026	0.005
TC20-04	157.3	158.15	0.85	100	887	652	74	na	na	na
TC20-04	158.15	160	1.85	100	135	53	15	na	na	na
TC20-04	165.95	166.8	0.85	100	19	30	33	na	na	na

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
TC20-04	167.4	168.4	1	100	39	36	26	na	na	na
TC20-04	168.4	169.4	1	100	16	65	36	na	na	na
TC20-04	169.4	170.5	1.1	100	109	56	39	na	na	na
TC20-04	171.95	173.4	1.45	94	678	62	60	na	na	na
TC20-04	177.3	178.3	1	100	549	69	53	na	na	na
TC20-04	178.3	179.45	1.15	100	585	71	56	na	na	na
TC20-04	190.9	192.2	1.3	100	1360	66	76	na	na	na
TC20-04	192.2	193.6	1.4	100	1180	72	82	na	na	na
TC20-04	196.8	198	1.2	100	103	81	48	na	na	na
TC20-04	198	199.5	1.5	100	46	41	43	na	na	na
TC20-04	199.5	200.7	1.2	100	150	38	49	na	na	na
TC20-04	201.3	202.5	1.2	100	37	60	37	na	na	na
TC20-04	202.5	203.65	1.15	100	68	80	44	na	na	na

Appendix One

JORC Code, 2012 Edition | 'Table 1' Report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Assays are reported for 36 diamond core drill holes for a total of 6,650m of drilling. The drill core was cut by diamond core saw and continuous quarter (NQ & HQ) core sample taken for assay according to lithological criteria in intervals ranging from 0.1 m to 3.8 m with a mean of 1.6 m. Sample weights for assay ranged from approx. 0.3 to 8.4 kg with a mean of c. 2.5 kg. Drilling and sampling were both supervised by a suitably qualified geologist. For the Company's best understanding of previous owner's drilling please refer to previous Blackstone Minerals' announcements to the ASX and additionally available from http://blackstoneminerals.com.au.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> The drilling was of HQ (64mm) and NQ (48mm) diameter and was conducted by drilling contractor Intergeo using Longyear diamond coring rigs and Ban Phuc Nickel Mines using GX-1TD diamond coring rigs. Selected core runs were orientated with a REFLEX ACTIII or spear tools.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Recoveries were calculated by Ban Phuc Nickel Mines personnel by measuring recovered core length vs downhole interval length. Drill core recovery through the reported mineralised zones ranged from 31 to 100 % with a mean of 95% (see Table 2). There is no discernible correlation between grades and core recovery.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All of the drill core was qualitatively geologically logged by a suitably qualified Ban Phuc Nickel Mines geologist. Sulfide mineral abundances were visually estimated. The detail of geological logging is considered sufficient for mineral exploration. 36 holes for 6,650 m were logged and 2,247 m selected for assay on the basis of the visual presence of sulfides.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	<ul style="list-style-type: none"> The drill core was cut lengthwise by diamond core saw and continuous half or quarter core sample bagged for assay in intervals according to lithological criteria determined by a Ban Phuc Nickel Mines geologist. Sampling intervals ranged from 0.1 m to 3.8 m with a mean of 1.6 m. Continuous remnant core has been retained in the trays for future reference or sampling as necessary. Duplicate quarter core samples were collected.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Sample weights for assay ranged from approx. 0.3 to 8.4 kg with a mean of c. 2.5 kg. The bagged core samples were submitted to SGS Hai Phong, Vietnam ('SGS') where the quarter core samples were dried and crushed to -5 mm, then a 250 g was split from each and pulverised to 85 % passing 75 microns to produce the analytical pulps which were then dispatched to ALS Geochemistry, Perth WA ('ALS') for assay.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Ni, Cu and Co were determined at ALS by industry standard nitric + perchloric + hydrofluoric + hydrochloric acid digest with ICP-AES finish. Pt, Pd and Au were determined at ALS by industry standard 50 g fire assay and ICP-AES finish. Approx. one commercially certified assay standard per 25 core samples was inserted by Blackstone Minerals in each sample submission. All standards reported within 14 % of the Ni, Cu, Co (mean difference 2%) and 16% Pt, Pd and Au (mean difference 2%) of reference values for the grade ranges of interest. Approximately one crushed rock blank per 25 samples was included in the submission and reported below 33 ppm for Ni, Cu and Co, and less than 6 ppb for Au, Pt and Pd. Quarter core duplicates were included at a rate of approx. 1 per 25 samples and sampling error is considered acceptable.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> The assay results are compatible with the observed mineralogy, historic mining and exploration results (please refer to previous Blackstone Minerals' announcements to the ASX and additionally available from http://blackstoneminerals.com.au). Twinned holes were not used. Primary data is stored and documented in industry standard ways. Assay data is as reported by ALS and has not been adjusted in any way. Remnant assay pulps are currently held in storage by the assay laboratory.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill hole collar location was determined by Leica 1203+ total station survey to centimetre accuracy. Holes recently drilled (1 only BC21-06) was surveyed by GPS - to be updated in due course The holes were down hole orientation surveyed using a Deviflex non-magnetic survey tool. Co-ordinates were recorded in Ban Phuc Mine Grid and UTM Zone 48N WGS84 grid and coordinate system. Topographic control is provided by a precision Ban Phuc Nickel Mines Digital Terrain Model.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data-spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<ul style="list-style-type: none"> The drilling is within and peripheral to a previously broadly drilled (50 m to >100 m drill spacing) parts of the Ban Phuc and Ban Chang deposits. Drilling at Ta Cuong, Ban Khoa and King Snake is step out in nature and usually between 50 m and

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Whether sample compositing has been applied. 	<p><150 m section spacing. Drilling was conducted on the Ban Phuc Mine Grid.</p> <ul style="list-style-type: none"> All visibly altered or mineralised zones in the drill core were sampled and assayed (see above). Non-composited data is reported. It is anticipated that with further drilling the reported drill results will be sufficient to establish mineral resources for Ban Chang, and the new King Cobra Zone results will be incorporated in a resource update for the Ban Phuc DSS body. With respect to Ta Cuong, Ban Khoa and King Snake – further delineation drilling is required prior to assessing mineral resources.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<p>Previous drilling and interpretation indicate the reported drill holes are suitably orientated to test the target zones.</p> <ul style="list-style-type: none"> Structural orientations determined from drill core suggest the reported sulfide intervals are close to true thickness for Ban Chang and at Ta Cuong. At King Snake true thicknesses may be 60-80% of the down hole thickness due to terrain constraints and consequent oblique intersection angles. The Ban Phuc holes were drilled in a range of orientations with respect to the mineralised zones for resource definition and metallurgical purposes. Relevant cross sections are included in the announcement.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<p>The chain of custody for the drill core samples from collection to dispatch to the assay laboratory was managed by Ban Phuc Nickel Mines personnel. Sample numbers were unique and did not include any locational information useful to non-Ban Phuc Nickel Mines and non-Blackstone Minerals personnel. The level of security is considered appropriate.</p>
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<p>The assay results agree well with the observed mineralogy, historic mining and exploration results (refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au).</p> <ul style="list-style-type: none"> Further drilling is planned to refine the shape and extents of the mineralised zones.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p>The drilling was located within the Ta Khoa Concession and is covered by the Foreign Investment Licence, 522 G/P, which Ban Phuc Nickel Mines Joint Venture Enterprise (BPNM JV E) was granted on January 29th, 1993. An Exploration Licence issued by the Ministry of Natural Resources and Environment covering 34.8 km² within the Ta Khoa Concession is currently in force.</p>

Criteria	Explanation	Commentary
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<p>Blackstone Minerals Limited owns 90% of Ban Phuc Nickel Mines.</p> <ul style="list-style-type: none"> The first significant work on the Ban Phuc nickel deposit and various adjacent prospects including Ban Chang was by the Vietnamese Geological Survey in the 1959-1963 period. The next significant phase of exploration and mining activity was by Asian Mineral Resources from 1996 to 2018, including mining of the Ban Phuc massive sulfide vein mining during the 2013 to 2016 period. The project, plant and infrastructure has been on care and maintenance since 2016.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The late Permian Ta Khoa nickel-copper-sulfide deposits and prospects are excellent examples of the globally well-known and economically exploited magmatic nickel - copper sulfide deposits. The identified nickel and copper sulfide mineralisation within the project include disseminated, net texture and massive sulfide types. The disseminated and net textured mineralisation occurs within dunite adccumulate intrusions, while the massive sulfide veins typically occur in the adjacent metasedimentary wallrocks and usually associated with narrow ultramafic dykes. For more detail of the deposit and regional geology see Mapleson and Grguric N43-101 Technical Report on the Ta Khoa (Ni Cu Co PGE) Prospects Son La Province, Vietnam available from System for Electronic Document Analysis and Retrieval (www.sedar.com) for Asian Minerals Resources Limited. A recent summary of the geology of the Ban Phuc intrusion can be found in Wang et al 2018, A synthesis of magmatic Ni-Cu-(PGE) sulfide deposits in the ~260 Ma Emeishan large igneous province, SW China and northern Vietnam, Journal of Asian Earth Sciences 154.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar; elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar; dip and azimuth of the hole down hole length and interception depth; hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Drill hole coordinates, depth, orientation, hole length and assay results are given in Tables 2 and 3. For the Company's best understanding of previous owners drilling please refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths 	<ul style="list-style-type: none"> Assay results given in Table 3 represent the drill core intervals as sampled and assayed. Upper cuts have not been applied. Metal equivalent values are not used.

Criteria	Explanation	Commentary
	<p>of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. 	
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	<ul style="list-style-type: none"> All intervals reported in Table 2 are down hole. Structural orientations determined from orientated drill core suggest that the reported intersections and intervals are >80% of the true thicknesses for Ban Chang and Ta Cuong. The Ban Phuc intersections range from c. 30% to >90% of true thickness. The King Snake intersections range from c. 60 to >80% of true thickness. Appropriate drill sections are included in the body of this release.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate exploration plan and sections are included in the body of this release.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced, to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All drill results given in Table 3 represent the intervals as sampled and assayed.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Appropriate exploration plan and sections are included in the body of this release. For the Company's best understanding of previous owners drilling please refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Blackstone Minerals proposes to conduct further drilling and associated activities to better define and extend the identified mineralised zones. An appropriate exploration plan is included in the body of this release.