

10 August 2021

**BOARD AND MANAGEMENT**MR LINDSAY DUDFIELD  
NON-EXECUTIVE CHAIRMANMR JAMES WILSON  
CHIEF EXECUTIVE OFFICERMS LIZA CARPENE  
NON-EXECUTIVE DIRECTORMR ANTHONY HO  
NON-EXECUTIVE DIRECTORMS JESSAMYN LYONS  
COMPANY SECRETARY**PROJECTS**

LAKE REBECCA (ALY 100%)

KARONIE (ALY 100%)

LACHLAN (ALY 80%)

WEST LYNN (ALY 80%)

BRYAH BASIN (ALY 20%, TSX-V SGI 80%)

BRYAH BASIN (ALY 20%, SFR 80%)

## Karonie re-splits confirm high grades

### HIGHLIGHTS

- One metre resamples from the Karonie Phase 1 drill program highlight excellent grades including:

#### KZ5

- 1m @ 15.3g/t Au from 57m in KZRC104
- 10m @ 1.54g/t Au (25m) in KZRC103 including:
  - 1m @ 4.52g/t Au (24m)
  - 4m @ 1.98g/t Au (30m)
- 3m @ 1.45g/t Au (97m) in KZRC107

#### Taupo

- 1m @ 4.02g/t Au within 3m @ 1.78g/t Au (106m) in TARC010
- 1m @ 3.41g/t Au (49m) within 3m @ 1.58g/t Au (49m) in TARC014

- High grade results in KZRC104 may represent a new zone or structural offset with mineralisation remaining open along strike and at depth
- Ore zone modelling and resource calculation commenced
- Structural mapping at Southern Karonie areas completed with results pending

Alchemy Resources Limited (ASX: ALY) ("Alchemy" or "the Company") is pleased to provide an exploration update for its 100% owned Karonie Gold Project in Western Australia. Composite samples from the Phase 1 Reverse Circulation ("RC") drill program at KZ5, Taupo and Parmelia Prospects have been resampled on 1m intervals, highlighting high grade zones within the original intervals.

The Phase 1 drill program at Karonie was focussed on infilling and extending shallow zones of mineralisation at Parmelia, Taupo and KZ5 with anomalous intercepts returned from most holes. The 1m resamples have confirmed the 4m composite samples, giving better granularity on grades and widths.

The outstanding high-grade intercept of **1m @ 15.3g/t Au in KZRC104** outlines the potential for shallow high-grade mineralisation, which remains open along strike.

Discussing the results of the program Alchemy's Chief Executive Officer, James Wilson, said:

*"Drilling at Karonie has highlighted the significant potential of the KZ5 and Taupo prospects with good grades and widths that occur close to surface. The 1m resampling has returned some exceptional grades including **1m @ 15.3g/t Au**, which is an exciting development and **the highest-grade intercept ever returned at KZ5**. Clearly more drilling is required to define the strike and depth of mineralisation in these areas, and planning is already underway for follow-up drilling. With re-sampling now complete, we have commenced 3-D modelling, with a view to potentially calculating a maiden resource at Karonie in the 2HCY21."*

**Alchemy Resources Limited**

ABN: 17 124 444 122

T: 9481 4400 | E: [info@alchemyresources.com.au](mailto:info@alchemyresources.com.au) | W: [www.alchemyresources.com.au](http://www.alchemyresources.com.au)  
8/8 Clive Street, West Perth 6004, WA

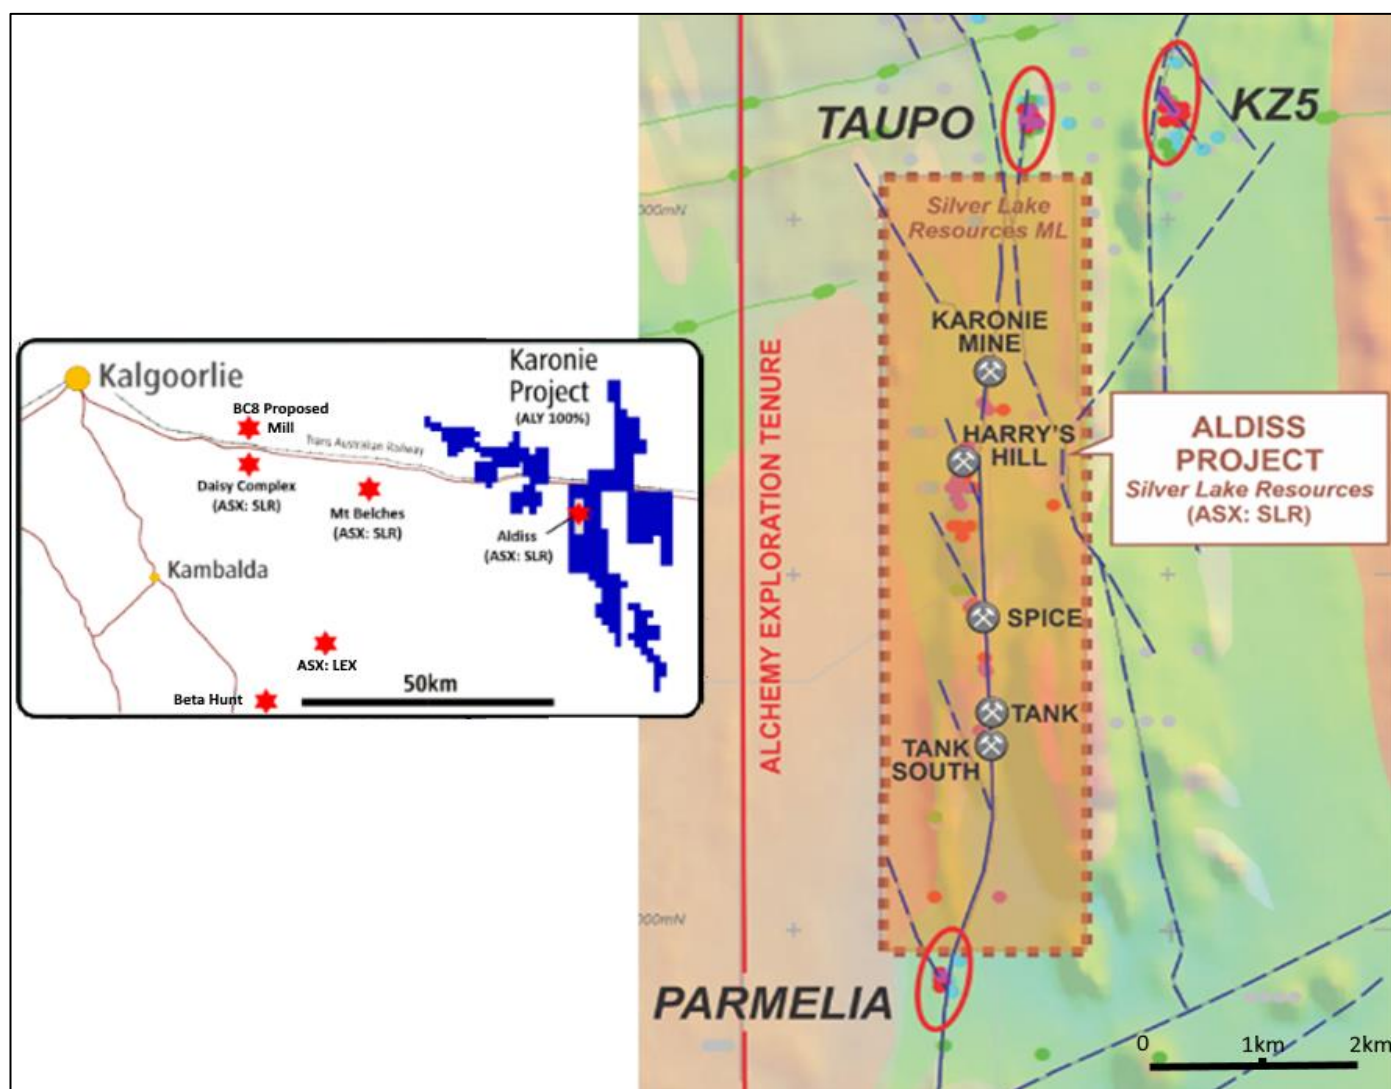


Figure 1: Karonie Project Location

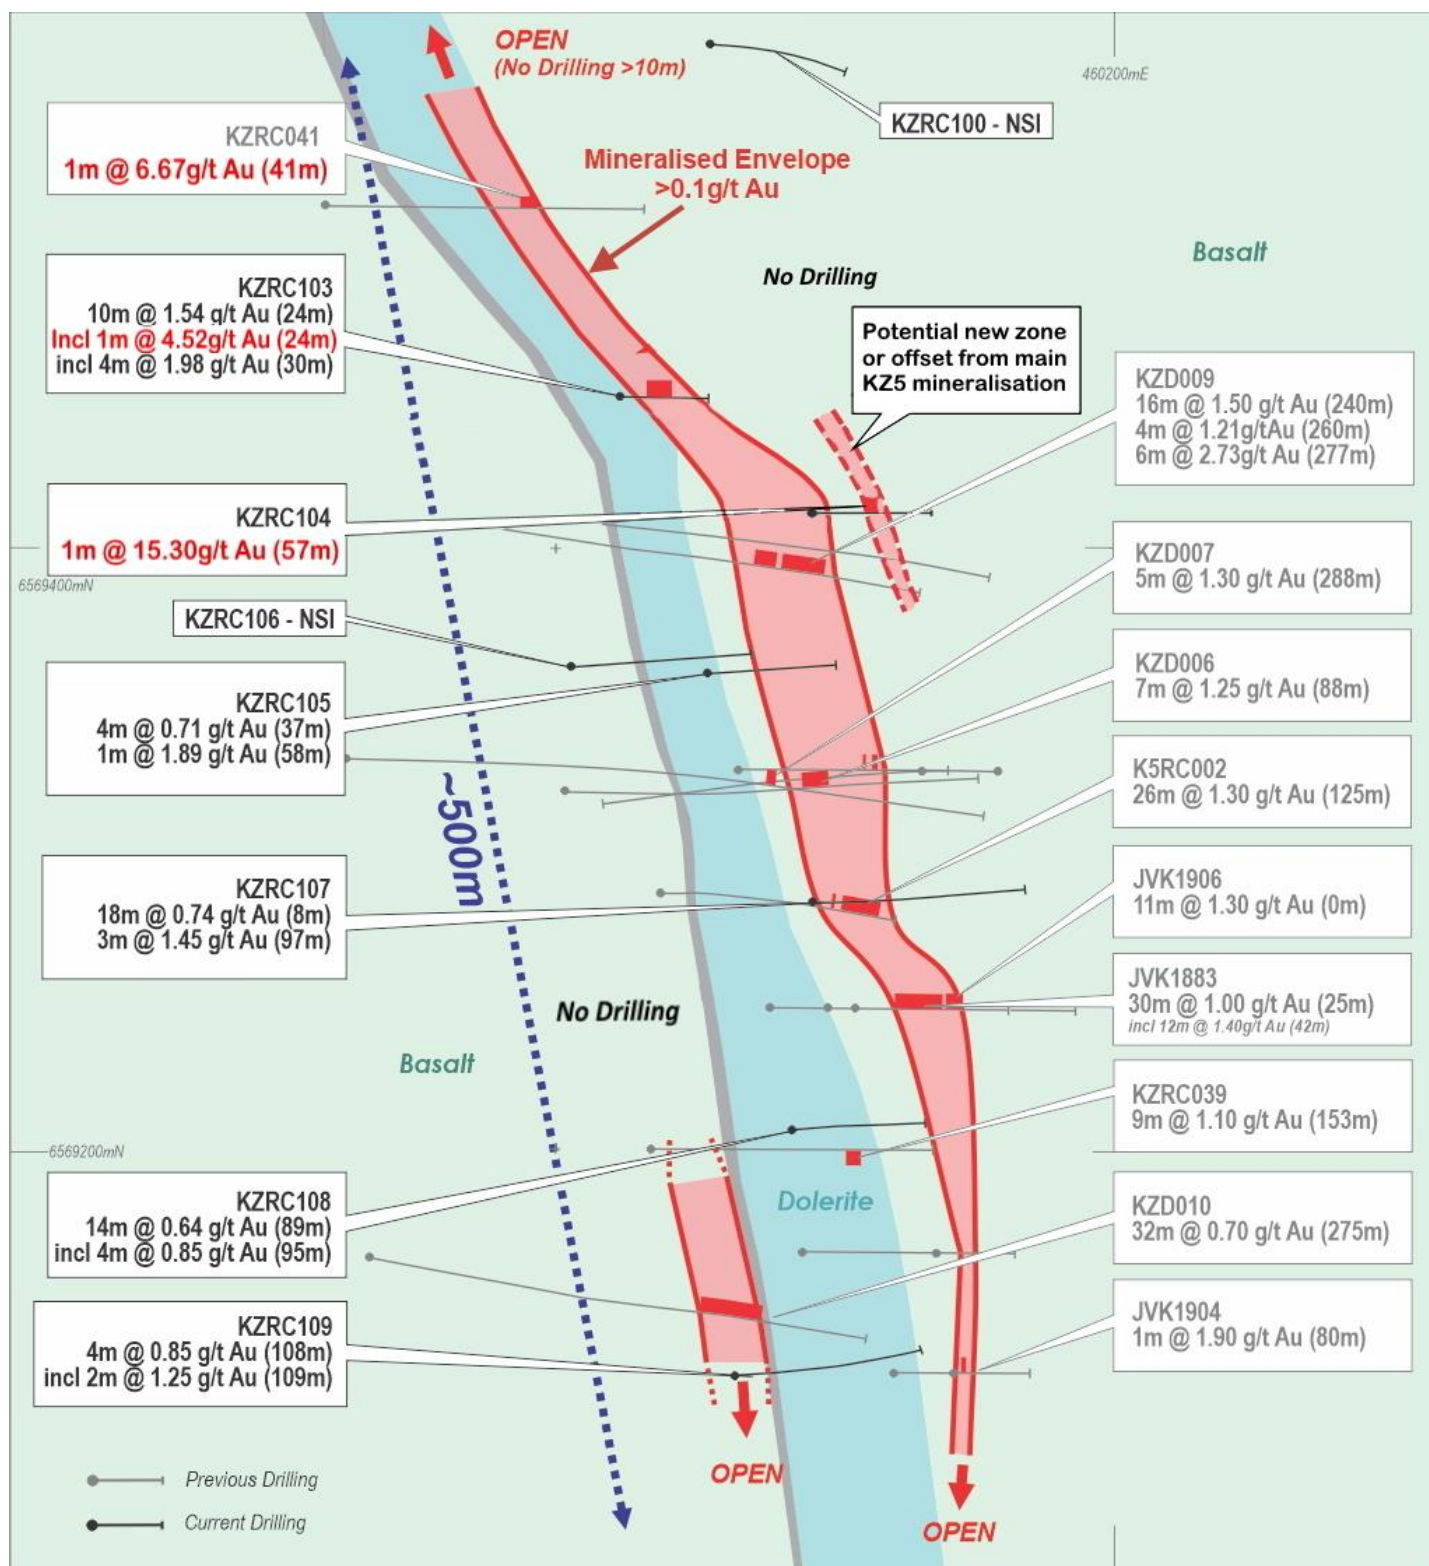


Figure 2: KZ5 Prospect Drill Plan - No drilling for 200m north and 70m south of the high grade intercept of 1m @ 15.3g/t Au recorded in hole KZR104

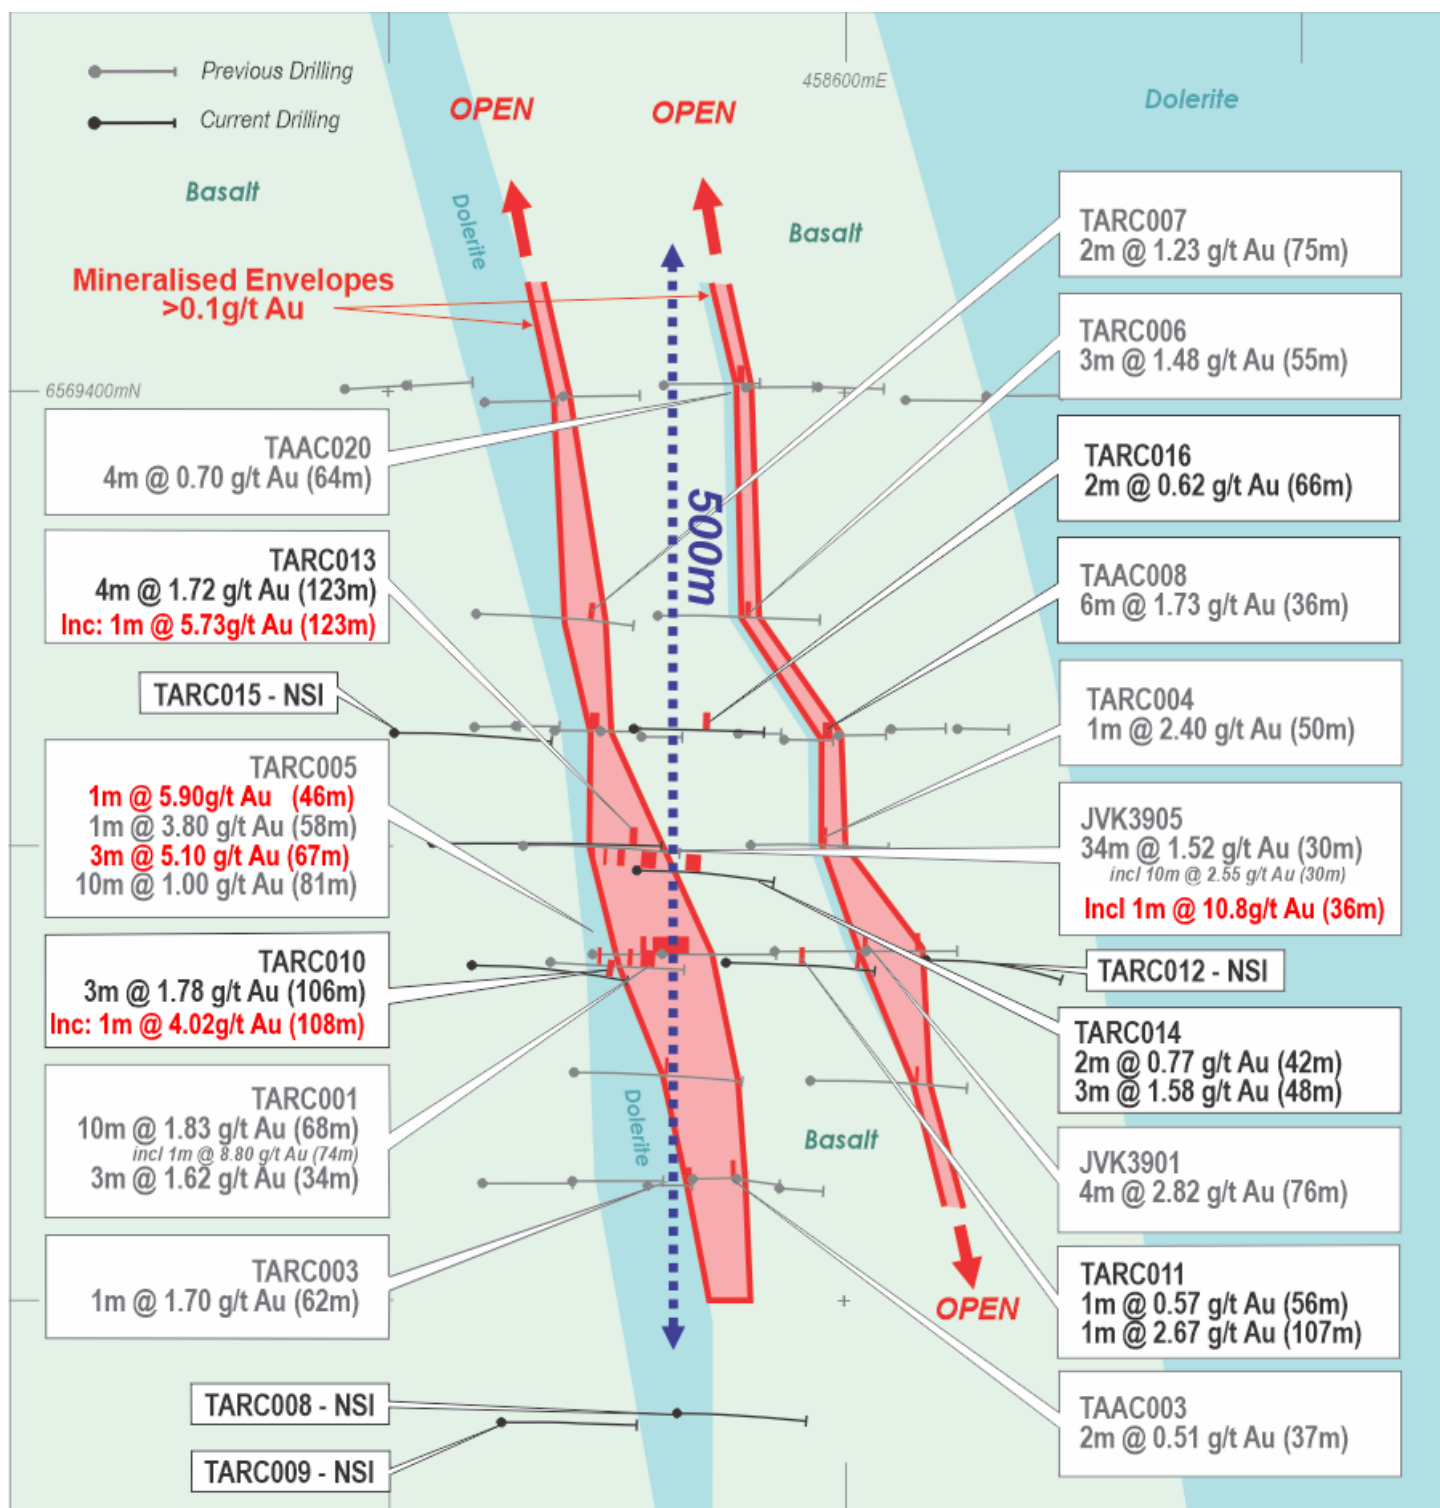


Figure 3: Taupo Prospect Drill Plan



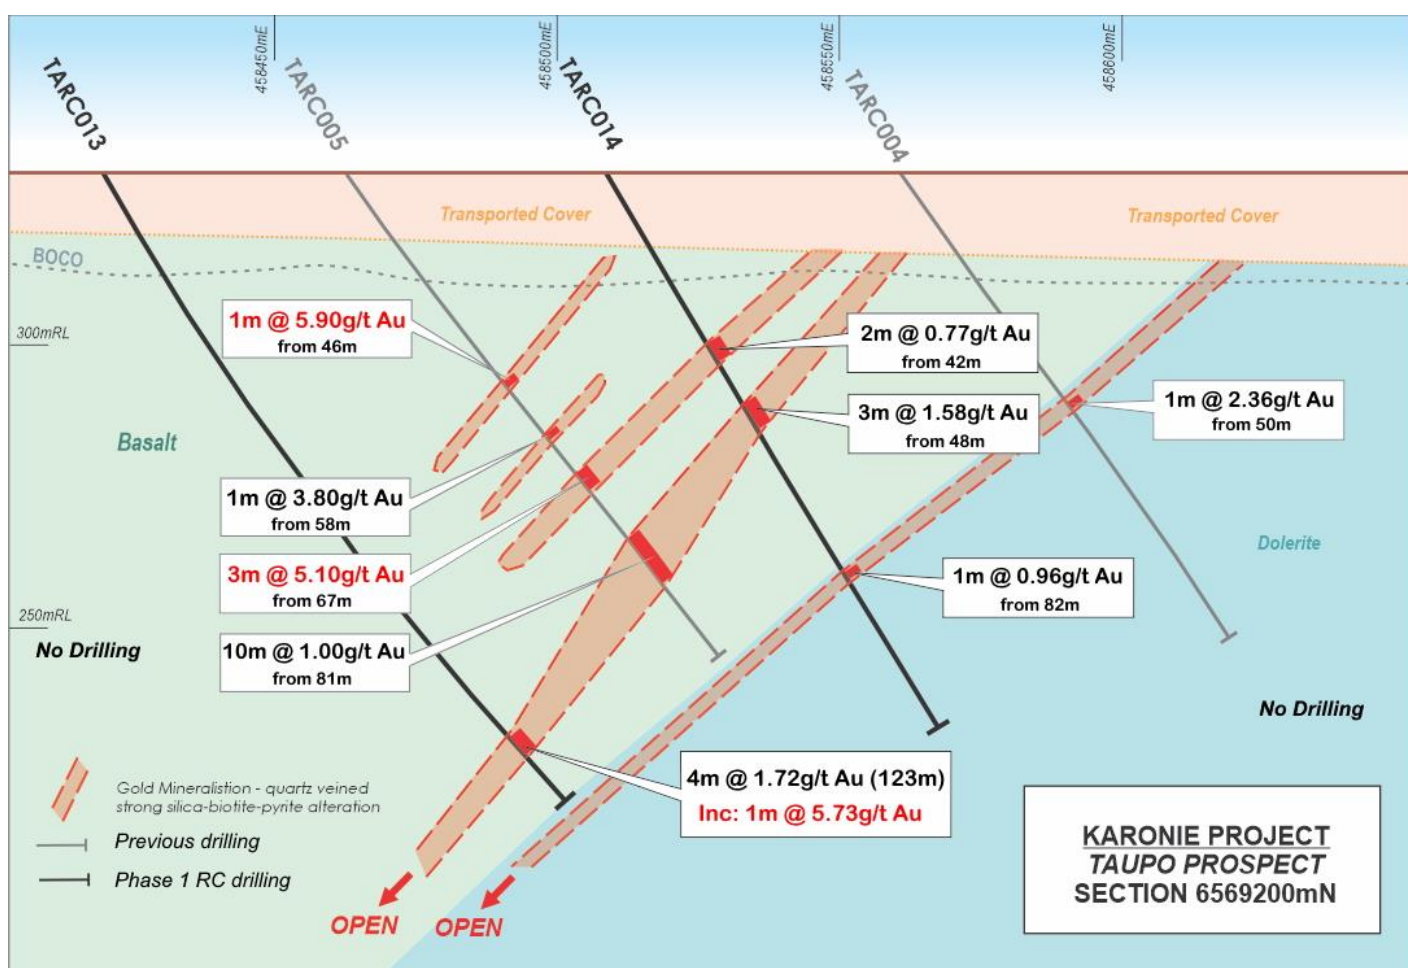


Figure 4: Taupo Prospect Cross Section 6569200mN

#### SURFACE MAPPING IN SOUTHERN KARONIE TENEMENTS COMPLETED – RESULTS PENDING

Alchemy has completed detailed structural and lithological mapping on the southern tenements in the Esplanade-Batavia areas with a view to defining new targets and refining existing areas. Better high-grade results from these areas include **3m @ 14.6g/t Au, 1m @ 17.8g/t Au and 8m @ 2.1g/t Au<sup>1</sup>**. Alchemy believes that a better understanding of the controls on mineralisation obtained from surface mapping, combined with utilising bedrock geology from the numerous drill holes in this area, will greatly assist drill targeting at southern Karonie. A total of 69 surface rock chip samples have been submitted for multi-element analysis with results and interpretation pending.

<sup>1</sup> Refer ALY announcement 24 May 2016

## NEXT STEPS

### PHASE 2/3 - DRILL PROGRAM AT SOUTHERN KARONIE PROSPECTS AND CLAYPAN SHEAR

Phase 2 drilling is planned to test the southern areas of the Karonie tenements that contain the Challenger, Batavia, Gilmore, Esplanade and Aldiss prospects. All are highly prospective with camp scale structural targets and numerous high-grade intercepts, which have not been followed up. Access agreements and drill planning have commenced.

The review of historic wide-spaced RC drilling indicates numerous high-grade intercepts including<sup>2</sup>:

- **2m @ 12.06g/t Au (from 182m) in ISRC1001** (Batavia Prospect)
- **1m @ 39.07g/t Au (from 121m) in ISRC1003** (Batavia Prospect)
- **8m @ 2.3g/t Au (from 128m) in ISRC1063** (Challenger Prospect)
- **10m @ 1.46g/t Au (from 128m) in ISRC1035** (Challenger Prospect)
- **1m @ 21.35g/t Au (from 133m) in LPRC018** (Esplanade Prospect)

Analysis of historic drilling shows that previous explorers were targeting broad near-surface targets. Alchemy believes that there is scope to follow up these zones and assess their potential to host short strike length high grade structures.

### PHASE 3 - DRILL PROGRAM AT CLAYPAN SHEAR ZONE PROSPECTS

The Claypan Shear area has significant alluvial cover and has seen limited modern exploration with only four lines of drilling over the 35km of strike extent. A short program of shallow RAB drilling was carried out in 2018 at the Dragon and Manhattan Prospects. Drilling intersected coarse-grained fractionated dolerite units displaying leucocratic segregations (typical host rocks to Bombora, Mt Charlotte, Fimiston and Hidden Secret gold mineralisation). Drilling identified up to 22m of transported cover, which established that historical auger drilling and soil sampling were not reliable exploration methods along the Claypan Shear Zone. Alchemy believes that systematic aircore drilling at the Manhattan Prospect would be much more effective in this area and has planned a program of 4,000-10,000m of aircore / RAB drilling.

---

<sup>2</sup> Refer ALY announcement 24 May 2016

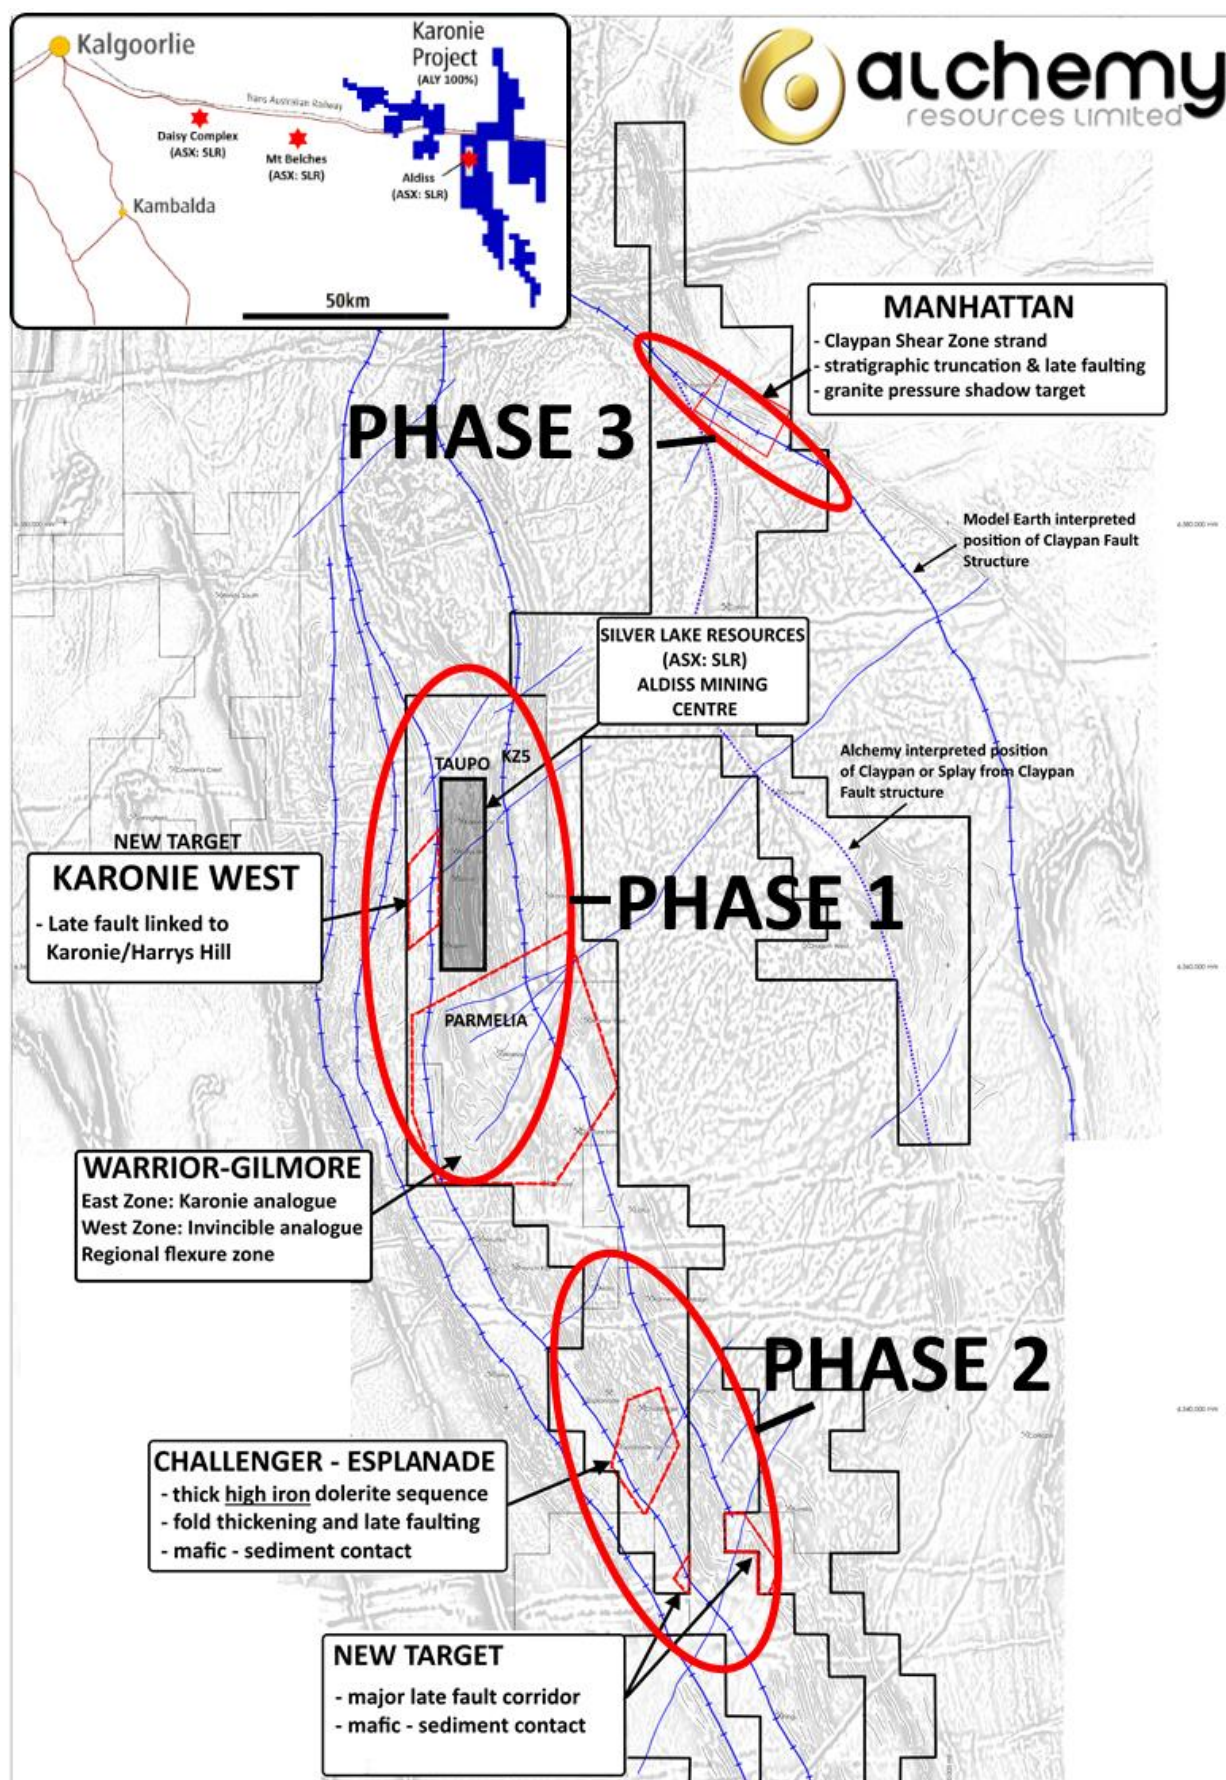


Figure 5: Karonie Project showing target areas

**Table 1: Karonie Project RC drill results – 1m resampling**

Hole ID	Prospect	From(m)	To(m)	Width (m)	Intercept (g/t Au)	Including (g/t Au)
TARC010	Taupo	106	109	3	3m @ 1.78g/t from 106m	1m @ 4.02g/t from 108m
TARC014	Taupo	42	44	2	2m @ 0.77g/t from 42m	
incl.		48	51	3	3m @ 1.58g/t from 48m	1m @ 3.41g/t from 49m
KZRC103	KZ5	24	34	10	10m @ 1.54g/t from 24m	4m @ 1.98g/t from 30m & 1m @ 4.52g/t from 24m
KZRC104	KZ5	56	57	1	1m @ 15.3g/t from 57m	
KZRC107	KZ5	8	26	18	18m @ 0.74g/t from 8m	
KZRC107		97	100	3	3m @ 1.45g/t from 97m	
PARC015	Parmelia	68	72	4	4m @ 0.82g/t from 68m	1m @ 1.51g/t from 70m
PARC015		98	118	20	20m @ 0.3g/t Au from 98m	

*1m Resample assays. Calculated at +0.5g/t Au, 2m maximum internal dilution*

**Table 2: Karonie Project RC drill hole locations**

Hole ID	Easting	Northing	Dip	Azimuth	Depth	Prospect
TARC010	458435	6569149	-60	90	120	Taupo
TARC014	458509	6569190	-60	90	114	Taupo
KZRC103	460021	6569451	-60	85	60	KZ5
KZRC104	460087	6569404	-60	85	96	KZ5
KZRC107	460092	6569282	-60	85	120	KZ5
PARC015	457625	6559100	-60	270	132	Parmelia



## **ABOUT THE KARONIE PROJECT**

The Karonie Project contains more than 80km of strike extent of Archean greenstone belt in the Eastern Goldfields. The Project has a high-quality geological setting, strategically located between major, regional-scale fault zones, the Keith-Kilkenny and Claypan Faults. These fault zones are interpreted to be deep-seated, domain-bounding structures within the highly gold-endowed Kurnalpi Terrane and in a position that hosts the world-class Karari-Carosue Dam gold deposits 75km to the north.

The Karonie Project is strategically located directly along strike of Silver Lake Resources' (ASX: SLR) Aldiss Project and along strike to the south of Breaker Resources' (ASX: BRB) Lake Roe gold project. The Project is in close proximity to existing processing plants and there is already substantial gold endowment in the area (Aldiss Project Resources >585koz @ 1.9g/t Au<sup>3</sup> – see SLR ASX announcement dated 19 August 2020).

Shallow drilling carried out by previous explorers indicates that the Karonie Project area has a complex regolith with a stripped Archean profile overlain by reworked sediments, wind-blown sands, paleo-drainage channels and salt lakes. Consequently, the shallow cover is very complex and areas with shallow gold anomalism require deeper RC drilling and diamond core drilling to adequately test identified targets.

## **ABOUT ALCHEMY RESOURCES**

Alchemy Resources Limited (ASX: ALY; “Alchemy” or the “Company”) is an Australian exploration company focused on growth through the discovery and development of gold, base metal, and nickel-cobalt resources within Australia. Alchemy has built a significant land package in the Carosue Dam - Karonie greenstone belt in the Eastern Goldfields region in Western Australia and has an 80% interest in the Lachlan/Cobar Basin Projects in New South Wales. Alchemy also maintains its interest in the Bryah Basin Project in the gold and base metal-rich Gascoyne region of Western Australia, where Superior Gold Inc. (TSX-V: SGI) and Sandfire Resources Limited (ASX: SFR) are continuing to advance gold and base metal exploration, respectively.

## **COMPETENT PERSON STATEMENT**

The information in this report that relates to Exploration Results is based on information compiled by Mr James Wilson, who is the Chief Executive Officer of Alchemy Resources Limited and holds shares and options in the Company. Mr Wilson is a Member of the Australian Institute of Geoscientists and has sufficient experience of relevance to the styles of mineralisation and the types of deposits under consideration, and to the activities undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' ('JORC Code 2012'). Mr Wilson consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

*This announcement has been approved for release by the Board.*

For further information please contact:

James Wilson

Chief Executive Officer

E: james@alchemyresources.com.au

P: 08 9481-4400

## APPENDIX A

### JORC Code, 2012 Edition – Table 1 Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>Samples referred to in this Public Report are reverse circulation (RC) drill samples, obtained using an ‘industry standard’ drill rig (350psi / 1150cfm &amp; 800psi / 1400 cfm booster), drilling equipment and sampling practices.</p> <p>RC drilling obtained 1m samples dispensed into plastic bags and calico bags via an industry standard cyclone / cone splitter.</p> <p>The cone splitter was used to obtain one calico bag containing a reduced size 1m (or 2m) sample “split” for gold analysis (1 to 3kg) and large 1m plastic bag of drill chips. Samples for gold analysis were collected at 1m intervals. The RC samples obtained are representative of the material drilled.</p> <p>4m composite samples taken with a sample scoop thrust into the RC sample bag which is laid out in individual metres in a plastic bag on the ground. 1m single splits taken using a cone splitter at time of drilling, if 4m composites are anomalous (&gt;100-200ppb or lower depending on location), 1m single splits are submitted for analyses. Average sample weights about 3.0kg for 4m composites and 2.0-3.0kg for 1m samples</p>
Drilling techniques	<p><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i></p>	<p>RC drilling was completed from surface using 3m x 4” RC drill rods, a 5.25” hammer (with a standard sample retrieval collar) and a RC tungsten button drill bit.</p>
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>Sample recoveries and moisture content estimates were logged / recorded into spreadsheets by the field assistant then uploaded into a database. There were very few (&lt;1%) significant sample recovery problems.</p> <p>No relationship exists between sample recovery and grade, and accordingly no bias has occurred as a result of loss/gain of material. No results have been received to date.</p>
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>Geological logging was completed on all RC and AC holes, with colour, weathering, grain-size, lithology, alteration, mineralogy, veining, textures/structure and comments on other significant features noted. Logging of sulphide mineralisation and veining is quantitative. All holes were logged in full.</p> <p>Representative samples of bedrock collected from each metre of each RC hole were retained in labelled chip sample trays. These are stored in the Alchemy office in Perth.</p> <p>No judgement has yet been made by independent qualified consultants as to whether RC samples have been geologically and geotechnically logged to a level of detail to support</p>

Criteria	JORC Code explanation	Commentary
		appropriate Mineral Resource estimation, mining studies and metallurgical studies.
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>RC samples were cone split and collected in pre-numbered calico bags. The cone splitter sample shoot opening was adjusted to collect between 1 and 3 kg of sample. Samples were collected every metre. Residual sample material was collected every metre in large green plastic bags and retained on site for resampling if required.</p> <p>One commercial laboratory standard or blank laboratory standard, one blank sample (barren basalt) and one duplicate sample was inserted every 30 samples (i.e. 6% QAQC samples).</p> <p>RC sample sizes are considered appropriate for the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and the assay ranges for the primary elements analysed.</p> <p>RC samples were collected from the drill rig by spearing each 1m collection bag (RC) or from the ground (AC) and compiling a 4m composite sample. Single splits were automatically taken by the rig cone splitter for RC. Wet or dry samples were noted in the logs.</p>
Quality of assay data and laboratory tests	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<p>All RC samples were sent to the ALS Laboratory in Kalgoorlie for sample preparation and analysis. Preparation of the samples follows industry laboratory best practice involving logging of sample weights, drying the entire sample in an electric oven set at 105°C+5°C for several hours (drying time dependent on moisture content), then crushing the entire sample (&gt;70% -6mm). A split of 2.5 to 3kg was taken and then pulverized to 85% passing 75µm using an Essa LM5 grinding mill. A representative sample was split and bagged as the analytical sample.</p> <p>All samples were analysed using ALS method code Au-AA26 for Au (up to 50g Fire Assay with AAS finish) with a lower detection limit of 0.01g/t Au.</p> <p>Laboratory QAQC involves the use of internal laboratory standards using certified reference material, blanks, splits and duplicates as part of in-house procedures.</p> <p>Alchemy used commercially available reference materials (Lab Standards) with a suitable range of values, that were inserted every 30 samples.</p> <p>Results indicate that Lab Standard assay values are within acceptable error limits.</p> <p>Blank samples did not detect any significant contamination from adjacent samples and duplicate sample assay values are also within acceptable error limits.</p>
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<p>Reported drill hole intercepts are compiled by the Company's competent person.</p> <p>No twinned holes were drilled in the current drilling campaign.</p> <p>Data is collected by qualified geologists and geo-technicians working under the supervision of a qualified geologist and entered into Excel spreadsheets. Validation rules are in place to ensure no data entry errors occur. Data is loaded into a database by an experienced database administrator, and reviewed by an Alchemy geologist, who is a competent person.</p>

Criteria	JORC Code explanation	Commentary
		No assay data adjustments have been made.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	A DGPS was used to locate collar positions, with an expected +/-10cm vertical and horizontal accuracy. Down hole surveys were collected at surface and at end of hole in RC drill holes using a downhole camera. The grid system used for all collar locations is the UTM Geocentric Datum of Australia 1994 (MGA94 Zone 51). The drill collar and down hole location accuracy is considered appropriate for this stage of exploration.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	Drill line spacings currently range from ~20m to ~50m within each prospect area, and on these drill lines hole spacings vary from ~20m to ~40m. No Mineral Resource or Reserve has been reported for this drilling. Shallow RC samples within alluvial cover at Taupo were physically composited into 4m samples.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Gold bearing structures and lithologies in the area drilled are interpreted to dip steeply to the west and plunge moderately down to the east. All holes were drilled at between -55 degrees towards the grid east (~88.0° magnetic) (approx. right angles to lithological trends). No orientation-based sampling bias has been identified.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	All drill samples were collected in pre-numbered calico bags and subsequently put into large green plastic bags and stored in a trailer on site until transported to ALS Kalgoorlie. All samples were transported via company vehicle to ALS Kalgoorlie and subsequently transported to Perth by ALS for prep and sample analysis.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	Considering the preliminary nature of the drill program, no external audit or review of the sampling techniques or sample data capture has been conducted to date.

## Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	Type - Exploration Licence (currently in good standing) Reference name –Karonie Reference number – E28/2575 Location – 100km east of Kalgoorlie, Australia. Ownership – 100% Goldtribe Corporation Pty Ltd (a wholly owned subsidiary of Alchemy Resources Limited) Overriding royalties - none The land is 100% freehold. No Wilderness Reserves, National Parks, Native Title sites or registered historical sites are known. No environmental issues are known.



Criteria	JORC Code explanation	Commentary
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<p>A significant amount of exploration has been conducted across the majority of E28/2575. Previous exploration companies include Freeport McMoran Ltd, Poseidon Gold Ltd, WMC, Goldfields Pty Ltd, Integra Mining Ltd, Border Gold, and Silver Lake Resources.</p> <p>Exploration work completed across the area covered by E28/2575 has included desktop studies and collaborative research, geological and regolith mapping, soil sampling, RAB, Aircore, RC and diamond drilling, and numerous airborne and ground geophysical surveys (magnetics, gravity, IP, surface EM and downhole EM).</p>
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation</i>	<p>Deposit Type – Structurally controlled, shear zone and dolerite hosted mesothermal gold mineralisation.</p> <p>Geological setting – Proterozoic Woodline Formation overlying variably folded Archean and sheared sediments and mafic volcanic units. Multiple deformation events leading to complex faulting and metamorphism ranging from greenschist to amphibolite facies.</p> <p>Style of mineralisation – quartz vein hosted gold mineralisation within steep west dipping shear zones. Better grades and tonnages are associated with isoclinally folded (or otherwise thickened) coarser grained mafic units (dolerites). Gold mineralisation is associated with strong silicification-carbonate-biotite + calc-silicate alteration, and observed steep north plunging fold axes and lineations correlate with steep north plunging high grade ore shoots.</p>
<i>Drill hole Information</i>	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> <li>○ <i>easting and northing of the drill hole collar</i></li> <li>○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i></li> <li>○ <i>dip and azimuth of the hole</i></li> <li>○ <i>down hole length and interception depth</i></li> <li>○ <i>hole length.</i></li> </ul> <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	All drill hole information is tabulated within the body of the announcement.
<i>Data aggregation methods</i>	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p>	<p>A weighted average was used to calculate all mineralisation intercepts.</p> <p>A 0.5g/t Au lower cut-off grade, no upper cut off grade, and maximum 2m internal waste is used in the calculations for RC drilling.</p>

Criteria	JORC Code explanation	Commentary
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	
<i>Relationship between mineralisation widths and intercept lengths</i>	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	All intercepts reported are downhole widths. It is estimated that the angle between the drill hole direction and the plane of mineralisation is $\sim 45^\circ$ (or less) which implies that downhole intercept width $\times \sim 0.7$ = true intercept width (or thicker).
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Appropriate plans and cross sections have been included in the body of this announcement.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All gold drill intercepts $>0.3\text{g/t Au}$ have been reported for RC drilling.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	All meaningful data and information has been included in the body of the report.
<i>Further work</i>	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	Drilling has been completed. Follow up drilling will be planned if results warrant additional work.