ASX ANNOUNCEMENT

19 August 2021



VIKING IDENTIFIES MULTIPLE FOLLOW UP TARGETS FROM AC DRILL PROGRAMME

- 4 primary target areas identified for further follow up outside of First Hit trend
- Most significant is +300m >15ppb gold in regolith anomaly containing two
 >40ppb gold anomalies associated with NE structure which extends to First Hit
- Pathfinder association elements identified (Mo, W, Bi & In) to support targets and identify areas of potential
- Drill programmes including RC and/or DD, being planned to commence in the coming quarter

Viking Mines Managing Director & CEO Julian Woodcock said "I am pleased to report that we have received the AC drilling results and completed a thorough interpretation which has identified 4 primary exploration target areas to follow up. In addition, results provide support for continuing to explore the First Hit structure north and south of the historic mine workings to identify potential high-grade mineralised lodes. The strategy employed by Viking to fingerprint the mineralisation at First Hit Mine with the Diamond Drill programme has proved invaluable in identifying the subtle ppb level gold anomalies generated by these high-grade narrow vein systems. Using this information, we have identified areas containing potentially gold bearing structures which run across the Viking tenements and are now planning the follow up exploration programmes to commence in the coming quarter."

ANNOUNCEMENT DETAILS

Viking Mines Limited (ASX: VKA) ("Viking" or "the Company") is pleased to announce that all gold and multielement results have been received and interpretation completed for the Company's Air Core (AC) drill programme undertaken on the First Hit Project ("the **Project"**).

2 key observations have identified 4 immediate priority follow up target areas (Figure 1 & Figure 4) *in addition to* the mineralisation identified along the First Hit trend.

- 1. ~**15ppb** Au halo surrounds high-grade diamond drill core intersections from recent drilling¹ (47.05 g/t Au or 47,050 ppb Au) (Figure 2 & Figure 3).
- 2. **Pathfinder elements** (Mo, Bi, W & In) determined which have been used to further support the targets and identify areas of potential (Figure 4).

The 4 priority target areas identified for further follow up exploration activity are:

- 1. Twin Peaks: Broad **+300m >15ppb gold in regolith anomaly** with 2 >40ppb peaks associated with a significant interpreted NE striking structure and weak to moderate level pathfinder element association (Figure 5).
- 2. Jana's Reward: **5 x >20ppb gold in regolith targets** spread over a 1,000m x 400m area, in an area of structural complexity and supported by higher value pathfinder element association and historic auger sampling (Figure 7).

-

¹ ASX release 24 June



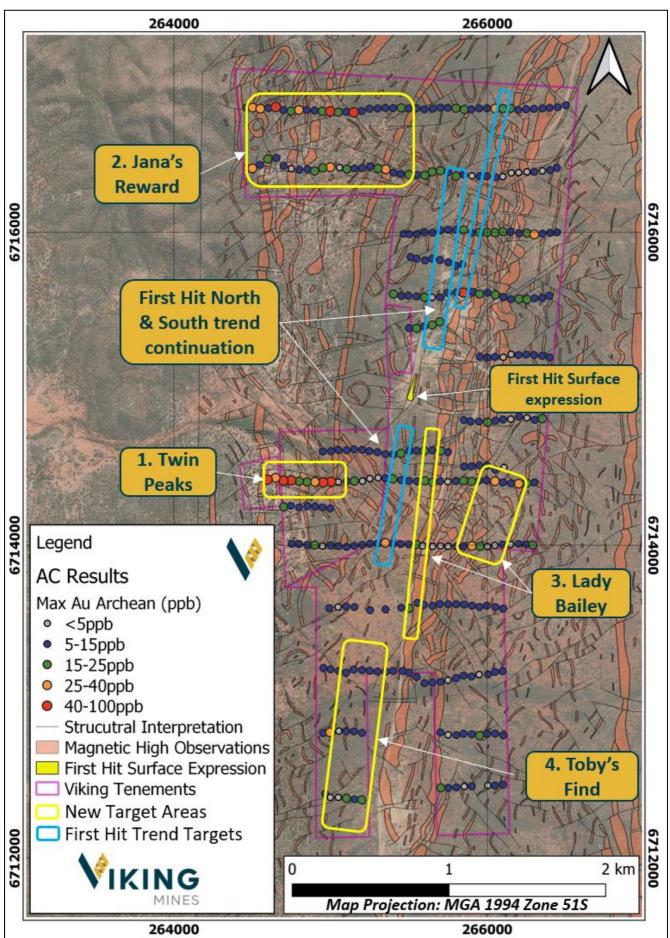


Figure 1; Map showing maximum ppb gold in Archean basement obtained in AC drilling results with 4 primary follow up target areas outlined in yellow boxes and mineralised trends North and South from First Hit in blue boxes.



- 3. Lady Bailey: **3 x >15ppb gold in regolith targets** spread across 2 AC traverses and proximal to a significant interpreted NE trending structure with weak associated pathfinder element association (Figure 9).
- 4. Toby's Find: **High level pathfinder element** association over an 800m x 150m area over 3 x AC traverses with coincident >20ppb gold in regolith over 1 AC traverse (Figure 10).

These target areas are *in addition to* further indicators received from the AC drilling to follow up immediately North and South from the historic First Hit gold mine.

RESULTS INTERPRETATION PROCESS

As part of the interpretation process, several industry standard methods were utilised to determine the appropriate anomaly thresholds to apply to the data and are discussed below.

This is an essential step in the interpretation process as the results returned for the AC drilling need to be assessed in context and the expectations of the results be ascertained. The methods used have been successful in identifying distinct anomalies across the First Hit tenure which will require further follow up.

Diamond Drilling Data

One of the key data sets used to assess the anomaly thresholds is direct observation in the Diamond Drilling results reported 24 June 2021. Figure 3 and Figure 2 show the grades returned downhole and reported as ppb gold. The key observation is that immediately adjacent to the high-grade result of 47,050ppb (47.05g/t), the core samples returned 44ppb and 49ppb respectively (Figure 3). These in turn form part of a broader zones, 12m wide >15ppb and a 19m wide >10ppb.

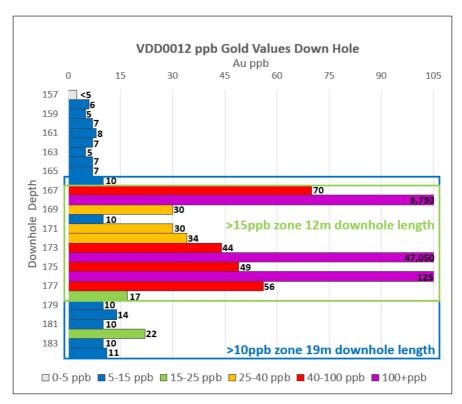


Figure 2; Downhole ppb gold results for VDD012. Note >15ppb zone is 12m downhole length and >10ppb zone is 19m downhole length.



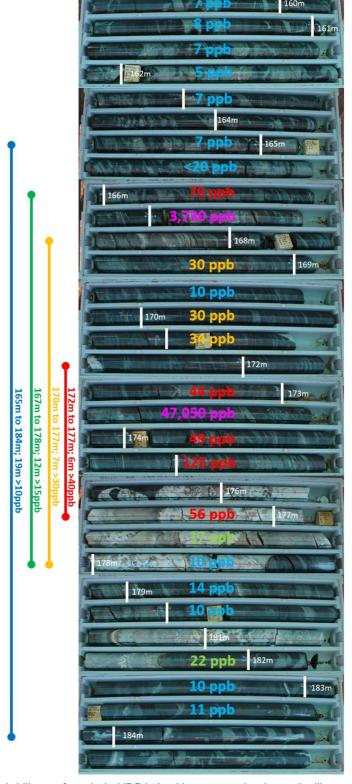


Figure 3; Photos of diamond drill core from hole VDD012 with annotated ppb results illustrate the narrow nature of low-grade halo immediately adjacent to high-grade gold mineralisation at First Hit. This observation has been used to assess the level of AC anomalies returned from the AC drill programme.

The importance of this observation is related to the scale and spacing of the AC drill programme, which was completed on a 50m x 400m spacing. The broader low-level >10ppb 19m wide zones observed in the drill core has given Viking reason to further evaluate low level gold anomalies observed in the AC drilling results. As such an anomaly threshold of >15ppb has been selected to identify target areas when observed in conjunction with other supporting factors.



Multielement Analysis

All end of hole AC results were analysed for gold and a 60 element suite. The strongest statistical associations with gold have been identified with Molybdenum (Mo), Bismuth (Bi), Tungsten (W) and Indium (In) and subsequently these elements have been determined as potential pathfinders for gold mineralisation.

CSA Global undertook a technique called **Principal Component Analysis** (PCA) on the geochemical data generated from AC programme. PCA simplifies the complexity of geochemical data while retaining trends and patterns. It does this by transforming the data into fewer dimensions, which act as summaries of features. A PCA plot shows clusters of samples based on their similarity. The PCA identified the 4 pathfinder elements (Mo, Bi, W & In) and were subsequently used to calculate a score (PC5 - "**Pathfinder association score**").

The importance of the PCA is that the pathfinders are interpreted to indicate proximity to potential gold mineralisation but without direct association (i.e. when no gold is detected). This is important when exploring for narrow vein high-grade systems (such as that identified at First Hit) because the footprint associated with mineralisation is very narrow.

Figure 4 below shows the distribution of the pathfinder association scores calculated for end of hole samples. A key observation is the presence of higher scores in some samples without directly associated >15ppb gold values. This has been noted along strike to the north and south of First Hit and at the Toby's Find target. Areas where moderate to high PC5 scores are coincident with regolith gold anomalies provides further support for the gold anomaly such as that observed at the Jana's Reward and Lady Bailey targets.

Additional discrete zones of elevated pathfinder PC5 scores require further investigation and may produce additional targets for follow up testing and evaluation.

TARGET SUMMARY

The 4 target areas identified for further follow up assessment are presented below. Each of the target areas has been identified through evaluation of the following characteristics:

- Gold value in ppb from Air Core drilling.
- Gold value in ppb in historical auger drilling (near surface sampling) to support AC results in the appropriate regolith context.
- PC5 pathfinder association score.
- Structural setting from magnetic geophysics.
- Proximity to known mineralised occurrences.

Each of these characteristics have been reviewed to both characterise and determine the significance of the anomaly.



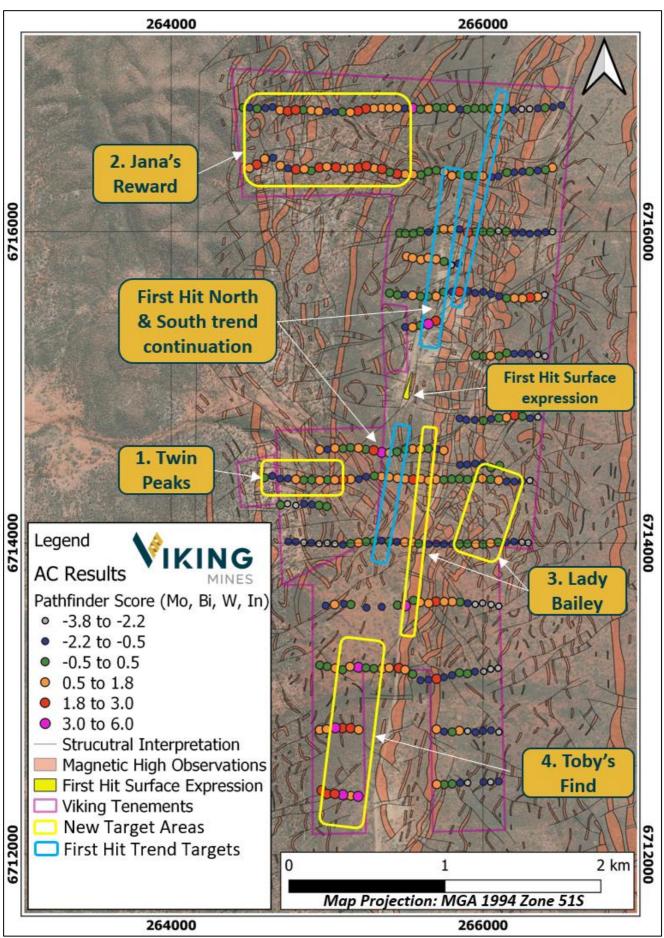


Figure 4; Map showing pathfinder PC5 score for end of hole mutielement AC drilling results with 4 primary follow up target areas outlined in yellow boxes and mineralised trends North and South from First Hit in blue boxes. Note strong pathfinder association along First Hit North and South trend.



Twin Peaks

The Twin Peaks target (Figure 1 & Figure 5) is located 700m South-West of the First Hit historic gold mine and has the following characteristics:

- +300m >15ppb gold in regolith anomaly (single line with 50m spaced holes).
- 2 zones of higher anomalous values >40ppb at different horizons in the regolith profile (Figure 6).
- +300m >25ppb gold anomaly in lag/transported material above the Archean regolith (Figure 6).
- Located on a NE striking structure which extends to the First Hit surface projection 700m to the NE.
- Located immediately due East of the historic high-grade Two Chinamen workings.

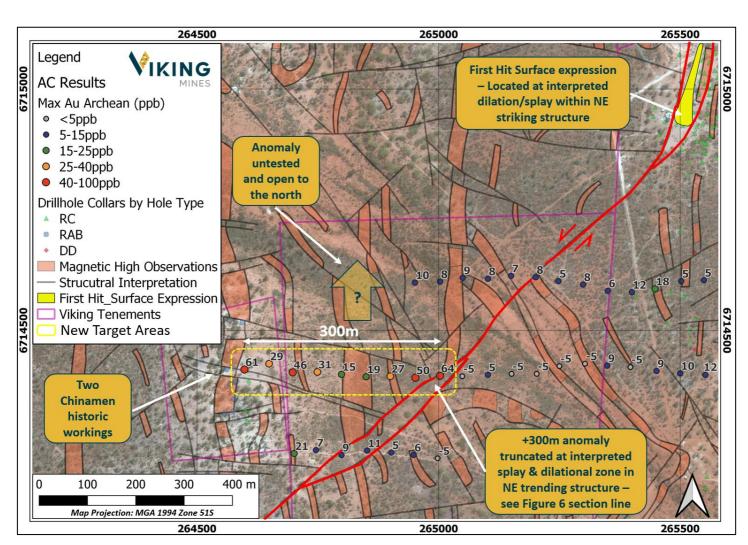


Figure 5; Map showing the Twin Peaks gold in regolith anomaly. Values shown are ppb gold. Note location of anomaly in relation to the NE striking structure which extends to First Hit 700m to the NE.



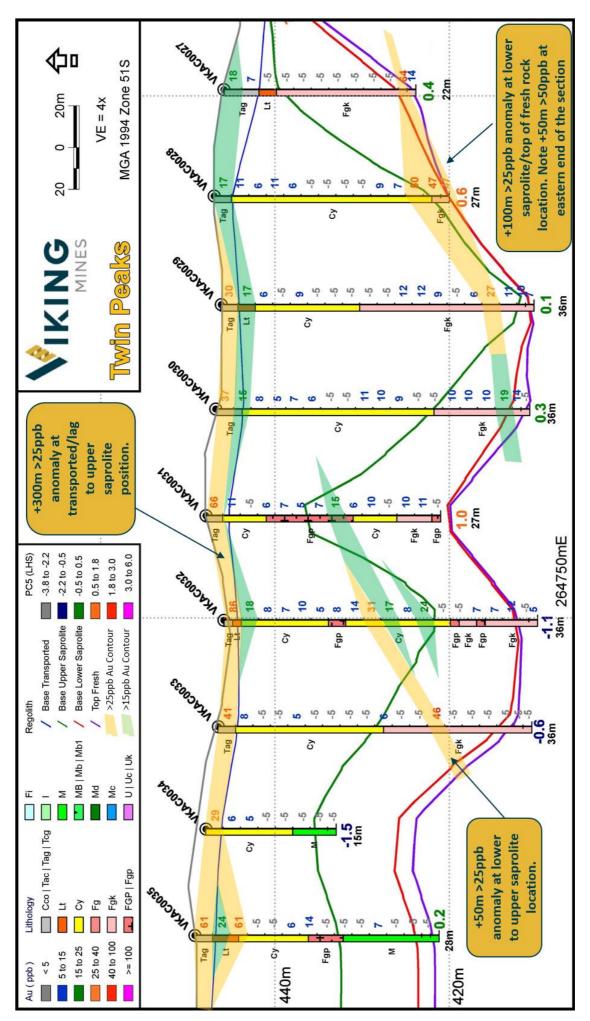


Figure 6; Cross section through the Twin Peaks target showing downhole gold values in ppb and the distribution of gold anomalies in the regolith profile. End of hole annotations show PC5 pathfinder score. Note outlines of >15ppb (green) and >25ppb (orange) defining the anomalies identified in cross section. Note 8 x vertical exaggeration applied to this section.



Jana's Reward Target

The Jana's Reward target (Figure 1 & Figure 7) is located >1.5km to the North North-West of the historic First Hit gold mine and has the following characteristics:

- 5 zones (Figure 7) with anomalous values >15ppb with peak values of 41ppb distributed over a 1,000m x 400m area.
- AC results correlate with historic auger drilling results >15ppb across 3 zones.
- 2 potential eastern anomalies are observed in AC data, however require further work to infill data from the 400m AC line spacing (at this stage continuity can't be confirmed).
- A strong elevated pathfinder association score (Figure 4 & Figure 8) across the whole area.
- Elevated gold in lag/transported material above the Archean regolith (Figure 8).
- Shallow transported/lag cover and thin residual regolith indicates gold dispersion may be restricted, further narrowing the width of gold anomalies.
- Complex structural setting with multiple N-S trending magnetic high units and interpreted offsetting structures.

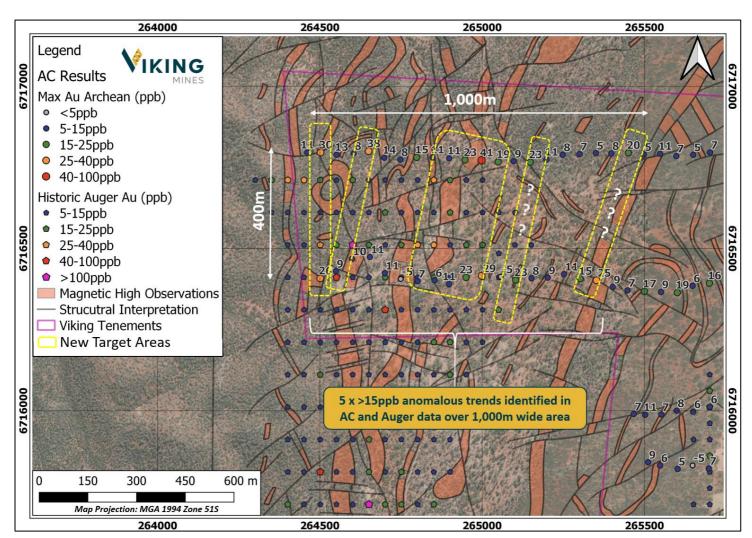


Figure 7; Map showing the Jana's Reward gold in regolith anomaly. Numbered values shown are max ppb gold in Archean derived from AC drilling. Supporting historic Auger data shown with same colour legend but values not listed. Note 5×15 ppb trends coincide with orientation of magnetic high observations and potential structural positions.



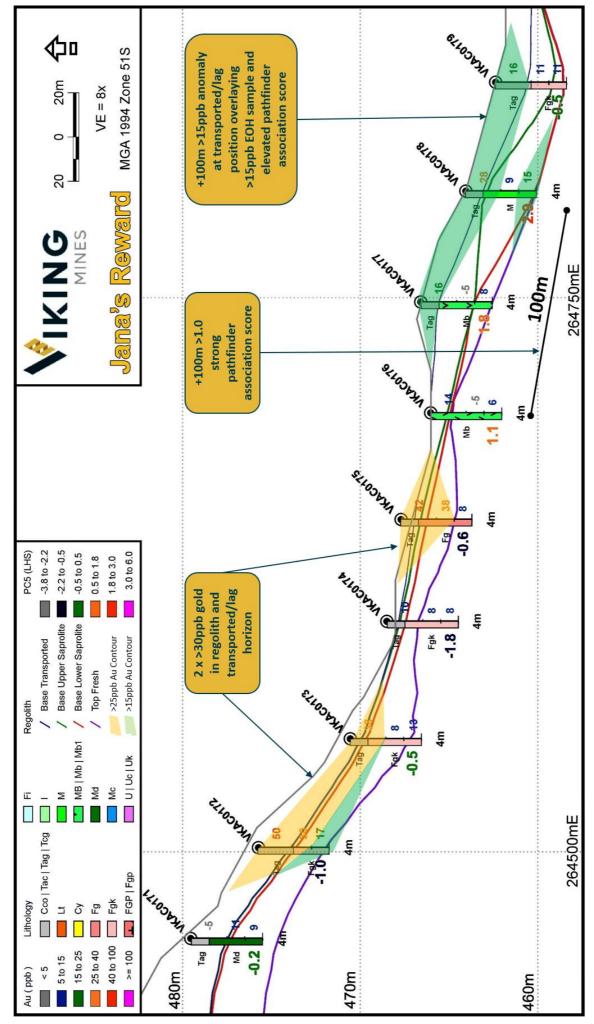


Figure 8; Cross section on the northern most line at the Jana's Reward target. Note the thin cover and preserved regolith profile and the higher value ppb gold results seen in the transported/lag material above the Archean >15ppb values. Note 8 x vertical exaggeration applied to this section.



Lady Bailey

The Lady Bailey target (Figure 1 & Figure 9) is located 330m to the South South-East of the First Hit Historic Gold Mine and has the following characteristics:

- 3 zones with anomalous values >15ppb flanking the margins of the mag high (ultramafic).
- 1 x >15ppb trend occurring across 4 AC traverses covering 1,000m along the western margin of magnetic high (ultramafic). Occurs in parallel position to First Hit structure. Elevated gold in *transported* cover (up to a high of *445 ppb* gold in hole VKAC0225) occurs above the trend.
- 1 x > 15ppb anomaly on eastern margin of magnetic high occurring across 2 AC traverses 400m apart. No direct association with historic auger sampling and unable to determine if the anomaly is continuous between the traverses at the current level of exploration.
- 1 x >15ppb result occurring at possible hinge position in arcuate magnetic high. Historic auger sampling does not cover this trend and unable to determine if the anomaly is continuous between the traverses at the current level of exploration.
- Structural complexity in the area and proximity to a regional NE trending structure observed in the magnetic interpretation cross-cutting the area.
- Moderate PC5 pathfinder score association in vicinity of elevated gold values providing support to the gold anomalies (Figure 4).

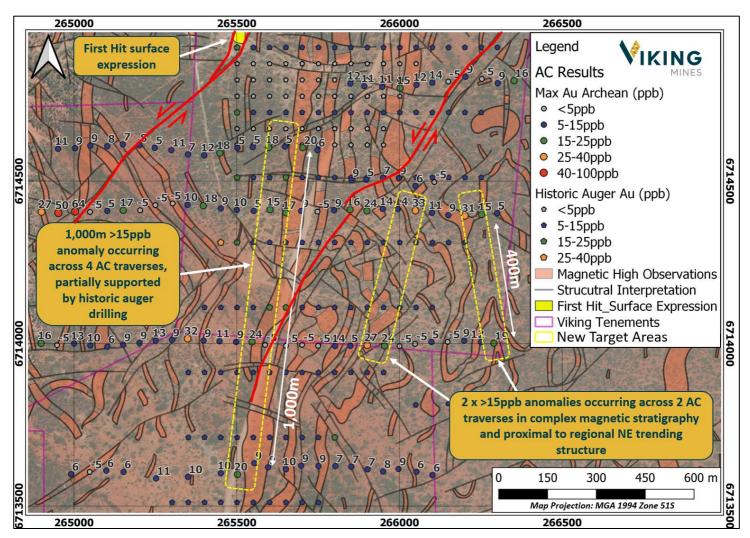


Figure 9; Map showing the Lady Bailey gold in regolith anomalies. Numbered values shown are max ppb gold in Archean derived from AC drilling. Supporting historic Auger data shown with same colour legend but values not listed.



Toby's Find

The Toby's Find target (Figure 1 & Figure 10) is located 2km to the South of the First Hit Historic Gold Mine and has the following characteristics:

- 1 x 150m x 800m zone with strong pathfinder association score occurring across 3 AC traverses (Figure 10).
- >20ppb association on the southernmost traverse occurring at end of hole in 2 holes supporting pathfinder association .
- Target occurs on margins of gravity low (potential felsic intrusion) and magnetic high (ultramafic) in same stratigraphic position and orientation as the First Hit structure.
- This target is a conceptual target based on the pathfinder geochemical data with no historical drilling or surface sampling in this area.

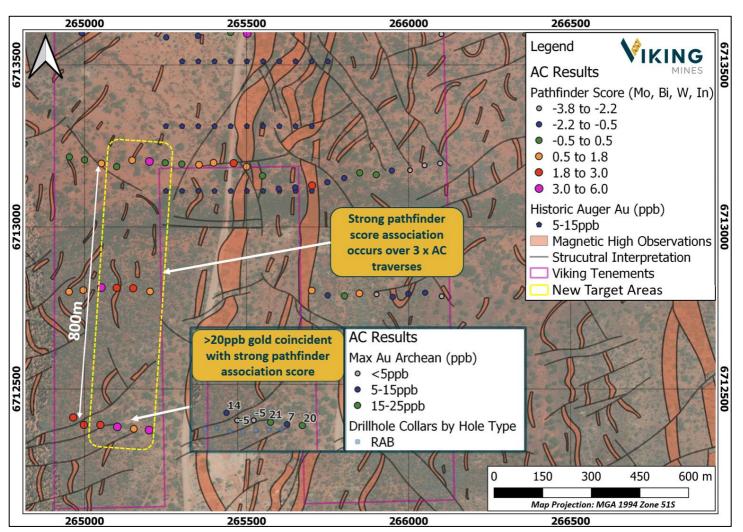


Figure 10; Map showing the location of the Toby's Find target with pathfinder association score (PC5). Note the high PC5 trend occurring over 3 x AC traverses on the western side of the magnetic high. A >15ppb gold occurrence is present on the southernmost traverse as show on the inlay map.



First Hit Trend

In addition to the new 4 target areas identified outside of the First Hit trend, further support for continued work along the First Hit mineralised trend has been obtained with the AC results.

North Trend

- +1,400m parallel position to the First Hit structure (Figure 11) with 64ppb gold value within intermittent >15ppb gold and coincident moderate to high PC5 pathfinder anomaly along margins of magnetic high unit (ultramafic).
- +1,400m moderate coincident PC5 pathfinder and intermittent >15ppb gold anomaly associated with magnetic high units along strike from known mineralised structure (Figure 11).
- Intermittent high (>40ppb) gold in historic auger sampling supporting identified trends.
- It is important to note in Figure 11 the below detection level of the historic auger results in the SW corner of the image. This is directly above the First Hit surface projection of mineralisation and above Viking's diamond drillhole VDD016 which contains visible gold in a 20cm quartz vein 58m downhole (ASX release 23 July 2021). This is significant as it illustrates the variable effectiveness of auger sampling for defining bedrock anomalies.

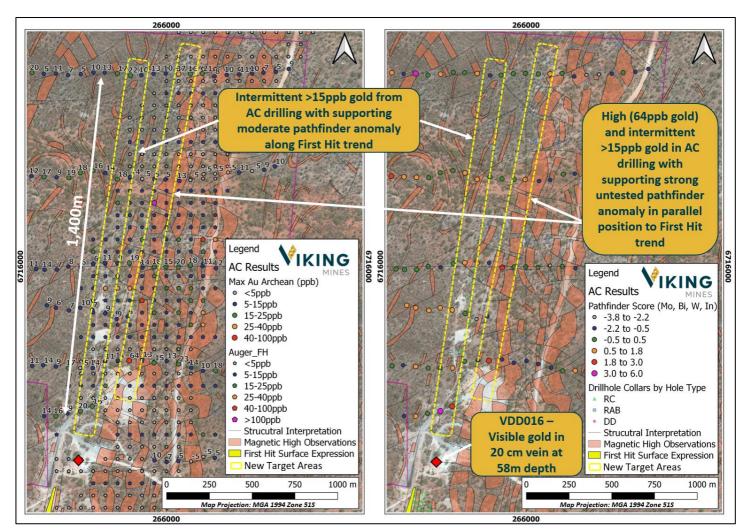


Figure 11; Maps showing anomalies identified along the First Hit North trend seen in Max gold in Archean (left) and pathfinder association score (right). Note location of diamond hole VDD016 at the bottom of the image with visible gold seen in 20cm vein at 58m depth downhole.



South Trend

- +600m >15ppb gold in AC drilling occurring over 3 traverses (Figure 12) following the strike orientation of First Hit structure south of the First Hit surface projection.
- Associated moderately elevated PC5 pathfinder with proximal strong values immediately west of the northern traverse.
- Untested trend for >400m between AC traverses.
- Stripped regolith profile on the northern 2 AC traverses suggests limited dispersion of any bedrock gold and effectiveness of AC at this drill spacing will be limited.
- Further follow up bedrock testing required to identify the structural position.

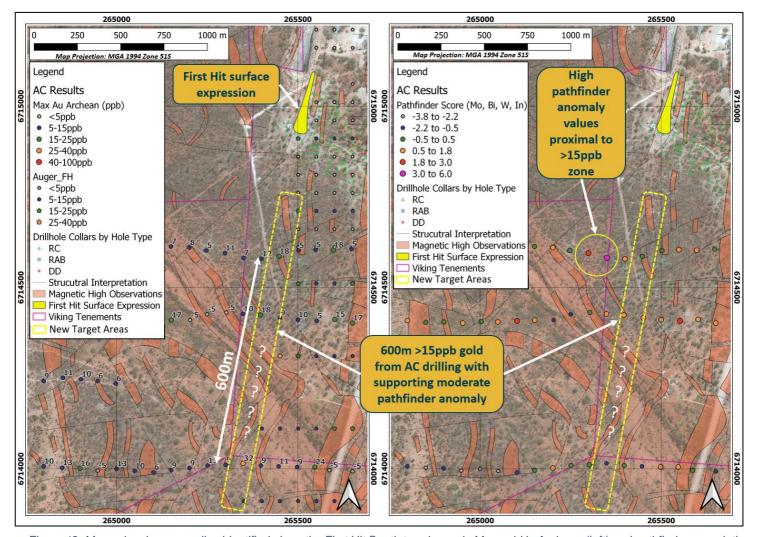


Figure 12; Maps showing anomalies identified along the First Hit South trend seen in Max gold in Archean (left) and pathfinder association score (right). Note high pathfinder scores proximal to interpreted trend along strike from First Hit mineralisation.



Next Steps

The following activities will be undertaken to continue to advance the First Hit project and to follow up on the AC targets generated:

- Further analysis of gold anomaly thresholds adjacent to mineralisation at First Hit.
- Further assessment of discrete gold and PC5 anomalies to determine their significance and identify further follow up targets.
- Updated assessment of pathfinder elements using DD and AC downhole portable XRF dataset.
- Review of follow up exploration strategies to determine the most effective methods including:
 - Field geological mapping.
 - Auger drilling and soil sampling to better constrain anomalies.
 - Bedrock drill planning (RC and/or DD).
- Incorporation of the assay results interpretation into the regional geological and structural model being generated by Model Earth.
- Contact drilling contractors to determine availability for follow up drill programmes with the objective of commencing in the coming quarter.

Further updates will be provided to market on the future planned programmes at the First Hit Project once they have been determined.

-END-

This announcement has been authorised for release by the Board of the Company.

Julian Woodcock

Managing Director and CEO

Viking Mines Limited

For further information, please contact:

Viking Mines Limited

Sarah Wilson Company Secretary 08 9322 1587



ABOUT VIKING MINES

Viking Mines is a gold focussed company with the **First Hit Project** located 150km NW of Kalgoorlie in Western Australia being the primary asset under exploration.

Viking have an aggressive exploration strategy to explore for high grade gold occurrences and discover ounces along fertile gold structures. The historically mined, First Hit gold mine is the focus of Vikings activity to deliver on this strategy. Rapid advancement and exploration are occurring to explore, discover and develop gold ounces at the Project. The strategy will generate shareholder value through the discovery of new gold resources.

First Hit Project, Western Australia

The **First Hit Project** is centred around the historic high-grade First Hit gold mine situated along the prospective Ida and Zuleika Shear zones in the Eastern

FIRST HIT PROJECT

POSTICLE

SOUTHER CROSS

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

PROJECT

POSTICLE

POSTICLE

PROJECT

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

PROJECT

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

POSTICLE

PROJECT

POSTICLE

PROJECT

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

POSTICLE

PROJECT

POSTICLE

POSTICLE

POSTICLE

POSTICLE

PROJECT

POSTICLE

POST

Goldfields of Western Australia. The Project incorporates ~28km² of tenements with 6 active Mining and Prospecting licences and 1 Exploration licence under application. At the core of this landholding is a 6.4km² group of contiguous tenements which host the historic First Hit gold mine.

Prior to closure of the First Hit gold mine by Barra Resources in 2002 and at a time of depressed gold prices of US\$ 320/oz, the First Hit mine produced ~30koz ounces of gold at an average grade of ~7.7g/t Au. No modern exploration activity has been conducted in the past 18 years and creates a significant opportunity for Viking. The Company is focused on delivering exploration programmes to test near mine extensions and regional targets around the **First Hit Project** with the objective of defining fertile structures and discovering gold ounces.

Examples of the high-grade nature of the mineralisation previously drilled at First Hit include:

- 4.9m at 64.8g/t Au from 62.1m (FHU045)¹
- 3m at 77.6g/t Au from 224.0m (BFH030)¹
- 4m at 26.1g/t Au from 58.0m (BFH005)¹

The Project area is well serviced by infrastructure and is located 50km west of the sealed Goldfields highway and the township of Menzies. The nearest operating Gold Processing Plant is the Davyhurst Mill 50km to the south, owned and operated by Ora Banda Mining (ASX:OBM). The nearest operating gold mine is the Riverina open pit, located 8km south of the First Hit gold mine, owned by OBM.

The Company also has projects located in Ghana. Viking is currently undergoing legal proceedings to secure costs and interest associated with the sale of the Akoase project in Ghana.

Forward-Looking Statements

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning Viking Mines Limited's planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could," "plan," "estimate," "expect," "intend," "may", "potential," "should," and similar expressions are forward-looking statements. Although Viking Mines Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Hele ID	Hele	Fact (m)	Nonth	DI (m)	End of	A-: (0)	D:- /0\	Doubh	Danmhala	Aumh
Hole ID	Hole Type	East (m) MGA94	North (m)	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From	Downhole Length	Au ppb
VKAC0001	AC	266300	MGA94 6714401	425	42	0	-90	(m) 0	(m) 2	9
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6 8	2	<5 5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14 16	2	<5 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32 34	2	<5 <5
-	-	-	-	-	-	-	-	36	2	<5
-	-	-	-	-	-	-	-	38	2	<5
-	-	-	-	-	-	-	-	40 41	1	<5 5
- VKAC0002	- AC	266252	- 6714397	439	- 45	- 0	- -90	0	1 2	<5
-	-	-	-	-	-	-	-	2	2	20
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16 18	2	<5 <5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	5
-	-	-	-	-	-	-	-	26 28	2	15 <5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	2	<5
-	-	-	-	-	-	-	-	34	2	<5
-	-	-	-	-	-	-	-	36 38	2	<5 11
-	-	-	-	-	-	-	-	40	2	9
-	-	-	-	-	-	-	-	42	2	14
- VKAC0003	- AC	266201	- 6714393	431	48	- 0	- -90	44 0	1 2	<5 18
- VKAC0003	-	-	-	-	-	-	-70	2	2	15
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	6	2	15
-	-	-	-	-	-	-	-	8 10	2	12 24
-	-	-	-	-	-	-	-	12	2	13
-	-	-	-	-	-	-	-	14	2	11
-	-	-	-	-	-	-	-	16 18	2	16 13
-	-	-	-	-	-	-	-	20	2	13
-	-	-	-	-	-	-	-	22	2	10
-	-	-	-	-	-	-	-	24	2	10
-	-	-	-	-	-	-	-	26 28	2 2	17 <5
-	-	-	-	-	-	-	-	30	2	6
-	-	-	-	-	-	-	-	32	2	<5
-	-	-	-	-	-	-	-	34 36	2	31 <5
-	-	-	-	-	-	-	-	38	2	<5 <5
-	-	-	-	-	-	-	-	40	2	<5
-	-	-	-	-	-	-	-	42	2	<5
-	-	-	-	-	-	-	-	44 46	2	<5 <5
-	-	-	-	-	-	-	-	47	1	<5
VKAC0004	AC	266150	6714395	432	54	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2 2	<5 <5
-	-	-	-	-	-	-	-	4 6	2	<5 <5
-	-	-	-	-	-	-	-	9	1	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
-	-	-	-	-	-	-	-	16	2	<5 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32 34	2	<5 <5
-	-	-	-	-	-	-	-	36	2	<5
-	-	-	-	-	-	-	-	38	2	<5
-	-	-	-	-	-	-	-	40	2	<5
-	-	-	-	-	-	-	-	42	2	5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	44	2	<5
-	-	-	-	-	-	-	-	46	2	<5
-	-	-	-	-	-	-	-	48	2	<5
-	-	-	-	-	-	-	-	50 52	2	5 <5
-	-	-	-	-	-	-	-	53	1	9
-	-	-	-	-	-	-	-	8	1	0
VKAC0005	AC	266100	6714402	432	41	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	7
-	-	-	-	-	-	-	-	6	2	6 <5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16 18	2	11 <5
-	-	-	-	-	-	-	-	20	2	11
-	-	-	-	-	-	-	-	22	2	11
-	-	-	-	-	-	-	-	24	2	7
-	-	-	-	-	-	-	-	26	2	8
-	-	-	-	-	-	-	-	28	2	11
-	-	-	-	-	-	-	-	30 32	2	7 8
-	-	-	-	-	-	-	-	34	2	9
-	-	-	-	-	-	-	-	36	2	9
-	-	-	-	-	-	-	-	38	2	10
-	-	-	- (74.4400	-	- 42	-	-	40	1	10
VKAC0006	AC	266049	6714409	432	43	-	-90	2	2	16 33
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	10
-	-	-	-	-	-	-	-	8	2	7
-	-	-	-	-	-	-	-	10	2	13
-	-	-	-	-	-	-	-	12	2	11
-	-	-	-	-	-	-	-	14 16	2	8 9
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	10
-	-	-	-	-	-	-	-	22	2	6
_	-	-	-	-	-	-	-	24	2	9
-	-	-	-	-	-	-	-	26 28	2	7 10
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	2	15
-	-	-	-	-	-	-	-	34	2	17
-	-	-	-	-	-	-	-	36	2	9
-	-	-	-	-	-	-	-	38 40	2	10 25
-	-	-	-	-	-	-	-	40	1	5
VKAC0007	AC	265995	6714414	432	25	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	12
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	7
-	-	-	-	-	-	-	-	8 10	2	7
-	-	-	-	-	-	-	-	12	2	10
-	-	-	-	-	-	-	-	14	2	5
-	-	-	-	-	-	-	-	16	2	6
-	-	-	-	-	-	-	-	18 20	2	7
-	-	-	-	-	-	-	-	22	2	14
-	-	-	-	-	-	-	-	24	1	8
VKAC0008	AC	265949	6714414	433	29	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	4 6	2	6 10
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	10
-	-	-	-	-	-	-	-	12	2	9
-	-	-	-	-	-	-	-	14	2	5
-	-	-	-	-	-	-	-	16	2	8
-	-	-	-	-	-	-	-	18 20	2	7 8
-	-	-	-	-	-	-	-	22	2	6
-	-	-	-	-	-	-	-	24	2	8
-	-	-	-	-	-	-	-	26	2	14
- -	-	- 2/5000	- (714400	- 420	- 07	-	-	28	1	5
VKAC0009	AC -	265900	6714408	438	27 -	-	-90 -	2	2	14 24
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	9
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12 14	2	6
-	-	-	-	-	-	-	-	16	2	6 10
-	-	-	-	-	-	-	-	18	2	10
-	-	-	-	-	-	-	-	20	2	7
-	-	-	-	-	-	-	-	22	2	7
-	-	-	-	-	-	-	-	24	2	11
-	-	-	-	-	-	-	-	26	1	<5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
VKAC0010	AC	265848	6714412	434	27	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	6	2	16 9
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	9
-	-	-	-	-	-	-	-	12	2	8
-	-	-	-	-	-	-	-	14	2	6
-	-	-	-	-	-	-	-	16 18	2	8 9
-	-	-	-	-	-	-	-	20	2	7
-	-	-	-	-	-	-	-	22	2	6
-	-	-	-	-	-	-	-	24	2	11
- VKAC0011	- AC	265799	- 6714410	434	- 19	- 0	- -90	26 0	1 2	<5 15
	-	-	-	-	-	-	-70	2	2	10
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	9
-	-	-	-	-	-	-	-	8 10	2	5
-	-	-	-	-	-	-	-	12	2	<5 <5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	1	5
VKAC0012	AC	265748	6714406	437	18	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14 16	2	<5 <5
-	-	-	-	-	-	-	-	17	1	<5
VKAC0013	AC	265698	6714408	436	18	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	1	<5
- VKAC0014	- AC	265651	6714402	- 445	21	- 0	- -90	17 0	1 2	9
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8 10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	11
-	-	-	-	-	-	-	-	16	2	10
-	-	-	-	-	-	-	-	18	2	10
- VKAC0015	- AC	265602	- 6714412	- 442	- 12	- 0	- -90	20	2	17 52
	-	-	-	-	-	-	-70	2	2	7
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	9 7
-	-	-	-	-	-	-	-	10 11	1	15
VKAC0016	AC	265552	6714408	442	19	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	8
-	-	-	-	-	-	-	-	4	2	5
-	-	-	-	-	-	-	-	6 8	2	<5 5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5 <5
- VKAC0017	AC	265500	6714411	442	3	- 0	- -90	18 0	1 2	<5 10
-	-	-	-	-	-	-	-70	2	1	5
VKAC0018	AC	265451	6714416	442	4	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	1	<5
- VKAC0019	- AC	265397	- 6714424	- 443	- 4	- 0	- -90	3	2	5 18
- VNAC0019	AC -	- 200397	-	- 443	-	-	-90	2	1	<5
-	-	-	-	-	-	-	-	3	1	<5
VKAC0020	AC	265349	6714427	443	4	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	1	7
- VKAC0021	- AC	265303	- 6714431	439	5	- 0	- -90	3	1 2	9 <5
- VNACUUZ I	AC -	- 200303		- 439	-	-	-90	2	2	5
-	-	-	-	-	-	-	-	4	1	<5
VKAC0022	AC	265250	6714426	437	7	0	-90	0	2	5
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	6	2	9 <5
VKAC0023	AC	265203	6714410	440	10	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	9

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	<5
VKAC0024	AC	265151	6714410	440	7	0	-90	0	2	<5 9
-	-	-	-	-	-	-	-	2	2	17
-	-	-	-	-	-	-	-	4	2	<5
- VKAC0025	- AC	265102	- 6714408	439	- 6	- 0	- -90	6	1 2	<5 19
- VKAC0025	AC -	- 203102	-	-	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	1	5
-	-	-	- (74.4405	-	-	-	-	5	1	<5
VKAC0026	AC -	265049	6714405	440	- 6	0	-90 -	2	2	8 <5
_	-	-	-	-	-	-	-	4	1	<5
-	-	-	-	-	-	-	-	5	1	<5
VKAC0027	AC	265003	6714406	439	22	0	-90	0	2	18
-	-	-	-	-	-	-	-	2	2	7 <5
_	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
-	-	-	-	-	-	-	-	16	2	<5
_	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	1	64
- VKAC0028	- AC	- 264952	- 6714402	- 446	- 27	- 0	- -90	21	1 2	14 17
- VKAC0028	AC -	264952	- 6/14402	- 446	-	-	-90	2	2	11
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	11
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10 12	2	<5 <5
_	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	9
-	-	-	-	-	-	-	-	20 22	2	7 50
	-	-	-	-	-	-	-	24	2	47
-	-	-	-	-	-	-	-	26	1	37
VKAC0029	AC	264900	6714405	443	36	0	-90	0	2	30
-	-	-	-	-	-	-	-	2	2	17 6
	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	9
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14 16	2	<5 <5
_	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	12
-	-	-	-	-	-	-	-	22	2	12
-	-	-	-	-	-	-	-	24 26	2	9 <5
-	-	-	-	-	-	-	-	28	2	6
-	-	-	-	-	-	-	-	30	2	27
-	-	-	-	-	-	-	-	32	2	11
-	-	-	-	-	-	-	-	34 35	1	10 7
VKAC0030	AC	264850	6714404	432	36	0	-90	0	2	37
-	-	-	-	-	-	-	-	2	2	15
-	-	-	-	-	-	-	-	4	2	8
-	-	-	-	-	-	-	-	6 8	2	5 7
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16 18	2	11 10
-	-	-	-	-	-	-	-	20	2	9
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	10
-	-	-	-	-	-	-	-	28 30	2	10 10
-	-	-	-	-	-	-	-	32	2	19
-	-	-	-	-	-	-	-	34	1	14
- VIV A COCCC	-	- 2/4700	/744400	- 420	- 07	-	- 00	35	1	<5
VKAC0031	AC -	264799	6714409	439	27 -	0	-90 -	2	2	66 11
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	7
-	-	-	-	-	-	-	-	10 12	2	5 7
-	-	-	-	-	-	-	-	14	2	15
-	-	-	-	-	-	-	-	16	2	6
-	-	-	-	-	-	-	-	18	2	10
-	-	-	-	-	-	-	-	20	2	<5 10
-	-	-	-	-	-	-	-	22	2	10

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	24	2	11
-	-	-	-	-	-	-	-	26	1	<5
VKAC0032	AC	264749	6714414	439	36	0	-90	0	2	86
-	-	-	-	-	-	-	-	2	2	18 8
-	-	-	-	-	-	-	-	6	2	7
-	-	-	-	-	-	-	-	8	2	10
-	-	-	-	-	-	-	-	10 12	2	5 8
-	-	-	-	-	-	-	-	14	2	14
-	-	-	-	-	-	-	-	16	2	31
-	-	-	-	-	-	-	-	18	2	17
-	-	-	-	-	-	-	-	20	2	8
-	-	-	-	-	-	-	-	22 24	2	24 <5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	7
-	-	-	-	-	-	-	-	30	2	7
-	-	-	-	-	-	-	-	32 34	1	12 <5
-	-	-	-	-	-	-	-	35	1	5
VKAC0033	AC	264698	6714413	436	36	0	-90	0	2	41
-	-	-	-	-	-	-	-	2	2	8
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-	-	-	-	-	-	-	6 8	2	<5 5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16 18	2	<5 6
-	-	-	-	-	-	-	-	20	2	6 <5
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	46
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30 32	2	<5 <5
-	-	-	-	-	_	-	-	34	1	<5
-	-	-	-	-	-	-	-	35	1	<5
VKAC0034	AC	264649	6714431	440	15	0	-90	0	2	29
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4 6	2	5 <5
-	-	-	-	-	-	-	-	8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	1	<5
VKAC0035	AC -	264598	6714419	443	28	-	-90 -	2	2	61 24
	-	-	-	-	-	-	-	4	2	61
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12 14	2	14
-	-	-	-	-	-	-	-	16	2	<5 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	7
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24 26	2	<5 <5
-	-	-	-	-	-	-	-	27	1	0
VKAC0036	AC	264751	6714009	440	35	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18 20	2	<5 <5
-	-	-	-	-	-	-	-	22	2	<5 <5
-	-	-	-	-	-	-	-	24	2	<5
_	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5 <5
-	-	-	-	-	-	-	-	32 34	2	<5 <5
VKAC0037	AC	264799	6714007	439	24	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8 10	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	6
-	-	-	-	-	-	-	-	20	2	10

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	22	1	<5 <5
VKAC0038	AC	264850	6714003	440	16	0	-90	0	2	13
-	-	-	-	-	-	-	-	2	2	6 10
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10 12	2	<5 <5
-	-	-	-	-	-	-	-	14	1	5
-	-	-	-	-	-	-	-	15	1	<5
VKAC0039	AC -	264899	6714001	440	13	-	-90 -	2	2	16 <5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8 10	2	<5 <5
-	-	-	-	-	-	-	-	12	1	<5
VKAC0040	AC	264948	6713995	439	6	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	1	<5 <5
-	-	-	-	-	-	-	-	5	1	<5
VKAC0041	AC	265000	6714000	439	9	0	-90	0	2	13
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	<5
VKAC0042	AC -	265050	6713994	438	7	-	-90 -	0 2	2	10 <5
-	-	-	-	-		-	-	4	2	<5
-	-	-	-	-	-	-	-	6	1	<5
VKAC0043	AC -	265102	6713990 -	437	15 -	0 -	-90 -	0 2	2	8 <5
-	-	-	-	-		-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	1	<5
VKAC0044	AC -	265151	6713996	436	9	-	-90 -	0 2	2	23 <5
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	6
- VKAC0045	- AC	265201	6714002	437	9	- 0	- -90	8	1 2	<5 14
- VRAC0043	AC -	-	-	-	-	-	-70	2	2	5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2 1	9 5
VKAC0046	AC	265251	6714009	437	30	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	6	2	<5 13
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	7
-	-	-	-	-	-	-	-	28 29	1 1	<5 <5
VKAC0047	AC	265301	6714011	448	27	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	7
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2 2	5 <5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	9
-	-	-	-	-	-	-	-	20 22	2	5 <5
-	-	-	-	-	-	-	-	24	2	<5
- V/KA C0040	-	- 2/5240	- (714015	- 422	- 45	-	-	26	1	<5
VKAC0048 -	AC -	265349	6714015	433	45 -	0 -	-90 -	0 2	2	16 9
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8 10	2	8 <5
-	-	-	-	-	-	-	-	12	2	5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16 18	2	<5 8
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	<5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	26 28	2	7 32
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	_	_	-	32	2	7
-	-	-	-	-	-	-	-	34	2	<5
-	-	-	-	-	-	-	-	36	2	<5
-	-	-	-	-	-	-	-	38	2	6
-	-	-	-	-	-	-	-	40	2	<5
-	-	-	-	-	-	-	-	42 44	2 1	<5 <5
VKAC0049	AC	265398	6714009	432	27	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	2	13
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	12 14	2	<5 5
-	-	-	-	-	-	-	-	16	2	9
	-	-	-	-	_	-	-	18	2	6
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	5
-	-	-	-	-	-	-	-	26	1	<5
VKAC0050	AC	265447	6714007	441	27	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	5
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	8
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	11
-	-	-	-	-	-	-	-	20	2	7
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	11
-	-	-	- (74.4005	- 427	-	-	-	26	1	<5
VKAC0051	AC	265498	6714005	436	15	- 0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	<5 8
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	9
-	-	-	-	-	-	-	-	12	2	7
-	-	-	-	-	-	-	-	14	1	<5
VKAC0052	AC	265547	6714005	431	16	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	17
-	-	-	-	-	-	-	-	6	2	<5 <5
-	-	-	-	-	-	-	-	8	2	20
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	1	24
-	-	-	-	-	-	-	-	15	1	<5
VKAC0053	AC	265587	6713996	433	10	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	6	2	<5 <5
	-	-	-	-	-	-	-	8	1	<5 <5
-	-	-	-	-	-	-	-	9	1	<5
VKAC0054	AC	265651	6713993	435	15	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
- VKAC0055	AC	265701	6713996	427	12	0	-90	0	2	<5 6
	AC -	203701	-	- 427	-	-	-90	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	1	<5
-	-	-	-	-	-	-	-	11	1	<5
11/1 0005/	AC	265750	6713993	427	12	0	-90	0	2	6
	-	-	-	-	-	-	-	2	2	8
-		-	-	-	-	-	-	4	2	<5
	-		-	-	-	-	-	6 8	2	<5
-	-	-				-	-			<5
- - -	-	-	-	-						
-		-	-	-	-	-	-	10	1	<5
- - - -	- - - -			-	-	-	-	10 11	1 1	<5 <5
- - - - -		- - - 265802	-	-	- - 12		- - -90	10 11 0	1	<5
- - - - - - VKAC0057	- - - - AC		- - - 6713992	- - 428	-	- 0	-	10 11	1 1 2	<5 <5 14
- - - - - - VKAC0057	- - - - AC	- - 265802	- - - 6713992	- - 428 -	- - 12 -	- 0 -	- - -90 -	10 11 0 2	1 1 2 2	<5 <5 14 <5
- - - - - VKAC0057 - -	- - - - - AC - -	- - - 265802 - - -	- - - 6713992 - - -	- 428 - - -	- - 12 - - -	- 0 - - -	- -90 - -	10 11 0 2 4 6 8	1 1 2 2 2 2 2 2	<5 <5 14 <5 14 <5 <5
- - - - - - VKAC0057	- - - - AC - -	- - - 265802 - - - -	- - - 6713992 - - -	- - 428 - - - -	- - 12 - - -	- 0 - -	- -90 - - - -	10 11 0 2 4 6 8	1 1 2 2 2 2 2 2 2	<5 <5 14 <5 14 <5 45 <5 <5 <5
- - - - - VKAC0057 - -	- - - - - AC - -	- - - 265802 - - -	- - - 6713992 - - -	- 428 - - -	- - 12 - - -	- 0 - - -	- -90 - -	10 11 0 2 4 6 8	1 1 2 2 2 2 2 2	<5 <5 14 <5 14 <5 <5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	1	<5
VKAC0059	AC	265901	6713995	433	15	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	27
-	-	-	-	-	-	-	-	12 14	<u>2</u> 1	<5 <5
VKAC0060	AC	265954	6713993	437	27	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8 10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	24
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	1	<5
VKAC0061	AC	266000	6713992	435	23	0	-90	15	2	<5
-	-	-	-	-	-	-	-	17	2	<5
-	-	-	-	-	-	-	-	19 21	<u>2</u> 1	<5 <5
-	-	-	-	-	-	-	-	22	1	<5 <5
-	-	-	-	-	-	-	-	0	15	0
VKAC0062	AC	266048	6713999	434	23	0	-90	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 0	1 18	<5
VKAC0063	- AC	266098	6714005	437	- 28	- 0	- -90	10	2	0 <5
-	-	-	-	-	-	-	-70	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
_	-	-		-	-	-	-	24	2	5
-	-	-	-	-	-	-	-	26	1	<5
-	-	-	-	-	-	-	-	27	1	<5
-	-	-	- (74.4005	-	-	-	-	0	10	0
VKAC0064	AC -	266148	6714005	432	39	-	-90 -	17 19	2	<5 <5
_	-	-		-	-	-	-	21	2	<5
-	-	-	-	-	-	-	-	23	2	<5
-	-	-	-	-	-	-	-	25	2	<5
-	-	-	-	-	-	-	-	27	2	<5
-	-	-	-	-	-	-	-	29 31	2	<5 <5
_	-	-	-	-	-	-	-	33	2	<5
-	-	-	-	-	-	-	-	35	2	<5
-	-	-	-	-	-	-	-	37	1	<5
-	-	-	-	-	-	-	-	38	1 1 7	<5
- VKAC0065	- AC	- 266199	6714009	- 428	39	- 0	- -90	0 10	17 2	0 <5
-	AC	-	-	-	-	-	-90	12	2	6
-	-	-	-	-	-	-	-	14	2	7
-	-	-	-	-	-	-	-	16	2	6
-	-	-	-	-	-	-	-	18	2	7
-	-	-	-	-	-	-	-	20 22	2	5 5
-	-	-	-	-	-	-	-	24	2	6
-	-	-	-	-	-	-	-	26	2	<5
-		-	-	-	-	-	-	28	2	<5
	-			-	-	-	-	30	2	<5
-	-	-	-							
-	-	-	-	-	-	-	-	32	2	9
	-		-	-	-	-	-	32 34	2	9 <5
-	-	-	-	-			-	32	2	9
	- - - -	- - - -		- - - -	- - -			32 34 36 38 0	2 2 2 1 10	9 <5 6 5
- - - - - VKAC0066	- - - - - - AC	- - - - - 266250	- - - - - 6714005	- - - - - 428	- - - - 39	- - - - 0	- - - - - -90	32 34 36 38 0	2 2 2 1 10 2	9 <5 6 5 0 <5
- - - - - VKAC0066	- - - - - - AC	- - - - - 266250	- - - - - 6714005	- - - - 428	- - - 39	- - - 0	- - - - - -90	32 34 36 38 0 12	2 2 2 1 10 2	9 <5 6 5 0 <5 7
- - - - - VKAC0066	- - - - - - AC	- - - - - - 266250	- - - - - 6714005	- - - - 428	- - - 39 -	- - - 0	- - - - -90	32 34 36 38 0 12 14	2 2 2 1 10 2 2 2	9 <5 6 5 0 <5 7
- - - - - VKAC0066	- - - - - - AC	- - - - - 266250	- - - - - 6714005	- - - - 428	- - - 39	- - - 0	- - - - - -90	32 34 36 38 0 12	2 2 2 1 10 2	9 <5 6 5 0 <5 7
- - - - - VKAC0066	- - - - - AC		- - - - - 6714005 -	- - - - 428 -	39	- - - - 0	- - - - -90	32 34 36 38 0 12 14 16 18 20 22	2 2 2 1 10 2 2 2 2 2 2	9 <5 6 5 0 <5 7 7 6 <5 12 9
		266250	6714005	- - - - - 428 - - -	39		- - - - -90 - -	32 34 36 38 0 12 14 16 18 20 22 24	2 2 2 1 10 2 2 2 2 2 2 2 2 2	9 <5 6 5 0 <5 7 6 <5 12 9
		266250	- - - - - 6714005 - - - - -	- - - - 428 - - - - -	39	- 0	- - - - - - - - - - - - - - - - - - -	32 34 36 38 0 12 14 16 18 20 22 24 26	2 2 1 10 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	9 <5 6 5 0 <5 7 6 6 <5 12 9 11
			6714005		39		- - - - - - - - - - - - - - - - - - -	32 34 36 38 0 12 14 16 18 20 22 24 26 28	2 2 2 1 10 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	9 <5 6 5 0 <5 7 6 <5 12 9 11 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5
			- - - - - 6714005 - - - - -	- - - - 428 - - - - -	39	- 0	- - - - - - - - - - - - - - - - - - -	32 34 36 38 0 12 14 16 18 20 22 24 26 28 30	2 2 1 10 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	9 <5 6 5 0 <5 7 6 <5 12 9 11 11 <5 <5 <5
- - - - - - - - - - - - - - - - - - -			6714005		39		- - - - - - - - - - - - - - - - - - -	32 34 36 38 0 12 14 16 18 20 22 24 26 28	2 2 2 1 10 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	9 <5 6 5 0 <5 7 6 <5 12 9 11 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5 <5
			6714005		39		- - - -90 - - - - - - -	32 34 36 38 0 12 14 16 18 20 22 24 26 28 30 32	2 2 1 10 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	9 <5 6 5 0 <5 7 6 <5 12 9 11 <5 <5 <5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
- VKAC0067	- AC	266290	6714001	430	39	- 0	- -90	13	12 2	0 5
	- AC	-	-	-	-	-	-70	15	2	<5
-	-	-	-	-	-	-	-	17	2	8
-	-	-	-	-	-	-	-	19	2	<5
-	-	-	-	-	-	-	-	21 23	2	<5 <5
-	-	-	-	-	-	-	-	25	2	19
-	-	-	-	-	-	-	-	27	2	<5
_	-	-	-	-	-	-	-	29	2	6
-	-	-	-	-	-	-	-	31 33	2	16 <5
-	-	-	-	-		-	-	35	2	6
-	-	-	-	-	-	-	-	37	1	7
-	-	-	-	-	-	-	-	38	1	<5
- VKAC0068	- AC	266352	6714809	- 427	29	- 0	- -90	0	13 2	0 5
- VKACUU68	AC -	-	-	- 427	-	-	-90	2	2	14
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	16
-	-	-	-	-	-	-	-	8	2	5
-	-	-	-	-	-	-	-	10 12	2	<5 <5
-	-	-	-	-	-	-	-	14	2	<5 <5
-	-	-	-	-		-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 24	2	<5 8
-	-	-	-	-	-	-	-	26	2	10
-	-	-	-	-	-	-	-	28	1	<5
VKAC0069	AC	266302	6714801	432	33	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	5 <5
-	-	-	-	-	-	-	-	10	2	5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	9
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-		-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5
- VKAC0070	- AC	266253	6714814	434	36	- 0	-90	32 0	1 2	<5 <5
-	-	-	-	-	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 12	2	<5 <5
	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	2	<5 <5
-	-	-	-	-	-	-	-	34 35	1	<5 <5
VKAC0071	AC	266203	6714821	435	27	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8 10	2 2	<5 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5 <5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
-	-	-	-	-	-	-	-	26	1	7
VKAC0072	AC	266150	6714806	436	21	0	-90	0	2	7
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	1	<5

Hole ID	Hole Type	East (m) MGA94	North (m)	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From	Downhole Length	Au ppb
VKAC0073	AC	266101	MGA94 6714803	437	14	0	-90	(m) 0	(m) 2	11
-	-	-	-	-	-	-	-	2	2	14
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6 8	2	<5 6
-	-	-	-	-	-	-	-	10	2	5
-	-	-	-	-	-	-	-	12	1	<5
-	-	-	-	-	-	-	-	13	1	<5
VKAC0074	AC	266052	6714796	433	12	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	<5 6
-	-	-	-	-	-	-	-	6	2	7
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	1	<5
- VKAC0075	- AC	266002	- 6714786	430	- 12	- 0	- -90	11 0	1 2	<5 15
- VKAC0075	AC -	- 200002	-	- 430	-	-	-90	2	2	5
-	-	-	-	-	-	-	-	4	2	5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	8
-	-	-	-	-	-	-	-	10 11	1	7 5
- VKAC0076	- AC	265947	6714790	435	- 12	- 0	- -90	0	2	11
	-	-	-	-	-	-	- 70	2	2	9
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 11	1	7 <5
VKAC0077	AC	265892	6714792	432	7	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	5
-	-	-	-	-	-	-	-	4	1	5
-	-	-	-	-	-	-	-	5	1	<5
- VKAC0079	- AC	245040	- 4714900	432	-	-	- 00	6	1	0
VKAC0078	AC -	265849	6714800	- 432	3	- 0	-90 -	2	<u>2</u> 1	12 6
VKAC0079	AC	266397	6715200	431	30	0	-90	0	2	9
-	-	-	-	-	-	-		2	2	<5
-	-	-	-	-	-	-	-	4	2	13
-	-	-	-	-	-	-	-	6	2	10
-	-	-	-	-	-	-	-	8 10	2	<5 <5
	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-		-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	5
-	-	-	-	-	-	-	-	28	1	<5
-	-	-	- (745040	- 422	-	-	-	29	1	<5
VKAC0080	AC -	266350	6715210	433	33	0	-90	2	2	6
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	6
-	-	-	-	-	-	-	-	22 24	2	5
-	-	-	-	-	-	-	-	26	2	<5 <5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	1	<5
VKAC0081	AC	266299	6715215	436	24	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14 22	<u>2</u> 1	<5 <5
-	-	-	-	-	-	-	-	16	2	<5 <5
-	-	-	-	-		-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	23	1	<5
VKAC0082	AC	266249	6715218	437	6	0	-90	0	2	5
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	5	1	<5
VKAC0083	AC	266199	6715215	435	8	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 7	1	5
- VKAC0084	- AC	266152	6715220	435	7	- 0	- -90	0	2	0 5
¥1010004	7.0	200132	07 10220	700	· /	V	-70	U		

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
- \/KAC009E	- ^C	244102	- 471E201	- 427	- 4	-	- 00	6	1 2	<5 <5
VKAC0085	AC -	266102	6715201	427	-	-	-90 -	2	2	<5 <5
-	-	-	-	-	-	-	-	4	1	<5
-	-	-	-	-	-	-	-	5	1	<5
VKAC0086	AC	266049	6715203	434	10	0	-90	2	2	5 <5
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	<5
- \//\ \ \ C0007	- A.C	- 2//002	- (715100	- 427	- 10	-	-	9	1	<5
VKAC0087	AC -	266002	6715199	436	13 -	-	-90 -	2	2	9 <5
-	-	-	-	-	-	-	-	4	2	5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 12	<u>2</u> 1	<5 7
VKAC0088	AC AC	265952	6715205	438	8	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	1	<5 <5
- VKAC0089	- AC	266395	6715594	445	- 45	- 0	- -90	7	1 2	<5 7
- VRAC0007	-	-	-	-	-	-	-70	2	2	6
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 12	2	<5 <5
-	-	-	-	-	-	-	-	14	2	<5 <5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	6
-	-	-	-	-	-	-	-	22 24	2	5 6
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-		-	28	2	9
-	-	-	-	-	-	-	-	30	2	6
-	-	-	-	-	-	-	-	32	2	<5
-	-	-	-	-	-	-	-	34	2	<5
-	-	-	-	-	-	-	-	36 38	2	9 5
	-	-	-	-	-	-	-	40	2	6
-	-	-	-	-	-	-	-	42	2	<5
-	-	-	-	-	-	-	-	44	1	<5
VKAC0090	AC	266350	6715580	443	39	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	14
-	-	-	-	-	-	-	-	4 6	2	9 7
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	5
-	-	-	-	-	-	-	-	12	2	10
-	-	-	-	-	-	-	-	14	2	9
-	-	-	-	-	-	-	-	16 18	2	5 <5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28 30	2	<5 <5
-	-	-	-	-	-	-	-	32	2	<5 <5
-	-	-	-	-	-	-	-	34	2	<5
-	-	-	-	-	-	-	-	36	2	<5
- VKA C0001	-	-	- /715577	- 441	- 2/	-	-	38	1	<5
VKAC0091	AC	266302	6715577	441	36	0	-90	2	2	13 7
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14 16	2	8 <5
-	-	-	-	-	-	-	-	18	2	6
-	-	-	-	-	-	-	-	20	2	5
-	-	-	-	-	-	-	-	22	2	8
-	-	-	-	-	-	-	-	24	2	6
-	-	-	-	-	-	-	-	26	2	8 9
-	-	-	-	-	-	-	-	28 30	2	10
-	-	-	-	-	-	-	-	32	2	9
-	-	-	-	-	-	-	-	34	1	11
-	-	-	-	-	-	-	-	35	1	<5
VKAC0092	AC	266253	6715570	442	36	0	-90	0	2	21
-	-	-	-	-	-	-	-	2	2	18 10
-	-	-	-	-	-	-	-	6	2	11
-	-	-	-	-	-	-	-	8	2	10

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	10	2	9
-	-	-	-	-	-	-	-	12	2	14
-	-	-	-	-	-	-	-	14 16	2	12 15
-	-	-	-	-	-	-	-	18	2	13
-	-	-	-	-	-	-	-	20	2	11
-	-	-	-	-	-	-	-	22	2	10
-	-	-	-	-	-	-	-	24	2	7
-	-	-	-	-	-	-	-	26 28	2	10 <5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	2	8
-	-	-	-	-	-	-	-	34	1	<5
- VKAC0093	- AC	266202	- 6715573	440	22	- 0	- -90	35 0	1 2	<5 11
	-	-	-	-	-	-	-70	2	2	10
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	6	2	11
-	-	-	-	-	-	-	-	8 10	2	14 18
-	-	-	-	-	-	-	-	12	2	14
-	-	-	-	-	-	-	-	14	2	12
-	-	-	-	-	-	-	-	16	2	10
-	-	-	-	-	-	-	-	18	2	11
-	-	-	-	-	-	-	-	20 21	1	<5 <5
VKAC0094	AC	266151	6715572	440	15	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	8
-	-	-	-	-	-	-	-	8 10	2	7
-	-	-	-	-	-	-	-	12	2	5
-	-	-	-	-	-	-	-	14	1	<5
VKAC0095	AC	266103	6715585	441	9	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	2	10 9
_	-	-	-	-	-	-	-	6	2	11
-	-	-	-	-	-	-	-	8	1	<5
VKAC0096	AC	266051	6715600	443	6	0	-90	0	2	23
-	-	-	-	-	-	-	-	2	<u>2</u> 1	8 6
-	-	-	-	-	-	-	-	5	1	5
VKAC0097	AC	266002	6715613	445	6	0	-90	0	2	13
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4 5	1	7 <5
VKAC0098	AC	265950	6715605	448	6	0	-90	0	2	15
-	-	-	-	-	-	-	-	2	2	10
-	-	-	-	-	-	-	-	4	1	8
- VKAC0099	- AC	265902	- 6715619	449	9	- 0	- -90	5 0	1 2	<5 13
-	-	-	-	-	-	-	-	2	2	8
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6 8	1	8
VKAC0100	AC	265848	6715614	449	9	0	-90	0	2	<5 25
-	-	-	-	-	-	-	-	2	2	11
-	-	-	-	-	-	-	-	4	2	7
-	-	-	-	-	-	-	-	6	2	9
- VKAC0101	- AC	265802	- 6715615	448	- 18	- 0	- -90	8	2	64 14
-	-	-	-	-	-	-	- 70	2	2	10
-	-	-	-	-	-	-	-	4	2	8
-	-	-	-	-	-	-	-	6	2	7
-	-	-	-	-	-	-	-	8 10	2	7
-	-	-	-	-	-	-	-	12	2	11
-	-	-	-	-	-	-	-	14	2	10
-	-	-	-	-	-	-	-	16	1	6
- VKAC0102	- ^C	245749	- 4715411	- 425	- 11	-	- 00	17 0	1 2	<5 11
VKAC0102	AC -	265748	6715611	435	11 -	-	-90 -	2	2	11 8
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	9
-	-	-	-	-	-	-	-	8	2	<5
- VKAC0103	- AC	265699	- 6715584	440	- 4	- 0	- -90	10 0	2	<5 14
	-	-	-	-	-	-	-70	2	1	10
-	-	-	-	-	-	-	-	3	1	8
VKAC0104	AC	265648	6715584	443	2	0	-90	0	1	15
- VKAC0105	- AC	265599	- 6715584	- 447	3	- 0	- -90	0	2	<5 17
-	-	-	-	-	-	-	-70	2	1	<5
VKAC0106	AC	265548	6715590	452	7	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	7
-	-	-	-	-	-	-	-	4 6	2	9 <5
VKAC0107	AC	265496	6715595	457	4	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	1	14
- VKAC0108	- AC	265451	- 6715593	- 460	- 10	- 0	- -90	3	1 2	5 11
VINACUTU8	AC	Z0040 I	07 10073	400	10	U	-70	U		111

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	2	2	<5 6
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	9	1	9 5
VKAC0109	AC	265401	6715605	464	4	0	-90	0	2	19
-	-	-	-	-	-	-	-	2	1	8
- VKAC0110	- AC	265467	- 6715990	460	- 4	- 0	- -90	3	1 2	<5 11
-	-	-	-	-	-	-	-70	2	1	7
-	-	-	- (745007	-	-	-	-	3	1	<5
VKAC0111	AC -	265502	6715987	461	-	-	-90 -	2	<u>2</u> 1	14 11
-	-	-	-	-	-	-	-	3	1	<5
VKAC0112	AC -	265552	6715988	457	-	- 0	-90 -	0	2	10 6
-	-	-	-	-	-	-	-	4	1	7
-	-	-	-	-	-	-	-	5	1	<5
VKAC0113	AC -	265599	6716000	453	7	-	-90 -	0 2	2	11 8
-	-	-	-	-	-	-	-	4	2	5
- VKAC0114	- AC	265650	- 6715997	- 451	- 6	- 0	- -90	6	1 2	5 6
- VNACU114	AC -	200000	- 6/1599/	451	-	-	-90	2	2	5
-	-	-	-	-	-	-	-	4	1	<5
- VKAC0115	- AC	265701	- 6716012	- 449	7	- 0	- -90	5	1 2	<5 <5
-	-	-	-	-	-	-	-70	2	2	6
-	-	-	-	-	-	-	-	4	2	<5
- VKAC0116	- AC	265749	- 6716016	- 447	7	- 0	- -90	6	1 2	<5 11
-	-	-	-	-	-	-	-	2	1	8
-	-	-	-	-	-	-	-	3	3	<5 0
VKAC0117	AC	265800	6716015	444	9	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	5
-	-	-	-	-	-	-	-	6	2	<5 7
-	-	-	-	-		-	-	8	1	<5
VKAC0118	AC	265849	6716015	444	15	0	-90	0	2	19
-	-	-	-	-	-	-	-	2	2	7 6
-	-	-	-	-	-	-	-	6	2	5
-	-	-	-	-	-	-	-	8 10	2	6 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	1	<5
VKAC0119	AC -	265903	6715996 -	444	20	0 -	-90 -	0 2	2	18 11
-	-	-	-	-	-	-	-	4	2	10
-	-	-	-	-	-	-	-	6	2	12
-	-	-	-	-	-	-	-	10	2	11 5
-	-	-	-	-	-	-	-	12	2	14
-	-	-	-	-	-	-	-	14 16	2	11 10
-	-	-	-	-	-	-	-	18	1	11
-	- 0	-	- (745000	-	-	-	-	19	1	14
VKAC0120 -	AC -	265951	6715999	445	12	0 -	-90 -	0 2	2	18 8
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6 8	2	11 14
-	-	-	-	-	-	-	-	10	1	9
- VKAC0121	-	245000	- 6715999	- 445	- 9	-	- 90	11	1	5 15
VKAC0121 -	AC -	265999	6/15999	445	-	0 -	-90 -	2	2	15 12
-		-	-	-	-	-	-	4	2	13
-	-	-	-	-	-	-	-	6 8	<u>2</u> 1	9 <5
VKAC0122	AC	266049	6715997	444	9	0	-90	0	2	20
-	-	-	-	-	-	-	-	2	2	11
-	-	-	-	-	-	-	-	6	2	10 11
-	-	-	-	-	-	-	-	8	1	<5
VKAC0123	AC	266099	6716004	444	18	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	18 8
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8 10	2	<5 9
-		-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	9
-	-	-	-	-	-	-	-	16 17	1	10 <5
VKAC0124	AC	266149	6716001	443	12	0	-90	0	2	28
-	-	-	-	-	-	-	-	2	2	11
-	-	-	-	-	-	-	-	6	2	9
-	-	-	-	-	-	-	-	8	2	7
-	-	-	-	-	-	-	-	10 11	1	9 <5
-	-	1 - 1		-	1 - 1			1.1	1 1	< 0

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
VKAC0125	AC	266203	6715993	443	12	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	11
-	-	-	-	-	-	-	-	4	2	12
-	-	-	-	-	-	-	-	6 8	2	6 8
-	-	-	-	-	-	-	-	10	1	<5
-	-	-	-	-	-	-	-	11	1	<5
VKAC0126	AC	266253	6715994	443	12	0	-90	2	2	20 15
-	-	-	-	-	-	-	-	4	2	10
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	9
-	-	-	-	-	-	-	-	10 11	1	8 <5
VKAC0127	AC	266300	6715986	443	8	0	-90	0	2	27
-	-	-	-	-	-	-	-	2	2	15
-	-	-	-	-	-	-	-	6	2	7 9
-	-	-	-	-	-	-	-	7	1	<5
VKAC0128	AC	266352	6715991	444	10	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	13
-	-	-	-	-	-	-	-	6	2	11 9
-	-	-	-	-	-	-	-	8	1	6
-	-	-	-	-	-	-	-	9	1	<5
VKAC0129	AC	266401	6715997	442	7	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	2	14 8
-	-	-	-	-	-	-	-	6	1	<5
VKAC0130	AC	266445	6715999	442	36	0	-90	0	2	15
-	-	-	-	-	-	-	-	2	2	8
-	-	-	-	-	-	-	-	4 6	2	11 6
_	-	-	-	-	-	-	-	8	2	9
_	-	-	-	-	-	-	-	10	2	5
-	-	-	-	-	-	-	-	12	2	10
-	-	-	-	-	-	-	-	14 16	2	5 9
-	-	-	-	-	-	-	-	18	2	6
-	-	-	-	-	-	-	-	20	2	7
-	-	-	-	-	-	-	-	22	2	8
-	-	-	-	-	-	-	-	24 26	2	5 7
-	-	-	-	-	-	-	-	28	2	6
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	2	<5
-	-	-	-	-	-	-	-	34 35	1	8 <5
VKAC0131	AC	266445	6716411	440	22	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	2	10
-	-	-	-	-	-	-	-	4	2	5
-	-	-	-	-	-	-	-	6 8	2	8
_	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	9
-	-	-	-	-	-	-	-	14	2	6
-	-	-	-	-	-	-	-	16 18	2	5 6
_	-	-	-	-	-	-	-	20	1	<5
-	-	-	-	-	-	-	-	21	1	<5
VKAC0132	AC	266401	6716397	437	8	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2 1	8 9
-	-	-	-	-	-	-	-	5	1	<5
-	-	-	-	-	-	-	-	6	2	0
VKAC0133	AC	266352	6716392	435	8	0	-90	0	2	<5 <5
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	1	<5
-	-	-	- (74,00)	-	-	-	-	7	1	<5
VKAC0134	AC	266299	6716386 -	436	8	0	-90 -	2	2	12 8
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	1	11
-	-	-	- (74,00)	-	-	-	-	7	1	<5
VKAC0135	AC -	266253	6716386	437	-	0	-90 -	2	2	<5 <5
-	-	-	-	-	-	-	-	4	1	<5
-	-	-	-	-	-	-	-	5	1	<5
VKAC0136	AC	266200	6716381	439	11	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5 <5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	- (74 (070	-	-	-	-	10	1	<5
VKAC0137	AC -	266153	6716379	440	9	0	-90 -	2	2	<5 <5
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	- (74/255	-	-	-	-	8	1	<5
VKAC0138	AC -	266099	6716355	441	6	0	-90 -	2	2	<5 <5
	-	1 - 1	-	-	-	-				50

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	5	1	<5 <5
VKAC0139	AC	266054	6716351	442	9	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	13
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-	-	-	-	-	-	-	6 8	2	<5
VKAC0140	AC	265997	6716357	443	9	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	6	2	<5 <5
-	-	-	-	-	-	-	-	8	1	5
VKAC0141	AC	265952	6716358	444	15	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	7
-	-	-	-	-	-	-	-	6	2	5 <5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	<u>2</u> 1	<5 5
VKAC0142	AC	265902	6716360	444	7	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	<5
- VKAC0143	- AC	265852	- 6716367	- 446	9	- 0	- -90	6	1 2	<5 12
-	-	-	-	-	-	-	-70	2	2	14
-	-	-	-	-	-	-	-	4	2	10
-	-	-	-	-	-	-	-	6 8	<u>2</u> 1	8 <5
- VKAC0144	AC	265800	6716358	445	- 8	0	-90	0	2	<5 15
-	-	-	-	-	-	-	-	2	2	18
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	7	1	<5 6
VKAC0145	AC	265750	6716384	443	15	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	14
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	9 7
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	8
- VKAC0146	- AC	265700	- 6716393	- 444	9	- 0	- -90	14 0	1 2	<5 14
VKACU146	AC -	205700	- 0/10393	- 444	-	-	-90	2	2	16
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	6	2	6
- VKAC0147	- AC	265648	6716385	- 442	10	- 0	- -90	8	1 2	<5 11
- VRAC0147	- AC	-	-	-	-	-	-70	2	2	18
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	5
-	-	-	-	-	-	-	-	8	1	<5 <5
VKAC0148	AC	265601	6716364	443	12	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	6	2	19 <5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	1	<5
- \/KAC0140	- A.C	- 0/5551	- (71/2//	- 444	- /	-	-	11	1	5
VKAC0149 -	AC -	265551	6716366	- 444	6	0 -	-90 -	2	2	9 <5
-	-	-	-	-	-	-	-	4	1	<5
- V/// A CO1 FO	-	- 2/5500	- (71/2/0	- 44/	-	-	-	5	1	5
VKAC0150	AC -	265500	6716368	446	4	0 -	-90 -	0	2	17 <5
-	-	-	-	-	-	-	-	3	1	6
VKAC0151	AC	265448	6716371	447	10	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	7 <5
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	1	<5
- V/// A CO1 F 2	-	-	- (71/201	- 440	-	-	-	9	1	6
VKAC0152 -	AC -	265402	6716381	448	-	0 -	-90 -	0 2	<u>2</u> 1	9 <5
-	-	-	-	-	-	-	-	3	1	6
VKAC0153	AC	265352	6716402	450	7	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	1	25
VKAC0154	AC	265302	6716407	454	13	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	15
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-	-	-	-	-	-	-	8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	- (74 / 404	-	-	-	-	12	1	8
VKAC0155	AC -	265252	6716421	457	13	-	-90 -	0 2	2	14 6
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	10	2	8
- VKAC0156	- AC	- 265202	- 6716410	- 459	- 15	- 0	- -90	12 0	1 2	11 8
- VKACU136	-	-	-	437	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
- VKAC0157	- AC	- 265152	- 6716408	460	- 6	- 0	- -90	14 0	1 2	9
- VICACU137	- AC	-	-	-	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	1	8
- VKAC0158	- AC	265103	- 6716403	- 459	- 15	- 0	- -90	5 0	1 2	0 <5
-	-	-	-	-	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 6
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	23
- VKAC0159	- AC	265057	- 6716413	449	7	- 0	- -90	14 0	2	10 <5
- VICACU137	AC -	-	-	-	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
- VKAC0160	- AC	- 264998	- 6716416	451	- 10	- 0	- -90	6	1 2	<5 6
- VKACU160	-	-	-	431	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	29
-	-	-	-	-	-	-	-	6 8	<u>2</u> 1	<5 <5
-	-	-	-		-	-	-	9	1	<5
VKAC0161	AC	264950	6716411	452	10	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	<5 5
-	-	-	-	-	-	-	-	6	2	9
-	-	-	-	-	-	-	-	8	1	9
- \/KAC0142	- AC	- 264898	- 4714200	- 454	- 10	- 0	- -90	9	1 2	23
VKAC0162	AC -	204898	6716390	434	10	-	-90	2	2	20 9
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	6	2	<5 8
-	-	-	-	-	-	-	-	8 9	1	<5
VKAC0163	AC	264853	6716402	455	4	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	1	6
VKAC0164	AC	264801	6716399	457	- 4	- 0	-90	3	1 2	<5 6
-	-	-	-	-	-	-	-	2	1	5
-	-	- 0/4740	- (74/40/	- 450	-	-	-	3	1	7
VKAC0165	AC -	264749	6716406	459	4	- 0	-90 -	2	<u>2</u> 1	<5 <5
-	-	-	-	-	-	-	-	3	1	<5
VKAC0166	AC	264700	6716424	462	10	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2	11 6
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	9
- VKAC0167	- AC	- 264654	- 6716474	463	- 10	- 0	- -90	9	1 2	<5 11
-	-	-	-	-	-	-	-	2	2	11
-	-	-	-	-	-	-	-	4	2	5
-	-	-	-	-	-	-	-	6 8	<u>2</u> 1	6 <5
-	-	-	-	-	-	-	-	9	1	<5
VKAC0168	AC	264599	6716468	466	10	0	-90	0	2	15
-	-	-	-	-	-	-	-	2	2	10 6
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	<5
- VKAC0169	- AC	264549	- 6716430	467	- 4	- 0	- -90	9	1 2	<5 9
-	-	-	-	-	-	-	-	2	1	<5
- \//\/ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \	-	- 2/4504	- (71/400	- 470	-	-	-	3	1	<5
VKAC0170	AC -	264501	6716408	470	4	0 -	-90 -	2	<u>2</u> 1	10 26
-	-	-	-	-	-	-	-	3	1	<5
VKAC0171	AC	264461	6716796	468	4	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	1	11 9
VKAC0172	AC	264502	6716796	466	4	0	-90	0	2	50
-	-	-	-	-	-	-	-	2	1	30
- VK∆C0173	-	- 26/1551	- 6716789	- 161	- 4	-	-90	3	1	17 38
VKAC0173	AC -	264551	6716789	464	-	-	-90 -	2	<u>2</u> 1	38 8
-	-	-	-	-	-	-	-	3	1	13
VKAC0174	AC	264604	6716793	462	4	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	1 1	8
VKAC0175	AC	264650	6716800	460	4	0	-90	0	2	42
-	-	-	-	-	-	-	-	2	1	38
-	-	-	-	-	-	-	-	3	1	8

Hole ID	Hole Type	East (m) MGA94	North (m)	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From	Downhole Length	Au ppb
VKAC0176	AC	264698	MGA94 6716780	460	4	0	-90	(m)	(m)	14
-	-	-	-	-	-	-	-	2	1	<5
- VKAC0177	- AC	264748	- 6716774	- 459	- 4	- 0	- -90	3	1 2	6 16
-	-	-	-	-	-	-	-	2	1	<5
- VKAC0178	- AC	264798	- 6716781	- 456	- 4	- 0	- -90	3	2	8 28
	-	-	-	-	-	-	-70	2	1	9
- VKAC0179	- AC	264847	- 6716781	- 456	- 4	- 0	- -90	3	1 2	15 16
- VNACU179	AC -	-	-	-	-	-	-70	2	1	11
- VKAC0180	- AC	264898	- 6716778	- 455	- 4	- 0	- -90	3	1 2	11 11
- VKACU18U	AC -	-	-	455	-	-	-90	2	1	6
-	-	-	-	-	-	-	-	3	1	11
VKAC0181	AC -	264947	6716773 -	455 -	7	0 -	-90 -	0 2	2	11 12
-	-	-	-	-	-	-	-	4	2	<5
- VKAC0182	- AC	264998	- 6716772	- 454	7	- 0	- -90	6	1 2	23 10
-	-	-	-	-	-	-	-	2	2	41
-	-	-	-	-	-	-	-	6	2	14 9
VKAC0183	AC	265049	6716767	453	13	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	10
-	-	-	-	-	-	-	-	6	2	<5 19
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 12	<u>2</u> 1	6 10
VKAC0184	AC	265097	6716769	451	10	0	-90	0	2	13
-	-	-	-	-	-	-	-	2	2 2	<5 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	8
- VKAC0185	- AC	265148	- 6716766	453	- 4	- 0	- -90	9	2	9 53
-	-	-	-	-	-	-	-	2	1	23
- VKAC0186	- AC	- 265198	- 6716774	- 458	7	- 0	- -90	3	1 2	16 10
- VNACU100	AC -	-	-	-	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	6
VKAC0187	AC	265248	6716789	464	7	- 0	-90	6	1 2	11 6
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	6	<u>2</u> 1	<5 8
VKAC0188	AC	265300	6716791	453	4	0	-90	0	2	<5
-	-	-	-	-	-	-	-	3	1	<5 7
VKAC0189	AC	265350	6716794	453	4	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	1	<5 5
VKAC0190	AC	265398	- 6716793	453	6	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	5	1	<5 8
VKAC0191	AC	265450	6716795	454	4	0	-90	0	2	10
-	-	-	-	-	-	-	-	3	1	<5 20
VKAC0192	AC	265498	6716790	458	4	0	-90	0	2	<5
-	-	-	-	-	-	-	-	3	1	<5 5
VKAC0193	AC	265548	6716792	461	4	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	1	<5 11
- VKAC0194	AC	265598	6716785	466	4	- 0	-90	0	2	11 <5
-	-	-	-	-	-	-	-	2	1	7
- VKAC0195	- AC	265650	- 6716789	- 463	- 4	- 0	- -90	3	1 2	<5 <5
-	-	-	-	-	-	-	-	2	1	<5
- VKAC0196	- AC	- 265702	- 6716796	- 462	- 4	- 0	- -90	3	1 2	5 10
-	-	-	-	-	-	-	-	2	1	<5
- VKAC0107	- ^C	265749	- 4714705	- 460	- 1	-	- 90	3	1 2	7
VKAC0197 -	AC -	265748	6716795 -	460	-	-	-90 -	2	1	10 13
-	-	-	-	-	-	-	-	3	1	5
VKAC0198	AC -	265800	6716792	456	-	-	-90 -	2	<u>2</u> 1	16 17
-	-	-	-	-	-	-	-	3	1	<5
VKAC0199	AC	265853	6716784	457	7	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	11 22
-	-	-	-	-	-	-	-	6	1	<5
VKAC0200	AC -	265898	6716785	457	-	-	-90 -	2	2	10 8
-	-	-	-	-	-	-	-	3	1	9
VKAC0201	AC -	265948	6716791	451 -	4	0	-90 -	2	<u>2</u> 1	13 12
	-	-	-	-	-	-	-	3	1	<5
VKAC0202	AC	265998	6716792	448	4	0	-90	0	2	10

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	2	1	<5
-	-	-	- (74 (700	- 441	- 10	-	-	3	1	5
VKAC0203	AC -	266051	6716790	- 441	10	-	-90 -	2	2	37 10
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	6	2	11
-	-	-	-	-	-	-	-	8	1	<5 <5
VKAC0204	AC	266099	6716790	441	9	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	12
-	-	-	-	-	-	-	-	4	2	10
-	-	-	-	-	-	-	-	6 8	<u>2</u> 1	16 5
VKAC0205	AC	266148	6716792	439	9	0	-90	0	2	21
-	-	-	-	-	-	-	-	2	2	18
-	-	-	-	-	-	-	-	4	2	7
-	-	-	-	-	-	-	-	6 8	2	<5 8
VKAC0206	AC	266198	6716780	440	9	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	8 5
VKAC0207	AC	266248	6716786	441	9	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	8
- VKAC0208	- AC	266299	- 6716788	440	- 6	- 0	- -90	8	1 2	<5 11
	- AC	-	-	-	-	-	-70	2	2	7
-	-	-	-	-	-	-	-	4	1	6
-	-	- 2//252	- (71/701	- 420	- /	-	-	5	1	<5 10
VKAC0209	AC -	266352	6716791	439	6	0 -	-90 -	2	2	10 6
_	-	-	-	-	-	-	-	4	1	<5
-	-	-	-	-	-	-	-	5	1	<5
VKAC0210	AC	266398	6716795	436	6	0	-90	0	2	7
-	-	-	-	-	-	-	-	2	2	<5 6
	-	-	-	-	-	-	-	5	1	<5
VKAC0211	AC	266449	6716799	440	9	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	1	<5 5
VKAC0212	AC	266502	6716811	442	6	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	1	<5
- VKAC0213	- AC	266101	- 6713595	435	- 27	- 0	- -90	5	1 2	5 6
-	-	-	-	-	-	-	-70	2	2	10
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	6
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	1	<5
VKAC0214	AC	266052	6713605	434	30	0	-90	6	2	6
-	-	-	-	-	-	-	-	8 10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-		-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18 20	2	6 <5
-	-	-	-	-	-	-	-	22	2	<5 <5
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	1	<5
-	-	-	-	-	-	-	-	29 0	6	<5 0
VKAC0215	AC	265997	6713614	433	36	0	-90	5	2	9
-	-	-	-	-	-	-	-	7	2	<5
-	-	-	-	-	-	-	-	9	2	<5
-	-	-	-	-	-	-	-	11 13	2	<5 <5
-	-	-	-	-	-	-	-	13	2	<5 5
-	-	-	-	-	-	-	-	17	2	<5
-	-	-	-	-	-	-	-	19	2	<5
-	-	-	-	-	-	-	-	21	2	6
-	-	-	-	-	-	-	-	23 25	2	5 8
-	-	-	-	-	-	-	-	27	2	6
-	-	-	-	-	-	-	-	29	2	9
-	-	-	-	-	-	-	-	31	2	6
-	-	-	-	-	-	-	-	33	2	5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	WGA94	-	-	-	-	35	1	<5
_	-	-	-	-	-	-	-	0	5	0
VKAC0216	AC	265950	6713606	433	30	0	-90	5	2	<5
-	-	-	-	-	-	-	-	7	2	7 9
-	-	-	-	-	-	-	-	11	2	8
-	-	-	-	-	-	-	-	13	2	9
-	-	-	-	-	-	-	-	15 17	2	5
-	-	-	-	-	-	-	-	17	2	6 <5
-	-	-	-	-	-	-	-	21	2	<5
-	-	-	-	-	-	-	-	23	2	8
-	-	-	-	-	-	-	-	25 27	2	<5
-	-	-	-	-	-	-	-	29	1	6 5
-	-	-	-	-	-	-	-	0	5	0
VKAC0217	AC	265902	6713613	434	24	0	-90	5	2	6
-	-	-	-	-	-	-	-	7	2	5 <5
	-	-	-	-	-	-	-	11	2	7
-	-	-	-	-	-	-	-	13	2	<5
-	-	-	-	-	-	-	-	15	2	6
-	-	-	-	-	-	-	-	17	2	<5
-	-	-	-	-	-	-	-	19 21	2	7
-	-	-	-	-	-	-	-	23	1	<5
-	-	-	-	-	-	-	-	0	5	0
VKAC0218	AC	265852	6713621	437	30	0	-90	3	2	19
-	-	-	-	-	-	-	-	5 7	2	<5 6
-	-	-	-	-	-	-	-	9	2	10
-	-	-	-	-	-	-	-	11	2	7
_	-	-	-	-	-	-	-	13	2	6
-	-	-	-	-	-	-	-	15 17	2	5
-	-	-	-	-	-	-	-	19	2	7
-	-	-	-		-	-	-	21	2	6
-	-	-	-	-	-	-	-	23	2	5
-	-	-	-	-	-	-	-	25	2	5
-	-	-	-	-	-	-	-	27 29	1	<5 <5
-	-	-	-	-	-	-	-	0	3	0
VKAC0219	AC	265803	6713623	439	33	0	-90	3	2	11
-	-	-	-	-	-	-	-	5	2	8
-	-	-	-	-	-	-	-	7	2	5 <5
-	-	-	-	-	-	-	-	11	2	6
-	-	-	-	-	-	-	-	13	2	6
_	-	-	-	-	-	-	-	15	2	<5
-	-	-	-	-	-	-	-	17 19	2	6 5
-	-	-	-	-	-	-	-	21	2	6
-	-	-	-		-	-	-	23	2	6
-	-	-	-	-	-	-	-	25	2	5
-	-	-	-	-	-	-	-	27	2	7
-	-	-	-	-	-	-	-	29 31	<u>2</u> 1	6 <5
-	-	-	-	-	-	-	-	32	1	<5
-	-	-		-	-	-	-	0	3	0
VKAC0220	AC	265751	6713623	438	30	0	-90	4	2	8
-	-	-	-	-	-	-	-	6 8	2	6 5
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	8
-	-	-	-	-	-	-	-	14	2	6
-	-	-	-	-	-	-	-	16 18	2	<5 <5
-	-	-	-	-	-	-	-	20	2	6
-	-	-	-	-	-	-	-	22	2	7
-	-	-	-	-	-	-	-	24	2	9
-	-	-	-	-	-	-	-	26 28	2	<5 7
-	-	-	-	-	-	-	-	28	1	<5
-	-	-	-	-	-	-	-	0	4	0
VKAC0221	AC	265698	6713624	435	27	0	-90	4	2	6
-	-	-	-	-	-	-	-	6	2	7
-	-	-	-	-	-	-	-	8 10	2	6
-	-	-	-	-	-	-	-	12	2	9
-	-	-	-	-	-	-	-	14	2	9
-	-	-	-	-	-	-	-	16	2	11
-	-	-	-	-	-	-	-	18 20	2	<5 5
-	-	-	-	-	-	-	-	22	2	9
-	-	-	-	-	-	-	-	24	2	7
-	-	-	-	-	-	-	-	26	1	6
- -	-	- 245451	- 4712412	- 420	- 20	-	- 00	0	4	0
VKAC0222	AC -	265651	6713613	430	20	0 -	-90 -	2	2	16 10
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	8
-	-	-	-	-	-	-	-	8	2	6

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-		-	-	-	-	10	2	9
-	-	-	-	-	-	-	-	12	2	10
-	-	-	-	-	-	-	-	14 16	2	8 10
-	-	-	-	-	-	-	-	18	1	5
-	-	-	- (740/40	-	-	-	-	19	1	<5
VKAC0223	AC -	265596	6713619	434	18	- 0	-90 -	2	2	18 10
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	8
-	-	-	-	-	-	-	-	8 10	2	6 9
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	9
-	-	-	-	-	-	-	-	16 17	1	7 <5
VKAC0224	AC AC	265554	6713632	435	18	0	-90	0	2	17
-	-	-	-	-	-	-	-	2	2	14
-	-	-	-	-	-	-	-	4	2	7 9
-	-	-	-	-	-	-	-	6 8	2	8
-	-	-	-	-	-	-	-	10	2	7
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14 16	<u>2</u> 1	9 7
-	-	-	-	-	-	-	-	17	1	<5
VKAC0225	AC	265502	6713597	435	21	0	-90	0	2	21
-	-	-	-	-	-	-	-	2	2	445
-	-	-	-	-	-	-	-	6	2	16 11
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	8
-	-	-	-	-	-	-	-	12 14	2	10 9
-	-	-	-	-	-	-	-	16	2	20
_	-	-	-	-	-	-	-	18	2	13
-	-	- 2/5451	- (712/01	- 424	- 27	-	-	20	1	9
VKAC0226	AC -	265451	6713601	434	36	-	-90 -	2	2	82 11
-	-	-	-	-	-	-	-	4	2	11
-	-	-	-	-	-	-	-	6	2	12
-	-	-	-	-	-	-	-	8 10	2	11 13
-	-	-	-	-	-	-	-	12	2	10
-	-	-	-	-	-	-	-	14	2	13
-	-	-	-	-	-	-	-	16	2	15
-	-	-	-	-	-	-	-	18 20	2	16 15
-	-	-	-	-	-	-	-	22	2	13
-	-	-	-	-	-	-	-	24	2	11
-	-	-	-	-	-	-	-	26 28	2	10 9
-	-	-	-	-	-	-	-	30	2	8
-	-	-	-	-	-	-	-	32	2	10
-	-	-	-	-	-	-	-	34	1	7
VKAC0227	AC	265350	6713590	431	35	0	-90	35 24	2	6 18
-	-	-	-	-	-	-	-	26	2	6
-	-	-	-	-	-	-	-	28	2	13
-	-	-	-	-	-	-	-	30 32	2	10 7
-	-	-	-	-	-	-	-	34	1	<5
-	-	-	-	-	-	-	-	0	24	0
VKAC0228	AC -	265252	6713585	433	39	0 -	-90 -	30 32	2	11 10
-	-	-	-	-	-	-	-	34	2	9
-	-	-	-	-	-	-	-	36	2	11
-	-	-	-	-	-	-	-	38 0	1 30	6
- VKAC0229	AC	265152	6713605	435	30	0	-90	24	2	7
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	1	<5
-	-	-	-	-	-	-	-	29 0	1 24	6
VKAC0230	AC	265099	6713609	433	33	0	-90	25	2	6
-	-	-	-	-	-	-	-	27	2	6
-	-	-	-	-	-	-	-	29 31	<u>2</u> 1	<5 <5
-	-	-	-	-	-	-	-	32	1	5
-	-	-	-	-	-	-	-	0	25	0
VKAC0231	AC	265048	6713605	434	30	0	-90	23	2	5
-	-	-	-	-	-	-	-	25 27	2	<5 <5
-	-	-	-	-	-	-	-	29	1	<5
-	-	-	-	-	-	-	-	0	23	0
VKAC0232	AC	264991	6713598	434	27	0	-90	22	2	6
-	-	-	-	-	-	-	-	24 26	2	5 <5
-	-	-	-	-	-	-	-	0	22	0
VKAC0233	AC	264953	6713216	437	20	0	-90	11	2	<5
-	-	-	-	-	-	-	-	13 15	2	<5 5
			-	-			-	10		Ü

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	17 19	2	<5
-	-	-	-	-	-	-	-	0	1 11	<5 0
VKAC0234	AC	265000	6713207	437	24	0	-90	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	6
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	8
-	-	-	-	-	-	-	-	20	2	6
-	-	-	-	-	-	-	-	22	1	8 <5
-	-	-	-	-	-	-	-	0	8	0
VKAC0235	AC	265052	6713196	438	18	0	-90	12	2	6
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16 17	1	6
-	-	-	-	-	-	-	-	0	12	0
VKAC0236	AC	265099	6713186	438	27	0	-90	12	2	7
-	-	-	-	-	-	-	-	14	2	7
-	-	-	-	-	-	-	-	16 18	2	<5 6
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22	2	8
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26 0	1 12	5
VKAC0237	AC	265147	6713206	438	24	0	-90	11	2	6
-	-	-	-	-	-	-	-	13	2	9
-	-	-	-	-	-	-	-	15	2	6
-	-	-	-	-	-	-	-	17 19	2	7
-	-	-	-	-	-	-	-	21	2	6
-	-	-	-	-	-	-	-	23	1	6
-	-	-	-	-	-	-	-	0	11	0
VKAC0238	AC	265200	6713202	436	21	0	-90	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 8
-	-	-	-	-	-	-	-	16	2	6
-	-	-	-	-	-	-	-	18	2	6
-	-	-	-	-	-	-	-	20	1	5
- VKAC0239	- AC	- 265249	- 6713198	- 442	- 18	- 0	- -90	0 12	10 2	0 8
- VKAC0237	AC -	- 203247	-	-	-	-	-70	14	2	8
-	-	-	-	-	-	-	-	16	1	5
-	-	-	-	-	-	-	-	17	1	<5
- VKAC0240	- AC	265300	- 6713194	435	- 24	- 0	- -90	0 12	12 2	0 6
- VKAC0240	- AC	-	-	-	-	-	-70	14	2	6
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	5 <5
-	-	-	-	-	-	-	-	23	1	<5
-	-	-	-	-	-	-	-	0	12	0
VKAC0241	AC	265353	6713192	434	18	0	-90	11	2	<5
-	-	-	-	-	-	-	-	13 15	2	7 <5
-	-	-	-	-	-	-	-	17	1	5
-	-	-	-	-	-	-	-	0	11	0
VKAC0242	AC	265398	6713198	434	24	0	-90	12	2	8
-	-	-	-	-	-	-	-	14 16	2 2	9 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	5
-	-	-	-	-	-	-	-	22	1	<5
-	-	-	-	-	-	-	-	23 0	1 12	<5 0
VKAC0243	AC	265460	6713197	435	24	0	-90	8	2	6
-	-	-	-	-	-	-	-	10	2	5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14 16	2 2	8
-	-	-	-	-	-	-	-	18	2	6
-	-	-	-	-	-	-	-	20	2	6
-	-	-	-	-	-	-	-	22	1	<5
-	-	-	-	-	-	-	-	23 0	1 8	6
VKAC0244	AC	265500	6713186	432	15	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	7
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	11
-	-	-	-	-	-	-	-	8 10	2	6 <5
-	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	1	<5
VKAC0245	AC	265549	6713158	431	12	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	5 <5
-	-	-	-	-	-	-	-	6	2	8
-	-	-	-	-	-	-	-	8	2	9
-	_	-	_	-	-	_	_	10	1	8

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
- VKAC0246	- AC	265599	- 6713118	- 429	9	- 0	- -90	11 0	2	5
	-	-	-	-	-	-	-70	2	2	6
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	1	5
VKAC0247	AC	265650	6713122	432	12	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	2	6 <5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 11	1	5 14
VKAC0248	AC	265702	6713128	431	6	0	-90	0	2	5
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	5	1	6
VKAC0249	AC	265749	6713138	430	4	0	-90	0	2	6
-	-	-	-	-	-	-	-	3	1	6 <5
VKAC0250	AC	265801	6713151	428	5	0	-90	0	2	<5
-	-	-	-	-	-	-	-	2	2	6
- VKAC0251	- AC	265849	- 6713167	428	- 4	- 0	- -90	0	2	9
-	-	-	-	-	-	-	-	2	1	8
-	-	-	- (740474	-	-	-	-	3	1	7
VKAC0252	AC -	265900	6713161	428	17 -	0 -	-90 -	0	2	7
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	8
-	-	-	-	-	-	-	-	8 10	2	6 <5
-	-	-	-	-	-	-	-	12	2	8
-	-	-	-	-	-	-	-	14 16	2	<5 6
VKAC0253	AC	265948	6713174	427	24	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	5
-	-	-	-	-	-	-	-	6	2	<5 <5
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	1	<5 <5
-	-	-	-	-	-	-	-	23	1	<5
VKAC0254	AC -	266004	6713175	426	30	- 0	-90 -	14 16	2	<5 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	1	<5
-	-	-	-	-	-	-	-	29 0	14	5
VKAC0255	AC	266049	6713190	425	30	0	-90	12	2	<5
-	-	-	-	-	-	-	-	14 16	2	5 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	1	<5 5
-	-	-	-	-	-	-	-	29 0	1 12	5
VKAC0256	AC	266097	6713196	427	26	0	-90	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
-	-	-	-	-	-	-	-	16	2	<5 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-	-	-	-	24	1	<5
-	-	-	-	-	-	-	-	25	1	6
- VKAC0257	- AC	266102	- 6712786	431	30	- 0	- -90	9	10 2	0 <5
-	-	-	-	-	-	-	-	11	2	<5
-	-	-	-	-	-	-	-	13	2	<5
-	-	-	-	-	-	-	-	15 17	2	<5 <5
-	-	-	-	-	-	-	-	19	2	<5
-	-	-	-	-	-	-	-	21 23	2	<5 <5
-	-	-	-	-	-	-	-	23	2	<5 5
-	-	-	-	-	-	-	-	27	2	<5
-	-	-	-	-	-	-	-	29 0	9	5
VKAC0258	AC	266051	6712797	435	34	0	-90	7	2	<5

	Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
	-	-	-		-	-	-	-		2	<5
1											
Color	-	-	-	-	-	-	-	-			
VAACQ229 AC 26590 6712784 436 439 1 1 1 2 2 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	-	-			-			-			
VIACO259 AC 265991 6712794 836 39 0 0 .90 8 2 .65 VIACO259 AC 265990 6712794 836 39 0 0 .90 8 0 .20 VIACO259 AC 265990 6712794 836 39 0 0 .90 8 0 .20 VIACO259 AC 265991 6712794 836 39 0 0 .90 8 0 .90 VIACO259 AC 265991 6712792 830 855 0 .90 VIACO250 AC 265990 6712792 830 855 0 .90 VIACO250 AC 265990 6712797 833 8	-	-	-	-	-	-	-	-	29	2	
VRACQUE AC 265999 6712794 336 379 0 90 6 8 2 455 VRACQUE AC 265999 6712794 336 379 0 90 6 8 2 455 VRACQUE AC 265999 6712794 336 379 0 90 6 8 2 455 VRACQUE AC 265999 6712794 336 379 0 90 6 8 2 2 455 VRACQUE AC 265999 6712795 330 355 VRACQUE AC 265999 6712795 3430 355 VRACQUE			1								
WACQUEEN AC 265999 6712794 836 39 0 990 6 2 2 45 1 1 2 1 1 2 2 45 1 1 1 1 1 2 2 45 1 1 1 1 1 2 2 45 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1											
										,	
1	-										
The content of the	-	-	-					-			
1	-	-	-		-			-			
1	-	-	-		-			-			
	-	-	-	-	-	-	-	-	20	2	
1	-	-	-		-	-		-			
1	-	-	-	-	-	-	-	-			
1	-	-	-	-	-	-	-	-			
The color of the											
										2	
Company											
VKACQ260 AC 265951 6712784 431 45 0 .90 .9 2 <5 .<	-	-	-	-	-	-	-	-			
	VKAC0260	AC.	265951	6712784	431	45	0	-90			
1											
	-	-	-	-	-	-	-	-	13	2	
1	-	-		-	-			-			
	-	-	-	-	-	-	-	-			<5
	-	-	-		-			-			
	-	-	-	-	-	-	-	-		2	<5
VKACQ261 AC 265901 6712792 430 45 0 -90 9 0 2 5 5											
NACO261 AC 265901 6712792 430 45 0 -90 99 2 5		 									
VKAC0261 AC 265901 6712792 430 45 0 -90 9 2 5 . <td></td> <td></td> <td>-</td> <td>-</td> <td>-</td> <td></td> <td>-</td> <td></td> <td></td> <td></td> <td></td>			-	-	-		-				
	VKAC0261	AC	265901	6712792	430	45	0	-90			
	-	-	-	-	-	-	-	-	11	2	
	-	-	-	-	-	-	-	-	23	2	<5
Color											
- - - - - - - - - -											
										2	<5
VKAC0262 AC 265848 6712795 436 23 0 -90 8 2 5 - - - - - - 10 2 8 - - - - - - - 10 2 8 - - - - - - - 10 2 8 - - - - - - - 110 2 8 - - - - - - - 12 2 <5											
The following color	-	-	-	-	-	-	-	-		9	0
20									18	2	<5
VKAC0263 AC 265802 6712787 433 6 0 -90 0 2 11 - - - - - - - 2 2 11 - - - - - - - 2 2 5 - - - - - - - 4 1 <5											5
VKAC0263 AC 265802 6712787 433 6 0 -90 0 2 11 - - - - - - - 2 2 5 - - - - - - - 4 1 <5											
2 2 5 4 11 <5 5 11 <5 5 11 <5											
VKAC0265 AC 265701 6712804 429 15 0 -90 0 2 6 2 2 5 4 2 6 6 2 <5 8 2 6	-	-	-	-	-	-	-	-	5	1	<5
- - - - - - - 2 2 5 - - - - - - - 4 2 6 - - - - - - - 6 2 <5											
4 2 6 6 2 <5 8 2 6											
6 2 <5 8 2 6											
8 2 6											

Hole ID	Hole Type	East (m) MGA94	North (m)	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From	Downhole Length	Au ppb
-	-	-	MGA94	-	-	-	-	(m) 12	(m) 2	<5
-	-	-	-	-	-	-	-	14	1	7
VKAC0266	AC	266101	6712469	430	30	0	-90	17	2	<5
-	-	-	-	-	-	-	-	19	2	<5
-	-	-	-	-	-	-	-	21	2	<5
-	-	-	-	-	-	-	-	23 25	2	<5 <5
-	-	-	-	-	-	-	-	27	2	<5
-	-	-	-	-	-	-	-	29	1	5
-	-	-	-	-	-	-	-	0	17	0
VKAC0267	AC	266049	6712465	430	33	0	-90	17	2	<5
-	-	-	-	-	-	-	-	19 21	2	<5 <5
	-	-	-	-	-	-	-	23	2	<5
_	-	-	-	-	-	-	-	25	2	<5
-	-	-	-	-	-	-	-	27	2	<5
-	-	-	-	-	-	-	-	29	2	<5
-	-	-	-	-	-	-	-	31	1	5
-	-	-	-	-	-	-	-	32 0	1 17	6
VKAC0268	AC	266003	6712465	435	34	0	-90	17	2	<5
-	-	-	-	-	-	-	-	19	2	<5
-	-	-	-	-	-	-	-	21	2	<5
-	-	-	-	-	-	-	-	23	2	<5
-	-	-	-	-	-	-	-	25	2	<5 <5
-	-	-	-	-	-	-	-	27 29	2	<5 <5
-	-	-	-	-	-	-	-	31	2	<5
-	-	-	-	-	-	-	-	33	1	<5
-	-	-	-	-	-	-	-	0	17	0
VKAC0269	AC	265853	6712459	439	40	0	-90	19	2	9
-	-	-	-	-	-	-	-	21	2	<5 <5
-	-	-	-	-	-	-	-	23 25	2	<5 <5
-	-	-	-	-	-	-	-	27	2	<5
_	-	-	-	-	-	-	-	29	2	<5
-	-	-	-	-	-	-	-	31	2	<5
-	-	-	-	-	-	-	-	33	2	<5
-	-	-	-	-	-	-	-	35	2	<5
-	-	-	-	-	-	-	-	37 38	1	<5 <5
-	-	-	-	-	-	-	-	0	19	0
_	-	-	-	-	-	-	-	39	1	0
VKAC0270	AC	265901	6712460	437	42	0	-90	16	2	<5
-	-	-	-	-	-	-	-	18	2	5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22 24	2	<5 <5
-	-	-	-	-	-	-	-	26	2	<5
-	-	-	-	-	-	-	-	28	2	<5
-	-	-	-	-	-	-	-	30	2	<5
-	-	-	-	-	-	-	-	32	2	<5
-	-	-	-	-	-	-	-	34	2	<5
-	-	-	-	-	-	-	-	36 38	2	<5 <5
_	-	-	-	-	-	-	-	40	1	<5
-	-	-	-	-	-	-	-	41	1	11
-	-	-	-	-	-	-	-	0	16	0
VKAC0271	AC	265802	6712453	439	21	0	-90	0	2	26
-	-	-	-	-	-	-	-	2	2	10 5
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14 16	2	6 <5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	1	<5
VKAC0272	AC	265751	6712449	438	3	0	-90	0	2	6
-	-	-	-	-	-	-	-	2	1	6
VKAC0273	AC	265703	6712450	437	8	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	<5 <5
-	-	-	-	-	-	-	-	6	1	16
-	-	-	-	-	-	-	-	7	1	10
VKAC0274	AC	264965	6712412	426	30	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	16
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20 22	2	<5 <5
-	-	-	-	-	-	-	-	24	2	5
-	-	-	-	-	-	-	-	26	2	<5
_	-	-	-	-	-	-	-	28	1	11
-	-	-	-	-	-	-	-	29	1	14

Hole ID	Hole Type	East (m) MGA94	North (m)	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From	Downhole Length	Au ppb
VKAC0275	AC	264998	MGA94 6712389	432	24	0	-90	(m) 0	(m) 2	16
- VNACU2/3	AC -	-	-	-	-	-	-70	2	2	8
	-	_	_	-	_	_	_	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18 20	2	<5 <5
-	-	-	-	-	-	-	-	22	1	<5 <5
		_	_	-	_	_	_	23	1	<5
VKAC0276	AC	265049	6712389	437	21	0	-90	0	2	8
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12 14	2	<5 <5
	-	-	-	-	-	-	-	16	2	<5
_	-	-	-	-		-	-	18	2	<5
_	-	_	_	_	_	_	_	20	1	<5
VKAC0277	AC	265101	6712383	437	18	0	-90	0	2	14
	-	-	-	-	-	-	-	2	2	5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5 <5
-	-	-	-	-	-	-	-	14 16	1	<5 6
	-	-	-	-		-	-	17	1	21
VKAC0278	AC	265152	6712377	438	12	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	11
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	1	<5
-	-	-	-	-	-	-	-	11	1	7
VKAC0279	AC	265199	6712373	439	13	0	-90	0	2	23
-	-	-	-	-	-	-	-	2	2	12
-	-	-	-	-	-	-	-	6	2	5 6
		-	-	-	-	-	-	8	2	6
	-	_	-	-	_	-	-	10	2	6
_	_	_	_	_	_	_	_	12	1	20
VKAC0280	AC	264952	6712800	434	18	0	-90	7	2	<5
-	-	-	-	-	-	-	-	9	2	7
-	-	-	-	-	-	-	-	11	2	<5
-	-	-	-	-	-	-	-	13	2	<5
-	-	-	-	-	-	-	-	15	2	<5
-	-	-	-	-	-	-	-	17	1	5
- VKAC0281	- AC	- 264996	- 6712805	432	- 12	- 0	- -90	0	7 2	0 14
VNACU261	-	-	-	- 432	-	-	-70	2	2	<5
-	-	-	-	-	-	-	-	4	2	14
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	29
-	-	-	-	-	-	-	-	10	1	<5
-	-	-	-		-	-	-	11	1	7
VKAC0282	AC	265052	6712813	429	15	0	-90	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	6
-	-	-	-	-	-	-	-	10	2	<5 <5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	1	<5
-	-	-	-	-	-	-	-	0	4	0
VKAC0283	AC	265099	6712812	429	18	0	-90	7	2	6
-	-	-	-	-	-	-	-	9	2	6
-	-	-	-	-	-	-	-	11	2	<5
-	-	-	-	-	-	-	-	13	2	<5
-	-	-	-	-	-	-	-	15	2	6
-	-	-	-	-	-	-	-	17	1	5
- VKAC0284	- AC	265150	- 6712811	430	- 12	- 0	- -90	0	7 2	0 6
VNACU284	AC -	-	-	- 430	-	-	-90	2	2	10
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	6
-	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	1	6
-	-	-	-	-	-	-	-	11	1	5
VKAC0285	AC	265202	6712801	431	9	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	<u>2</u> 1	6
- VKAC0286	AC	264701	6714245	442	18	0	-90	8 7	2	<5 <5
-	-	-	-	-	-	-	-70	9	2	5
-	-	-	-	-	-	-	-	11	2	<5
-	-	-	-	-	-	-	-	13	2	10

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	15	2	21
-	-	-	-	-	-	-	-	17 0	7	<5 0
VKAC0287	AC	264746	6714252	441	18	0	-90	7	2	<5
-	-	-	-	-	-	-	-	9	2	<5
-	-	-	-	-	-	-	-	11 13	2	<5 <5
-	-	-	-	-	-	-	-	15	2	<5
-	-	-	-	-	-	-	-	17	1	7
-	-	-	- (74.40.40	-	- 10	-	-	0	7	0
VKAC0288	AC -	264799	6714242	439	18	0 -	-90 -	3 5	2	<5 <5
-	-	-	-	-	-	-	-	7	2	11
-	-	-	-	-	-	-	-	9	2	<5
-	-	-	-	-	-	-	-	11 13	2	9 <5
-	-	-	-	-	-	-	-	15	2	<5
-	-	-	-	-	-	-	-	17	1	5
-	-	-	- (74.4054	-	- 10	-	-	0	3	0
VKAC0289	AC -	264852	6714251	446	18	- 0	-90 -	2	2	21 9
-	-	-	-	-	-	-	-	4	2	5
-	-	-	-	-	-	-	-	6	2	13
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 12	2	6 5
-	-	-	-	-	-	-	-	14	2	11
-	-	-	-	-	-	-	-	16	1	5
- -	- AC	264002	- 6714247	444	- 11	- 0	- -90	17 0	1 2	11
VKAC0290	AC -	264902	6/1424/	- 444	- 11	-	-90	2	2	15 10
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	5
-	-	-	-	-	-	-	-	8	2	5
- VKAC0291	- AC	264948	6714242	442	9	- 0	- -90	10 0	2	<5 19
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	<5
- VKAC0292	- AC	264998	6714235	441	12	- 0	- -90	8	1 2	<5 14
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 6
-	-	-	-	-	-	-	-	10	1	<5
-	-	-	-	-	-	-	-	11	1	<5
VKAC0293	AC	266107	6714497	433	30	0	-90	13	2	<5
-	-	-	-	-	-	-	-	15 17	2	<5 <5
-	-	-	-	-	-	-	-	19	2	<5
-	-	-	-	-	-	-	-	21	2	<5
-	-	-	-	-	-	-	-	23	2	<5
-	-	-	-	-	-	-	-	25 27	2	<5 <5
-	-	-	-	-	-	-	-	29	1	<5
-	-	-	-	-	-	-	-	0	13	0
VKAC0294	AC	266049	6714485	434	29	-	-90 -	8 10	2	<5
-	-	-	-	-	-	-	-	10	2	6 5
-	-	-	-	-	-	-	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	5
-	-	-	-	-	-	-	-	18 20	2	<5 <5
-	-	-	-	-	-	-	-	22	2	6
-	-	-	-	-	-	-	-	24	2	<5
-	-	-	-	-	-	-	-	26	2	6 -F
-	-	-	-	-	-	-	-	28	1 8	<5 0
VKAC0295	AC	265998	6714509	431	15	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6 8	2	<5 5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
- -	-	245040	- 471/1510	- 121	- 1/	-	- 90	14	1	<5 o
VKAC0296	AC -	265949	6714510	431	14	0 -	-90 -	0 2	2	9
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6	2	5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10 12	2 1	<5 <5
-	-	-	-	-	-	-	-	13	1	7
VKAC0297	AC	265898	6714504	430	9	0	-90	0	2	9
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	6	2	<5 <5
-	-	-	-	-	-	-	-	8	1	5
VKAC0298	AC	265853	6714502	432	6	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	2	<5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
-	-	-	-	-	-	-	-	4	1	5
-	-	-	- (74.4500	-	- 45	-	-	5	1	9
VKAC0299	AC -	264951	6714599	440	15 -	-	-90 -	0 2	2	14 11
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	<5 <5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
- VKAC0300	- AC	265003	- 6714601	- 441	- 6	- 0	- -90	14 0	1 2	10 103
	- AC	-	-	-	-	-	- 70	2	2	9
-	-	-	-	-	-	-	-	4	1	5
- VKAC0301	- AC	265050	- 6714609	443	- 13	- 0	- -90	5	1 2	8 7
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5
-	-	-	-	-	-	-	-	6 8	2	5 8
-	-	-	-	-	-	-	-	10	2	9
-	- A.C	- 2/5102	- (714/07	- 442	- 4	-	-	12 0	1	9
VKAC0302	AC -	265102	6714607	- 442	-	-	-90 -	2	2	6 8
-	-	-	-	-	-	-	-	3	1	<5
VKAC0303	AC	265150	6714613	446	7	0	-90	0	2	21
-	-	-	-	-	-	-	-	2	2	6 7
-	-	-	-	-	-	-	-	6	1	<5
VKAC0304	AC -	265201	6714610	446	4	0	-90 -	0	2	13
-	-	-	-	-	-	-	-	3	1	8
VKAC0305	AC	265248	6714602	447	7	0	-90	0	2	12
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	6	<u>2</u> 1	<5 5
VKAC0306	AC	265299	6714595	447	4	0	-90	0	2	11
-	-	-	-	-	-	-	-	2	1	8
- VKAC0307	- AC	265350	6714582	- 447	- 4	- 0	- -90	3	1 2	6 7
-	-	-	-	-	-	-	-	2	1	6
-	-	-	- (74.4570	- 440	-	-	-	3	1	5
VKAC0308	AC -	265400	6714579	448	-	-	-90 -	2	<u>2</u> 1	21 12
-	-	-	-	-	-	-	-	3	1	11
VKAC0309	AC -	265448	6714586	449	10	-	-90 -	0 2	2	70 18
-	-	-	-	-	-	-	-	4	2	9
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	<5 <5
VKAC0310	AC	265502	6714602	451	4	0	-90	0	2	10
-	-	-	-	-	-	-	-	2	1	5
- VKAC0311	- AC	265549	- 6714604	- 446	- 4	- 0	-90	3	1 2	<5 5
-	-	-	-	-	-	-	-	2	1	<5
-	-	-	-	-	-	-	-	3	1	5
VKAC0312	AC -	265598	6714603	439	-	-	-90 -	0 2	<u>2</u> 1	17 7
-	-	-	-	-	-	-	-	3	1	18
VKAC0313	AC	265648	6714606	436	4	0	-90	0	2	16
-	-	-	-	-	-	-	-	3	1	<5 5
VKAC0314	AC	265703	6714603	432	7	0	-90	0	2	20
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	6	<u>2</u> 1	5 <5
VKAC0315	AC	265748	6714595	432	10	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	2	5
-	-	-	-	-	-	-	-	6	2	6 5
-	-	-	-	-	-	-	-	8	1	5
- VKAC0316	- ^C	- 245511	- 67159/1	- /51	- 2	-	- 00	9	1	<5 o
VKAC0316	AC -	265511	6715841	451 -	2	-	-90 -	0	1	9 5
VKAC0317	AC	265548	6715831	448	2	0	-90	0	1	9
- VKAC0318	- AC	265602	- 6715820	- 447	- 4	- 0	- -90	0	1 2	6 7
- VKACU318	AC -	- 265602	-	- 447	-	-	-90	2	1	5
-	-	-	-	-	-	-	-	3	1	5
VKAC0319	AC	265648	6715831	445	10	0	-90	0 2	2 2	10 <5
-	-	-	-	-	-	-	-	4	2	<5 <5
-	-		-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	1	<5
- VKAC0320	- AC	265698	- 6715822	- 444	7	- 0	- -90	9	1 2	<5 5
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5 7
- VKAC0321	AC	265750	6715808	443	7	- 0	-90	6	1 2	7
-	-	-	-	-	-	-	-	2	2	<5
-	-	-	-	-	-	-	-	4	2	<5

Hole ID	Hole Type	East (m) MGA94	North (m) MGA94	RL (m)	End of Hole (m)	Azi (°)	Dip (°)	Depth From (m)	Downhole Length (m)	Au ppb
_	-	-	-	-	-	_	-	6	1	<5
VKAC0322	AC	265797	6715785	443	25	0	-90	0	2	21
-	-	-	-	-	-	-	-	2	2	<5
_	-	-	-	-	-	-	-	4	2	<5
_	-	-	-	-	-	-	-	6	2	<5
_	-	-	-	-	-	-	-	8	2	<5
_	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
_	-	-	-	-	-	_	-	14	2	<5
-	-	-	-	-	-	-	-	16	2	<5
-	-	-	-	-	-	-	-	18	2	<5
-	-	-	-	-	-	-	-	20	2	<5
-	-	-	-	-	-	-	-	22	2	<5
-	-	-	-	-	-	-	-	24	1	9
VKAC0323	AC	265842	6715795	443	22	0	-90	0	2	28
-	-	-	-	-	-	-	-	2	2	6
-	-	-	-	-	-	-	-	4	2	6
-	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	<5
-	-	-	-	-	-	-	-	10	2	<5
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	-	-	-	-	14	2	<5
_	-	-	-	-	_	_	-	16	2	<5
_	-	-	-	-	_	_	-	18	2	6
-	-	-	-	-	-	-	-	20	1	<5
_	-	-	-	-	_	_	-	21	1	6
VKAC0324	AC	265500	6715387	453	4	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	1	6
_	-	-	-	-	-	-	-	3	1	6
VKAC0325	AC	265548	6715386	451	7	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	11
_	-	-	-	-	-	-	-	4	2	7
_	-	-	-	-	_	_	-	6	1	6
VKAC0326	AC	265596	6715398	448	7	0	-90	0	2	9
-	-	-	-	-	_	_	_	2	2	<5
_	-	-	-	-	-	-	-	4	2	7
_	-	-	-	-	-	_	-	6	1	5
VKAC0327	AC	265649	6715407	445	19	0	-90	0	2	14
-	-	-	-	-	-	-	-	2	2	9
_	-	-	-	-	-	-	-	4	2	<5
_	-	-	-	-	-	-	-	6	2	<5
-	-	-	-	-	-	-	-	8	2	5
-	-	-	-	-	-	-	-	10	2	<5
_	-	-	-	-	-	-	-	12	2	6
-	-	-	-	-	-	-	-	14	2	10
_	-	-	-	-	-	-	-	16	2	16
_	-	-	-	-	-	-	_	18	1	20
VKAC0328	AC	265697	6715427	443	22	0	-90	0	2	16
-	-	-	-	-	-	-	-	2	2	9
-	-	-	-	-	-	-	-	4	2	<5
_	-	-	-	-	-	-	-	6	2	5
_	-	-	-	-	-	-	-	8	2	6
-	-	-	-	-	-	-	-	10	2	6
-	-	-	-	-	-	-	-	12	2	<5
-	-	-	-	_	-	-	-	14	2	<5
_		-	-	-	-	-	-	16	2	10
-	-	-	-	-	-	-	-	18	2	9
-	-	-	-	-	-	-	-	20	1	<5
-	-	-	-	-	-	-	-	21	1	8
-		1 -	1 -		1 -	-		41	1	. 0



COMPETENT PERSONS STATEMENT

Information in this release that relates to Exploration Results on the Western Australian projects is based on information compiled by Mr Ian Stockton, who is a Member of the Australian Institute of Mining and Metallurgy (AusIMM). Mr Stockton is a full-time employee of CSA Global. Mt Stockton is engaged by Viking Mines Ltd as an independent consultant. Mr Stockton has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Stockton consents to the inclusion in the release of the matters based on his information in the form and the context in which it appears.

JORC Table 1

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.	Historical Surface Geochemistry Several companies have undertaken surface exploration through the history of the tenement including Riverina Gold, Croesus Gold, WMC, Barminco and Barra Gold. A total of 24,289 samples have been collected, however CSA Global has limited information on these surveys apart from WMC and Barminco, as described below. WMC mining completed several phases of soil geochemistry between 1990 and 1992 with 2,836 samples collected. This included: Stream sediment geochemistry from active streams from contemporary lags within stream beds. 2 kg pan concentrate samples collected from trap sites in active drainage channels. Soil samples collected from 5-15 cm depth or 15-30 cm depth depending on soil thickness and passed through - 10#, +36#, -80# or 120# meshes. Surface soil sampling was sieved through a 6 mm mesh. Barminco Pty Ltd undertook 2 geochemical soil geochemistry programs on the northern part of M30/99 between 1995 and 2000. The first soil survey completed was designed to test areas of residual soil and outcrop, whereas the second soil survey tested areas covered by shallow transported cover. In areas of residual soil and outcrop -80 mesh soil samples were collected on a 50 m x 50 m spaced grid and analysed for gold and arsenic. In areas of transported cover, a preliminary 100 m x 400 m spaced auger soil sampling program was undertaken. The details of the sampling methods and horizons tested for the -80# mesh soil sampling and auger sampling are not described. WMC collected ironstone float rock chip samples (number unknown) across the tenements. Barminco completed undertook rock chip sampling between 1996 and 2002, though the number of samples collected is unknown. Rock chips are described as being collected also taken in areas with cover, laterite development and recent drainage areas for pathfinder and mapping purposes. Historical Surface Drilling WMC completed 13 RC drill holes and one diamond drill hole during their tenure between 1990 and 1992. No descriptions of the natu



Criteria	JORC Code explanation	Commentary
		Percussion samples were split at the drill sites and a 2-5 kg sample was taken for processing and analysis. Probable waste zones were sampled by compositing over 2-4 metres and individual samples were retested if the composites were anomalous. Diamond drill core from was split length ways and half was used for initial analysis whilst the remaining half was used for reference material (kept used for metallurgical testing as required).
		Historical Underground Ore Control and Definition: Underground resource definition drilling using drill core provided solid core samples for analysis. During mining operations face channels and production drill holes were used to assist with ore definition and control. Whole core was sampled from UG drill core. Historical Underground Face Sampling As drives advanced Barminco geologists/technicians carried out rock chip sampling across the exposed drive face. Not all drive advance faces were mapped or sampled. The sampling was treated similarly to a drill hole although typically undertaken as a 'channel' rock chip sample along a pre-determined line at right angles to the dip of the vein structures/mineralisation. The face was mapped and significant geological features recorded. The sample line attitude (dip), sample number, sample length, and sample lithology recorded. In addition, the assay result for gold (Au) were recorded following receipt. Summary of VKA Exploration Drilling and Sampling - 2021 Diamond drill core sampling was undertaken utilising half core designated by CSA Global personnel which was marked up with a cutting line and sent to Dynamics G-Ex contractor in Kalgoorlie, where half core was sampled. Core that was not sampled was sent to the VKA facility in Perth for storage and subsequently all cut core is stored in Perth
		at a VKA facility Aircore samples were collected at the drill rig during the drilling process. Samples were collected from drill spoils by a scoop over 2m composites with a 1m end of hole bedrock sample taken for each hole. The samples collected were between ~0.5 and ~3kg and submitted to MinAnalytical laboratories for analytical work. Additionally, handheld XRF analysis was undertaken on some but not all aircore samples (described below) The Competent Person considers these sampling methods appropriate for this style of mineralisation.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Historical Information The entire RC sample was collected and sampled at the drill rig; samples from diamond drilling were subsampled in a core handling facility. Diamond and RC field duplicates were taken on selected intervals within the interpreted mineralised horizons to measure representativity of sample splits. Historical Underground Face Sampling No information is provided in available reports to ascertain the representivity of the face sampling, though some face maps show both selective and mark ups for sampling lines across the lode. No information has been located relating to QAQC procedures such as duplicate sampling, certified standards or laboratory repeats or standards. Summary of 2021 VKA Exploration Drill Sampling Diamond drill core is cut and sampled along designated cut lines in areas of geological and interpreted mineralisation to provide representative sampling. The position of the cut line on the diamond core is chosen to ensure that the selected sample is representative. Aircore sample recovery was monitored for excessive sample loss and recorded to ensure sample representivity. The Competent Person considers these sampling methods appropriate for this style of mineralisation.



Criteria	JORC Code explanation	Commentary									
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information	Sample preparation for RC and diamond drilling consisted of coarse crushing a maximum of 3 kg of the submitted samp pulverising to >85% passing 75 microns and homogenising the pulp for all sample types. 50 g sample sizes were chosen for analysis of gold, with fire assay fusion and detection by atomic absorption spectrome (AAS). Historical Underground Face Sampling Available reports indicate gold distribution is often erratic and visible Au noted in many face samples. It is not known w steps were taken to address the issue of 'nuggety' Au and sample bias. Face sampling appears to have been both select and along sampling lines on face maps. Summary of VKA 2021 Exploration Drill Sampling Diamond drilling was drilling HQ core (63.5mm) to provide a larger core diameter for better representivity of sampling the potential for coarse gold. Between 20cm and 1m (generally 1m) of half core is being sampled by Dynamics G-Ex contractor in Kalgoorlie. The assay methodology is described below. Diamond core analysis: Between 0.5kg and 6kg of half core sample is pulverised to produce a 50g charge for fire assay. pulp samples are analysed by Laboratory portable XRF. Selected samples to characterise host rocks and alteration are digested by a 4-Acid digest and analysed for 60 elements using a ICP-OES/MS finish. Photon Assay: Samples were analysed at MinAnalytical in Perth where samples were considered to be possibly high gra such as core near zones of historical mineralisation. The analytical method used was a 500 g Photon Assay, a non-destructive method for gold only. Aircore sample analysis: Aircore drilling was used to obtain 2m composite and individual 1m end of hole samples from which 3 kg was pulverised to produce a 50 g charge for fire assay. Selected drill samples were analysed pXRF in the field in Minanalytical Laboratory. Selected samples to characterise host rocks and alteration are digested by a 4-Acid digest analysed for 60 elements using a ICP-OES/MS finish. The Competent Person considers these sampling and								nown what th selective mpling given i-Ex assay. All on are nigh grade n- s from the field and digest and	
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, facesampling bit or other type, whether core is oriented and if so, by what method, etc.).	Historical Drilling Drillhole data over the holes, and 50 UG DDF ore drive headings). RC samples were collected by the obtained from avainable of the obtai	H holes, with ected using a drilling utili ilable report	an additio a face-samp ised an NQ	nal 504 UG oling, 4.5-in 2 size (50.6	face chann ch diamete mm) drill b ore photos t	el samples r bit via the it. The core the core siz UG_	(collected a inner reture diameter f	rn tube to a for undergro o be NQ. UG_ Under	l channels a sample spli	itter. g could not



Criteria	JORC Code explanation	Commentary				
		Summary of Current Expl Current Exploration drilling table below.		ore drilling and aircore drill	ing. The drill metres ar	e summarised in the
		DDH		AC		Total
		Surface Diamond Core Drilling		Air Core Drilling		
		Holes & (m)	% of total	Holes & (m)	% of total	
		19	5.5	328	94.5	347
		4028.49	44.2	5080	55.8	9108.49
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	tables in the available da Report: "Sample recovering problems encountered" CSA Global briefly review holes (FHU001, FHU019, with long intervals of unit CSA Global through example the original project owner Summary of Current Expl Recoveries of diamond done to the measurement oxide zone core was only Aircore drilling recoveries.	ta. The following commes throughout the drillied historical drill core so FHU041, FHU044, FHU0 proken core and no eviduating core photos is satures in this regard would longitude or were measured to between drillers block retrieved in competents were visually estimate	of drill core or RC recoveries then tis extracted from the 2 ng programs has been exceptored on site (holes un-laber 245, FHU046, FHU052, FHU054, FHU0	001 First Hit Mine Ore illent (majority greater felled) and core photographs) and noted that core were adequate though as a guide and determined ill recoveries were greated with the fresh rock teological logging proce	Resource and Mining than 80%) with no major aphs of underground drill re was in good condition better documentation by ining the actual length of ter than 90%. In the interface.
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	record of measures in pla Summary of Current Expl Drilling was undertaken versure core could be recovery was greater that Aircore drilling sample reequipment and procedur	oce to maximise recover oration Drilling with a HQ assembly to n overed, near surface, no n 90%. covery was monitored t es that are suitable to n	e for ground conditions to r ry. naximise core size and there otwithstanding that the targ to ensure representivity of a naximise sample recovery a g techniques and measures	efore recovery and tripl gets were wholly within the samples. Drilling use and the representative r	le tube was utilised to fresh rock where ed standard drilling nature of the samples.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Historical Information Insufficient information of grade exists.	on sample recovery is av	vailable to establish whethe	er a relationship betwee	en sample recovery and



Criteria	JORC Code explanation	Commentary	
		Summary of Current Exploration Drilling The high recovery achieved from current diamond drilling indicates there is unlikely to be bias in recovery/ analytical results. Aircore drilling used standard drilling equipment and procedures that are suitable to maximise sample recovery and the representative nature of the samples. The relationship between sample recovery and grade is not a significant factor in determining anomalism in aircore drilling. The Competent Person considers there to be limited bias related to the recovery/sampling at the First Hit mineralisation.	
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Historical Information All RC and diamond drillholes were geologically logged to an industry standard appropriate for the mineralisation present at the project. All RC drill chip samples were geologically logged at 1 m intervals from surface to the end of each drillhole. Diamond core was photographed, and RC chips were retained in chip trays for future reference. Ausdrill completed three, NQ2 diamond drill holes at the First Hit deposit for geotechnical assessment prior to mining. The holes were designed in consultation with Golder Associates Pty Ltd and were targeted into the mineralised zones and continued on average 30 m into the footwall to assess the likely ground conditions for the decline and ore accesses. Approximately 70 metres of core was drilled for each hole allowing the hanging wall, the ore zone and the footwall zone to be assessed. Golders Associates Pty Ltd were commissioned to undertake the geotechnical assessment. The Competent Person considers that the level of detail is sufficient for geotechnical studies. Underground Face Sampling The underground face samples were used to guide mine development. Due to the lack of information regarding the quality of the face samples these should be regarded as qualitative only and can only be used to provide an indicative guide as the presence or otherwise of mineralisation. Summary of Current Exploration Drilling Diamond drill core is logged to a geological detail suitable for a mineral resource estimate ensuring all lithology, alteration and interpreted mineralisation is recorded and drilling continues through the footwall where possible. Geotechnical logging is recorded in key areas (RQD) and drill core is orientated to be able to measure structural orientations. Remaining core is available for metallurgical sampling if required. Aircore sample logging of rock chips samples from drill cuttings are undertaken as a first pass indication of potential gold and multi-element anomalism. Samples of rock chips from drill cuttings were logged by the geo	
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.	Historical Information Lithological logging is qualitative in nature. Logged intervals were compared to the quantitative geochemical analyses to validate the logging. The Competent Person considers that the availability of qualitative and quantitative logging has appropriately informed the geological modelling, including weathering and oxidation, water table level and rock type. Underground Face Sampling The logging of the underground face samples is qualitative only. Summary of Current Exploration Drilling	



Criteria	JORC Code explanation	Commentary		
		Logging of aircore and diamond drilling is qualitative in nature. All drill core and aircore samples are photographed. Aircore samples were photographed on the ground and rock chips in chip trays. The Competent Person considers the logging methods appropriate for this style of mineralisation.		
	The total length and percentage of the relevant intersections logged.	Historical Information The total length of all drilling was geologically logged. Underground Face Sampling The underground face sampling hardcopy plans indicate in the majority of cases the face was sketch mapped and the 'channel' geologically logged with the sample length or interval recorded. Summary of Current Exploration Drilling All diamond and aircore drilling were geologically logged with detailed logging in areas of interest. The Competent Person considers the logging methods appropriate for this style of mineralisation.		
	If core, whether cut or sawn and whether quarter, half or all core taken.	Historical Information Diamond core was cut into two halves using a diamond core saw for surface drilling. One of the halves was placed into a numbered calico bag, which was tied and placed in a plastic/poly-weave bags for assaying. Underground DDH samples were whole core sampled. Summary of Current Exploration Drilling Diamond core was cut into two halves using a diamond core saw for surface drilling. One half of the core is used in the assay process. This work was undertaken by a trained contractor group (Dynamics G-Ex) The Competent Person considers the sampling methods appropriate for this style of mineralisation.		
Subsampling techniques and sample preparation	If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.	Historical Information RC samples were collected via a splitter to yield sub samples of approximately 3 kg from a 1 m downhole sample length. Expected waste zones were initially sampled as 2 m or 4 m composites and later resampled at 1 m intervals if anomalous assay results were returned. Re-sampling was undertaken using the spear sampling method Summary of Current Exploration Drilling AC samples were collected from drill spoils by a scoop over 2m composites with a 1m end of hole sample taken for each hole. The samples collected at a weight of between ~0.5 and ~3kg No sub-sampling or further sample preparation for samples derived from AC drilling is being reported. Most of the samples were dry.		
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Historical Information The Competent Person considers the historical methods described as appropriate for this style of mineralisation. Summary of Current Exploration Drilling The Competent Person considers the current methods and processes as described in previous sections as appropriate for this style of mineralisation.		
	Quality control procedures adopted for all subsampling stages to maximise representivity of samples.	Historical Information CSA Global were unable to establish QAQC processes involving the use of CRM, including blanks and standards. The following is described from the First Hit Mine Ore Resources and Mining Report, 2001 and indicates duplicates were used to inform the resource model.		



Criteria	JORC Code explanation	Commentary
		"Several samples were often submitted for each positive assay. These were taken on site and submitted to the same laboratory under a different sample number and then assayed using the same technique. An average of these results for each interval has been used within the ore resource calculations". CSA Global does not consider the above process to be suitable as a form of QAQC. The lack of CRMs is not industry practice. CSA Global recommends the application of industry standard QAQC to all future drilling programs. <u>Underground Face Sampling</u> CSA Global were unable to establish QAQC processes involving the use of CRM, including blanks and standards. <u>Summary of Current Exploration Drilling</u> No sub sampling has been applied to the current drill programmes for either the diamond drilling or Aircore drilling. The Competent Person considers the current methods of sampling as described as appropriate for this style of mineralisation.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	Historical Information See comments above regarding the use of duplicates by Barminco. Several samples were often submitted for each positive assay. These were taken on site and submitted to the same laboratory under a different sample number and then assayed using the same technique. An average of these results for each interval has been used within the ore resource calculations. Underground Face Sampling CSA Global were unable to establish representivity of the face samples or the use of field duplicates or assaying of sample splits. Summary of Current Exploration Drilling CSA Global have applied industry standard QAQC procedures for sampling processes to diamond drilling and aircore drilling programs. Diamond drilling At this stage no further sub-sampling methods have been applied. No duplicate/second half sampling was undertaken which may also be revised depending on all assay results received. Aircore drilling No field duplicates were collected as the current sampling is considered appropriate for determining anomalism rather than exact results. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Historical Information The First Hit Project mineralisation and targets within the associated tenements are expected to be coarse grained and nuggety gold. Further exploration will need to consider the grain size of gold and distribution of particles. No previous petrology reports were found, and future work will include petrological studies in the early stage of exploration. Underground Face Sampling No information is available re sample size. The mineralisation is known to include nuggety visible Au.
		Summary of Current Exploration Drilling The mineralisation at the First Hit project is historically recorded as containing coarse gold. As such the diamond drilling program is utilising HQ core as the appropriate core size to maximise the potential to intersect any course gold if present.



Criteria	JORC Code explanation	Commentary	
		All host rocks are fine grained and HQ core size is appropriate for the grain size. The Aircore drilling is aiming to detect gold anomalism and the sample sizes are considered appropriate to the grain size of the material being sampled given the style of mineralisation being targeted. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.	
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Historical Information 7,865 samples were prepared for Fire Assay and tested by Kalgoorlie Assay Laboratory. There are incomplete records for the remaining 2,150 samples. Fire Assay is considered a total digest and whilst generally appropriate for the type of mineralisation, cyanide bottle roll leach test work may be recommended for exploration should coarse gold be encountered in future exploration. Underground Face Sampling No information is available with respect to the quality of the face samples. Summary of Current Exploration Drilling All samples were analysed by MinAnalytical laboratory in Perth. The analytical technique for the diamond drill core samples for Au concentrations consists of the Fire Assay method (50g charge) for lower gold grade samples and 500g Photon assay for high grade gold samples. The 500g Photon assay technique is more appropriate for higher grade nuggety samples due to the higher sample charge compared to the fire assay method. All core samples are analysed by a Laboratory portable XRF and selected samples by 4 acid digest with a ICP-OES/MS finish to characterise host lithologies and alteration. Fire assay technique is considered a total technique. The four acid digest ICP-OES/MS technique is considered total for most rock types except for rocks containing very resistant minerals such as spinel. The Photon assay technique is considered a total technique. The analytical techniques for the aircore samples include: Fire Assay method (50g charge) for gold, four acid digest with ICP-MS/OES finish for 60 elements, and pXRF method for 34 elements. The analytical technique for Au is considered total with the rest being mostly partial. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.	
	For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Historical Information No non-destructive tools or devices are recorded as being used. Summary of Current Exploration Drilling A pXRF survey has been completed in the field using a handheld instrument by Bruker, the S1 Titan 800 model. The measurements were completed in three ranges (Exploration Mode) with 20 counts per range. Autocalibration measurements were used for reading checks and adjustments. A laboratory Olympus Vanta portable XRF is used for diamond core and aircore sample pulps on hand pressed cups. Autocalibration measurements are used for reading checks and adjustment. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.	
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether	Historical Information	



Criteria	JORC Code explanation	Commentary	
	acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	CSA Global has not been able to obtain the original assay certificates for exploration and resource drilling on the First Hit Project tenements. As recorded in the QC procedure section duplicates were used as a way of informing the resource model. For future exploration it is recommended that standard CRMS, blanks and duplicates be used for QAQC. <u>Underground Face Sampling</u> No information is available with respect to QAQC procedures. <u>Summary of Current Exploration Drilling</u> The QAQC procedures for the diamond drill core samples for fire assay consists of the analyses of a certified standard and blank for every 20 samples. One QAQC fire assay standard failed and the 8 samples either side of failed std have been reanalysed, including a new standard. The QAQC procedures for the aircore drilling program consists of the analyses of a certified standards (every 20 samples) and blanks (every 40 samples). The QAQC for Photon analysis averaged approximately 1 every 5 samples. There was one failure, however the failed Std repeated, indicating there was a potential mixed standard. All Viking QAQC protocols were met, and analysis results passed required hurdles to ensure acceptable levels of accuracy and precision attained for exploration purposes. One high grade Photon STD failed, however on the balance of the program the QAQC was of a satisfactory quality. The Competent Person considers the QAQC described as appropriate for this style of mineralisation.	
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	Historical Information Due to the samples being sampled and collected 20 years ago, independent verification is difficult and has not been undertaken. CSA Global recommend unpacking the remaining drill core on site and reviewing the geology, alteration, structure and mineralisation. Underground Face Sampling No independent verification has been undertaken so far, however the hardcopy plan data is being entered into a database, which will facilitate checking of assay data presented on the face sampling plans against that recorded in Barminco and Barra Resources reports. Summary of Current Exploration Drilling CSA Global are contracted to Viking Mines Limited and internal checking processes including regular checks of structure and veins by alternative personnel for relevance to historical mineralised mined areas and historical drill intersections. The returned laboratory assay results have been reviewed and where returned standards are outside two standard deviations from the expected value the batch of samples have been re-analysed. The Competent Person considers the process described as appropriate. Historical Information No twin drilling has been undertaken; however, significant reported underground development and sampling has verified	
	The use of twinned holes.	No twin drilling has been undertaken; however, significant reported underground development and sampling has verified the information provided by the surface drilling. Some twinning of drill holes for exploration purposes is recommended by CSA Global. Summary of Current Exploration Drilling	



Criteria	JORC Code explanation	Commentary	
		There were no twinned holes drilled in the current diamond drill program, however the drill holes completed for the diamond drilling program are located within areas proximal to the drilling completed as part of the previous operator's resource drilling. There are no twin holes for the aircore program. The Competent Person considers the process described as appropriate.	
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Historical Information The data entry, storage and documentation of primary data was completed in Microsoft Access databases and assembled by CSA Global into a central database for future purposes. The majority of the data reviewed by CSA Global has been summarised from primary sources. Underground Face Sampling No independent verification has been undertaken so far, however the hardcopy plan data is being entered into a database, which will facilitate checking of assay data presented on the face sampling plans against that recorded in Barminco and Barra Resources reports. The face sampling data is presented as a series of Tables in Barra Resources report —'Final Mine Report, 2002' and submitted to DMIRS. Summary of Current Exploration Drilling Diamond Drilling: Primary logging data were entered into a protected spreadsheet which was then uploaded into relational data base. Aircore Drilling: Primary data for drill cuttings, including sample number, depth, colour, grain size, weathering, lithology, alteration, and the presence of minerals potentially related to mineralisation including quartz and pyrite, were collected in the field and entered into a protected spreadsheet which was then uploaded into relational database. The Competent Person considers the process described as appropriate.	
	Discuss any adjustment to assay data.	No adjustments or calibrations have been made to any assay data.	
Location of data points	Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Historical Information All drill hole collars were surveyed by differential global positioning system (DGPS) or by the mine operations survey equipment. The following extract from the 2001 First Hit Mine Ore Resource and Mining report states the following: Down hole surveying of drill holes were undertaken on the majority of holes whilst being drilled. This has enabled only dip readings to be collected as the instrument was used within the drill string. Several programs of downhole surveying using a single shot Eastman camera have been completed for all available holes in the First Hit area and have been incorporated into the database. Where downhole surveys were unavailable due to the collapse of the hole, survey estimates at regular intervals have been applied. These are based on the deviation of the surrounding drill holes. Drill holes greater than 100 m in depth deviated consistently in the azimuth to the southwest (against rotation). The dip angle in most cases steepened and in some of the deeper holes this was quite dramatic. Drill string stabilizers were tried at various times in an attempt to help alleviate this problem but no consistent results were achieved. Underground Face Sampling The location of face sampled was recorded by mine surveyors. The face samples were used to guide mine development. It is unknown the extent the face sample data was used in Mineral Resource estimates.	



Criteria	JORC Code explanation	Commentary
		Diamond drilling. The collar positions were surveyed using a differential GPS with an accuracy of +/-0.5m. The downhole azimuth and dip were surveyed using a Reflex Easy Gyro tool with an accuracy of +/- 1 degree for the azimuth and +/-0.1 degrees for the dip. Aircore drill hole collar positions were located by hand-held GPS during drilling. Expected accuracy is +/- 5m for northing and easting. There are no down hole surveys and drill holes are vertical. These are not part of a resource estimate. Additionally, Specialist remote sensing operators Sensorem (sensorem.com.au) were engaged to undertake a high-resolution surveys using the Wingtra Hovermap® drone systems. The purpose of these surveys is to provide a Digital Terrain Model (DTM) across the contiguous tenure, high resolution images and 3D LiDAR scans of the underground workings. These surveys will provide datasets to support the regional AC programme with geological interpretation The Competent Person considers the processes for diamond collar, underground and aircore collar locations as appropriate.
	Specification of the grid system used.	Historical Information Topographic data for the mine drilling were captured in MGA Zone 51 grid. A local grid has been established at First Hit, which is orthogonal to the known mineralised trend of the area (020 degrees). The grid orientation is at 290 degrees magnetic which is optimal for this deposit. The conversion from local to AMG 84 grid is presented in the table below. Local
	Quality and adequacy of topographic control.	Historical topographic Information Historical survey work for the First Hit Mine was conducted via differential global positioning system (DGPS) and is appropriate as an industry standard method. A topographic surface used for coding the block model was built from a system using a detailed drone survey. The Competent Person considers that the surface is suitable for future exploration activities. Summary of VKA 2021 Exploration Drilling The DTM and collar locations for the diamond drilling were located by differential GPS. Topographic control on Aircore drill holes is from DTM and hand-held GPS. Accuracy +/- 5m. The Competent Person considers the processes for diamond collar and aircore collar locations as appropriate.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Historical Information The majority of the data on the tenements is surface geochemistry which are adequate for defining anomalies for future exploration. Summary of VKA 2021 Exploration Drilling Diamond drilling is completed on an irregular pattern targeting specific targets in and around the existing mine workings. Aircore drilling was conducted on fence lines 200-400m apart with 50 m hole spacing. The Competent Person considers the data spacing for diamond drilling and aircore drilling appropriate for reporting exploration results.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity	Historical Information Existing drilling on the periphery of historically mined areas is suitable for defining additional drill targets laterally, down dip and in the near surface environment.



Criteria	JORC Code explanation	Commentary		
	appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	Summary of VKA 2021 Exploration Drilling The diamond drilling is considered appropriate for exploration drilling for this type of deposit and no resources are currently being estimated. The AC sample spacing is considered suitable for first pass testing of exploration targets for gold mineralisation in the Yilgarn Craton of WA.		
	Whether sample compositing has been applied.	Historical Information Sample composting was applied in initial exploration drilling at the First Hit Project and always followed up by detailed sampling at 1 m interval, or less for core drilling. Summary of VKA 2021 Exploration Drilling No sample compositing has been applied for diamond drill core samples. Two-metre sample compositing has been applied for all but the end of hole Aircore drill samples. The Competent Person considers the sampling for the diamond drill core appropriate and the compositing of the aircore samples to be appropriate for This stage of exploration.		
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Historical Information The regular spaced drilling on consistent sections, and the orientations orthogonal to the strike of the lodes, has provided consistent support to intersections of mineralisation to eliminate any bias or influence of hole angles on grades. Summary of VKA 2021 Exploration Drilling Diamond drilling is predominately orthogonal to the strike of the deposit, with one hole drilled oblique to the mineralisation to intersect several additional lithological units. The variable dip of the veins means the drill hole will intersect the veins at different core angles. understanding the geometry of the vein system is managed through incorporating as much of the underground mapping and historical drilling as possible. Additionally, all diamond holes are oriented to understand and measure the variability of structures and mineralisation. Aircore drill fences were oriented across the known geological structures in the area. No drill hole orientation has been applied. The drill hole spacing, and orientation is considered appropriate for first pass testing of exploration targets for gold mineralisation in the Yilgarn Craton of WA. The Competent Person considers the processes for diamond collar and aircore collar orientations as appropriate.		
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Historical Information No relationship has been noted between drillhole orientation and mineralisation. Summary of the VKA 2021 Exploration Drilling At this stage in the exploration process, neither the diamond drilling nor aircore drilling is considered by the Competent Person to have introduced a sampling bias.		
Sample security	The measures taken to ensure sample security.	Historical Information The competent person is unaware of measures taken to ensure sample security during past exploration. Chain of custody procedures are recommended for future exploration. Summary of VKA 2021 Exploration Drilling Diamond core and AC Samples were collected and stored by CSA Global personnel near the camp facilities in the project area. Samples derived from diamond drilling were transported from site to Dynamics G-EX in Kalgoorlie and samples then submitted to MinAnalytical laboratory in Kalgoorlie by CSA or Dynamics G-Ex personnel. AC drilling samples were transported from the site to MinAnalytical in Kalgoorlie via Hannans Transport and submitted there to the sample preparation facility at the		



Criteria	JORC Code explanation	Commentary	
		completion of the program. Minanalytical in Kalgoorlie transported the samples from Kalgoorlie to their analysis facility in Perth. The Competent Person considers the processes for diamond collar and aircore collar orientations as appropriate.	
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Historical Information No external audit of sampling techniques and data could be sourced from the documents provided to CSA Global. Summary of VKA 2021 Exploration Drilling No external audits or reviews have yet been undertaken on the sampling data however the competent person is satisfied with the processes employed. The analytical data have been reviewed and the competent person is satisfied with the data quality.	



JORC 2012 Table 1 Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary		
			are located approximately 50 km verina 3038 1:100,000 topographio	due west of the town of Menzies, Western Australia on the map sheets, and include:
		Tenement	Status	Holder
		M30/0091	LIVE	Red Dirt Mining Pty Ltd
		M30/0099	LIVE	Red Dirt Mining Pty Ltd
		P30/1125	LIVE	Red Dirt Mining Pty Ltd
		P30/1126	Live – undergoing transfer to Viking	Australia Menzies Emeralds Pty Ltd
		P30/1137	LIVE	Red Dirt Mining Pty Ltd
	historical sites, wilderness or national park and environmental settings.	P30/1144	LIVE	Red Dirt Mining Pty Ltd
		E29/1131	PENDING	Viking Mines Ltd
		E29/1133	PENDING	Viking Mines Ltd
Mineral tenement		E30/0529	PENDING	Viking Mines Ltd
		P29/2652	PENDING	Viking Mines Ltd
		P30/1126 is subject to a 1% N tenement. Red Dirt Mining are not aware Native Title, Historical sites and Archaeological and ethnograph involved an examination of the ethnographic site distribution. Aboriginal significance. This inf A recent search of the Depart Aboriginal Heritage Sites idention The mining lease was granted in tenement.	let Smelter Royalty with Australia of any material 3rd party interests of Wilderness of Studies were undertaken for Me existing ethnographic data base of The studies concluded that it was formation was submitted to the Dement of Aboriginal Affairs (DAA) fied within any tenement covered prior to the Native Title Act being e	130/99 prior to further development in 2001. These studies pertaining to the mining area and an examination of known as unlikely that the developments will impact any sites of a partment of Aboriginal Affairs. Heritage Inquiry System indicates there are no registered under this MCP (DAA 2019).
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the	i ne tenements are held in goo	d standing by Red Dirt Mining Pty	LTG.
	area.			



Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The Red Dirt tenements have been actively explored and mined since 1886 with the arrival of prospecting parties during the initial Western Australia gold rush. Arthur and Tom Evans founded the First Hit gold mine in 1938. Tom and Arthur worked the mine until Tom sold his share to Riverina station owner Bill Skathorpe in late 1953. Arthur and Bill worked the mine until Bill's death in 1954. George Vujcich Senior bought the mine from Arthur and Bill's estate in late 1955. George and then his son George operated the mine intermittently over a 40-year period. Barminco purchased the First Hit tenement from George's daughter in late 1996. Regional exploration activities were undertaken by Western Mining Corporation (WMC) and Consolidated Gold Operations prior to 1996 including geochemical sampling, lag sampling and auger programs. The programs covered the various regolith features with a purpose of defining broad geochemical anomalies. From 1996 to 2002 exploration and development was undertaken by Barra Resource or Barminco. Barminco Pty Ltd undertook geochemical soil geochemistry on the northern part of M30/99 between 1995 and 2000. Various combinations of multielement geochemistry were completed historically, ranging from gold-only assays to 42 element geochemistry. The following extract from the Barra Resources mine closure and production report provides an insight to the exploration and discovery of the First Hit deposit: "Barrminco Pty Ltd acquired the First Hit tenement in August 1996, with the objective of exploring for and developing moderate sized high grade gold deposits. Because of Barminco's mining and exploration activities at Two Boys, Karonie, Jenny Wren, Gordon Sirdar and Bacchus Gift mines the period between August 1996 and June 2000 saw only intermittent work at First Hit. Twenty RC drill holes were completed demonstrating the potential for high-grade underground resources. The First Hit deposit was effectively discovered in June 2000 with drill hole BFH 025 which returned 3 zones of mineral
Geology	Deposit type, geological setting and style of mineralisation	Regional Geology The area of interest lies on the 1:100,000 Riverina geological sheet 3038 (Wyche, 1999). The Mt Ida greenstone belt is a north-striking belt of predominantly metamorphosed (upper greenschist-amphibolite facies) mafic and ultramafic rocks that form the western boundary of the Eastern Goldfields geological terrane. The major structure in this belt is the Mt Ida Fault, a deep mantle tapping crustal suture that trends N-S and dips to the east. It marks the western boundary of the Kalgoorlie Terrane (~2.7 Ga) of the Eastern Goldfields Province against the Barlee Terrane (~3.0 Ga) of the Southern Cross Province to the west. To the east the belt is bounded by the Ballard Fault, a continuation of the strike extensive Zuleika Shear. The Mt Ida belt is widely mineralised, predominantly with discordant vein gold deposits. Associated element anomalism typically includes copper and arsenic but neither have been identified in economic concentrations. There is some nickel sulphide mineralisation associated with the komatiite component of the supracrustal rocks and the area includes a locally significant beryl deposit sporadically mined for emeralds. In the Riverina area the outcrop position of the Ida Fault is equivocal, and it is best regarded as a corridor of related structures with an axis central to the belt. The Riverina and First Hit Project area dominantly comprises metabasalts and metadolerites of tholeiitic parentage with lesser metagabbros and komatiites. Small post-tectonic granitoids intrude the sequence with locally higher-grade metamorphic



Criteria	JORC Code explanation	Commentary
		conditions. Structurally, the dominant features are north-striking, east-dipping reverse faults and associated anastomosing strain zones. A conjugate set of late brittle structures striking NE and NW is also evident. The mineralisation exploited to date has typically been narrow mesothermal anastomosing veins. These frequently have strike and dip dimensions able to sustain small high-grade mining operations. Local Geology The local geology of the First Hit Project area comprises north striking ultramafics, komatiites and peridotites with some sediments in the eastern part of the block. To the west there is a metabasalt unit including a prominent gabbro and further west again more peridotite with amphibolite. The general strike trend drifts to the north-northwest then back to north. The sequence includes a small felsic intrusive west of the Emerald workings and a zone of felsic schists within the eastern ultramafics. Felsic intrusives occur in the northwest corner. The local strike fabric trends north then north-northeast. The First Hit mineralisation occurs as a quartz lode varying to 4 m in thickness dipping at 70° to the east. The lode is hosted in biotite-carbonate schist within metabasalt and plunges to the south at around 50°. Numerous shafts, prospecting pits and costeans exist on the tenements and recorded production for the First Hit and First Hit North areas in the period 1930-1974 was ~7478 oz Au from 6091 tonnes mined. The First Hit North workings are 130 m further to the north-northeast. References Wyche, S.1(1995). Geology of the Mulline and Riverina 1:100,000 Sheets. Geological Survey of Western Australia Grey, A.R (2002) Annual Technical Reporting, 1 July 2000 to 30 June 2001, E30/193, M30/99, M30/118, P30/869, P30/894, Padrige 4:400.000 Sheets.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Riverina 1:100,000 Sheet 3038 Barra Resources Limited A summary of the relevant drillhole information has been included in the body of the report.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	No top cuts have been applied to the reporting of the assay results. Intersection lengths and grades for all holes are reported as down-hole length-weighted averages of geologically selected intervals.



Criteria	JORC Code explanation	Commentary
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	The drilling programs at the First Hit deposit reported herein are variably oblique to the true width of the deposit. All drill holes are reported as down hole widths as the true width cannot be determined.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views	All appropriate maps and plans are included in the body of the report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All appropriate information is included in the report.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances	CSA Global undertook Principal Component Analysis on the geochemical data generated from air core programs across the tenement. Principal component analysis (PCA) simplifies the complexity of geochemical data while retaining trends and patterns. It does this by transforming the data into fewer dimensions, which act as summaries of features. A PCA plot shows clusters of samples based on their similarity. CSA Global and Viking Mines have utilised the historical geochemistry described in Section One to provide guidance in interpreting anomalism in prospects where anomalism has been defined in 2021 aircore geochemistry. The competent Person considers this appropriate geochemical support in the context of defining exploration targets.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	The next stage of work post drilling includes 3D model of the First Hit mineralisation at the mine scale is with preliminary wireframes constructed for mineralised lodes, faults and lithologies. The model, when_completed, will be used to undertake further targeting and plan follow up drilling. 3D modelling of the regional geology and structure at the tenement scale is in progress. The evaluation of the geochemical data is being evaluated to design additional exploration activities on the exploration tenements which may include geochemistry, RC and diamond drilling.