

Completion of Rock of Ages RC Drilling

Highlights

- Completed 5 hole, 654m RC program targeting extensive trend of historical high-grade gold workings
- Encouraging indicators of potential mineralisation observed within predicted target zone
- Every hole intersected quartz veining and zones of disseminated pyrite and/or arsenopyrite within a sheared, silicified felsic volcanic unit
- Assay results anticipated in 5 to 6 weeks (subject to laboratory backlog)

Western Mines Group Ltd (WMG or Company) (**ASX:WMG**) is pleased to update shareholders on the completion of a maiden drilling program at the Rock of Ages Project.

Summary

WMG has completed a maiden drilling program at the Company's Rock of Ages Project. This reverse circulation (RC) drill program was the first to properly test the depth potential of the high-grade gold mineralisation associated with the historical Rock of Ages workings - a series of shallow mine shafts and workings, over approximately 600m strike.

The drill program completed 5 holes to maximum depth of 150m, for a total of 654m, across 4 drill lines along the main central strike of the trend. The drilling was designed to target an inferred sub-vertical westerly dipping mineralised horizon and test for high-grade gold shoots or lodes beneath the main central shafts and workings. The Company is encouraged by the results of the drilling with a number of indicators of potential mineralisation observed as predicted.

The drilling predominantly intersected sheared felsic volcanics, which were often heavily weathered down to approximately 70-80m. In fresh rock, within the target horizon, quartz veining and zones of disseminated pyrite and arsenopyrite were observed within the silicified, sheared felsic volcanic.

Samples are in the process of being delivered to the ALS laboratory in Perth for gold analysis by fire assay, with results anticipated in 5 to 6 weeks (subject to current industry backlog). Whilst WMG is encouraged by a number of the geological indicators observed in the drilling, geochemical assay is required determine the presence of any gold mineralisation.

Commenting on the Rock of Ages Project, WMG Managing Director Caedmon Marriott said:

"We're pleased to have completed the Company's maiden drilling program. Rock of Ages was a walk up target given the concentration of high-grade historical workings that had never been properly tested at depth. The program was designed to target an inferred dipping mineralised horizon and we are encouraged by the execution of the drilling and the results observed. Every hole intersected zones of quartz veining and disseminated pyrite and arsenopyrite, within the silicified and sheared felsic volcanic unit, at the predicted target horizon. We now eagerly await the assay results!"

Project Overview

The Rock of Ages Project comprises prospecting licence P38/4203 and is located approximately 32km southeast of Laverton. The project lies on the Laverton Greenstone Belt, around 4.5km south of the historical Burtville Mining Centre and is surrounded by Focus Minerals (ASX:FML) Laverton Gold Project, with the neighbouring deposits of Burtville (206,000oz at 0.96g/t Au) and Karridale (1.19Moz at 1.33g/t Au) within a 5km radius. The tenement contains the Rock of Ages workings where historical records indicate 2,074oz Au was mined between 1902 and 1911 at an average grade of 50g/t Au.

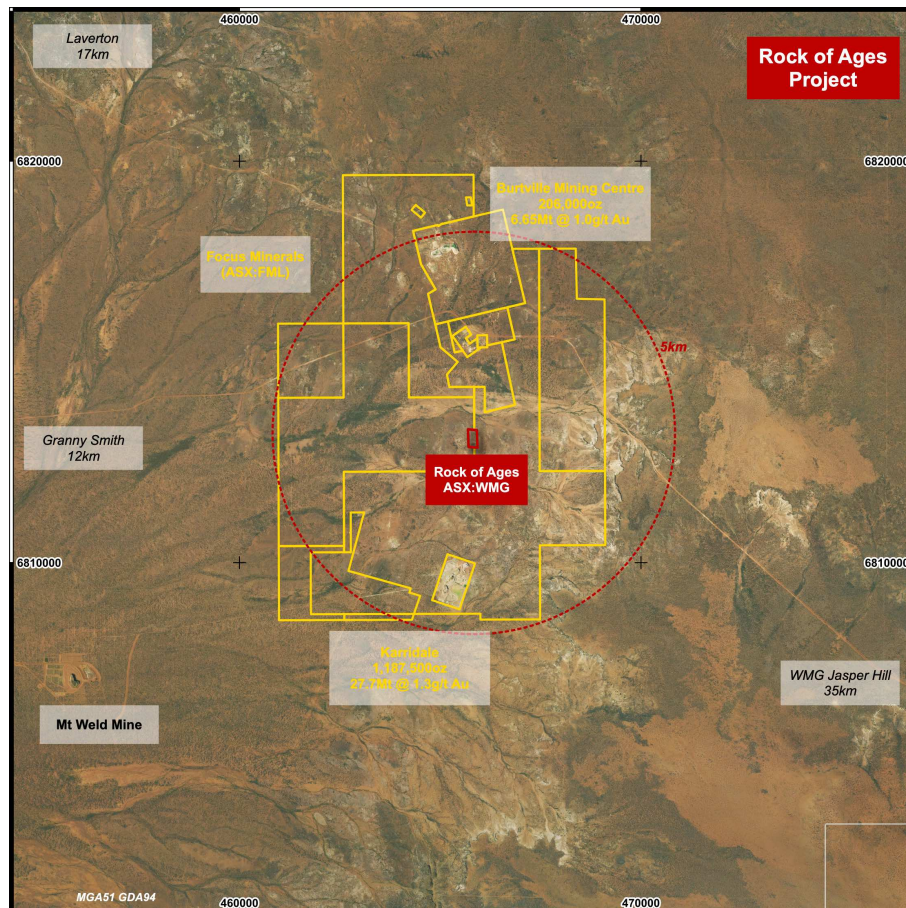


Figure 1: Location of Rock of Ages Project

WMG RC Drilling Program

WMG has completed a 5 hole RC drilling program totalling 654m designed to test beneath the main central cluster of shafts and workings and area of extensive mullock dumps. The holes ranged in depth from 120m to 150m depth targeting an inferred sub-vertical mineralised horizon dipping towards the west. The holes were drilled across 4 lines along the strike of the trend of shafts and workings.

The drilling predominantly intersected sheared felsic volcanics, which were often heavily weathered down to approximately 70-80m. An increased depth of weathering can often be associated with areas of mineralisation within the Eastern Goldfields of WA. In fresh rock, within the target horizon, quartz veining and zones of disseminated pyrite and arsenopyrite were observed in every hole, within the silicified, sheared felsic volcanic unit.

HoleID	Easting (MGA51)	Northing (MGA51)	Max Depth (m)	Azimuth	Dip	From (m)	To (m)	Interval (m)	Notes
RARC001	465810	6813000	126	90	-60	94	107	13	Silicified, sheared felsic volcanic with quartz veining, pyrite and arsenopyrite
RARC002	465800	6812965	138	90	-60	104 121	115 127	11 6	Silicified, sheared felsic volcanic with quartz veining and pyrite
RARC003	465820	6812930	120	90	-60	97	103	6	Silicified, sheared felsic volcanic with quartz veining and pyrite
RARC005	465795	6812930	150	90	-60	108 139	115 145	7 6	Silicified, sheared felsic volcanic with quartz veining, pyrite and arsenopyrite
RARC006	465820	6183035	120	90	-60	95	108	13	Silicified, sheared felsic volcanic with quartz veining and pyrite

Table 1: Details of WMG RC Drilling Program at Rock of Ages



Figure 2: Example of silicified, sheared felsic volcanic rock chip with disseminated pyrite and arsenopyrite (Hole RARC001, depth of 106m)

A total of 288 samples were collected for geochemical assay, with 4m composites taken from 0m to 40m down each hole and 2m composites taken from 40m to end of each hole. The samples are in the process of being delivered to the ALS laboratory in Perth for gold analysis by fire assay, with results anticipated in 5 to 6 weeks (subject to current industry backlog). WMG is encouraged by the geological indicators observed in the drilling, however, only geochemical assay will determine the presence of any gold mineralisation. The Company looks forward to updating shareholders on these results in due course.

For further information please contact: Dr Caedmon Marriott
 Managing Director
 Tel: +61 475 116 798
 Email: contact@westernmines.com.au

This announcement has been authorised for release to the ASX by the Board of Western Mines Group Ltd

Western Mines Group Ltd

ACN 640 738 834
Level 3, 33 Ord Street
West Perth
WA 6005

Board**Rex Turkington**

Non-Executive Chairman

Dr Caedmon Marriott

Managing Director

Francesco Cannavo

Non-Executive Director

Paul Burton

Non-Executive Director

Capital Structure

Shares: 43.8m
Options: 18.4m
Share Price: \$0.185
Market Cap: \$8.10m
Cash (30/06/21): \$5.5m

 @westernmines
 westernmines
 Western Mines Group

About WMG

Western Mines Group Ltd (ASX:WMG) is a mineral exploration company driven by the goal to create significant investment returns for our shareholders through exploration and discovery of high-value gold and nickel sulphide deposits across a portfolio of highly-prospective projects located on major mineral belts of Western Australia.

Our flagship project and current primary focus is the Mulga Tank Ni-Cu-PGE Project, a major dunite intrusive found on the under-explored Minigwal Greenstone Belt. Previous work shows significant evidence for a working sulphide mineral system and is considered highly prospective for Ni-Cu-PGE mineralisation.

WMG holds numerous other projects across major WA mineral belts including Melita (Au), midway between Kookynie and Leonora in the heart of the WA Goldfields and Jasper Hill (Au), with numerous prospective gold trends extending from the adjacent Lord Byron and Fish historical gold mines. The Company is also actively exploring Youanmi (Au), Pavarotti (Ni-Cu-PGE), Rock of Ages (Au), Broken Hill Bore (Au) and Pinyalling (Au).

Competent Persons Statement

The information in this announcement that relates to Exploration Results and other technical information complies with the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code) and has been compiled and assessed under the supervision of Dr Caedmon Marriott, Managing Director of Western Mines Group Ltd. Caedmon is a Member of the Australian Institute of Geoscientists and a Member of the Australasian Institute of Mining and Metallurgy. He has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC Code. Caedmon consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

Disclaimer

Some of the statements appearing in this announcement may be in the nature of forward looking statements. You should be aware that such statements are only predictions and are subject to inherent risks and uncertainties. Those risks and uncertainties include factors and risks specific to the industries in which WMG operates and proposes to operate as well as general economic conditions, prevailing exchange rates and interest rates and conditions in the financial markets, among other things. Actual events or results may differ materially from the events or results expressed or implied in any forward looking statement. No forward looking statement is a guarantee or representation as to future performance or any other future matters, which will be influenced by a number of factors and subject to various uncertainties and contingencies, many of which will be outside WMG's control.

WMG does not undertake any obligation to update publicly or release any revisions to these forward looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions or conclusions contained in this announcement. To the maximum extent permitted by law, none of WMG, its Directors, employees, advisors or agents, nor any other person, accepts any liability for any loss arising from the use of the information contained in this announcement. You are cautioned not to place undue reliance on any forward looking statement. The forward looking statements in this announcement reflect views held only as at the date of this announcement.

Rock of Ages

JORC Code, 2012 Edition - Table 1

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Reverse circulation drilling was used to obtain individual 1 metre samples downhole Each 1 metre sample was grab sampled and composited over either a 4 metre interval (from 0m to 40m depth) or 2 metre interval (from 40m depth to end of hole) to obtain approximately a 2kg to 3kg sample for analysis Samples will be pulverised to obtain a homogenised sample from which a 50g sample will be used for fire assay A QA/QC system comprising standards, blanks and duplicate sample analysis is used to evaluate the assay process
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Reverse circulation percussion using a Hydco RC70 drill rig with a 5.25inch face sampling bit
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Sample recoveries assessed quantitatively with each 1 metre sample weighed to assess recovery Standard drilling techniques used to maximise sample recovery Information not available to assess relationship between sample recovery and grade
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Drill holes geologically logged on a metre basis Logging is to a level of detail sufficient to support Mineral Resource estimation or other technical studies but further detailed information would be required Logging is qualitative in nature 100% of all drill holes and relevant intersections logged

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> • Majority of samples were dry however minor ground water was encountered and some samples were taken wet • Systematic grab sampling of approximately 0.5kg to 1kg from each 1 metre drill sample to obtain either a 4 metre or 2 metre composite sample of around 2kg to 3kg • Industry standard sample preparation techniques will be undertaken and considered appropriate for the sample type and material sampled • The sample size is considered appropriate to the grain size of the material being sampled
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> • Nature and quality of the assay and laboratory procedures are considered appropriate for the drill chip samples • Samples will be submitted to ALS in Perth for gold fire assay using method code Au-AA24, considered to be a total technique • Standards, blanks and duplicate samples introduced throughout the sample collection on a 1:25 ratio to ensure quality control • ALS will also complete duplicate sampling and run internal standards as part of the assay regime
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • No assay data yet received • Any significant intersections of gold mineralisation are currently unknown
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • Drill hole collars located using a handheld GPS with accuracy of +/-3m, downhole surveys undertaken for all holes using an accurate gyroscopic tool • Coordinates are in GDA94 Zone 51 • Topographic control is adequate and based on handheld GPS
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • Drill holes were completed on 35m spaced lines • Sample compositing has been applied with either 4 individual metre samples composited to obtain an assay sample for samples from 0m to 40m depth and 2 individual metre samples composited to obtain an assay sample for sampled from 40m depth to end of hole
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Orientation of sampling is downhole • There is no quantitative information regarding the orientation of mineralised structures and the relationship between drilling orientation and the orientation of key mineralised structures is not known • No sampling bias is considered to have been introduced but there is currently insufficient information to confirm this

Criteria	JORC Code explanation	Commentary
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> Samples were bagged and secured in the field by Company staff Samples will be transported directly to the analytical laboratory by a third party freight company
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> No sampling techniques or data have been independently audited

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> Tenement P38/4203 Held 100% by Western Mines Group Ltd 1% NSR to original tenement holder Native Title Claim by Nyalpa Pirniku not yet determined No known historical or environmentally sensitive areas within the tenement area Tenement is in good standing
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> Esmeralda Exploration undertook a 7 hole RC drilling program within the project area in 1985 (WAMEX A17850)
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> Geology consists of quartz veins in a schistose felsic volcanic-tuffaceous sequence that includes ferruginous chert units
Drill hole information	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> A listing of the drill hole information material to the understanding of the exploration results provided in the body of this announcement To date no geochemical assay data confirming gold mineralisation has been received and the information presented is for the purpose of updating shareholders on the completion of the drilling program only The use of any data is recommended for indicative purposes only in terms of potential gold mineralisation and for developing exploration targets
Data aggregation methods	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> No metal equivalent values have been quoted

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • Presence of any gold mineralisation is currently unknown • Field observations are reported as down hole lengths
Diagrams	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • Appropriate maps and tabulations are presented in the body of the announcement
Balanced reporting	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • No assay data yet received
Other substantive exploration data	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • Geological field observations presented in the body of the announcement
Further work	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Future exploration may include more RC drilling • Exploration is at an early stage and future drilling areas will depend on interpretation of results