



**ASX Announcement**  
4 October 2021

## Scotia Deeps returns wide and very high grade results

Pantoro Limited (**ASX:PNR**) (**Pantoro**) is pleased to provide further high grade drilling results from the Scotia Deeps program currently underway at the Norseman Gold Project (PNR: 50%). The program is designed to extend known mineralisation and convert current Inferred and unclassified material to Indicated Mineral Resource and Probable Ore Reserve.

### Key Highlights

- New high grade results from outside of the current Ore Reserve including:
  - » 18 m @ 8.29 g/t Au from 174 m.
  - » 6 m @ 11.68 g/t Au from 114 m.
  - » 11 m @ 3.22 g/t Au from 179 m inc. 4 m @ 6.81 g/t Au .
  - » 3.7 m @ 7.04 g/t Au from 358 m.
  - » 3.4 m @ 9.37 g/t Au from 405.6 m.
  - » 1.7 m @ 12.96 g/t Au from 297.1 m.
  - » 6 m @ 3.45 g/t Au from 361 m inc. 3.2 m @ 5.83 g/t Au.
  - » 7 m @ 2.92 g/t Au from 331 m inc. 2 m @ 6.02 g/t Au.
  - » 3.26 m @ 5.95 g/t Au from 314.96 m.
  - » 3.8 m @ 3.81 g/t Au from 435.4 m.
  - » 7.2 m @ 17.58 g/t Au from 431.2 m.
  - » 4.4 m @ 6.1 g/t Au from 505.6 m.
  - » 11.3 m @ 5.1 g/t Au from 364.7 m.
  - » 3 m @ 5.19 g/t Au from 152 m.
  - » 1.2 m @ 16.26 g/t Au from 480.8 m.
  - » 2.9 m @ 8.05 g/t Au from 258.1 m.
  - » 5.4 m @ 3.99 g/t Au from 379.4 m.
  - » 2 m @ 7.2 g/t Au from 357 m.
  - » 2 m @ 7.46 g/t Au from 17 m.
- Results received to date have successfully confirmed continuity of Inferred Mineral Resources and unclassified mineralisation, revealing consistent ore zones ideal for open stoping.
- These results are expected to deliver additional Ore Reserves, further extending the current mine life and annual gold production.
- Mineral Resource and Ore Reserve update planned for March 2022 quarter.
- Drilling confirms high grade mineralisation more than 500m below surface, suggesting a long life underground ore source. Underground Mining is expected to commence well before the completion of open pit mining with an integrated plan already included in the Phase One Mine Plan.
- Drill out is continuing with four active drill rigs currently deployed.

Commenting on the results Pantoro Managing Director Paul Cmrlec said:

“Drilling within the Scotia Mining Centre has been an outstanding success, both in extending known orebodies and in discovery of new mineralised zones. The results at depth confirm that the Scotia Mining Centre will be a long life, very high grade ore source for the Norseman Gold Project for many years to come.”

**Pantoro Limited**  
ABN 30 003 207 467

t: +61 8 6263 1110 | e: admin@pantoro.com.au | w: www.pantoro.com.au  
PO Box 1353 West Perth WA 6872 | 1187 Hay Street, West Perth WA 6005


## Scotia Deeps Results

Drilling has been ongoing at Scotia Deeps throughout Pantoro's drilling campaign over the past 18 months. While the current Phase One Mine Plan only includes modest underground Ore Reserves from Scotia, Pantoro believes that the Scotia Orebody presents an outstanding high grade underground opportunity which can be substantially larger than currently defined.

Additional high grade underground ounces would facilitate further improvement of the robust outcomes of the Phase One Mine Plan, potentially extending mine life and increasing annual gold production. Drilling results received from Scotia Deeps since announcement of the maiden Ore Reserve in October 2020 include:

- 7.2 m @ 17.58 g/t Au from 431.2 m.
- 1.2 m @ 16.26 g/t Au from 480.8 m.
- 1.7 m @ 12.96 g/t Au from 297.1 m.
- 6 m @ 11.68 g/t Au from 114 m.
- 18 m @ 8.29 g/t Au from 174 m.
- 4 m @ 10.83 g/t Au inc. 0.7 m @ 56.20 g/t Au from 437 m.
- 3.4 m @ 9.37 g/t Au from 405.6 m.
- 3 m @ 8.12 g/t Au inc. 1 m @ 21.60 g/t Au from 180 m.
- 2.9 m @ 8.05 g/t Au from 258.1 m.
- 9.94 m @ 7.24 g/t Au inc. 1.75 m @ 17.38 g/t Au from 195.06 m.
- 2 m @ 7.46 g/t Au from 17 m.
- 2 m @ 7.2 g/t Au from 357 m.
- 3.7 m @ 7.04 g/t Au from 358 m.
- 2.6 m @ 6.51 g/t Au from 451.8 m.
- 4.4 m @ 6.1 g/t Au from 505.6 m.
- 5.25 m @ 5.27 g/t Au from 155.75 m.
- 11.3 m @ 5.1 g/t Au from 364.7 m.
- 3.26 m @ 5.95 g/t Au from 314.96 m.
- 3 m @ 5.19 g/t Au from 152 m.
- 10 m @ 3.18 g/t Au from 177 m.
- 3.85 m @ 4.03 g/t Au from 446.1 m.
- 5.4 m @ 3.99 g/t Au from 379.4 m.
- 3.8 m @ 3.81 g/t Au from 435.4 m.
- 6 m @ 3.45 g/t Au from 361 m inc. 3.2 m @ 5.83 g/t Au.
- 11 m @ 3.22 g/t Au from 179 m inc. 4 m @ 6.81 g/t Au.
- 7 m @ 2.92 g/t Au from 331 m inc. 2 m @ 6.02 g/t Au.

Refer to ASX Announcement entitled 'Deep drilling at Scotia confirms high grade mineralisation' dated 10 May 2021.

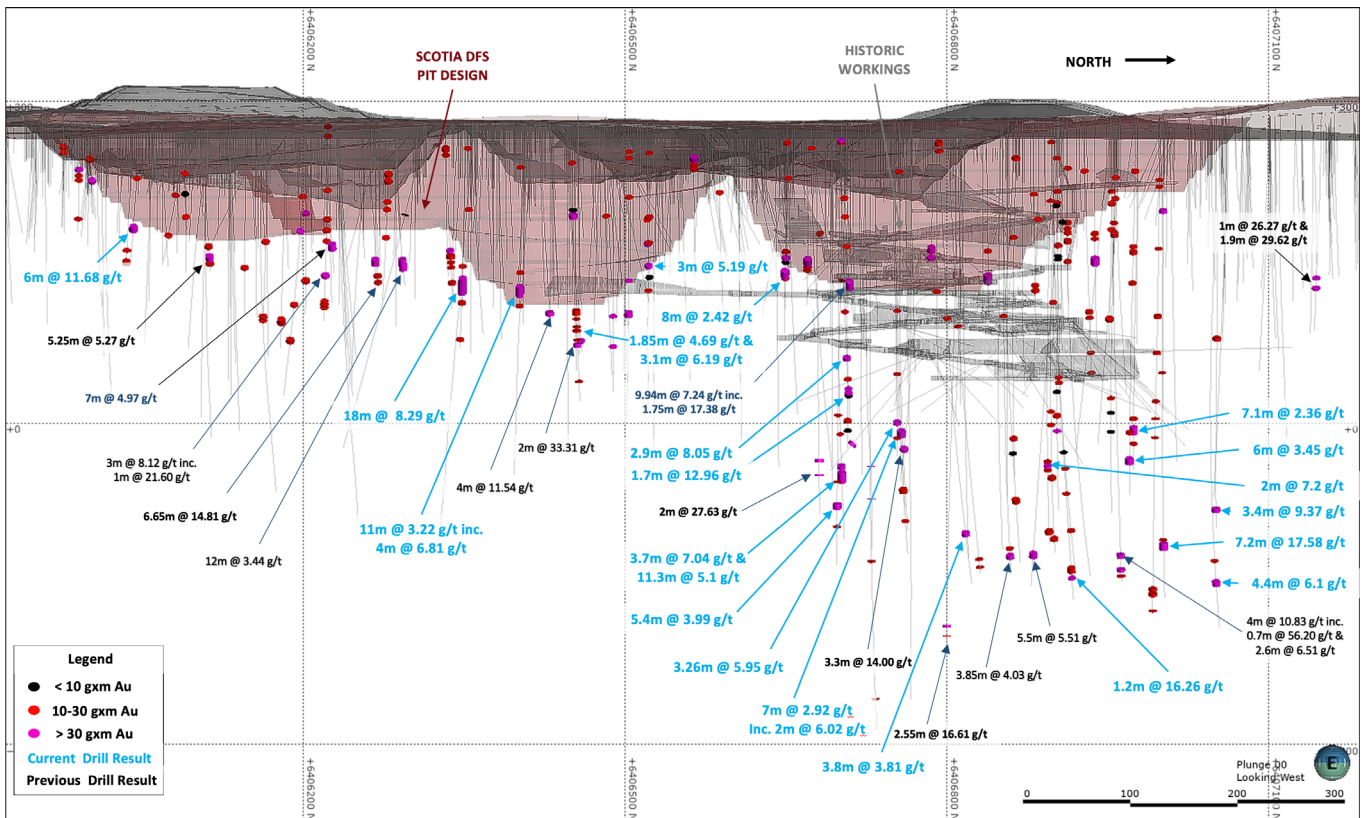

Long Section of Scotia Mine

Pantoro anticipates completion of the current phase of drilling during the December 2021 quarter, and intends to re-estimate Mineral Resources and Ore Reserves during the March 2022 quarter. Additional phases of drilling are expected to be ongoing at the Scotia Mining Centre for the foreseeable future.

### Scotia Mining Centre

The Scotia Mining Centre is located approximately 25 km south of Norseman and was discovered in 1893. The historic production recorded from the Scotia mine via open pit and underground mining was 811,000 tonnes @ 5.9 g/t Au for 155,000 ounces. Scotia was actively mined from 1987 until 1996.

Scotia hosts a number of Mineral Resource areas in close proximity, and several zones where high grade mineral occurrences have not yet been classified. Pantoro has been very successful in demonstrating the value of the Scotia Mining Centre, with a current Mineral Resource of 10,618 Kt @ 2.2 g/t Au for 753,000 ounces and Ore Reserve of 4,216 Kt @ 2.2 g/t Au for 298,000 Ounces (Refer to ASX release on 23 September 2021 titled Annual Mineral Resource & Ore Reserve Statement”).

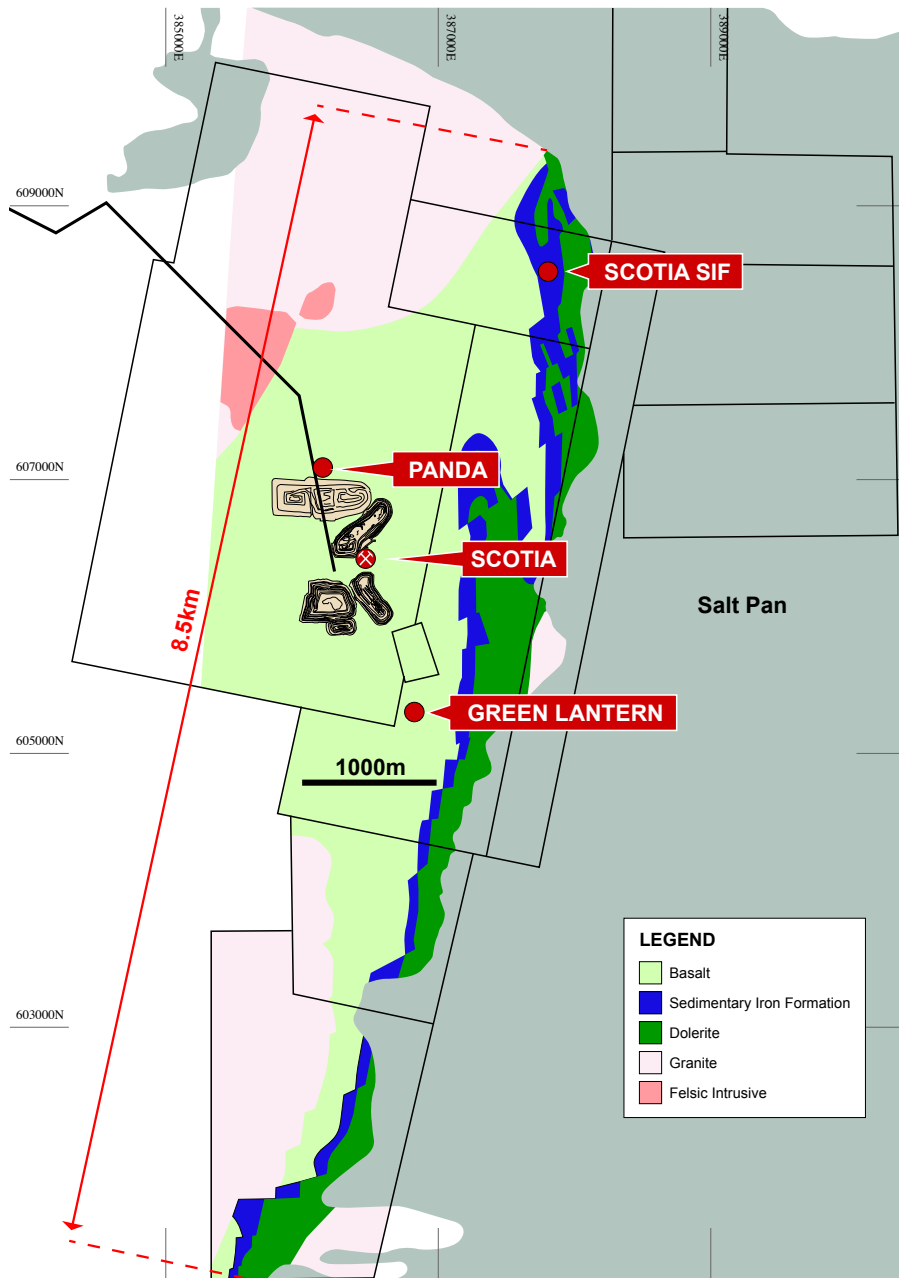


Figure: Plan of Scotia Mining Centre

The mineralisation at Scotia is hosted by a shear zone that transects the Woolyeenyer Formation. The geological environment differs from that at Norseman, in that the stratigraphy has been subjected to higher metamorphic grades. Primary gold is located in shear zones with quartz sulphide veins predominantly pyrrhotite and is structurally controlled by closely spaced brittle faults of varying orientations.

### **About the Norseman Gold Project (Pantoro 50%)**

Pantoro announced the major acquisition of 50% of the Norseman Gold Project in May 2019 and completion occurred on 9 July 2019. Pantoro is the manager of the unincorporated joint venture, and is responsible for defining and implementing work programs, and the day to day management of the operation.

The Norseman Gold Project is located in the Eastern Goldfields of Western Australia, at the southern end of the highly productive Norseman-Wiluna greenstone belt. The project lies approximately 725 km east of Perth, 200 km south of Kalgoorlie, and 200 km north of Esperance.

The project comprises 146 near-contiguous mining tenements, most of which are pre-1994 Mining Leases. The tenure extends approximately 70 lineal kilometres of the highly prospective Norseman–Wiluna greenstone belt covering approximately 800 square kilometres.

Historically, the Norseman Gold Project areas have produced over 5.5 million ounces of gold since operations began in 1935, and is one of, if not the highest grade fields within the Yilgarn Craton.

The current Mineral Resource is 4.5 million ounces of gold (100% basis). Many of the Mineral Resources defined to date remain open along strike and at depth, and many of the Mineral Resources have only been tested to shallow depths. In addition, there are numerous anomalies and mineralisation occurrences which are yet to be tested adequately to be placed into Mineral Resources, with a number of highly prospective targets already identified by drilling.

Pantoro has focused initial project planning on six initial mining areas containing multiple deposits which are amenable to both open pit and underground mining. A Phase One DFS was completed in October 2020 detailing an initial seven year mine plan with a centralised processing facility and combination of open pit and underground mining producing approximately 108,000 ounces per annum. A new one million tonne per annum processing plant is to be constructed by GR Engineering following an extensive tendering process.

### **Enquiries**

Paul Cmrlec | Managing Director | Ph: +61 8 6263 1110 | Email: [admin@pantoro.com.au](mailto:admin@pantoro.com.au)

This announcement was authorised for release by Paul Cmrlec, Managing Director.

## Appendix 1 – Table of Drill Results

Hole Number	Northing	Easting	RL	Dip (degrees)	Azimuth (degrees)	End of Hole Depth (m)		Downhole From (m)	Downhole To (m)	Downhole Intersection (m)	Au gpt (uncut)	Est. True Width (m)
SCRCD21_108	6406454	386576	279	-65	270	284.8		203	203.5	0.5	3.09	0.4
SCRCD21_108	6406454	386576	279	-65	270	284.8		210.4	211.45	1.05	1.28	0.84
SCRCD21_108	6406454	386576	279	-65	270	284.8		213.9	215.75	1.85	4.69	1.48
SCRCD21_108	6406454	386576	279	-65	270	284.8		223.7	224	0.3	4.69	0.24
SCRCD21_108	6406454	386576	279	-65	270	284.8		227.2	230.3	3.1	6.19	2.48
SCRCD21_108	6406454	386576	279	-65	270	284.8		264.6	265.5	0.9	8.78	0.72
SCRCD21_122	6406701	386896	279	-60	270	200		17	19	2	7.46	1.6
SCRCD21_127	6406850	386905	276	-60	270	151.8				0	NSA	0
SCRCD21_133	6406975	386805	286	-60	270	399.8		59	61	2	1.79	1.6
SCRCD21_133	6406975	386805	286	-60	270	399.8		140	141	1	1.19	0.8
SCRCD21_133	6406975	386805	286	-60	270	399.8		145	148	3	1.10	2.4
SCRCD21_133	6406975	386805	286	-60	270	399.8		178	180	2	2.68	1.6
SCRCD20_097	6406800	386823	279	-65	270	399.8		201.7	202.7	1	1.60	0.8
SCRCD20_097	6406800	386823	279	-65	270	399.8		436	437	1	2.09	0.8
SCRCD20_097	6406800	386823	279	-65	270	450.7		444	444.7	0.7	11.90	0.56
SCRCD20_098	6406791	386920	280	-65	270	492.6		205	205.9	0.9	6.49	0.72
SCRCD20_098	6406791	386920	280	-65	270	492.6		435.4	439.2	3.8	3.81	3.04
SCRC21_118	6406926	386694	285	-55	270	290		61	62	1	1.17	0.8
SCRC21_118	6406926	386694	285	-55	270	290		216	218	2	2.34	1.6
SCRC21_118	6406926	386694	285	-55	270	290		223	224	1	2.12	0.8
SCRC21_118	6406926	386694	285	-55	270	290		260	261	1	1.10	0.8
SCRC21_118	6406926	386694	285	-55	270	290		281	282	1	1.55	0.8
SCRCD21_091	6406998	386836	284	-65	270	501.4		64	65	1	1.43	0.8
SCRCD21_091	6406998	386836	284	-65	270	501.4		71	72	1	4.10	0.8
SCRCD21_091	6406998	386836	284	-65	270	501.4		134	135	1	2.14	0.8
SCRCD21_091	6406998	386836	284	-65	270	501.4		201	204	3	1.62	2.4
SCRCD21_091	6406998	386836	284	-65	270	501.4		238	240	2	1.02	1.6

Hole Number	Northing	Easting	RL	Dip (degrees)	Azimuth (degrees)	End of Hole Depth (m)		Downhole From (m)	Downhole To (m)	Downhole Intersection (m)	Au gpt (uncut)	Est. True Width (m)
SCRCD21_091	6406998	386836	284	-65	270	501.4		287	288	1	1.06	0.8
SCRCD20_094	6406998	386836	284	-65	270	440		353	354	1	1.54	0.8
SCRCD20_094	6406998	386836	284	-65	270	440		357	359	2	7.20	1.6
SCRCD20_094	6406998	386836	284	-65	270	440		362	363	1	1.52	0.8
SCRCD20_094	6406998	386836	284	-65	270	440		425	429	4	1.52	3.2
SCRCD21_119	6406998	386836	284	-55	270	264		101	103	2	1.56	1.6
SCRCD21_119	6406998	386836	284	-55	270	264		132	133	1	1.43	0.8
SCRCD21_119	6406998	386836	284	-55	270	264		237	240	3	0.82	2.4
SCRCD21_114	6406998	386836	284	-55	270	243.6		168.4	176.4	8	2.42	6.4
SCRCD21_123	6406998	386836	284	-60	270	351.6		314.96	318.22	3.26	5.95	2.608
SCRCD21_123	6406998	386836	284	-60	270	351.6		332.87	333.17	0.3	10.50	0.24
SCRCD20_099	6406998	386836	284	-70	270	441.8		291	291.6	0.6	5.31	0.48
SCRCD20_099	6406998	386836	284	-70	270	441.8		357.85	358.15	0.3	19.00	0.24
SCRCD20_099	6406998	386836	284	-70	270	441.8		379.4	384.8	5.4	3.99	4.32
SCRCD20_099	6406998	386836	284	-70	270	441.8		402.7	403.5	0.8	3.99	0.64
SCRCD21_124	6406998	386836	284	-60	270	414.7		202	202.6	0.6	2.02	0.48
SCRCD21_124	6406998	386836	284	-60	270	414.7		331	338	7	2.92	5.6
SCRCD21_124	6406998	386836	284	-60	270	414.7	incl.	332	334	2	6.02	1.6
SCRCD21_133	6406975	386805	286	-60	270	399.8		333.2	335.4	2.2	1.54	1.76
SCRCD21_133	6406975	386805	286	-60	270	399.8		361	367	6	3.45	4.8
SCRCD21_133	6406975	386805	286	-60	270	399.8	incl.	363.8	367	3.2	5.83	2.56
SCRCD21_120	6406998	386836	284	-60	270	324.7		208.1	208.7	0.6	7.40	0.48
SCRCD21_120	6406998	386836	284	-60	270	324.7		258.1	261	2.9	8.05	2.32
SCRCD21_120	6406998	386836	284	-60	270	324.7		282.5	283.3	0.8	1.95	0.64
SCRCD21_120	6406998	386836	284	-60	270	324.7		292.8	293.5	0.7	14.30	0.56
SCRCD21_120	6406998	386836	284	-60	270	324.7		297.1	298.8	1.7	12.96	1.36
SCRCD21_120	6406998	386836	284	-60	270	324.7		301	301.7	0.7	1.05	0.56
SCRCD21_091	6406998	386836	284	-65	270	501.4		304.6	304.9	0.3	5.97	0.24

Hole Number	Northing	Easting	RL	Dip (degrees)	Azimuth (degrees)	End of Hole Depth (m)		Downhole From (m)	Downhole To (m)	Downhole Intersection (m)	Au gpt (uncut)	Est. True Width (m)
SCRCD21_091	6406998	386836	284	-65	270	501.4		323.6	324.1	0.5	3.66	0.4
SCRCD21_091	6406998	386836	284	-65	270	501.4		475	477.3	2.3	1.07	1.84
SCRCD21_091	6406998	386836	284	-65	270	501.4		480	483.2	3.2	1.14	2.56
SCRCD21_091	6406998	386836	284	-65	270	501.4		498	498.55	0.55	13.50	0.44
SCRCD21_129	6406900	386889	278	-60	270	480.7		273.4	274.1	0.7	4.52	0.56
SCRCD21_129	6406900	386889	278	-60	270	480.7		279	279.5	0.5	11.60	0.4
SCRCD21_129	6406900	386889	278	-60	270	480.7		372	372.5	0.5	2.09	0.4
SCRCD21_129	6406900	386889	278	-60	270	480.7		439	440	1	2.00	0.8
SCRCD21_125	6406750	386921	279	-60	270	457.9		266.2	266.7	0.5	5.42	0.4
SCRCD21_125	6406750	386921	279	-60	270	457.9		388	392	4	1.67	3.2
SCRCD21_125	6406750	386921	279	-60	270	457.9		422.5	422.9	0.4	15.30	0.32
SCRCD21_132	6406977	386775	286	-60	270	370.7		317	318.2	1.2	1.57	0.96
SCRCD21_132	6406977	386775	286	-60	270	370.7		325.9	333	7.1	2.36	5.68
SCRCD21_132	6406977	386775	286	-60	270	370.7		343	344	1	1.11	0.8
SCRCD21_130	6406897	386921	276	-60	270	504.7		347.7	348	0.3	1.46	0.24
SCRCD21_130	6406897	386921	276	-60	270	504.7		391.6	391.9	5.1	1.35	4.08
SCRCD21_130	6406897	386921	276	-60	270	504.7		470	475.1	5.1	1.05	4.08
SCRCD21_130	6406897	386921	276	-60	270	504.7		480.8	482	1.2	16.26	0.96
SCRCD21_121	6406706	386861	281	-60	270	353.2		322.7	324.7	2	4.59	1.6
SCRCD21_121	6406706	386861	281	-60	270	353.2		334.3	334.7	0.4	1.37	0.32
SCRCD21_126	6406850	386875	277	-60	270	200				0	NSA	0
SCRCD21_090	6407001	386786	287	-65	90	486.7		261.4	261.8	0.4	5.85	0.32
SCRCD21_090	6407001	386786	287	-65	90	486.7		428.3	428.8	0.5	2.90	0.4
SCRCD21_090	6407001	386786	287	-65	90	486.7		431.2	438.4	7.2	17.58	5.76
SCRC21_148	6406048	386700	277	-54	270	150		60	61	1	1.05	0.8
SCRC21_148	6406048	386700	277	-54	270	150		114	120	6	11.68	4.8
SCRC21_149	6405997	386682	276	-50	270	120		40	43	3	0.95	2.4
SCRC21_149	6405997	386682	276	-50	270	120		67	70	3	3.90	2.4



Hole Number	Northing	Easting	RL	Dip (degrees)	Azimuth (degrees)	End of Hole Depth (m)		Downhole From (m)	Downhole To (m)	Downhole Intersection (m)	Au gpt (uncut)	Est. True Width (m)
SCRCD21_128	6406900	386858	279	-60	270	465.7		311.95	312.25	0.3	7.72	0.24
SCRCD21_128	6406900	386858	279	-60	270	465.7		325.9	326.85	0.95	3.87	0.76
SCRCD21_128	6406900	386858	279	-60	270	465.7		382.45	385.25	2.8	1.20	2.24
SCRCD21_128	6406900	386858	279	-60	270	465.7		449.3	451.7	2.4	2.32	1.92
SCRCD21_088	6407051	386755	290	-65	270	426.8		231	234	3	1.53	2.4
SCRC21_150	6405976	386679	277	-60	270	100		24	26	2	3.96	1.6
SCRC21_150	6405976	386679	277	-60	270	100		32	33	1	2.04	0.8
SCRCD21_090	6407001	386786	287	-65	90	486.7		98	101	3	3.91	2.4
SCRCD21_183	6406755	386911	279	-60	270	234		52	53	1	1.81	0.8
SCRCD21_172	6406901	386802	282	-60	270	246		41	42	1	1.41	0.8
SCRCD21_172	6406901	386802	282	-60	270	246		77	78	1	2.74	0.8
SCRCD21_172	6406901	386802	282	-60	270	246		89	90	1	2.09	0.8
SCRCD21_172	6406901	386802	282	-60	270	246		134	136	2	1.05	1.6
SCRCD21_172	6406901	386802	282	-60	270	246		146	147	1	0.70	0.8
SCRCD21_172	6406901	386802	282	-60	270	246		149	150	1	0.63	0.8
SCRC21_113	6406651	386654	279	-60	270	200		138	140	2	1.19	1.6
SCRC21_113	6406651	386654	279	-60	270	200		144	147	3	4.54	2.4
SCRC21_113	6406651	386654	279	-60	270	200		150	151	1	0.66	0.8
SCRC21_113	6406651	386654	279	-60	270	200		159	162	3	0.88	2.4
SCRC21_113	6406651	386654	279	-60	270	200		166	168	2	1.58	1.6
SCRCD21_177	6406879	386891	277	-60	270	210		73	74	1	4.09	0.8
SCRCD21_177	6406879	386891	277	-60	270	210		171	172	1	1.31	0.8
SCRCD21_177	6406879	386891	277	-60	270	210		176	178	2	1.03	1.6
SCRCD21_127	6406852	386899	275	-60	270	474.7		353.6	354	0.4	1.33	0.32
SCRCD21_127	6406852	386899	275	-60	270	474.7		403.8	407.85	4.05	1.78	3.24
SCRCD21_186	6406673	386886	279	-60	270	151		26	27	1	2.74	0.8
SCRCD21_188	6406650	386794	281	-60	270	151		22	24	2	1.15	1.6
SCRCD21_188	6406650	386794	281	-60	270	151		61	62	1	2.42	0.8

Hole Number	Northing	Easting	RL	Dip (degrees)	Azimuth (degrees)	End of Hole Depth (m)		Downhole From (m)	Downhole To (m)	Downhole Intersection (m)	Au gpt (uncut)	Est. True Width (m)
SCRC21_147	6406090	386668	278	-50	260	174		87	88	1	1.53	0.8
SCRC21_147	6406090	386668	278	-50	260	174		136	137	1	5.08	0.8
SCRC21_176	6406900	386893	278	-60	270	240		193	194	1	4.08	0.8
SCRC21_088	6407051	386755	290	-65	270	426.8		405.6	409	3.4	9.37	2.72
SCRC21_179	6406850	386968	272	-60	270	120				0	NSA	0
SCRC21_174	6406900	386846	280	-60	270	240		91	92	1	1.00	0.8
SCRC21_111	6406522	386581	279	-60	270	300		31	32	1	1.77	0.8
SCRC21_111	6406522	386581	279	-60	270	300		100	102	2	1.17	1.6
SCRC21_111	6406522	386581	279	-60	270	300		128	129	1	1.11	0.8
SCRC21_111	6406522	386581	279	-60	270	300		152	155	3	5.19	2.4
SCRC21_111	6406522	386581	279	-60	270	300		179	180	1	1.57	0.8
SCRC21_184	6406724	386901	279	-60	270	180				0	NSA	0
SCRC21_180	6406790	386934	279	-60	268	282		186	187	1	9.35	0.8
SCRC21_122	6406701	386896	279	-60	268	435.7		325.5	325.8	0.3	6.40	0.24
SCRC21_122	6406701	386896	279	-60	268	435.7		358	361.7	3.7	7.04	2.96
SCRC21_122	6406701	386896	279	-60	268	435.7		364.7	376	11.3	5.10	9.04
SCRC21_112	6406503	386626	279	-60	270	324		30	31	1	1.36	0.8
SCRC21_112	6406503	386626	279	-60	270	324		37	38	1	1.15	0.8
SCRC21_112	6406503	386626	279	-60	270	324		80	81	1	1.07	0.8
SCRC21_112	6406503	386626	279	-60	270	324		171	172	1	17.50	0.8
SCRC21_112	6406503	386626	279	-60	270	324		205	210	5	2.95	4
SCRC21_172	6406901	386802	282	-60	273	420		291	291.5	0.5	1.09	0.4
SCRC21_172	6406901	386802	282	-60	273	420		316	318	2	1.55	1.6
SCRC21_172	6406901	386802	282	-60	273	420		332.9	333.6	0.7	15.50	0.56
SCRC21_110	6406476	386619	279	-60	270	156				0	NSA	0
SCRC21_134	6406402	386567	279	-58	270	204		48	49	1	6.97	0.8
SCRC21_134	6406402	386567	279	-58	270	204		164	165	1	1.68	0.8
SCRC21_134	6406402	386567	279	-58	270	204		179	190	11	3.22	8.8

Hole Number	Northing	Easting	RL	Dip (degrees)	Azimuth (degrees)	End of Hole Depth (m)		Downhole From (m)	Downhole To (m)	Downhole Intersection (m)	Au gpt (uncut)	Est. True Width (m)
SCRCD21_134	6406402	386567	279	-58	270	204	incl.	179	183	4	6.81	3.2
SCRCD21_134	6406402	386567	279	-58	270	204		200	201	1	1.96	0.8
SCRCD21_151	6406449	386576	279	-60	270	132		42	43	1	2.28	0.8
SCRCD21_151	6406449	386576	279	-60	270	132		93	94	1	0.94	0.8
SCRCD21_151	6406449	386576	279	-60	270	132		97	102	5	2.48	4
SCRCD21_137	6406353	386651	281	-60	270	150		29	30	1	3.03	0.8
SCRCD21_137	6406353	386651	281	-60	270	150		96	97	1	1.12	0.8
SCRCD21_089	6407051	386852	291	-65	270	555.6		483.7	484.1	0.4	4.31	0.32
SCRCD21_089	6407051	386852	291	-65	270	555.6		505.6	510	4.4	6.10	3.52
SCRC21_136	6406352	386588	280	-57	270	252		161	162	1	2.85	0.8
SCRC21_136	6406352	386588	280	-57	270	252		174	192	18	8.29	14.4
SCRC21_136	6406352	386588	280	-57	270	252		201	203	2	0.98	1.6
SCRC21_136	6406352	386588	280	-57	270	252		242	243	1	2.55	0.8

## Appendix 2 – Mineral Resources

### Norseman Gold Project Mineral Resources (PNR 50%)

Total Mineral Resources	Measured			Indicated			Inferred			Total		
	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz
Total Underground	267	14.4	124	2,048	13.6	895	2,883	10.7	988	5,196	12.0	2,010
Total Surface South	140	2.3	10	11,541	2.0	737	12,910	2.7	1,132	24,591	2.4	1,886
Total Surface North	4,165	0.7	100	4,207	2.0	276	3,325	2.5	264	11,684	1.7	639
<b>Total</b>	<b>4,572</b>	<b>1.6</b>	<b>234</b>	<b>17,796</b>	<b>3.3</b>	<b>1,908</b>	<b>19,118</b>	<b>3.9</b>	<b>2,385</b>	<b>41,472</b>	<b>3.4</b>	<b>4,534</b>

Underground Mineral Resource	Measured			Indicated			Inferred			Total		
	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz
<b>Scotia</b>												
Scotia	-	-	-	364	6.2	72	703	4.7	107	1,067	5.2	180
<b>Total Scotia</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>364</b>	<b>6.2</b>	<b>72</b>	<b>703</b>	<b>4.7</b>	<b>107</b>	<b>1,067</b>	<b>5.2</b>	<b>180</b>

Surface Mineral Resource	Measured			Indicated			Inferred			Total		
	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz
<b>Scotia</b>												
Scotia	-	-	-	1,713	3.6	199	640	1.9	38	2,353	3.1	238
Green Lantern	-	-	-	3,962	1.4	180	2,849	1.4	132	6,811	1.4	312
Freegift	-	-	-	-	-	-	254	1.5	13	254	1.5	13
Panda	-	-	-	68	2.8	6	65	1.9	4	133	2.4	10
<b>Total Scotia</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>5,743</b>	<b>2.1</b>	<b>385</b>	<b>3,808</b>	<b>1.5</b>	<b>187</b>	<b>9,551</b>	<b>1.9</b>	<b>573</b>

Notes: For full details, refer to ASX Announcement entitled 'Annual Mineral Resources & Ore Reserve Statement' dated 23 September 2021.

Rounding may result in apparent summation differences between tonnes, grade and contained metal content.

Pantoro has a 50% share of the Norseman Gold Project Mineral Resource.

## Appendix 3 – JORC Code 2012 Edition – Table 1

### SECTION 1: SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>This release relates to results from Reverse Circulation (RC and Diamond Drill sampling at the Scotia Deeps prospect within the Norseman Gold Project.</li> <li>RC – Metzke fixed cone splitter used, with double chutes for field duplicates, Infinite adjustment between 4 – 15% per sample chute sampled every 1m</li> <li>RC samples 2-7kg samples are dispatched to an external accredited laboratory where they are crushed and pulverized to a pulp (P90 75 micron) for fire assay (40g charge).</li> <li>Diamond samples 2-5kg samples are dispatched to an external accredited laboratory (BVA Kalgoorlie and BVA Perth) where they are crushed and pulverized to a pulp (P90 75 micron) for fire assay (40g charge).</li> <li>All core is logged and sampled according to geology, with only selected samples assayed. Core is halved, with RHS of cutting line assayed, and the other half retained in core trays on site for further analysis. Samples are a maximum of 1.2m, with shorter intervals utilised according to geology to a minimum interval of .15m where clearly defined mineralisation is evident.</li> <li>Core is aligned, measured and marked up in metre intervals referenced back to downhole core blocks .</li> <li>Visible gold is encountered and where observed during logging, Screen Fire Assays are conducted when appropriate.</li> <li>Historical holes - RC drilling was used to obtain 1 m samples from which 2-3 kg split via a splitter attached to the cyclone assembly of the drill rig. From the commencement of the mine until late 1995 the assaying was done on site until the closure of the onsite laboratory the samples were sent to Silver Lake lab at Kambalda. From November 2001 the samples were sent to Analabs in Kalgoorlie, subsequently owned and operated by the SGS group. The samples have always been fire assayed with various charge weights (generally either 30 or 50g). The method was (using the SGS codes) DRY11 (sample drying, 105°C), CRU24 (crush &gt; 3.5kg, various mesh sizes per kg), SPL26 (riffle splitting, per kg), PUL48 (pulv, Cr Steel, 75µm, 1.5 to 3kg), FAA505 (AU FAS, AAS, 50g) (two of these were performed), and WST01 (waste disposal).</li> </ul>

Criteria	JORC Code explanation	Commentary
Drilling techniques	<ul style="list-style-type: none"> <li>• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>• RC – Reverse circulation drilling was carried out using a face sampling hammer and a 5&amp;5/8 inch diameter bit</li> <li>• Surface DD – HQ and NQ2 diamond tail completed on RC or Rock Roller precollars, All core has orientations completed where possible with confidence and quality marked accordingly.</li> <li>• Historic Underground drilling was completed using electric hydraulic drill rigs with standard core LTK46 and LTK48 both with the same nominal core size of 38mm.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>• Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>• Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>• Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>• All holes were logged at site by an experienced geologist or logging was supervised by an experienced geologist. Recovery and sample quality were visually observed and recorded.</li> <li>• RC- recoveries are monitored by visual inspection of split reject and lab weight samples are recorded and reviewed.</li> <li>• RC drilling by previous operators to industry standard at the time</li> <li>• DD – No significant core loss noted.</li> <li>• Historic holes have been inspected and core in the ore zones appears competent, with no evidence of core loss.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>• The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>• Geological logging is completed or supervised by a qualified geologist and logging parameters include: depth from, depth to, condition, weathering, oxidation, lithology, texture, colour, alteration style, alteration intensity, alteration mineralogy, sulphide content and composition, quartz content, veining, and general comments.</li> <li>• 100% of the holes are logged</li> </ul>

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>• All RC holes are sampled on 1m intervals</li> <li>• RC samples taken of the fixed cone splitter, generally dry.</li> <li>• Sample sizes are considered appropriate for the material being sampled</li> <li>• Core samples were sawn in half utilising an Almonte core-saw, with RHS of cutting line sent for assaying and the other half retained in core trays on site for future analysis.</li> <li>• For core samples, core was separated into sample intervals and separately bagged for analysis at the certified laboratory.</li> <li>• Core was cut under the supervision of an experienced geologist; it is routinely cut on the orientation line.</li> <li>• All mineralised zones are sampled as well as material considered barren either side of the mineralised interval</li> <li>• Field duplicates i.e. other half of core or ¼ core has not been routinely sampled</li> <li>• Field duplicates for RC drilling are routinely collected</li> <li>• Half core is considered appropriate for diamond drill samples.</li> <li>• RC drilling and sampling practices by previous operators are considered to have been conducted to industry standard.</li> <li>• Visual inspection of the ~70% of historic holes which have been half cored and sampled either side of ore zones to define waste boundary.</li> </ul>

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>Assays are completed in a certified laboratory in Kalgoorlie WA and Perth WA. Gold assays are determined using fire assay with 40g charge. Where other elements are assayed using either AAS base metal suite or acid digest with ICP-MS finish. The methods used approach total mineral consumption and are typical of industry standard practice.</li> <li>No geophysical logging of drilling was performed.</li> <li>Lab standards, blanks and repeats are included as part of the QAQC system. In addition, the laboratory has its own internal QAQC comprising standards, blanks and duplicates. Sample preparation checks of pulverising at the laboratory include tests to check that the standards of 90% passing 75 micron is being achieved. Follow-up re-assaying is performed by the laboratory upon company request following review of assay data. Acceptable bias and precision is noted in results given the nature of the deposit and the level of classification</li> </ul>
		<ul style="list-style-type: none"> <li>RC drill samples from the commencement of the mine until late 1995 the assaying was done on site until the closure of the onsite laboratory the samples were sent to Silver Lake lab at Kambalda. From November 2001 the samples were sent to Analabs in Kalgoorlie, subsequently owned and operated by the SGS group. The samples have always been fire assayed with various charge weights (generally either 30 or 50g). The method was (using the SGS codes) DRY11 (sample drying, 105°C), CRU24 (crush &gt; 3.5kg, various mesh sizes per kg), SPL26 (riffle splitting, per kg), PUL48 (pulv, Cr Steel, 75µm, 1.5 to 3kg), FAA505 (AU FAS, AAS, 50g) (two of these were performed), and WST01 (waste disposal).</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>Significant intersections are noted in logging and checked with assay results by company personnel both on site and in Perth.</li> <li>There are no twinned holes drilled as part of these results</li> <li>All primary data is logged on paper and digitally and later entered into the SQL database. Data is visually checked for errors before being sent to company database manager for further validation and uploaded into an offsite database. Hard copies of original drill logs are kept in onsite office.</li> <li>Visual checks of the data re completed in Surpac mining software</li> <li>No adjustments have been made to assay data unless in instances where standard tolerances are not met and re-assay is ordered .</li> </ul>



Criteria	JORC Code explanation	Commentary
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>Diamond Drilling was downhole surveyed initially with a CHAMP GYRO north seeking solid state survey tool sampling every 5m, for all holes drilled in October 2019 before swapping over to a Devi Gyro (Deviflex non-magnetic) survey tool with measurements taken every 3m.</li> <li>The RC drill holes used a REFLEX GYRO with survey measurements every 5m.</li> <li>A Champ Discover magnetic multi-shot drill hole survey tool has also been utilised for comparison on some holes taking measurements every 30m.</li> <li>Surface RC/DD drilling is marked out using GPS and final pickups using DGPS collar pickups</li> <li>The project lies in MGA 94, zone 51.</li> <li>Topographic control uses DGPS collar pickups and external survey RTK data and is considered adequate for use.</li> <li>Pre Pantoro survey accuracy and quality assumed to industry standard</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>This current round of drilling was nominally on 25m northing lines and spacing was between 10-30m across section lines depending on pre-existing hole positions.</li> <li>No compositing is applied to diamond drilling or RC sampling.</li> <li>All RC samples are at 1m intervals.</li> <li>Core samples are both sampled to geology of between 0.15 and 1.2m intervals.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>No bias of sampling is believed to exist through the drilling orientation</li> <li>All drilling in this program is currently interpreted to be perpendicular to the orebody.</li> </ul>
Sample security	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>No bias of sampling is believed to exist through the drilling orientation</li> <li>All drilling in this program is currently interpreted to be perpendicular to the orebody.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>No audit or reviews of sampling techniques have been undertaken however the data is managed by company data scientist who has internal checks/protocols in place for all QA/QC.</li> <li>In 2017 Cube Consulting carried out a full review of the Norseman database. Overall the use of QA/QC data was acceptable.</li> </ul>

## SECTION 2: REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The tenement where the drilling has been completed is 50% held by Pantoro subsidiary company Pantoro South Pty Ltd in an unincorporated JV with CNGC Pty Ltd. This is: M63/36.</li> <li>Tenement transfers to Pantoro South are yet to occur as stamp duty assessments have not been completed by the office of state revenue. The tenements predate native title claims.</li> <li>The tenements are in good standing and no known impediments exist.</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Gold was discovered in the area 1894 and mining undertaken by small Syndicates.</li> <li>In 1935 Western Mining established a presence in the region and operated the Mainfield and Northfield areas under the subsidiary company Central Norseman Gold Corporation Ltd. The Norseman asset was held within a company structure whereby both the listed CNGC held 49.52% and WMC held a controlling interest of 50.48%. They operated continuously until the sale to Croesus in October 2001 and operated until 2006. During the period of Croesus management the focus was on mining from the Harlequin and Bullen Declines accessing the St Pats, Bullen and Mararoa reefs. Open Pits were HV1, Daisy, Gladstone and Golden Dragon with the focus predominantly on the high grade underground mines.</li> <li>From 2006-2016 the mine was operated by various companies with exploration being far more limited than that seen in the previous years.</li> <li>The Scotia deposit was drilled by CNGC who mined the deposit by both open pit and underground methods between 1987 and 1996.</li> </ul>
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The Norseman gold deposits are located within the southern portion of the Eastern Goldfields Province of Western Australia in the Norseman-Wiluna greenstone belt in the Norseman district. Deposits are predominantly associated with near north striking easterly dipping quartz vein within metamorphosed Archean mafic rocks of the Woolyeenyer Formation located above the Agnes Venture slates which occur at the base.</li> <li>The principal units of the Norseman district, are greenstones which are west dipping and interpreted to be west facing. The sequence consists of the Penneshaw Formation comprising basalts and felsic volcanics on the eastern margin bounded by the Buldania granite batholith, the Noganyer Iron Formation, the Woolyeenyer formation comprising pillow basalts intruded by gabbros and the Mount Kirk Formation a mixed assemblage.</li> </ul>

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>The mineralisation is hosted in quartz reefs in steeper shears and flatter linking sections, more recently significant production has been sourced from NNW striking reefs known as cross structures (Bullen). Whilst a number of vein types are categorized the gold mineralisation is predominantly located in the main north trending reefs which in the Mainfield strike for over a kilometre. The quartz/sulphide veins range from 0.5 metres up to 2 metres thick, these veins are zoned with higher grades occurring in the laminated veins on the margins and central bucky quartz which is white in colour. Bonanza grades are associated with native gold and tellurides with other accessory sulphide minerals being galena, sphalerite, chalcopyrite, pyrite and arsenopyrite.</li> <li>The long running operations at Norseman have provided a good understanding on the controls of mineralisation as well as the structural setting of the deposits. The overall geology of the Norseman area is well understood with 3D Fractal Graphic mapping and detailed studies, adding to a good geological understanding to the area. The geometry of the main lodes at Norseman are well known and plunge of shoots predictable in areas, however large areas remain untested by drilling with the potential for new spurs and cross links high. Whilst the general geology of lodes is used to constrain all wireframes, predicting continuity of grade has proven to be difficult at the higher grades when mining and in some instances (containing about 7% of the ounces) subjective parameters have been applied.</li> </ul>
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>» easting and northing of the drill hole collar</li> <li>» elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>» dip and azimuth of the hole</li> <li>» down hole length and interception depth</li> <li>» hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>A table of drill hole data pertaining to this release is attached.</li> <li>All holes with results available from the last public announcement are reported.</li> </ul>

Criteria	JORC Code explanation	Commentary
Data aggregation methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Reported drill results are uncut</li> <li>All relevant intervals to the reported mineralised intercept are length weighted to determine the average grade for the reported intercept.</li> <li>All significant intersections are reported with a lower cut off of 1 g/t Au including a maximum of 2m of internal dilution. Individual intervals below this cut off are reported where they are considered to be required in the context of the presentation of results.</li> <li>No metal equivalents are reported.</li> </ul>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>Surface RC and Diamond drilling of the pits is perpendicular to the orebody.</li> <li>Downhole lengths are reported and true widths are calculated using a formula in excel based on orebody dip and strike relative to drilling angle</li> </ul>
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>Appropriate diagrams are included in the report.</li> </ul>
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>All holes available are tabled and reported.</li> <li>Diagrams show the location and tenor of both high and low grade samples.</li> </ul>
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>No other meaningful data to report.</li> </ul>
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>As already noted these drilling results are part of an ongoing definition program to evaluate the underground portion of the Scotia deposit.</li> </ul>

### **Exploration Targets, Exploration Results**

The information in this report that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Scott Huffadine, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr Huffadine is a director and full time employee of the company. Mr Huffadine is eligible to participate in short and long term incentive plans of and holds shares and options in the Company. Mr Huffadine has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Huffadine consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

### **Norseman Gold Project Mineral Resources & Ore Reserves**

The information is extracted from the report entitled 'Annual Mineral Resource & Ore Reserve Statement ' created on 23 September 2021 and is available to view on Pantoro's website ([www.pantoro.com.au](http://www.pantoro.com.au)) and the ASX ([www.asx.com.au](http://www.asx.com.au)). The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources or Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

### **Previous Scotia Drilling Results**

The information is extracted from the report entitled 'Deep drilling at Scotia confirms high grade mineralisation' dated 10 May 2021 and available to view on Pantoro's website ([www.pantoro.com.au](http://www.pantoro.com.au)) and the ASX ([www.asx.com.au](http://www.asx.com.au)). The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement. The company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

### **Forward Looking Statements**

Certain statements in this report relate to the future, including forward looking statements relating to Pantoro's financial position and strategy. These forward looking statements involve known and unknown risks, uncertainties, assumptions and other important factors that could cause the actual results, performance or achievements of Pantoro to be materially different from future results, performance or achievements expressed or implied by such statements. Actual events or results may differ materially from the events or results expressed or implied in any forward looking statement and deviations are both normal and to be expected. Other than required by law, neither Pantoro, their officers nor any other person gives any representation, assurance or guarantee that the occurrence of the events expressed or implied in any forward looking statements will actually occur. You are cautioned not to place undue reliance on those statements.