ASX ANNOUNCEMENT

14 February 2022



VIKING RECEIVES REMAINING ASSAYS FOR FIRST HIT NORTH TARGET

- Assays now returned for all 29 holes drilled at First Hit North target
- New high-grade results include:
 - VKRC0021: 2m at 4.10g/t Au from 15m
 - VKRC0001: 1m at 7.48g/t Au from 88m
 - o VKRC0004: 1m at 5.97g/t Au from 36m
- Results continue to support the discovery of two mineralised shoots 220m and
 720m north of the historic, high-grade First Hit Gold Mine
- Mineralisation intersected 40m from the limits of the historic mine workings confirming continuity
- Results for 42 holes from the remaining 3 targets tested are pending and will be announced as they are received over the March quarter

Viking Mines Limited (ASX: VKA) ("**Viking**" or "**the Company**") is pleased to update the market on the assays received for the remaining holes drilled in the First Hit North target as part of the 71-hole, 6,723m RC Drilling Programme at the First Hit Project ("**First Hit**" or "**the Project**"), 50km west of Menzies in the WA Goldfields.

These assay results bring the total number of holes reported to 29 (41% of the total 71 holes drilled). As reported on 22 December 2021, two potential mineralised shoots have been identified north of the historic First Hit Gold Mine. These results further support this theory and will be added to the wireframe model under development for the First Hit North target. The historic First Hit Mine pursued a narrow vein, high grade gold deposit and to date, these two additional shoots continue to demonstrate geological similarity.

New high-grade assays received as part of the recent drilling programme include:

- o VKRC0001: 1m at 7.48g/t Au from 88m
- o VKRC0004: 1m at 5.97g/t Au from 36m
- o VKRC0021: 2m at 4.10g/t Au from 15m

The wide spaced design (80m drill sections) of this drilling programme was used to test ~800m strike of the First Hit structure north from the historic mine. The successful identification of two potential shoots along the structure has achieved the primary objective of identifying high-grade mineralised positions along this previously under explored trend.

Commenting on the receipt of the First hit North target results, Viking Mines Managing Director & CEO Julian Woodcock said, "The receipt of the remaining results for the First Hit North targets are encouraging as they confirm that the First Hit Structure continues for >800m North of the historic mine workings."

"Our geological team planned the programme on a relatively wide drill spacing of 80m sections with the expectation that if mineralised shoots are present, we would intersect them



at these intervals. The programme has been successful in discovering previously unrecognised shoots which are open down dip and down plunge."

"Planning additional follow up holes in the field has allowed us to close up the drill spacing in some areas to 40m and help improve our understanding of the geometry of the mineralisation. The results indicate that the mineralisation trends further West than we expected which combined with some of the drill holes steepening during drilling has meant that they haven't reached the target horizon. This has left some areas of the potential mineralised position untested at depth."

"These 29 drill holes are being incorporated in our wireframe modelling and will be used to plan follow up exploration activity."

FIRST HIT NORTH

All assay results have now been received for the First Hit North target (Figure 1). In total 29 drillholes tested this target, which represents 41% of the 71 holes drilled across the 4 target areas. Drilling was completed in December 2021¹.

The two new shoots that have been identified have been named Camp 1 (720m North of the First Hit historic mine workings) and Hilton (220m North of the First Hit historic mine workings).

Results returned from the drill programme to date include:

Camp 1 Shoot:

- VKRC0023: 2m at 9.67g/t Au from 26m¹
- VKRC0021: 2m at 4.1g/t Au from 15m
- VKRC0066: 2m at 4.26g/t Au from 75m¹
- VKRC0021A: 6m at 0.64g/t from 26m including;
 - o 1m at 1.01g/t from 26m; and
 - o 1m at 1.56q/t from 29m

The newly discovered Camp 1 shoot has been encountered over ~125m strike length and to a depth of ~70m from surface (Figure 1 & Figure 2). Drilling has confirmed the presence of a continuously mineralised zone with demonstrated capability to generate high-grade gold intercepts with visible gold³.

Upon review of the drilling data, the mineralised zone appears steeper in cross section than predicted prior to drilling. This, combined with drillholes steepening due to excessive deviation whilst drilling, has resulted in holes VKRC0020, VKRC0022, VKRC0024 & VKRC0026 potentially not reaching the mineralised position (Figure 1 & Figure 3). This is significant as is means the shoot has not been effectively tested downdip from the intersected mineralisation in the shallower holes.

Further evaluation and assessment is required to test the down dip potential of this shoot. The potential for drilling diamond tails off the RC holes is under consideration.

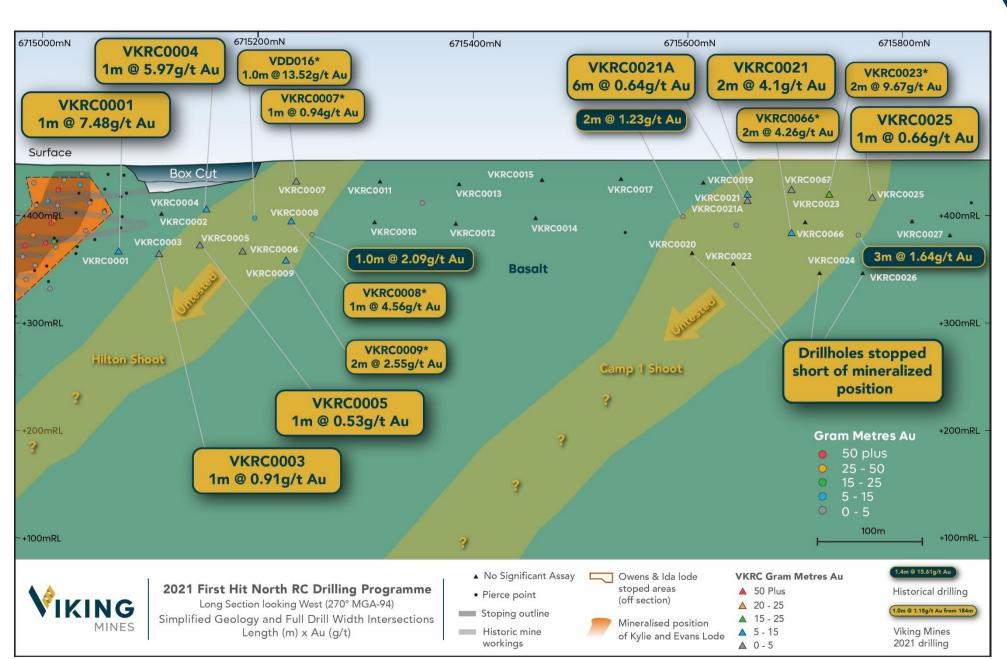


Figure 1; Long section of First Hit North target area showing assay results received. The two shoot positions outlined are located 220m and 720m north of the historic mine workings and named the Hilton and Camp 1 shoots respectively. Note the 4 drillholes in the Camp 1 shoot which have been interpreted to have not reached the mineralised position due to the steepening of the mineralised zone and the deviation of the RC drillholes. VKRC holes marked with * have been previously reported to the ASX on 22 December 2021.



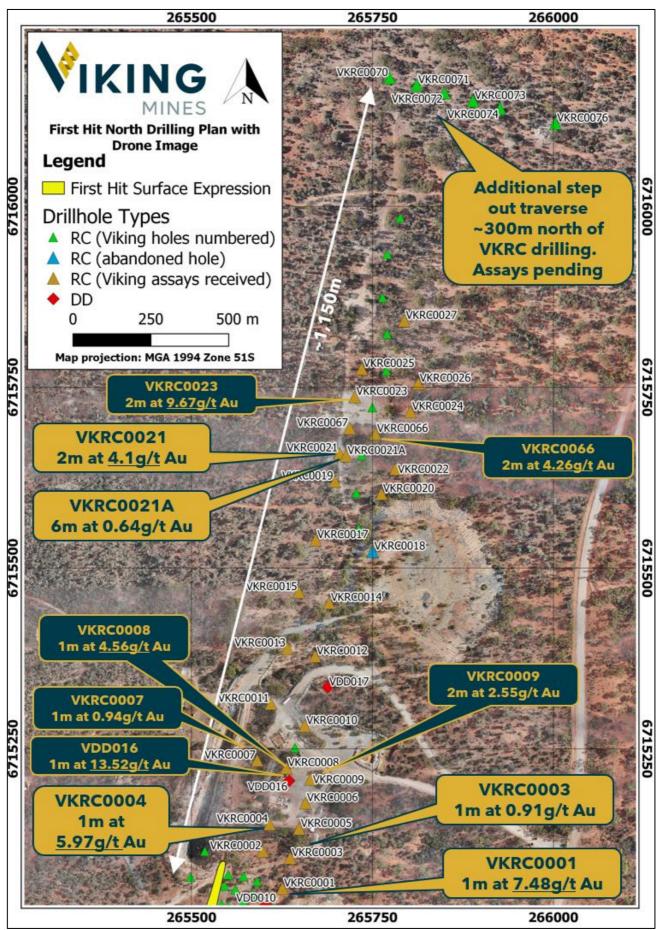


Figure 2; Map of the First Hit North target area with the key assay results annotated (new results in the orange boxes and previously reported results in the dark boxes). Drilling has discovered 2 new shoots, 720m north of First Hit (Camp 1 shoot) and 220m North of First Hit (Hilton shoot). Holes VKRC0020 to VKRC0026 have potentially missed the target zone which has resulted in them being ineffective in testing the down dip potential of the Camp 1 shoot.



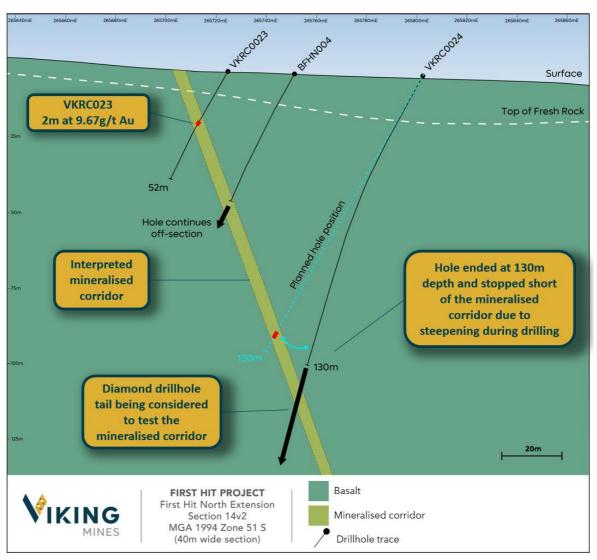


Figure 3; Cross section at First Hit North target showing high grade intercept in hole VKRC0023. Interpretation of the mineralised zone from adjacent sections has shown that it is steeper than originally envisaged and that hole VKRC0024 steepened and did not reach the target horizon.

Hilton Shoot:

- VDD016: 1m at 13.52g/t Au from 57m⁴
- VKRC0004: 1m at 5.97 g/t Au from 36m
- VKRC0008: 1m at 4.56g/t Au from 64m¹
- VKRC0009: 1m at 2.55g/t Au from 98m¹

The Hilton shoot, which was discovered as part of the 2021 diamond drilling programme⁴, has now been encountered over ~110m strike length and to a depth of ~90m from surface (Figure 1 & Figure 2). Drilling has confirmed the continuity of the First Hit structure and associated mineralisation, also with the capability to generate high-grade gold intercepts with visible gold².

First Hit Extensions:

In addition to the new shoots, a drill hole 40m north of the First Hit historic mine workings has encountered high-grade mineralisation:

VKRC0001: 1m at 7.48g/t Au from 88m



Hole VKRC0001 encountered the mineralisation immediately north of the 360m level in the historic mine workings, ~60m below surface (Figure 1 & Figure 2). This hole demonstrates that the limited drilling immediately adjacent to the mine has not closed off the mineralisation. Drilling is open down dip and down plunge of this intercept, giving potential for near mine extensions which are readily accessible from the underground workings. Further assessment down dip and down plunge is warranted.

Programme Outcomes

The following successful outcomes have been achieved by the drill programme:

- 1. The First Hit structure has been defined over a strike length of ~800m North of the historical high-grade First Hit gold mine (**Error! Reference source not found.**) using logged geology and ppb Au level anomalism.
 - This confirms the pathway for mineralising fluids continues and that the area remains prospective.
- 2. Two mineralised shoots have been discovered, 220m and 720m North respectively of the historical workings, both with visible gold observed^{2&3}, and high-grade intercepts identified (Figure 1).
 - This confirms that the First Hit structure has the potential to produce further shoots with the same style of gold mineralisation seen at First Hit.
- 3. Mineralisation has been intersected <u>only</u> 40m north of the historic mine workings (VKRC0001 Figure 1).
 - This demonstrates the lack of drill testing near the historic mine and indicates the potential for readily accessible mineralisation to be identified.

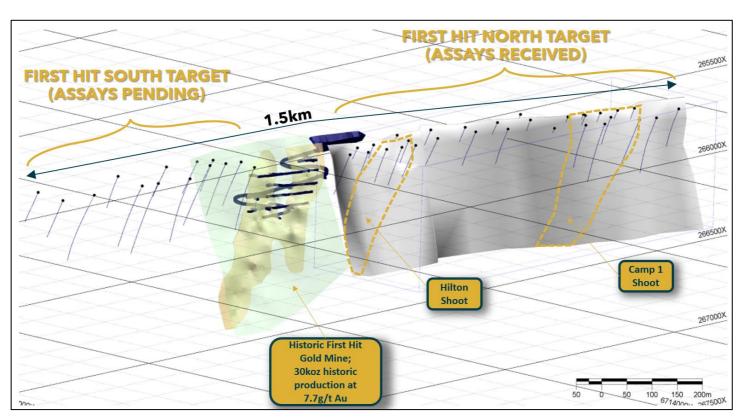


Figure 4; Isometric view to the NW showing the historic First Hit mine workings and mineralised lodes (gold) located within the sheared basalt host rock (green). The grey wireframe to the north has been created from the recent First Hit North RC drilling data (black traces) and represents the mineralised corridor interpreted from the drilling. The interpreted position of the Hilton and Camp 1 shoots are outlined. Note the First Hit South target area with assays pending.



RC PROGRAMME STATUS

Drilling Summary

On completion, the RC drill programme totalled 71 holes for 6,723 metres (Table 1). This has been amended from the release on 22 December due to an error in the hole count stating 72 drill holes (drillhole VKRC0016 was not drilled based on observations made in the field rendering it ineffective). The updated table is provided below.

Table 1: First Hit Project targets tested as part of the 2021 RC drill programme with number of holes and metres drilled detailed

Prospect	No Holes	Metres
First Hit North	29*	2,437
First Hit North additional traverse	6	654
First Hit South	14**	1,669
Twin Peaks	10	903
Jana's Reward	11	990
Jana's Reward additional hole testing old workings	1	70
TOTAL	71	6,723

^{*} includes 1 hole abandoned and not reaching target due to collapsing collar

Lab Turnaround and Results Forecast

All remaining samples from the drill programme are at the Intertek laboratory awaiting analysis. Prior to commencement of the drill programme, the laboratory communicated a turnround time of 8-10 weeks. Due to industry wide pressures, this has extended out to 13-14 weeks, with the increase occurring between batches received in December to those received in February.

The Company is in regular communication with the laboratory to determine the timing of results but the delays are being felt across the industry. At the time of this ASX release, the laboratory has indicated that no further extension of the turnaround time is expected.

Based on this communication, Viking still expects all results will be received within the March quarter FY22. However, with uncertainty surrounding COVID-19 cases in WA, further delays are possible. Once received, results are QA/QC evaluated and then interpreted prior to reporting to market. It is expected that results will be reported in groups on a target by target basis as they are consolidated.

NEXT STEPS

Following completion of the field activities component of the drill programme, the following activities are underway on the project:

- Wireframing 3D interpretation of the geology and mineralisation is underway (Figure 4). Initial wireframes have been created of the First Hit North structure and will be appended to the wireframes of First Hit. On receipt of the First Hit South drill results this will be extended to encompass the full 1.5km of the First hit structure which has undergone initial drill testing.
- The remaining results for holes drilled at First Hit North Extension (additional stepout traverse), First Hit South, Twin Peaks, and Jana's Reward are progressively due over the remainder of the March quarter. Interpretation and assessment of the logged geology is ongoing and assay results will be built into the geological models as they are received.

^{**} includes 1 hole abandoned and not reaching target due to shanked drill bit



- Drill programme results will be assessed on completion of the models to identify the best opportunities for further follow up exploration activity.
- A review of the drillholes that may not have reached the target horizon is underway and contractors are being approached to assess the viability of re-entering drillholes to extend them using diamond drilling to effectively test the structure.

END

This announcement has been authorised for release by the Board of the Company.

Julian Woodcock
Managing Director and CEO

Viking Mines Limited

For further information, please contact: **Viking Mines Limited**Sarah Wilson - Company Secretary
08 6245 0870

Media & Investor Relations Citadel-MAGNUS Cameron Gilenko +61 466 984 953 Jonathan van Hazel +61 411 564 969

¹ ASX Announcement of 22 December 2021 - Viking receives high-grade results in first assays from 72 hole programme

² ASX Announcement of 15 November 2021 - Viking sees more visible gold in First Hit North RC drilling

³ ASX Announcement of 1 November 2021 - Viking sights visible gold in RC drilling 720m North of historic First Hit gold mine

⁴ ASX Announcement of 30 August 2021 - Viking diamond drilling delivers high-grade results of up to 71g/t Au & identifies new target

ABOUT VIKING MINES

Viking Mines is a gold focussed company with the **First Hit Project** located 150km NW of Kalgoorlie in Western Australia being the primary asset under exploration.

Viking have an aggressive exploration strategy to explore for high grade gold occurrences and discover ounces along fertile gold structures. The historically mined, First Hit gold mine is the focus of Vikings activity to deliver on this strategy. Rapid advancement and exploration are occurring to explore, discover and develop gold ounces at the Project. The strategy will generate shareholder value through the discovery of new gold resources.

First Hit Project, Western Australia

The **First Hit Project** is centred around the historic high-grade First Hit gold mine situated along the prospective Ida and Zuleika

FIRST HIT PROJECT

PROJECT

MENZIES

FIRST HIT PROJECT

MENZIES

**KALGOORLIE

Sounem Coust

Western Australia

Wathout Stand King

Aphrodite

Western Australia

Wathout Sirdar

Fimiston

Fimiston

Ronowna Belle

Kanowna Belle

Kan

Shear zones in the Eastern Goldfields of Western Australia. The Project incorporates ~28km² of tenements with 6 active Mining and Prospecting licences and 1 Exploration licence under application. At the core of this landholding is a 6.4km² group of contiguous tenements which host the historic First Hit gold mine.

Prior to closure of the First Hit gold mine by Barra Resources in 2002 and at a time of depressed gold prices of US\$ 320/oz, the First Hit mine produced ~30koz ounces of gold at an average grade of ~7.7g/t Au. No modern exploration activity has been conducted in the past 18 years and creates a significant opportunity for Viking. The Company is focused on delivering exploration programmes to test near mine extensions and regional targets around the **First Hit Project** with the objective of defining fertile structures and discovering gold ounces.

Examples of the high-grade nature of the mineralisation previously drilled at First Hit include:

- 4.9m at 64.8g/t Au from 62.1m (FHU045)¹
- 3m at 77.6g/t Au from 224.0m (BFH030)¹
- 4m at 26.1g/t Au from 58.0m (BFH005)¹

The Project area is well serviced by infrastructure and is located 50km west of the sealed Goldfields highway and the township of Menzies. The nearest operating Gold Processing Plant is the Davyhurst Mill 50km to the south, owned and operated by Ora Banda Mining (ASX:OBM). The nearest operating gold mine is the Riverina open pit, located 8km south of the First Hit gold mine, owned by OBM.

The Company also has projects located in Ghana. Viking is currently undergoing legal proceedings to secure costs and interest associated with the sale of the Akoase project in Ghana.

Forward-Looking Statements

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning Viking Mines Limited's planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could," "plan," "estimate," "expect," "intend," "may", "potential," "should," and similar expressions are forward-looking statements. Although Viking Mines Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.



APPENDIX 1 - ANALYTICAL RESULTS

Hole ID	East North (m) RL End of Hole		Azi	D: (0)	Depth	Downhole	Au			
Hole ID	noie Type	(m) MGA94	MGA94	KL	(m)	(°)	Dip (°)	From (m)	Length (m)	g/t
VKRC0001	RC	265627	6715059	442.7	105	285	-60	88	1.00	7.48
VKRC0003	RC	265638	6715098	442.7	105	285	-60	78	1.00	0.91
VKRC0004	RC	265609	6715147	445.25	60	285	-60	36	1.00	5.97
VKRC0005	RC	265648	6715137	444.32	105	285	-60	89	1.00	0.53
VKRC0021	RC	265705	6715660	445.85	50	285	-60	15	1.00	4.31
									1.00	3.89
VKRC0021A	RC	265713	6715655	446.35	60	285	-60	26	1.00	1.01
								27	1.00	0.19
								28	1.00	0.03
								29	1.00	1.56
								30	1.00	0.13
								31	1.00	0.95
VKRC0020	RC	265762	6715602	443.31	107	285	-60	63	1.00	1.15
VKRC0025	RC	265735	6715776	446.51	55	285	-60	35	1.00	0.66

APPENDIX 2 - JORC TABLES

COMPETENT PERSONS STATEMENT

Information in this release that relates to Exploration Results on the Western Australian projects is based on information compiled by Mr Ian Stockton, who is a Member of the Australian Institute of Mining and Metallurgy (AusIMM). Mr Stockton is a full-time employee of CSA Global. Mt Stockton is engaged by Viking Mines Ltd as an independent consultant. Mr Stockton has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Stockton consents to the inclusion in the release of the matters based on his information in the form and the context in which it appears.



JORC Table 1

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.	Historical Surface Geochemistry Several companies have undertaken surface exploration through the history of the tenement including Riverina Gold, Croesus Gold, WMC, Barrinco and Barra Gold. A total of 24,289 samples have been collected, however CSA Global has limited information on these surveys apart from WMC and Barminco, as described below. WMC mining completed several phases of soil geochemistry between 1990 and 1992 with 2,836 samples collected. This included: • Stream sediment geochemistry from active streams from contemporary lags within stream beds. • 2 kg pan concentrate samples collected from trap sites in active drainage channels. • Soil samples collected from 5-15 cm depth or 15-30 cm depth depending on soil thickness and passed through -10#, +36#, -80# or 120# meshes. • Surface soil sampling was sieved through a 6 mm mesh. Barminco Pty Ltd undertook 2 geochemical soil geochemistry programs on the northern part of M30/99 between 1995 and 2000. The first soil survey completed was designed to test areas of residual soil and outcrop, whereas the second soil survey tested areas covered by shallow transported cover. In areas of residual soil and outcrop, whereas the second soil survey tested areas covered by shallow transported cover. In areas of residual soil and outcrop, whereas the second soil survey tested areas covered by shallow transported owas enjaged to test areas of residual soil and outcrop, whereas the second soil survey tested areas covered by shallow transported owas enjaged to test areas of residual soil and outcrop, whereas the second soil survey tested areas covered by shallow transported owas enjaged for gold and areas of transported cover, a preliminary 100 m x 400 m spaced auger soil sampling program was undertaken. The details of the sampling methods and horizons tested for the -80# mesh soil sampling and auger sampling are not described. WMC collected ironstone float rock chip samples (number unknown) across the tenements. Barminco completed undertook rock chip sampling bet



Criteria	JORC Code explanation	Commentary
		was mapped and significant geological features recorded. The sample line attitude (dip), sample number, sample length, and sample lithology recorded. In addition, the assay result for gold (Au) were recorded following receipt. Summary of VKA 2021 RC Exploration Drilling and Sampling RC samples are collected at the drill rig during the drilling process. Samples are collected from a cone splitter by placing a calico bag across the two sample apertures as well as a bucket under the splitter to collect the reject. Samples are collected every metre drilled with the reject being dumped on the ground and the two calicoes being placed on top. Each of the calico sample bags are between 2 and 3kg in weight with one being collected for assay at Intertek laboratories in Kalgoorlie for 50g fire assay analysis. The Competent Person considers these sampling methods appropriate for this style of mineralisation.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Historical Information The entire RC sample was collected and sampled at the drill rig; samples from diamond drilling were subsampled in a core handling facility. Diamond and RC field duplicates were taken on selected intervals within the interpreted mineralised horizons to measure representativity of sample splits. Historical Underground Face Sampling No information is provided in available reports to ascertain the representivity of the face sampling, though some face maps show both selective and mark ups for sampling lines across the lode. No information has been located relating to QAQC procedures such as duplicate sampling, certified standards or laboratory repeats or standards. Summary of VKA 2021 RC Exploration Drilling and Sampling RC sample recovery is monitored for excessive sample loss and recorded to ensure sample representivity. The Competent Person considers these sampling methods appropriate for this style of mineralisation.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information	Historical Sample Preparation Sample preparation for RC and diamond drilling consisted of coarse crushing a maximum of 3 kg of the submitted sample, pulverising to >85% passing 75 microns and homogenising the pulp for all sample types. 50 g sample sizes were chosen for analysis of gold, with fire assay fusion and detection by atomic absorption spectrometry (AAS). Historical Underground Face Sampling Available reports indicate gold distribution is often erratic and visible Au noted in many face samples. It is not known what steps were taken to address the issue of 'nuggety' Au and sample bias. Face sampling appears to have been both selective and along sampling lines on face maps. Summary of VKA 2021 RC Exploration Drilling and Sampling RC sample analysis: RC drilling was used to obtain a 1m composite sample from which 2-3kg is pulverised to produce a 50g charge for fire assay. Selective 1m samples are collected for multi-element analysis. The Competent Person considers these sampling and analytical methods appropriate for this style of mineralisation.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	Historical Drilling Drillhole data over the First Hit Project area comprised 295 holes, consisting of 187 RC, 3 surface diamond holes, 55 RAB holes, and 50 UG DDH holes, with an additional 504 UG face channel samples (collected as horizontal channels across the ore drive headings). RC samples were collected using a face-sampling, 4.5-inch diameter bit via the inner return tube to a sample splitter. Surface diamond core drilling utilised an NQ2 size (50.6 mm) drill bit. The core diameter for underground drilling could not be obtained from available reports however from the core photos the core size appears to be NQ.



Criteria	JORC Code explanation	Commentary										
		F	RC	DD	Н	RA	AВ	UG _.	_DDH	UG_	CNHL	Total
		Reverse Circulation		Surface Dia		l Rotary Ai		_	Underground Diamond Core Drilling		ground ice Sampling	-
		holes & (m)	% of total	holes & (m)	% of total	holes & (m)	% of total	holes & (m)	% of total	holes & (m)	% of total	-
		187	23%	3	0%	55	7%	50	6%	504	63%	799
		24,132	78%	545	2%	2,091	7%	2,190	7%	2,094	7%	31,052
		The curren 2021 and c	t RC explora oncluded in	RC Explorate ation progra December	mme consi	-	drill holes fo	or 6,723m.	The progra	m commen	ced at the st	art of October
	Method of recording and assessing core and chip sample recoveries and results assessed.	the availab recoveries CSA Global (FHU001, F intervals of CSA Global original pro <u>Summary of</u> RC drilling in	entation reg le data. The throughout briefly revi- HU019, FHU f unbroken of through ex oject owners of VKA 2021 recoveries a	following of the drilling ewed histor JO41, FHUO core and no amining cor s in this rega RC Explorat re visually e	omment is programs hical drill con 44, FHU045 evidence of photos is ard would hitton Drilling estimated a	extracted for as been extressed on the stored on the store	from the 20 ccellent (mann site (holes FHU052, FH overies. nat core rec more concluding d as part of	001 First Hit ajority grea s un-labelle HU055) and coveries we usive.	t Mine Ore ter than 80 ed) and core noted that re adequat	Resource ar %) with no i e photograp core was ir e though be ocess.	nd Mining Remajor proble major proble hs of under n good cond	es and tables in eport: "Sample ems encountered" ground drill holes tion with long entation by the
Drill sample recovery	Measures taken to maximise sample recovery and ensure representative nature of the samples.	record of n Summary of RC drilling to maximis	echniques we neasures in of VKA 2021 sample reco e sample re etent Persor	place to ma RC Explorativery is mon covery and	ximise reco tion Drilling hitored to en the represe	overy. and Sample nsure representative na	ling esentivity o ture of the	f the sampl	les. Drilling	equipment	·	o additional ures were suitable for this style of
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.		of VKA 2021 used standa he samples. etent Persor	RC Explorated drilling e	tion Drilling quipment a	and proced	ures that ar	re suitable ·	to maximise	e sample red overy/sampl	•	very and grade he representative rst Hit





Criteria	JORC Code explanation	Commentary
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Historical Information All RC and diamond drillholes were geologically logged to an industry standard appropriate for the mineralisation present at the project. All RC drill chip samples were geologically logged at 1 m intervals from surface to the end of each drillhole. Diamond core was photographed, and RC chips were retained in chip trays for future reference. Ausdrill completed three, NQ2 diamond drill holes at the First Hit deposit for geotechnical assessment prior to mining. The holes were designed in consultation with Golder Associates Pty Ltd and were targeted into the mineralised zones and continued on average 30 m into the footwall to assess the likely ground conditions for the decline and ore accesses. Approximately 70 metres of core was drilled for each hole allowing the hanging wall, the ore zone and the footwall zone to be assessed. Golders Associates Pty Ltd were commissioned to undertake the geotechnical assessment. The Competent Person considers that the level of detail is sufficient for geotechnical studies. Historical Underground Face Sampling The underground face samples were used to guide mine development. Due to the lack of information regarding the quality of the face samples these should be regarded as qualitative only and can only be used to provide an indicative guide as the presence or otherwise of mineralisation. Summary of VKA 2021 RC Exploration Drilling and Sampling RC sample logging of rock chips samples from drill cuttings are undertaken as a first pass indication of potential gold and multi-element anomalism. Samples of rock chips from drill cuttings were logged by the geologist in the field, for parameters including, depth, colour, grain size, weathering, lithology, alteration, rock fabric and the presence of mineralis potentially related to mineralisation including quartz and sulphides. The Competent Person considers the logging methods appropriate for this style of mineralisation.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.	Historical Information Lithological logging is qualitative in nature. Logged intervals were compared to the quantitative geochemical analyses to validate the logging. The Competent Person considers that the availability of qualitative and quantitative logging has appropriately informed the geological modelling, including weathering and oxidation, water table level and rock type. Historical Underground Face Sampling The logging of the underground face samples is qualitative only. Summary of VKA 2021 RC Exploration Drilling and Sampling Logging RC drilling is qualitative in nature. RC samples were photographed in chip trays. The Competent Person considers the logging methods appropriate for this style of mineralisation.
	The total length and percentage of the relevant intersections logged.	Historical Information The total length of all drilling was geologically logged. Historical Underground Face Sampling The underground face sampling hardcopy plans indicate in the majority of cases the face was sketch mapped and the 'channel' geologically logged with the sample length or interval recorded. Summary of VKA 2021 RC Exploration Drilling and Sampling All RC drilling was geologically logged for lithology, alteration and mineralisation including panning for coarse gold typical of the mineralised system. The Competent Person considers the logging methods appropriate for this style of mineralisation.





Criteria	JORC Code explanation	Commentary
	If core, whether cut or sawn and whether quarter, half or all core taken.	Historical Information Diamond core was cut into two halves using a diamond core saw for surface drilling. One of the halves was placed into a numbered calico bag, which was tied and placed in a plastic/poly-weave bags for assaying. Underground DDH samples were whole core sampled. Summary of Current VKA 2021 RC Exploration Drilling and Sampling No Diamond drilling is being undertaken in the current drilling program
Subsampling techniques and sample preparation	If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.	Historical Information RC samples were collected via a splitter to yield sub samples of approximately 3 kg from a 1 m downhole sample length. Expected waste zones were initially sampled as 2 m or 4 m composites and later resampled at 1 m intervals if anomalous assay results were returned. Re-sampling was undertaken using the spear sampling method Summary of VKA 2021 RC Exploration Drilling and Sampling All RC samples were collected via a cone splitter to yield dry sub samples of approximately 3kg from a 1 m downhole sample length. Two sub-samples are collected from every 1m downhole interval with the second sub sample being collected if re-sampling is required at a later date. Gold panning was undertaken as part of the logging process to identify visible gold to assist with ongoing drill targeting.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Historical Information The Competent Person considers the historical methods described as appropriate for this style of mineralisation. Summary of Current VKA 2021 RC Exploration Drilling and Sampling The Competent Person considers the current methods and processes as described in previous sections as appropriate for this style of mineralisation.
	Quality control procedures adopted for all subsampling stages to maximise representivity of samples.	Historical Information The following is described from the First Hit Mine Ore Resources and Mining Report, 2001 and indicates duplicates were used to inform the resource model. "Several samples were often submitted for each positive assay. These were taken on site and submitted to the same laboratory under a different sample number and then assayed using the same technique. An average of these results for each interval has been used within the ore resource calculations". CSA Global does not consider the above process to be suitable as a form of QAQC. The lack of CRMs is not industry practice. CSA Global recommends the application of industry standard QAQC to all future drilling programs. Historical Underground Face Sampling CSA Global were unable to establish QAQC processes involving the use of CRM, including blanks and standards. Summary of VKA 2021 RC Exploration Drilling and Sampling Duplicate sub sampling has been applied to the current RC drill programmes (see details below). Selective panning for gold to assist with targeting was also undertaken. The Competent Person considers the current methods of sampling as described as appropriate for this style of mineralisation.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	Historical Information See comments above regarding the use of duplicates by Barminco. Several samples were often submitted for each positive assay. These were taken on site and submitted to the same laboratory under a different sample number and then assayed using the same technique. An average of these results for each interval has been used within the ore resource calculations. Historical Underground Face Sampling CSA Global were unable to establish representivity of the face samples or the use of field duplicates or assaying of sample splits.





Criteria	JORC Code explanation	Commentary
		Summary of Current 2021 RC Exploration Drilling and Sampling Field duplicates were collected from the cone splitter for every metre drilled. The second sample was selected as a duplicate on an ad-hoc basis either by trying to obtain a roughly 1:25 sample ratio or if the geologist identified a particular sample to be used as a duplicate. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Historical Information The First Hit Project mineralisation and targets within the associated tenements are expected to be coarse grained and nuggety gold. Further exploration will need to consider the grain size of gold and distribution of particles. No previous petrology reports were found, and future work will include petrological studies in the early stage of exploration. Historical Underground Face Sampling No information is available re sample size. The mineralisation is known to include nuggety visible Au. Summary of VKA 2021 RC Exploration Drilling and Sampling The RC drilling is aiming to detect gold anomalism and the sample sizes are considered appropriate to the grain size of the material being sampled given the style of mineralisation being targeted. Sampling of prospective horizons by panning is also being undertaken. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.
	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Historical Information 7,865 samples were prepared for Fire Assay and tested by Kalgoorlie Assay Laboratory. There are incomplete records for the remaining 2,150 samples. Fire Assay is considered a total digest and whilst generally appropriate for the type of mineralisation, cyanide bottle roll leach test work may be recommended for exploration should coarse gold be encountered in future exploration. Historical Underground Face Sampling No information is available with respect to the quality of the face samples. The analytical techniques to be used for the 2021 RC drilling programme samples include: Fire Assay method (50g charge) for gold, four acid digest with ICP-MS/OES finish for 60 elements, and pXRF method for 34 elements. The analytical technique for Au is considered total with the rest being mostly partial. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.
Quality of assay data and laboratory tests	data and laboratory For geophysical tools, spectrometers, handheld XRF instruments,	Historical Information No non-destructive tools or devices are recorded as being used. Summary of VKA 2021 Exploration AC and Diamond Drilling A pXRF survey has been completed in the field using a handheld instrument by Bruker, the S1 Titan 800 model. The measurements were completed in three ranges (Exploration Mode) with 20 counts per range. Autocalibration measurements were used for reading checks and adjustments. The Competent Person considers the current methods and processes described as appropriate for this style of mineralisation.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	Historical Information CSA Global has not been able to obtain the original assay certificates for exploration and resource drilling on the First Hit Project tenements. As recorded in the QC procedure section duplicates were used as a way of informing the resource model. For future exploration it is recommended that standard CRMS, blanks and duplicates be used for QAQC. Underground Face Sampling No information is available with respect to QAQC procedures.





Criteria	JORC Code explanation	Commentary
		Summary of VKA 2021 RC Exploration Drilling and Sampling The QAQC procedures for the RC drilling program consist of the analyses of certified standards, duplicates and blanks all at 4% so QAQC samples consists of 12% of the program. The Competent Person considers the QAQC described as appropriate for this style of mineralisation.
	The verification of significant intersections by either independent or alternative company personnel.	Historical Information Due to the samples being sampled and collected 20 years ago, independent verification is difficult and has not been undertaken. CSA Global recommend unpacking the remaining drill core on site and reviewing the geology, alteration, structure and mineralisation. Underground Face Sampling No independent verification has been undertaken so far, however the hardcopy plan data is being entered into a database, which will facilitate checking of assay data presented on the face sampling plans against that recorded in Barminco and Barra Resources reports. Summary of VKA 2021 RC Exploration Drilling and Sampling No independent verification of drilling and sampling, however similar protocols are being applied as per previous RC drilling programs The Competent Person considers the process described as appropriate.
Verification of sampling and assaying	The use of twinned holes.	Historical Information No twin drilling has been undertaken; however, significant reported underground development and sampling has verified the information provided by the surface drilling. Summary of VKA 2021 RC Exploration Drilling and Sampling There are no twinned holes planned in the-Current program- The Competent Person considers the process described as appropriate, though twinning of RC holes with diamond drilling may be appropriate given the visible gold observed in RC samples to avoid potentially overstating the down hole intervals in the RC intervals.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Historical Information The data entry, storage and documentation of primary data was completed in Microsoft Access databases and assembled by CSA Global into a central database for future purposes. The majority of the data reviewed by CSA Global has been summarised from primary sources. Underground Face Sampling No independent verification has been undertaken so far, however the hardcopy plan data is being entered into a database, which will facilitate checking of assay data presented on the face sampling plans against that recorded in Barminco and Barra Resources reports. The face sampling data is presented as a series of Tables in Barra Resources report – 'Final Mine Report, 2002' and submitted to DMIRS. Summary of VKA 2021 RC Exploration Drilling and Sampling Primary data for drill cuttings, including sample number, depth, colour, grain size, weathering, lithology, alteration, rock fabric and the presence of minerals potentially related to mineralisation including quartz and sulphides, were collected in the field and entered into a protected spreadsheet which was then uploaded into relational database. The Competent Person considers the process described as appropriate
	Discuss any adjustment to assay data.	No adjustments or calibrations have been made to any assay data.





Criteria	JORC Code explanation	Commentary					
Location of data	Accuracy and quality of surveys used to locate drillholes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Historical Information All drill hole collars were surveyed by differential global positioning system (DGPS) or by the mine operations survey equipment. The following extract from the 2001 First Hit Mine Ore Resource and Mining report states the following: Down hole surveying of drill holes were undertaken on the majority of holes whilst being drilled. This has enabled only dip readings to be collected as the instrument was used within the drill string. Several programs of downhole surveying using a single shot Eastman camera have been completed for all available holes in the First Hit area and have been incorporated into the database. Where downhole surveys were unavailable due to the collapse of the hole, survey estimates at regular intervals have been applied These are based on the deviation of the surrounding drill holes. Drill holes greater than 100 m in depth deviated consistently in the azimuth to the southwest (against rotation). The dip angle in most cases steepened and in some of the deeper holes this was quite dramatic. Drill string stabilizers were tried at various times in an attempt to help alleviate this problem, but no consistent results were achieved. Historical Underground Face Sampling The location of face sampled was recorded by mine surveyors. The face samples were used to guide mine development. It is unknown the extent the face sample data was used in Mineral Resource estimates. Summary of VKA 2021 RC Exploration Drilling and Sampling—Surveys The collar positions have been surveyed using a differential GPS with an accuracy of +/-0.5m once drilling of the planned programme was completed. The downhole azimuth and dip were surveyed using a Reflex Easy Gyro tool or an Axis Mining Technology Champ Gyro tool with an accuracy of +/-1 degree for the azimuth and +/-0.1 degrees for the dip. The Competent Person considers the survey processes as appropriate					
points	Specification of the grid system used.	Historical Information Topographic data for the mine drilling were captured in MGA Zone 51 grid. A local grid has been established at First Hit, which is orthogonal to the known mineralised trend of the area (020 degrees). The grid orientation is at 290 degrees magnetic which is optimal for this deposit. The conversion from local to AMG 84 grid is presented in the table below. Local					
	Quality and adequacy of topographic control.	Historical topographic Information Historical survey work for the First Hit Mine was conducted via differential global positioning system (DGPS) and is appropriate as an industry standard method. A topographic surface used for coding the block model was built from a system using a detailed drone survey. The Competent Person considers that the surface is suitable for future exploration activities. Summary of VKA 2021 RC Exploration Drilling and Sampling The DTM and collar locations for the RC drilling were located by differential GPS. The Competent Person considers the survey processes as appropriate.					
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Historical Information The majority of the data on the tenements is surface geochemistry which are adequate for defining anomalies for future exploration.					





Criteria	JORC Code explanation	Commentary
		Summary of VKA 2021 RC Exploration Drilling and Sampling RC drilling was undertaken on an irregular 40x40m, or 80x40m or 120x40m spacing to test specific targets and extensions of mineralisation identified in historical drill holes. The Competent Person considers the data spacing appropriate for reporting exploration results.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	Historical Information Existing drilling on the periphery of historically mined areas is suitable for defining additional drill targets laterally, down dip and in the near surface environment. Summary of VKA 2021 RC Exploration Drilling and Sampling The spacing of the RC drilling is considered appropriate for this type of deposit and no resources are currently being estimated.
	Whether sample compositing has been applied.	Historical Information Sample composting was applied in initial exploration drilling at the First Hit Project and always followed up by detailed sampling at 1 m interval, or less for core drilling. Summary of VKA 2021 RC Exploration Drilling and Sampling No sample compositing has been applied for RC drill samples. The Competent Person considers the sampling to be appropriate for this stage of exploration.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Historical Information The regular spaced drilling on consistent sections, and the orientations orthogonal to the strike of the lodes, has provided consistent support to intersections of mineralisation to eliminate any bias or influence of hole angles on grades. Summary of VKA 2021 RC Exploration Drilling and Sampling RC drilling is predominately orthogonal to the strike of the structural trends and mineral system. Understanding the geometry of the mineralised trends is managed through incorporating as much of the underground mapping and historical drilling as possible as well as regional data sets. Additionally, all RC holes are oriented to understand and measure the variability of structures and mineralisation. The Competent Person considers the processes as appropriate.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Historical Information No relationship has been noted between drillhole orientation and mineralisation. Summary of VKA 2021 RC Exploration Drilling and Sampling At this stage of exploration, RC drilling is considered by the Competent Person not to have introduced a sampling bias. However, as drilling continues, this will need to be reviewed as coarse gold has been observed in core and RC drilling which may require further review.
Sample security	The measures taken to ensure sample security.	Historical Information The competent person is unaware of measures taken to ensure sample security during past exploration. Chain of custody procedures are recommended for future exploration. Summary of VKA 2021 RC Exploration Drilling and Sampling Samples derived from the RC drilling were collected and stored by site personnel at a designated lay-down area on site. These samples were transported to Intertek laboratories in Kalgoorlie by site personnel or Pitbull transport. The Competent Person considers the processes for sample security as appropriate.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Historical Information No external audit of sampling techniques and data could be sourced from the documents provided to CSA Global.





Criteria	JORC Code explanation	Commentary
		Summary of VKA 2021 RC Exploration Drilling and Sampling No external audits or reviews have yet been undertaken on the sampling data however the competent person is satisfied with the processes employed. The analytical data have yet to be received.

JORC 2012 Table 1 Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary		
	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	Tenements and location The First Hit Project tenements are loca (05) 1:250,000 and Riverina 3038 1:100	• • • • •	ue west of the town of Menzies, Western Australia on the Menzies ets, and include:
		Tenement	Status	Holder
		M30/0091	LIVE	Red Dirt Mining Pty Ltd
		M30/0099	M30/0099 LIVE Red Dirt Mining Pty Lt	Red Dirt Mining Pty Ltd
		P30/1125	LIVE	Red Dirt Mining Pty Ltd
		P30/1126	LIVE	Viking Mines Ltd
		P30/1137	LIVE	Red Dirt Mining Pty Ltd
		P30/1144	LIVE	Red Dirt Mining Pty Ltd
Mineral tenement		E29/1133	LIVE	Viking Mines Ltd
and land tenure status		E29/1131	PENDING	Viking Mines Ltd
Status		E30/0529	PENDING	Viking Mines Ltd
		P29/2652	PENDING	Viking Mines Ltd
		E29/1169	PENDING	Viking Mines Ltd
		E29/1160	PENDING	Viking Mines Ltd
		P30/1126 is subject to a 1% Net Smelte Red Dirt Mining are not aware of any n Native Title, Historical sites and Wilder Archaeological and ethnographic studie	er Royalty with Australia Em naterial 3rd party interests o rness es were undertaken for M30	rces Limited and Barra Resources Limited. perald Menzies Pty Ltd on any gold produced from the tenement. per royalties. 2/99 prior to further development in 2001. These studies involved to the mining area and an examination of known ethnographic



Criteria	JORC Code explanation	Commentary
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	site distribution. The studies concluded that it was unlikely that the developments will impact any sites of Aboriginal significance. This information was submitted to the Department of Aboriginal Affairs. A recent search of the Department of Aboriginal Affairs (DAA) Heritage Inquiry System indicates there are no registered Aboriginal Heritage Sites identified within any tenement covered under this MCP (DAA 2019). The mining lease was granted prior to the Native Title Act being enforced. The tenements are held in good standing by Red Dirt Mining Pty Ltd. a wholly owned subsidiary of Viking Mines Ltd.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The Red Dirt tenements have been actively explored and mined since 1886 with the arrival of prospecting parties during the initial Western Australia gold rush. Arthur and Tom Evans founded the First Hit gold mine in 1938. Tom and Arthur worked the mine until Tom sold his share to Riverina station owner Bill Skathorpe in late 1953. Arthur and Bill worked the mine until Bill's death in 1954. George Vujcich Senior bought the mine from Arthur and Bill's estate in late 1955. George and then his son George operated the mine intermittently over a 40-year period. Barminco purchased the First Hit tenement from George's daughter in late 1996. Regional exploration activities were undertaken by Western Mining Corporation (WMC) and Consolidated Gold Operations prior to 1996 including geochemical sampling, lag sampling and auger programs. The programs covered the various regolith features with a purpose of defining broad geochemical anomalies. From 1996 to 2002 exploration and development was undertaken by Barra Resources or Barminco. Barminco Pty Ltd undertook geochemical soil geochemistry on the northern part of M30/99 between 1995 and 2000. Various combinations of multielement geochemistry were completed historically, ranging from gold-only assays to 42 element geochemistry. The following extract from the Barra Resources mine closure and production report provides an insight to the exploration and discovery of the First Hit deposit: "Barminco Pty Ltd acquired the First Hit tenement in August 1996, with the objective of exploring for and developing moderate sized high grade gold deposits. Because of Barminco's mining and exploration activities at Two Boys, Karonie, Jenny Wren, Gordon Sirdar and Bacchus Gift mines the period between August 1996 and June 2000 saw only intermittent work at First Hit. Twenty RC drill holes were completed demonstrating the potential for high-grade underground resources. The First Hit deposit was effectively discovered in June 2000 with drill hole BFH 025 which returned 3 zones of mineral
Geology	Deposit type, geological setting and style of mineralisation	Regional Geology The area of interest lies on the 1:100,000 Riverina geological sheet 3038 (Wyche, 1999). The Mt Ida greenstone belt is a north-striking belt of predominantly metamorphosed (upper greenschist-amphibolite facies) mafic and ultramafic rocks that form the western boundary of the Eastern Goldfields geological terrane. The major structure in this belt is the Mt Ida Fault, a deep mantle tapping crustal suture that trends N-S and dips to the east. It marks the western boundary of the Kalgoorlie Terrane (~2.7 Ga) of the





Criteria	JORC Code explanation	Commentary
		Eastern Goldfields Province against the Barlee Terrane (~3.0 Ga) of the Southern Cross Province to the west. To the east the belt is bounded by the Ballard Fault, a continuation of the strike extensive Zuleika Shear. The Mt Ida belt is widely mineralised, predominantly with discordant vein gold deposits. Associated element anomalism typically includes copper and arsenic but neither have been identified in economic concentrations. There is some nickel sulphide mineralisation associated with the komatiite component of the supracrustal rocks and the area includes a locally significant beryl deposit sporadically mined for emeralds. In the Riverina area the outcrop position of the Ida Fault is equivocal, and it is best regarded as a corridor of related structures with an axis central to the belt. The Riverina and First Hit Project area dominantly comprises metabasalts and metadolerites of tholeitic parentage with lesser metagabbros and komatilites. Small post-tectonic granitoids intrude the sequence with locally higher-grade metamorphic conditions. Structurally, the dominant features are north-striking, east-dipping reverse faults and associated anastomosing strain zones. A conjugate set of late brittle structures striking NE and NW is also evident. The mineralisation exploited to date has typically been narrow mesothermal anastomosing veins. These frequently have strike and dip dimensions able to sustain small high-grade mining operations. Local Geology The local geology of the First Hit Project area comprises north striking ultramafics, komatiites and peridotites with some sediments in the eastern part of the block. To the west there is a metabasalt unit including a prominent gabbro and further west again more peridotite with amphibolite. The general strike trend drifts to the north-northwest then back to north. The sequence includes a small felsic intrusive west of the Emerald workings and a zone of felsic schists within the eastern ultramafics. Felsic intrusives occur in the northwest corner. The local stri
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	A summary of the relevant drillhole information has been included in the body of the report.





Criteria	JORC Code explanation	Commentary
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	Significant assay results or aggregated intercept reporting have been completed using a minimum cut-off grade of 0.5g/t. No high grade cut-off has been used.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	The drilling programs at the First Hit deposit reported herein are variably oblique to the true width of the deposit. All drill holes are reported as down hole widths as the true width cannot be determined.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views	All appropriate maps and plans are included in the body of the report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All appropriate information is included in the report.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances	Geophysical data used at the First hit project includes: Magnetic data: Viking Mines purchased historic magnetic geophysical data from Southern Geoscience Consultants Pty Ltd from the multi-client data source. The data purchased is recorded as the Riverina (R#60371) survey and was completed by Barminco. 1,432 line km of data was purchased by Viking mines. The survey acquisition details are recorded as: Line spacing 25m, Line direction 090-270, Tie line spacing 250m, Tie line direction 180-000, Aircraft survey height 25m, Survey flown February 1999 Equipment specifications: Aircraft type Fletcher FU24-950, Survey navigation UTS Nav System V3.0, Data acquisition UTS ACQSYS V3.2, Data positioning Real time differential GPS, GPS type Novatel 951R, 12 channel, Magnetometer Scintrex Cesium Vapour Model CS2, Compensation RMS AADC II, Resolution 0.001nT, Recording interval 0.1 sec or 4-5m, Sensor height 25 m, Radar altimeter King model KRA-405, Recording interval 0.1 sec or 4-5m, Base station magnetometer Scintrex ENVI-MAG, Recording interval 5.0 sec Gravity data: The acquisition and processing of 674 new gravity stations commenced on the 26th of January 2021 and finished on the 30th of January 2021. Final data were delivered shortly after project completion. All data was acquired for Viking Mines Limited over the First hit project area located approximately 46km west of Menzies in the Gold Fields region of Western Australia. Gravity





Criteria	JORC Code explanation	Commentary
		stations were acquired using a 200m x 50m regular grid configuration by Atlas using one crew utilising foot-borne gravity methods. The following instrumentation was used for acquisition of the gravity data:
		• One CG-5 Autograv Gravity Meter (Serial Number: 41081, SF: 1.000000), One CHC i70+ GNSS Rover Receiver, One CHCi70+ GNSS Base Receiver
		3D modelling of the regional geology and structure at the tenement scale is in progress.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	The evaluation of all geochemical data is being evaluated to design additional exploration activities on the exploration tenements which may include geochemistry, RC and diamond drilling.
		Further assessment of RC samples received is required, including additional testwork on the remaining samples to determine the variability due to the relatively coarse nature of the gold seen in the RC chips. Additional assaying will be completed on the samples to see if there is a significant nugget effect.
		Execution of the 2021 RC drill programme consisting of 72 holes for 6,723m has been completed, however results are still being obtained and interpreted.
		This drill programme involved testing around step out hole VDD016 to test for new shoot potential, including additional systematic step out traverses to the north along the Frist Hit structural trend Programme design to test the depth extensions of the First Hit mineralisation. Three other target areas were also tested including First Hit South, Twin Peaks, and Jana's Reward.
		In addition, assessment of the effectiveness of historical RC drilling in light of recent observation on poor sampling practices (4m composites) for narrow vein high-grade gold targets will commence and be tested through the completion of the 2021 RC drilling programme.
		Incorporation of assay data into a regional structural model to define new targets for follow up and to provide support for the 4 target areas identified from the Air-Core programme.