



Resolute

ASX Announcement

17 February 2022

Tabakoroni Resource Increases 40%

Highlights

- Global Measured and Indicated Mineral Resource Estimate updated to 9.2 million tonnes at 4.4 g/t for 1.3 million ounces of gold a 40% increase over the previous estimate
- The gold deposit remains open along strike and down dip
- Studies to optimise the development of the resource continue
- Tabakoroni reserves to be updated in the annual Reserves and Resources statement

Resolute Mining Limited (Resolute or the Company) (ASX/LSE: RSG) is pleased to announce an updated Mineral Resource Estimate (MRE) from ongoing exploration success at Tabakoroni confirming the potential for a new open pit or underground gold mine.

2021 Drilling Program

Exploration success at Tabakoroni has continued with the Mineral Resource consistently growing.

Resolute published the maiden underground resource at Tabakoroni on 29 April 2019 with Mineral Resource updates reported in 2020 and 2021. These estimates covered the Tabakoroni Main Shear Zone and excluded the Splay area which continues to be reported separately.

Diamond drilling continued throughout 2021 focussed on outlining and expanding the coherent high-grade lens of mineralisation located underneath the Tabakoroni South oxide pit. The first intersections in this zone were reported on 14 October 2020 with drilling programs since that time focussing on fully exploring this new zone.

Mineral Resources for the southern high-grade zone were classified as Inferred in the January 2021 MRE announcement. Consequently, a major focus for drilling during 2021 was to upgrade this area of the Mineral Resource to the Indicated category.

Better intersections returned since the completion of the January 2021 estimate include:

TADD841 - 8m @ 28g/t from 383m

TADD841 - 13m @ 14.52g/t from 397m

TADD833 - 18m @ 11.20g/t from 317m

TADD954 - 9m @ 17.42g/t from 415m

TADD968 - 18m @ 36.77g/t from 416m

TADD984 - 4m @ 27.65g/t from 159m

TADD987 - 10m @ 10.86g/t from 341m

The location of the drill intersection pierce points are shown on Figure 1.



Updated Tabakoroni Mineral Resource Estimate

An updated MRE for the Tabakoroni Man Shear Zone (TMSZ) was completed in December 2021 using wireframe constrained ordinary kriged methodology which was the same as previous estimates.

The infill and expansion drilling undertaken in 2021 was successful with the majority of the southern high-grade zone being upgraded to indicated category.

The Global Measured and Indicated Mineral Resources for the TMSZ has been upgraded to 9.2 million tonnes (Mt) at 4.4 grams per tonne (g/t) gold (Au) at a cut off of 1.75g/t Au for a total of 1.35 million ounces (Moz), an increase of 40% over the previous estimate of 6.9Mt at 4.3g/t Au for 0.96Moz. Resource diamond drilling at 50m centre density in the southern high-grade zone was achieved during 2021 enabling the conversion of the majority of the previously classified inferred resources.

The Tabakoroni reserves will be released in the Annual Reserves and Resources Statement. The Global Mineral Resource is shown in Table 1

Tabakoroni Global Resource 1.75g/t cut off			
Category	Tonnes (000)s	Gold (g/t)	Ounces (000s)
Measured	41	3.83	51
Indicated	9,194	4.43	1,308
Inferred	2,802	3.12	281
Total	12,409	4.11	1,640

Table 1: Tabakoroni Global Mineral Resources at December 2021

Using the principals of Reasonable Prospects of Eventual Economic Extraction (RPEEE) the Global Mineral Resource was restricted by using both an open pit optimisation and a stope shape optimisation for material below the open pit shell.

Both optimisations were completed at a resource gold price of US\$2,000/oz, using likely mining and processing parameters to be encountered during eventual extraction of the material, such as the most likely mining methods and approximate mining and metallurgical parameters. The economically constrained Mineral Resource is shown in Table 2.

MINERAL RESOURCES	MEASURED			INDICATED			INFERRED			TOTAL RESOURCES		
	Tonnes (000s)	g/t	oz (000s)	Tonnes (000s)	g/t	oz (000s)	Tonnes (000s)	g/t	oz (000s)	Tonnes (000s)	g/t	oz (000s)
As at December 2021												
Mali												
Oxide and Transitional - OP	426	3.4	46	924	4.5	134	17	5.5	3	1,367	4.2	183
Fresh - OP	98	2.9	9	1,203	4.7	183	4	6.2	1	1,305	4.6	193
Fresh - UG	6	3.5	1	5,179	4.8	792	1,644	3.5	183	6,829	4.4	976
Tabakoroni Total	530	3.3	56	7,307	4.7	1,110	1,665	3.5	187	9,502	4.4	1,352

Table 2: Tabakoroni Open Pit and Underground Mineral Resources



Future Exploration at Tabakoroni

The mineralisation at Tabakoroni remains open both along strike and at depth and continued exploration success is expected to expand Mineral Resources. The Tabakoroni deposit is only drilled to shallow depths to date and has significant potential to grow at depth and along strike to the north and south.

Extensional diamond drilling during 2021 continued to intersect ore grade mineralisation confirming that the Tabakoroni deposit remains open at depth over the entire 1.8km strike length. Of particular interest are the very high grade-intersections announced on 25 August 2021 from mineralisation at the very bottom of the resource model such as 13m @ 14.52g/t from TADD841 and 18m @ 36.77g/t from TADD 968 (see Figure 1). These results support extension of high-grade shoots to be identified with further drilling.

Also of importance is the previously announced high grade result in TARD779 of 4m @ 10.13g/t Au from 195m (see Figure 1) which confirms the deposit is open to the south.

Drilling programs to be undertaken in 2022 will focus on three areas, extensions of the mineralised zone south of TARD779, test the depth extents of the high-grade zone under the South Pit and testing the northern plunge of the mineralisation underneath the North Pit.

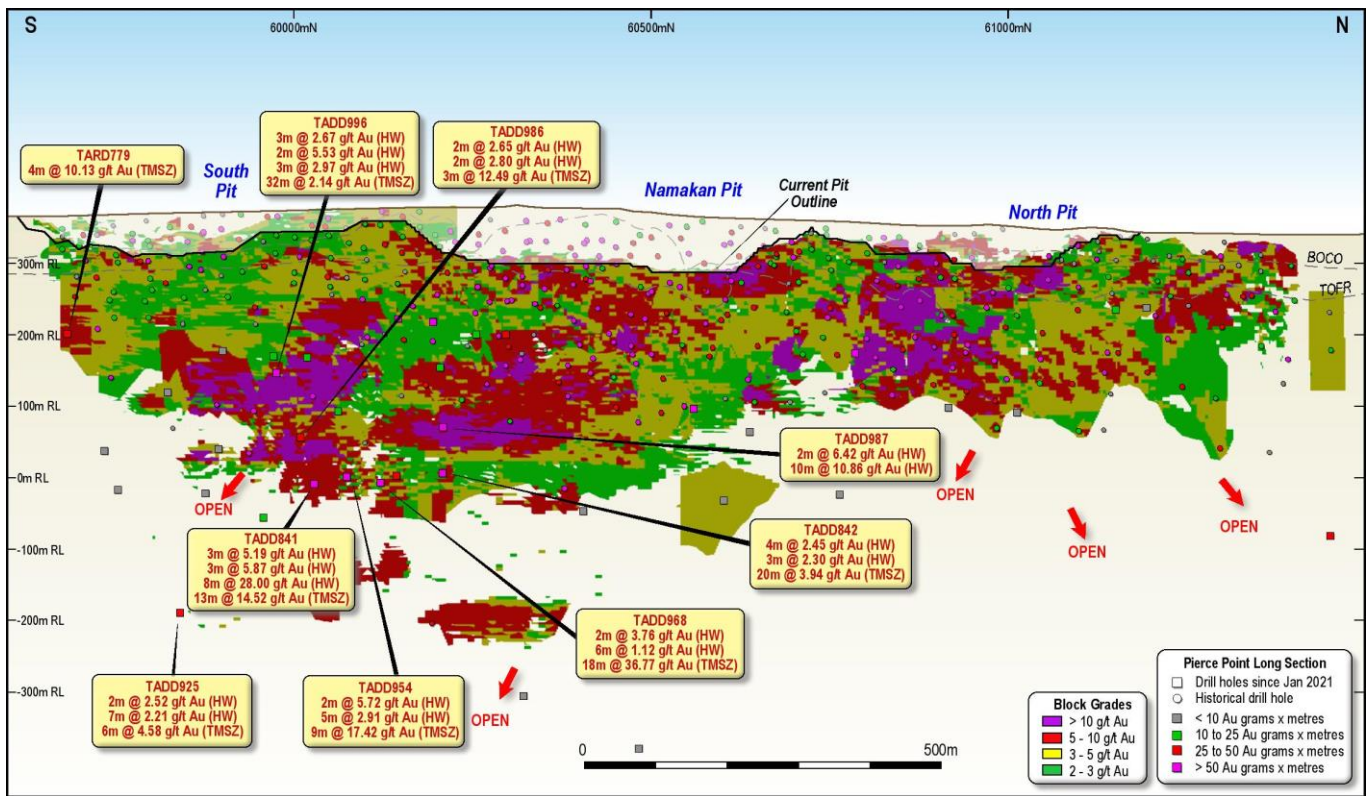


Figure 1. Tabakoroni Longitudinal Section with Mineral Resource block model and drill intersections

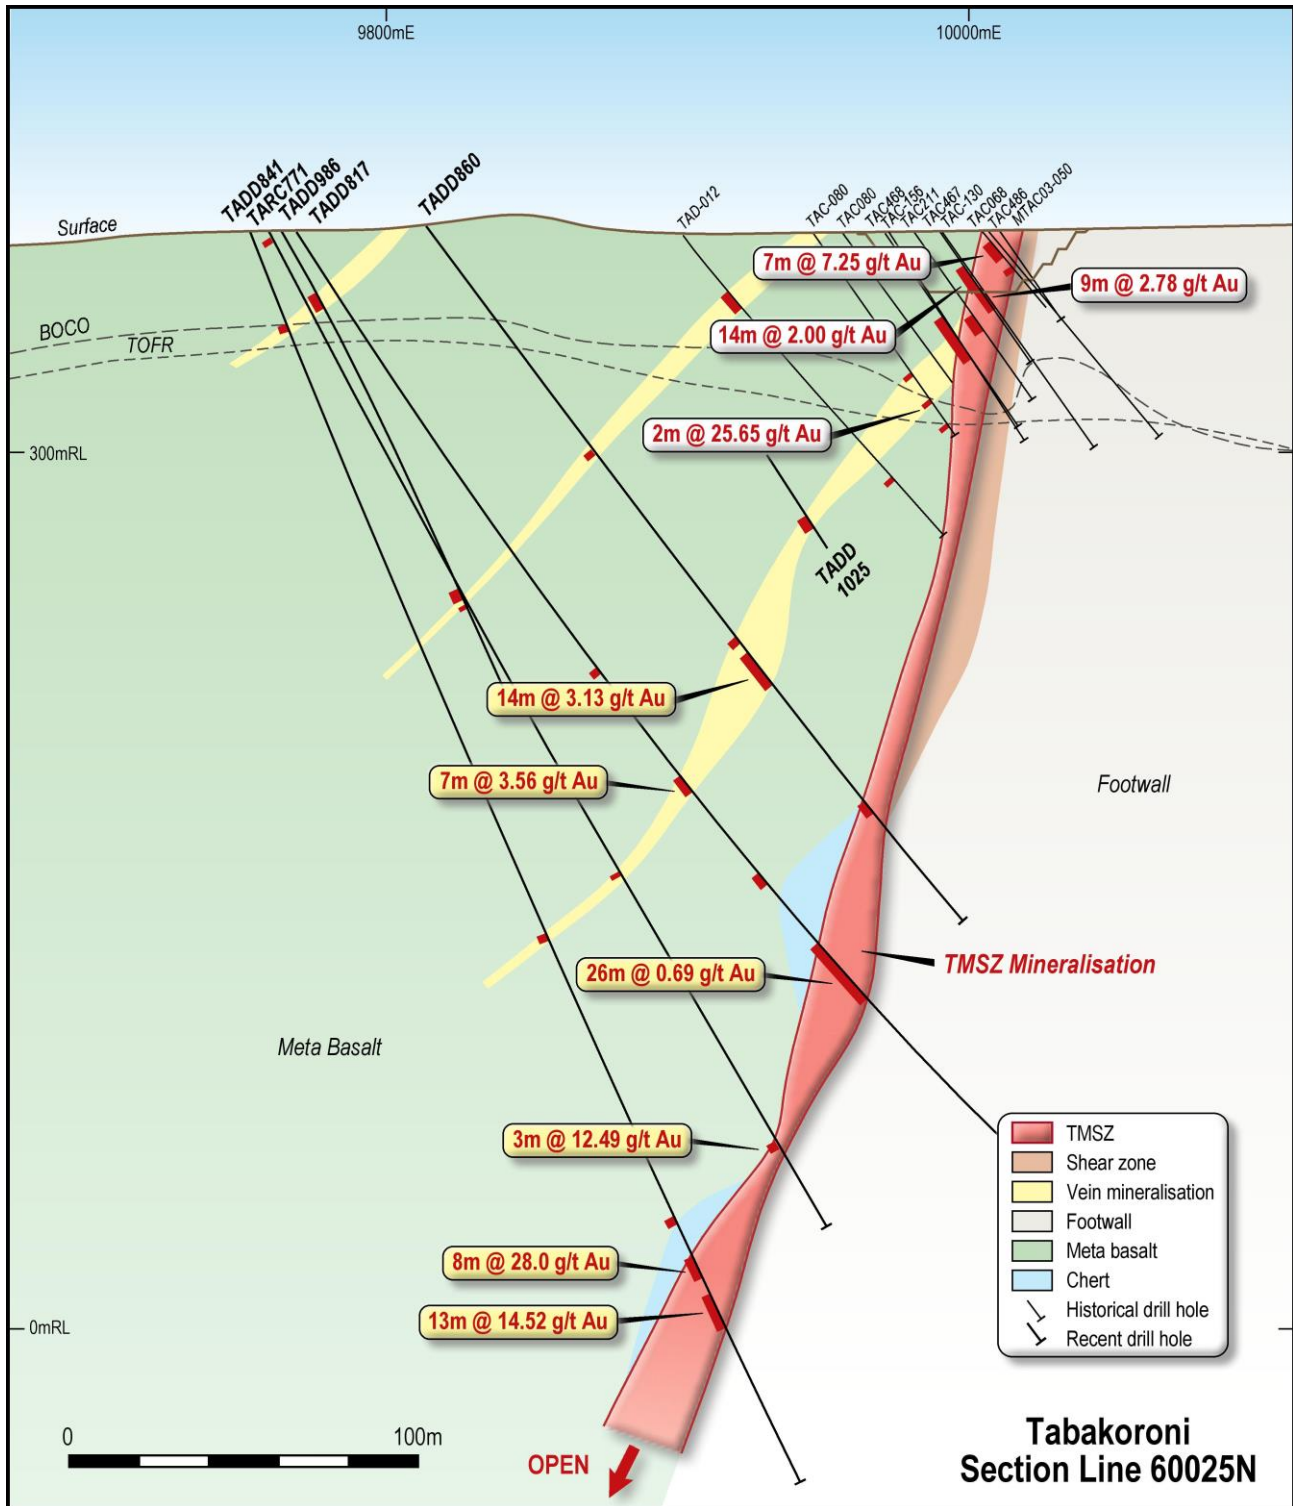


Figure 2: Tabakoroni Cross Section showing geology and gold mineralisation



Resolute

ASX Announcement



Figure 3: Tabakoroni drone photograph showing main structures and resource areas



Resolute

ASX Announcement

Resource Estimation and Classification methodology

Mineralisation wireframes were created with a cut-off grade of 1 g/t Au with a minimum downhole thickness of 2 m. Four domains have been identified at Tabakoroni. The main domain is the Tabakoroni Main Shear Zone (TMSZ) which is a steeply dipping shear mineralised over 1.8 km of strike. In the central portion of the deposit this structure becomes westerly dipping at depth. A second domain (Domain 200) was created for the parallel lodes adjacent to the TMSZ, and there are a number of shear-parallel smaller lodes. Another domain was created for the shallow westerly-dipping lodes in the southern and central portions of the deposit. These lodes are dipping at 45 degrees and appear to overprint the TMSZ. A final domain created was the steeply dipping mineralisation in the north-eastern portion of the deposit, which strikes at 20 degrees to the northeast. The shallow west dipping lodes appear to be veins with significant presence of arsenopyrite

Gold, sulphide sulphur, organic carbon and arsenic was estimated into a three-dimensional block model using ordinary kriging (OK).

Top cutting was required to reduce the influence of outlier values. Variograms were generated based on 1 metre composites for the mineralised domains. Some variograms were borrowed from other elements where there was insufficient data and where there was a strong correlation identified. This affected some of the arsenic domains. Optiro carried out kriging neighbourhood analysis based upon the gold variograms to optimise the estimation parameters, and these parameters were used for ordinary kriging into the 5 m x 10 m x 5 m parent cells.

Hard boundaries were utilised between the mineralised domains and the waste domain for all elements. A change in methodology for estimating COrg, S2 and arsenic was employed in this estimation. A review of the data showed there was a hard boundary needed between the transition material and the fresh material.

Three search passes, with increasing search distance and decreasing minimum sample numbers, were employed to inform the model. A nearest neighbour approach was used to fill the blocks without grade in the first three passes and given a search pass of 4. An average grade was also assigned where the nearest neighbour approach filled areas of grade higher than the domain average.

Density was assigned based on weathering codes; 2,190 measurements were taken from diamond hole samples. These measurements suggested a density of 2.72 g/m³ for the fresh, 2.38 g/m³ for the transitional material and 2.12 g/m³ for the oxide material.

The estimation was validated and then classified as Measured, Indicated and Inferred in accordance with the JORC Code (2012) reporting guidelines. The default classification for the mineralisation is an Inferred Mineral Resource. Measured Mineral Resources are defined by contiguous zones where the nominal drillhole density is 12.5m by 12.5m, while an Indicated Mineral Resource has been defined by zones where the nominal drillhole density is up to 50m by 50m. The resource has been depleted for mining as of 31 December 2021.

For further information, contact:

Stuart Gale
Managing Director & CEO



Resolute

ASX Announcement

About Resolute

Resolute is a successful gold miner with more than 30 years of experience as an explorer, developer and operator of gold mines in Australia and Africa which have produced more than 8 million ounces of gold. The Company trades on the Australian Securities Exchange (ASX) and the London Stock Exchange (LSE) under the ticker RSG. Resolute currently operates the Syama Gold Mine in Mali and the Mako Gold Mine in Senegal.

Contact Information

Resolute

Stuart Gale, Chief Executive Officer

James Virgo, GM Finance and Investor Relations

Telephone: +61 8 9261 6100

Email: contact@rml.com.au

Web: www.rml.com.au

Berenberg (UK Corporate Broker)

Matthew Armit / Detlir Elezi

Telephone: +44 20 3207 7800

Tavistock (UK Public Relations)

Jos Simson / Oliver Lamb

Telephone: +44 207 920 3150 / +44 778 855 4035

Email: resolute@tavistock.co.uk

Follow Resolute



FTI Consulting (Australian media)

Cameron Morse / James Tranter

Telephone: +61 433 886 871

Email: cameron.morse@fticonsulting.com

Authorised by Mr Stuart Gale, Chief Executive Officer

Competent Persons Statement

The information in this report that relates to the Exploration Results, Mineral Resources and Ore Reserves is based on, and fairly represents, information compiled by Mr Bruce Mowat, a member of The Australian Institute of Geoscientists. Mr Bruce Mowat has more than 5 years' experience relevant to the styles of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person, as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (the JORC Code). Mr Bruce Mowat is a full-time employee of the Resolute Mining Limited Group and holds equity securities in the Company. He has consented to the inclusion of the matters in this report based on his information in the form and context in which it appears. This information was prepared and disclosed under the JORC Code 2012 except where otherwise noted.

The information in this announcement that relates to the Mineral Resource estimate has been based on, and fairly represents, information and supporting documents prepared by Mrs Susan Havlin, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mrs Havlin is an employee of Optiro, a consultant to the Company, and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which has been undertaken to qualify as a Competent Person. Mrs Havlin confirms that the Mineral Resource estimate is based on information in the supporting documents and consents to the inclusion in the report of the Mineral Resource estimate and related content based on the information in the form and context in which it appears.

Cautionary Statement about Forward-Looking Statements

This announcement contains certain "forward-looking statements" including statements regarding our intent, belief or current expectations with respect to Resolute's business and operations, market conditions, results of operations



and financial condition, and risk management practices. The words “likely”, “expect”, “aim”, “should”, “could”, “may”, “anticipate”, “predict”, “believe”, “plan”, “forecast” and other similar expressions are intended to identify forward-looking statements. Indications of, and guidance on, future earnings, anticipated production, life of mine and financial position and performance are also forward-looking statements. These forward-looking statements involve known and unknown risks, uncertainties and other factors that may cause Resolute’s actual results, performance and achievements or industry results to differ materially from any future results, performance or achievements, or industry results, expressed or implied by these forward-looking statements. Relevant factors may include (but are not limited to) changes in commodity prices, foreign exchange fluctuations and general economic conditions, increased costs and demand for production inputs, the speculative nature of exploration and project development, including the risks of obtaining necessary licences and permits and diminishing quantities or grades of reserves, political and social risks, changes to the regulatory framework within which Resolute operates or may in the future operate, environmental conditions including extreme weather conditions, recruitment and retention of personnel, industrial relations issues and litigation. Forward looking statements are based on Resolute’s good faith assumptions as to the financial, market, regulatory and other relevant environments that will exist and affect Resolute’s business and operations in the future. Resolute does not give any assurance that the assumptions will prove to be correct. There may be other factors that could cause actual results or events not to be as anticipated, and many events are beyond the reasonable control of Resolute. Readers are cautioned not to place undue reliance on forward-looking statements, particularly in the current economic climate with the significant volatility, uncertainty and disruption caused by the COVID-19 pandemic. Forward-looking statements in this document speak only at the date of issue. Except as required by applicable laws or regulations, Resolute does not undertake any obligation to publicly update or revise any of the forward-looking statements or to advise of any change in assumptions on which any such statement is based. Except for statutory liability which cannot be excluded, each of Resolute, its officers, employees and advisors expressly disclaim any responsibility for the accuracy or completeness of the material contained in these forward-looking statements and excludes all liability whatsoever (including in negligence) for any loss or damage which may be suffered by any person as a consequence of any information in forward-looking statements or any error or omission.



Appendix 1: Recent Drilling Results

Tabakoroni

Hole_ID	North (WGS)	East (WGS)	RL (m)	Dip	Azi (WGS)	EOH (m)	From (m)	To (m)	Width (m)	Au (g/t)
TADD952	1164942	810431	341	-55	64	90.5	39	49	10	19.67
TADD959	1164889	810280	341	-55	60	252.3	133	135	2	11.52
TADD963	1164731	810442	344	-56	64	250.2	49	51	2	5.36
TADD963	1164731	810442	344	-56	64	250.2	91	101	10	4.01
TADD963	1164731	810442	344	-56	64	250.2	114	116	2	5.04
TADD963	1164731	810442	344	-56	64	250.2	128	134	6	1.16
TADD963	1164731	810442	344	-56	64	250.2	212	215	3	3.97
TADD992	1163531	810376	375	-72	63	639.3	202	205	3	7.05
TADD992	1163531	810376	375	-72	63	639.3	322	325	3	4.12
TADD992	1163531	810376	375	-72	63	639.3	363	365	2	3.43
TADD992	1163531	810376	375	-72	63	639.3	520	529	9	3.02
TADD992	1163531	810376	375	-72	63	639.3	593	603	10	1.23
TADD1001	1163446	810492	372	-68	57	412.3	147	149	2	3.88
TADD1001	1163446	810492	372	-68	57	412.3	259	268	9	4.38
TADD1008	1163309	810556	369	-56	62	308.9	136	140	4	2.35
TADD1008	1163309	810556	369	-56	62	308.9	226	233	7	5.75
TADD1008	1163309	810556	369	-56	62	308.9	254	256	2	4.2
TADD1009	1163458	810514	373	-67	67	420.2	127	129	2	5.43
TADD1009	1163458	810514	373	-67	67	420.2	238	248	10	3.41
TADD1011	1163415	810493	371	-72	69	520.1	273	282	9	6.54
TADD1011	1163415	810493	371	-72	69	520.1	392	396	4	1.31
TADD1011	1163415	810493	371	-72	69	520.1	461	464	3	2.89
TADD1015	1163478	810519	374	-63	58	390.3	227	229	2	3.65
TADD1015	1163478	810519	374	-63	58	390.3	333	337	4	1.5
TADD1018	1163514	810458	380	-64	60	419.2	156	158	2	6.71
TADD1018	1163514	810458	380	-64	60	419.2	255	259	4	1.45
TADD1018	1163514	810458	380	-64	60	419.2	366	380	14	1.88
TADD1019	1163567	810550	379	-64	66	291	69	71	2	8.39
TADD1019	1163567	810550	379	-64	66	291	172	175	3	29.15
TADD1019	1163567	810550	379	-64	66	291	236	244	8	3.02
TADD1019	1163567	810550	379	-64	66	291	250	255	5	31.76
TADD1020	1163591	810494	379	-63	63	330.3	177	186	9	2.26
TADD1020	1163591	810494	379	-63	63	330.3	317	319	2	3.76
TADD1021	1163352	810542	370	-66	58	414.2	136	140	4	3.3
TADD1022	1163370	810578	370	-65	64	306.3	106	113	7	1.72
TADD1022	1163370	810578	370	-65	64	306.3	206	212	6	2
TADD1022	1163370	810578	370	-65	64	306.3	255	258	3	16.43
TADD1023	1163625	810472	379	-67	60	415.5	108	113	5	1.39
TADD1023	1163625	810472	379	-67	60	415.5	213	215	2	2.88
TADD1023	1163625	810472	379	-67	60	415.5	286	288	2	3.38
TADD1023	1163625	810472	379	-67	60	415.5	336	341	5	2.13
TADD1024	1163741	810375	380	-69	61	476.7	214	216	2	3.26
TADD1025	1163524	810601	374	-59	63	205.5	36	38	2	4.59
TADD1025	1163524	810601	374	-59	63	205.5	112	118	6	1.66
TADD1026	1163176	810558	370	-57	66	336.5	31	33	2	2.65
TADD1026	1163176	810558	370	-57	66	336.5	227	229	2	2.98
TADD1026	1163176	810558	370	-57	66	336.5	235	239	4	10.29
TADD1027	1163651	810399	380	-72	59	605.4	253	256	3	3.43
TADD1027	1163651	810399	380	-72	59	605.4	341	343	2	3.81
TADD1027	1163651	810399	380	-72	59	605.4	570	574	4	2.93



Resolute

ASX Announcement

Hole_ID	North (WGS)	East (WGS)	RL (m)	Dip	Azi (WGS)	EOH (m)	From (m)	To (m)	Width (m)	Au (g/t)
TADD1028	1163233	810571	370	-54	64	276.3	79	83	4	5
TADD1028	1163233	810571	370	-54	64	276.3	152	154	2	9.18
TADD1028	1163233	810571	370	-54	64	276.3	219	221	2	6.33
TADD1028	1163233	810571	370	-54	64	276.3	226	228	2	41.14
TADD1029	1163230	810559	370	-65	62	425.8	152	154	2	3.6
TADD1029	1163230	810559	370	-65	62	425.8	167	172	5	1.48
TADD1029	1163230	810559	370	-65	62	425.8	355	359	4	125.85
TADD1030	1163527	810433	379	-74	62	525.2	179	181	2	3.12
TADD1030	1163527	810433	379	-74	62	525.2	487	498	11	1.9
TADD1031	1163711	810410	385	-69	58	435.3	211	216	5	1.78
TADD1031	1163711	810410	385	-69	58	435.3	249	251	2	4.03
TADD1031	1163711	810410	385	-69	58	435.3	348	353	5	2.72
TADD1031	1163711	810410	385	-69	58	435.3	377	389	12	3.01
TADD952	1164942	810431	341	-55	64	90.5	39	49	10	19.67
TADD959	1164889	810280	341	-55	60	252.3	133	135	2	11.52
TADD963	1164731	810442	344	-56	64	250.2	49	51	2	5.36
TADD963	1164731	810442	344	-56	64	250.2	91	101	10	4.01
TADD963	1164731	810442	344	-56	64	250.2	114	116	2	5.04
TADD963	1164731	810442	344	-56	64	250.2	128	134	6	1.16
TADD963	1164731	810442	344	-56	64	250.2	212	215	3	3.97
TADD992	1163531	810376	375	-72	63	639.3	202	205	3	7.05
TADD992	1163531	810376	375	-72	63	639.3	322	325	3	4.12
TADD992	1163531	810376	375	-72	63	639.3	363	365	2	3.43
TADD992	1163531	810376	375	-72	63	639.3	520	529	9	3.02
TADD992	1163531	810376	375	-72	63	639.3	593	603	10	1.23
TADD1001	1163446	810492	372	-68	57	412.3	147	149	2	3.88
TADD1001	1163446	810492	372	-68	57	412.3	259	268	9	4.38
TADD1008	1163309	810556	369	-56	62	308.9	136	140	4	2.35
TADD1008	1163309	810556	369	-56	62	308.9	226	233	7	5.75
TADD1008	1163309	810556	369	-56	62	308.9	254	256	2	4.2
TADD1009	1163458	810514	373	-67	67	420.2	127	129	2	5.43
TADD1009	1163458	810514	373	-67	67	420.2	238	248	10	3.41
TADD1011	1163415	810493	371	-72	69	520.1	273	282	9	6.54
TADD1011	1163415	810493	371	-72	69	520.1	392	396	4	1.31
TADD1011	1163415	810493	371	-72	69	520.1	461	464	3	2.89
TADD1015	1163478	810519	374	-63	58	390.3	227	229	2	3.65
TADD1015	1163478	810519	374	-63	58	390.3	333	337	4	1.5
TADD1018	1163514	810458	380	-64	60	419.2	156	158	2	6.71
TADD1018	1163514	810458	380	-64	60	419.2	255	259	4	1.45
TADD1018	1163514	810458	380	-64	60	419.2	366	380	14	1.88
TADD1019	1163567	810550	379	-64	66	291	69	71	2	8.39
TADD1019	1163567	810550	379	-64	66	291	172	175	3	29.15
TADD1019	1163567	810550	379	-64	66	291	236	244	8	3.02
TADD1019	1163567	810550	379	-64	66	291	250	255	5	31.76
TADD1020	1163591	810494	379	-63	63	330.3	177	186	9	2.26
TADD1020	1163591	810494	379	-63	63	330.3	317	319	2	3.76
TADD1021	1163352	810542	370	-66	58	414.2	136	140	4	3.3
TADD1022	1163370	810578	370	-65	64	306.3	106	113	7	1.72
TADD1022	1163370	810578	370	-65	64	306.3	206	212	6	2
TADD1022	1163370	810578	370	-65	64	306.3	255	258	3	16.43
TADD1023	1163625	810472	379	-67	60	415.5	108	113	5	1.39
TADD1023	1163625	810472	379	-67	60	415.5	213	215	2	2.88
TADD1023	1163625	810472	379	-67	60	415.5	286	288	2	3.38
TADD1023	1163625	810472	379	-67	60	415.5	336	341	5	2.13
TADD1024	1163741	810375	380	-69	61	476.7	214	216	2	3.26



Resolute

ASX Announcement

Hole_ID	North (WGS)	East (WGS)	RL (m)	Dip	Azi (WGS)	EOH (m)	From (m)	To (m)	Width (m)	Au (g/t)
TADD1025	1163524	810601	374	-59	63	205.5	36	38	2	4.59
TADD1025	1163524	810601	374	-59	63	205.5	112	118	6	1.66
TADD1026	1163176	810558	370	-57	66	336.5	31	33	2	2.65
TADD1026	1163176	810558	370	-57	66	336.5	227	229	2	2.98
TADD1026	1163176	810558	370	-57	66	336.5	235	239	4	10.29
TADD1027	1163651	810399	380	-72	59	605.4	253	256	3	3.43
TADD1027	1163651	810399	380	-72	59	605.4	341	343	2	3.81
TADD1027	1163651	810399	380	-72	59	605.4	570	574	4	2.93
TADD1028	1163233	810571	370	-54	64	276.3	79	83	4	5
TADD1028	1163233	810571	370	-54	64	276.3	152	154	2	9.18
TADD1028	1163233	810571	370	-54	64	276.3	219	221	2	6.33
TADD1028	1163233	810571	370	-54	64	276.3	226	228	2	41.14
TADD1029	1163230	810559	370	-65	62	425.8	152	154	2	3.6
TADD1029	1163230	810559	370	-65	62	425.8	167	172	5	1.48
TADD1029	1163230	810559	370	-65	62	425.8	355	359	4	125.85
TADD1030	1163527	810433	379	-74	62	525.2	179	181	2	3.12
TADD1030	1163527	810433	379	-74	62	525.2	487	498	11	1.9
TADD1031	1163711	810410	385	-69	58	435.3	211	216	5	1.78
TADD1031	1163711	810410	385	-69	58	435.3	249	251	2	4.03
TADD1031	1163711	810410	385	-69	58	435.3	348	353	5	2.72
TADD1031	1163711	810410	385	-69	58	435.3	377	389	12	3.01
TADD952	1164942	810431	341	-55	64	90.5	39	49	10	19.67
TADD959	1164889	810280	341	-55	60	252.3	133	135	2	11.52
TADD963	1164731	810442	344	-56	64	250.2	49	51	2	5.36
TADD963	1164731	810442	344	-56	64	250.2	91	101	10	4.01
TADD963	1164731	810442	344	-56	64	250.2	114	116	2	5.04
TADD963	1164731	810442	344	-56	64	250.2	128	134	6	1.16
TADD963	1164731	810442	344	-56	64	250.2	212	215	3	3.97
TADD992	1163531	810376	375	-72	63	639.3	202	205	3	7.05
TADD992	1163531	810376	375	-72	63	639.3	322	325	3	4.12
TADD992	1163531	810376	375	-72	63	639.3	363	365	2	3.43
TADD992	1163531	810376	375	-72	63	639.3	520	529	9	3.02
TADD992	1163531	810376	375	-72	63	639.3	593	603	10	1.23
TADD1001	1163446	810492	372	-68	57	412.3	147	149	2	3.88
TADD1001	1163446	810492	372	-68	57	412.3	259	268	9	4.38
TADD1008	1163309	810556	369	-56	62	308.9	136	140	4	2.35
TADD1008	1163309	810556	369	-56	62	308.9	226	233	7	5.75
TADD1008	1163309	810556	369	-56	62	308.9	254	256	2	4.2
TADD1009	1163458	810514	373	-67	67	420.2	127	129	2	5.43
TADD1009	1163458	810514	373	-67	67	420.2	238	248	10	3.41
TADD1011	1163415	810493	371	-72	69	520.1	273	282	9	6.54
TADD1011	1163415	810493	371	-72	69	520.1	392	396	4	1.31
TADD1011	1163415	810493	371	-72	69	520.1	461	464	3	2.89
TADD1015	1163478	810519	374	-63	58	390.3	227	229	2	3.65
TADD1015	1163478	810519	374	-63	58	390.3	333	337	4	1.5
TADD1018	1163514	810458	380	-64	60	419.2	156	158	2	6.71
TADD1018	1163514	810458	380	-64	60	419.2	255	259	4	1.45
TADD1018	1163514	810458	380	-64	60	419.2	366	380	14	1.88
TADD1019	1163567	810550	379	-64	66	291	69	71	2	8.39
TADD1019	1163567	810550	379	-64	66	291	172	175	3	29.15
TADD1019	1163567	810550	379	-64	66	291	236	244	8	3.02
TADD1019	1163567	810550	379	-64	66	291	250	255	5	31.76
TADD1020	1163591	810494	379	-63	63	330.3	177	186	9	2.26
TADD1020	1163591	810494	379	-63	63	330.3	317	319	2	3.76
TADD1021	1163352	810542	370	-66	58	414.2	136	140	4	3.3



Hole_ID	North (WGS)	East (WGS)	RL (m)	Dip	Azi (WGS)	EOH (m)	From (m)	To (m)	Width (m)	Au (g/t)
TADD1022	1163370	810578	370	-65	64	306.3	106	113	7	1.72
TADD1022	1163370	810578	370	-65	64	306.3	206	212	6	2
TADD1022	1163370	810578	370	-65	64	306.3	255	258	3	16.43
TADD1023	1163625	810472	379	-67	60	415.5	108	113	5	1.39
TADD1023	1163625	810472	379	-67	60	415.5	213	215	2	2.88
TADD1023	1163625	810472	379	-67	60	415.5	286	288	2	3.38
TADD1023	1163625	810472	379	-67	60	415.5	336	341	5	2.13
TADD1024	1163741	810375	380	-69	61	476.7	214	216	2	3.26
TADD1025	1163524	810601	374	-59	63	205.5	36	38	2	4.59
TADD1025	1163524	810601	374	-59	63	205.5	112	118	6	1.66
TADD1026	1163176	810558	370	-57	66	336.5	31	33	2	2.65
TADD1026	1163176	810558	370	-57	66	336.5	227	229	2	2.98
TADD1026	1163176	810558	370	-57	66	336.5	235	239	4	10.29
TADD1027	1163651	810399	380	-72	59	605.4	253	256	3	3.43
TADD1027	1163651	810399	380	-72	59	605.4	341	343	2	3.81
TADD1027	1163651	810399	380	-72	59	605.4	570	574	4	2.93
TADD1028	1163233	810571	370	-54	64	276.3	79	83	4	5
TADD1028	1163233	810571	370	-54	64	276.3	152	154	2	9.18
TADD1028	1163233	810571	370	-54	64	276.3	219	221	2	6.33
TADD1028	1163233	810571	370	-54	64	276.3	226	228	2	41.14
TADD1029	1163230	810559	370	-65	62	425.8	152	154	2	3.6
TADD1029	1163230	810559	370	-65	62	425.8	167	172	5	1.48
TADD1029	1163230	810559	370	-65	62	425.8	355	359	4	125.85
TADD1030	1163527	810433	379	-74	62	525.2	179	181	2	3.12
TADD1030	1163527	810433	379	-74	62	525.2	487	498	11	1.9
TADD1031	1163711	810410	385	-69	58	435.3	211	216	5	1.78
TADD1031	1163711	810410	385	-69	58	435.3	249	251	2	4.03
TADD1031	1163711	810410	385	-69	58	435.3	348	353	5	2.72
TADD1031	1163711	810410	385	-69	58	435.3	377	389	12	3.01

Notes to Accompany Table:

- Grid coordinates are WGS84 Zone 29 North
- Diamond core are sampled every 1m by cutting the core in half to provide a 2-4kg sample
- Cut-off grade for reporting of intercepts is >1g/t Au with a maximum of 3m consecutive internal dilution included within the intercept; only intercepts >=2m and >5 gram x metres are reported
- Samples are analysed for gold by 30g fire assay fusion with AAS instrument finish; over-range results are reanalysed by 30g fire assay fusion with gravimetric finish

Table 1 - Section 1: Tabakoroni Sampling Techniques and Data

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i> 	<p>The samples were collected from reverse circulation (RC) and diamond drill holes.</p> <p>RC samples were collected on 1m intervals by riffle split (dry) or by scoop (wet), to obtain a 1-3kg sample which was sent to the laboratory for crushing, splitting and pulverising to provide a 30g charge for analysis. . Following splitting adjacent to the bottom-of-hole orientation line, the right-hand side of the core is sampled in 1m intervals</p> <p>Sampling and sample preparation protocols are industry standard and are deemed appropriate by the Competent Person.</p>
Drilling techniques	<ul style="list-style-type: none"> <i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i> 	<p>Drill types used include reverse circulation with face sampling bit and core drilling using PQ and HQ sized bits. A digital core orientation system is used to define the bottom of the hole which is transferred to the drilled core..</p>
Drill sample recovery	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<p>Appropriate measures are taken to maximise sample recovery and ensure the representative nature of the samples.</p> <p>No apparent relationship is noted between sample recovery and grade.</p>
Logging	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> 	<p>Drill holes were geologically logged by geologists for colour, grainsize, lithology, minerals, alteration and weathering on geologically-domained intervals.</p> <p>Holes were logged in their entirety (100%) and this logging was considered reliable and appropriate.</p>



Resolute

ASX Announcement

	<ul style="list-style-type: none"> • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. • The total length and percentage of the relevant intersections logged. 	
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p>Reverse circulation samples were collected on 1m intervals by riffle split (dry) or by scoop (wet) to obtain a 1-3kg sample. Core samples were sawn using a diamond saw blade with half of the core sent for analysis.</p> <p>Sample preparation includes oven drying, crushing to 10mm, splitting and pulverising to 85% passing -75µm. These preparation techniques are deemed to be appropriate to the material being sampled.</p> <p>Reverse circulation and core field duplicates were collected by the company at a rate of 1:20 samples.</p> <p>Sampling, sample preparation and quality control protocols are of industry standard and all attempts were made to ensure an unbiased representative sample was collected. The methods applied in this process were deemed appropriate by the Competent Person.</p>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<p>All samples were dispatched to ALS Bamako for gold analysis by 30g fire assay fusion with AAS instrument finish (method code Au-AA25). Over-range results were re-analysed and reported by 30g fire assay fusion with gravimetric finish (method code Au-GRA21). The analytical method was appropriate for the style of mineralisation.</p> <p>No geophysical tools were used to determine elemental concentrations.</p> <p>Quality control (QC) procedures included the use of certified standards (1:40), non-certified sand blanks (1:40) and reverse circulation/core field duplicates (1:20).</p> <p>Laboratory quality control data, including laboratory standards, blanks, duplicates, repeats, grind size results and sample weights were also captured into the digital database.</p> <p>Analysis of the QC sample assay results indicates that an acceptable level of accuracy and precision has been achieved.</p>
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<p>Verification of significant intersections have been completed by company personnel and the Competent Person.</p> <p>No drill holes within the resource area were twinned.</p> <p>Drill holes were logged into digital templates with lookup codes, validated and then compiled into a relational SQL 2012 database using DataShed data management software. The database has verification protocols which are used to validate the data entry. The drill hole database is backed up on a daily basis to the head office server.</p> <p>Assay result files were reported by the laboratory in PDF and CSV format and imported into the SQL database without adjustment or modification.</p>
Location of data	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource 	<p>Collar coordinates were picked up in UTM (WGS84) by staff surveyors using an RTK DGPS with an expected accuracy of ±0.05m; elevations were height above EGM96 geoid.</p>



Resolute

ASX Announcement

<i>points</i>	<p><i>estimation.</i></p> <ul style="list-style-type: none"> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<p>Down hole surveys were collected at 10m intervals using a Reflex EZ-Gyro north seeking instrument. Coordinates and azimuths are reported in UTM WGS84 Zone 29 North.</p> <p>Tabakoroni drill holes were translated to local mine grid coordinates using 1 point and rotation.</p> <p>Local topographic control is via LIDAR surveys, satellite photography and drone UAV aerial survey.</p>
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data-spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<p>Drill hole spacing was sufficient to demonstrate geological and grade continuity appropriate for a Mineral Resource and the classifications applied under the 2012 JORC Code.</p> <p>The appropriateness of the drill spacing was reviewed by the geological technical team, both on site and head office. This was also reviewed by the Competent Person.</p> <p>Samples were collected on 1m intervals; no sample compositing is applied during sampling.</p>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<p>Holes were drilled predominantly perpendicular to mineralised domains where possible.</p> <p>No orientation-based sampling bias has been identified in the data.</p>
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<p>Samples were collected from the drill site and stored on site. All samples were individually bagged and labelled with unique sample identifiers, then securely dispatched to the laboratories. All aspects of sampling and dispatch process were supervised and tracked by SOMIFI personnel.</p>
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<p>External audits of procedures indicate protocols are within industry standards.</p>

Section 2 Reporting of Exploration Results

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
Mineral tenement and land tenure status	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<p>Drilling at Syama was conducted within the Malian Exploitation Concession Permit PE 93/003 which covers an area of 200.6 Km².</p> <p>Resolute Mining Limited has an 80% interest in the Syama project and the Exploitation Permit PE 93/003, on which it is based, through its Malian subsidiary, Société des Mines de Syama SA (SOMISY). The Malian Government holds a free carried 20% interest in SOMISY.</p> <p>Tabakoroni drilling was completed within the Finkolo-Tabakoroni Exploitation Licence PE 13/19. Resolute Mining Limited has an 85% interest in Exploitation Permit PE 13/19, through its Malian subsidiary, Société des Mines de Finkolo SA (SOMIFI). The Malian Government holds a free carried 10% interest in SOMIFI and a free carried 5% interest is held privately.</p>



Resolute

ASX Announcement

		The Permits are held in good standing. Malian mining law provides that all Mineral Resources are administered by DNGM (Direction Nationale de la Géologie et des Mines) or National Directorate of Geology and Mines under the Ministry of Mines, Energy and Hydrology.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<p>The Syama deposit was originally discovered by a regional geochemical survey undertaken by the Direction Nationale de Géologie et des Mines (DNGM) with assistance from the United Nations Development Program (UNDP) in 1985. There had also been a long history of artisanal activities on the hill where an outcropping chert horizon originally marked the present day position of the open pit.</p> <p>BHP during 1987-1996 sampled pits, trenches, auger, RC and diamond drill holes across Syama prospects. Randgold Resources Ltd during 1996-2000 sampled pits, trenches, auger, RAB, RC and diamond drill holes across Syama prospects.</p> <p>Etruscan Resources Inc explored Tabakoroni during 2002-2003 by auger, aircore, RC and diamond drill hole tails. The Tabakoroni area was previously explored Barrick Gold (1990) by auger, pits, trenches, RAB and diamond core drilling.</p>
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<p>The Syama Project is found on the northern margin of the Achaean-Proterozoic Leo Shield which forms the southern half of the West African Craton. The project area straddles the boundary between the Kadiana-Madinani terrane and the Kadiolo terrane. The Kadiana-Madinani terrane is dominated by greywackes and a narrow belt of interbedded basalt and argillite. The Kadiolo terrane comprises polymictic conglomerate and sandstone that were sourced from the Kadiana-Madinani terrane and deposited in a late- to syntectonic basin.</p> <p>Prospects are centred on the NNE striking, west dipping, Syama-Bananso Fault Zone and Birimian volcano-sedimentary units of the Syama Formation. The major commodity being sought is gold.</p> <p>The Tabakoroni deposit is hosted in upright tightly folded greenstone rocks of the Syama Formation, comprising interbedded basalt and sediment units, and an overlying complex sequence of deep marine and turbiditic sediments. The sequence overlying the basalts contains interbedded carbonaceous units (silts and shales) that are preferentially deformed, and which form the Tabakoroni Main Shear Zone (TMSZ) that lies along the approximate contact of the greenstone-sediment sequence. Gold mineralisation occurs within the TMSZ associated with quartz vein stockworks and stylolitic quartz reefs.</p>
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth whole length. If the exclusion of this information is justified on the basis that the information 	<p>All information, including easting, northing, elevation, dip, azimuth, coordinate system, drill hole length, intercept length and depth are measured and recorded in UTM Zone 29 WGS84.</p> <p>The Syama belt is mostly located on the Tengrela 1/200,000 topo sheet (Sheet NC 29-XVIII).</p> <p>The Tabakoroni local grid has been tied to the UTM Zone 29 WGS84 co-ordinate system.</p> <p>Spectrum Survey & Mapping from Australia established survey control at Tabakoroni using AusPos online processing to obtain an accurate UTM Zone 29 (WGS84) and ‘above geoid’ RL for the origin of the survey control points.</p> <p>Accuracy of the survey measurements is considered to meet acceptable industry standards.</p> <p>Drill hole information has been tabulated for this release in the intercepts table of the accompanying text.</p> <p>For completeness the following information about the drill holes is provided:</p> <ul style="list-style-type: none"> Easting, Northing and RL of the drill hole collars are measured and recorded in UTM Zone 29 (WGS84) Dip is the inclination of the drill hole from horizontal. A drill hole drilled at -60° is 60° from the horizontal



	<p><i>is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	<ul style="list-style-type: none"> Down hole length is the distance down the inclination of the hole and is measured as the distance from the horizontal to end of hole Intercept depth is the distance from the start of the hole down the inclination of the hole to the depth of interest or assayed interval of interest.
Data aggregation methods	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<p>Exploration results reported in this announcement are tabulated using the following parameters:</p> <ul style="list-style-type: none"> Grid coordinates are WGS84 Zone 29 North Cut-off grade for reporting of intercepts is ≥ 1 g/t Au No top cut of individual assays prior to length weighted compositing of the reported intercept has been applied Maximum 3m consecutive internal dilution included within the intercept <p>Metal equivalent values are not used in reporting.</p>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i> 	<p>The Syama mineralisation is steeply dipping at approximately 60 degrees from the horizontal.</p> <p>The majority of the Tabakoroni mineralisation is vertical. There is one domain which dips at 45o to the west.</p> <p>The majority of the drill holes are planned at a general inclination of -60 degrees east and as close to perpendicular to the ore zone as possible.</p> <p>At the angle of the drill holes and the dip of the ore zones, the reported intercepts will be slightly more than true width.</p>
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<p>Relevant maps, diagrams and tabulations are included in the body of text.</p>
Balanced reporting	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced, to avoid misleading reporting of Exploration Results.</i> 	<p>Exploration results and infill drilling results are being reported in this announcement and tabulated in the body of the text.</p>
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<p>No geophysical and geochemical data or any additional exploration information has been reported in this release, as they are not deemed relevant to the release.</p>



Resolute

ASX Announcement

Further work	<ul style="list-style-type: none">• <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further drilling is planned.
---------------------	--	------------------------------



Section 3 Estimation and Reporting of Mineral Resources

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
Database integrity	<ul style="list-style-type: none"> Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	<p>Data have been compiled into a relational SQL database; the setup of this database precludes the loading of data which do not meet the required validation protocols. The data is managed using DataShed© drill hole management software using SQL database techniques. Validation checks are conducted using SQL and DataShed© relational database standards. Data has also been checked against original hard copies for 100% of the data, and where possible, loaded from original data sources.</p> <p>Resolute completed the following basic validation checks on the data supplied prior to resource estimation:</p> <ul style="list-style-type: none"> Drill holes with overlapping sample intervals Sample intervals with no assay data or duplicate records Assay grade ranges Collar coordinate ranges Valid hole orientation data. <p>There are no significant issues identified with the data.</p>
Site visits	<ul style="list-style-type: none"> Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	<p>Mrs Susan Havlin, an employee of Optiro Pty Ltd and a Member of the Australasian Institute of Mining and Metallurgy is the Competent Person who has visited this site in February and October 2019.</p> <p>All aspects of drilling, sampling and mining are considered by the Competent Persons to be of a high industry standard.</p>
Geological interpretation	<ul style="list-style-type: none"> Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology. 	<p>The digital database used for the interpretation included logged intervals for the key stratigraphic zones of Tabakoroni. Detailed geological logs were available in hardcopy and digital and reviewed where necessary.</p> <p>There is a high level of confidence for the interpretation of the Tabakoroni Main Shear Zone (TMSZ) due to the close-spaced grade control drilling at surface and the confirmation of the position in the current oxide pits. Since an independent structural model was created there is high level of confidence in the geological interpretation of the minor lodes adjacent to the TMSZ.</p> <p>Wireframes used to constrain the estimation are based on drill hole intercepts and geological boundaries. All wireframes at Tabakoroni have been constructed to a 1g/t Au cut-off grade for shape consistency.</p> <p>The mineralisation in the TMSZ is generally quite consistent and drill intercepts clearly define the shape of the mineralised zones with limited options for large scale alternate interpretations.</p>
Dimensions	<ul style="list-style-type: none"> The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource. 	<p>The mineral resource at Tabakoroni comprises four individual domains. The main zone is the TMSZ, which extends for approximately 1,800 metres along strike; the sub-vertical dipping gold mineralised zone width varies between 1.5 and 15 metres, with an average thickness of 5 metres. The Mineral Resource is limited in depth by drilling, which extends from surface to a maximum depth of approximately 450 metres vertically.</p> <p>There is a zone parallel to the TMSZ which is generally at depth and not as consistent; this is dominantly in the central part of the deposit. The northeast (NE) domain is a zone which is striking at 20° and is sub vertical in the north of the deposit. The southern lode is shallow westerly-dipping lodes in the southern and central portion of the deposit. The whole of the Tabakoroni deposit, including domains additional to the TMSZ, extends for 450 metres in the horizontal plane.</p>
Estimation and modelling	<ul style="list-style-type: none"> The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, 	<p>Estimation was completed in Datamine Studio RM using an Ordinary Kriged model to estimate the gold grade. Grades were estimated into parent block of 5 mE by 10 mN by 5 mRL with sub-celling down to 1mE by 2 mN by 1 mRL was</p>



<p>techniques</p>	<p><i>domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i></p> <ul style="list-style-type: none"> <i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i> <i>The assumptions made regarding recovery of by- products.</i> <i>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterization).</i> <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i> <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i> <i>Any assumptions behind modelling of selective mining units.</i> <i>Any assumptions about correlation between variables.</i> <i>Description of how the geological interpretation was used to control the resource estimates.</i> <i>Discussion of basis for using or not using grade cutting or capping.</i> <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i> 	<p>employed for resolution of the mineralisation boundaries as defined by wireframes. The drill spacing at Tabakoroni varies from 12.5 by 12.5 metres for grade control to between 25 and 50 metres for the exploration holes.</p> <p>Drillhole sample data was flagged using domain codes generated from three-dimensional mineralisation domains. The grade control samples and exploration samples were composited to 1 metre intervals.</p> <p>Variogram orientations were largely controlled by the strike of the mineralisation and downhole variography. Variograms for estimation purposes were determined for each domain.</p> <p>Kriging neighbourhood analysis was performed to optimise the block size, sample numbers and discretisation levels with the goal of minimising conditional bias in the gold grade estimates.</p> <p>Mineralisation domains were treated as hard boundaries in the estimation process while oxidation surfaces were treated as soft boundaries.</p> <p>Three search passes were used, with the first search pass set to the range of the variogram for each element. A minimum of 8 and a maximum of 30 samples were used. The search stayed the same for the second pass but was increased by a factor of 2 for the third and final pass. The minimum number of samples was reduced to 6 for the second pass and 4 for the third pass.</p> <p>No deleterious elements were found in the ore.</p> <p>No selective mining units have been assumed.</p> <p>Top cuts were applied to reduce the variability of the data and to remove the outliers.</p> <p>The estimated block model grades were visually validated against the input drillhole data and comparisons were carried out against the drillhole data and by northing and elevation slices. Global comparison between the input data and the block grades for each variable is considered acceptable ($\pm 10\%$).</p> <p>Comparison with the mine production to date was carried out and was within an acceptable limit.</p>
<p>Moisture</p>	<ul style="list-style-type: none"> <i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i> 	<p>All tonnages have been estimated on a dry basis.</p>
<p>Cut-off parameters</p>	<ul style="list-style-type: none"> <i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i> 	<p>Mineral Resources for open pit extraction have been reported at a 1 g/t Au grade cut-off and above a US\$2000/oz optimised shell. The Mineral Resources for underground mining are undiluted and the mineralised blocks (within the mineralisation wireframes) have been reported within MSO wireframes created at US\$2,000/oz which is equivalent to 1.75 g/t Au cut-off grade.</p>
<p>Mining factors or assumptions</p>	<ul style="list-style-type: none"> <i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an</i> 	<p>A Pre-Feasibility study determined the mining method would be by long hole open stoping. No Mineral Resource margin (external) dilution has been modelled. A minimum stope dip of 30 degrees on the footwall was applied. More rigorous mining assumptions and parameters will be applied during the conversion to Ore Reserves.</p>



Resolute

ASX Announcement

	<i>explanation of the basis of the mining assumptions made.</i>							
Metallurgical factors or assumptions	<ul style="list-style-type: none"> <i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i> 	No metallurgical factors or assumptions have been made during the resource estimation process as these will be addressed during the conversion to Ore Reserves.						
Environmental factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a green fields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i> 	<p>It is a requirement of Decree No.03-594/P-RM of 31 December 2003 of Malian law that an Environmental and Social Impact Study (Étude d'Impact Environnemental et Social – EIES) must be undertaken to update the potential environmental and social impacts of the mine's redevelopment. The EIES for the Syama Gold Mine (including Tabakoroni) was approved in November 2007 and an Environment Permit (07- 0054/MEA – SG) was issued by the Ministry of Environment and Sanitation on 22 November 2007. The Ministry of Environment conducts timely reviews of the Syama Gold Mine to ensure that company maintains compliance with the EIES guidelines.</p> <p>At Syama and Tabakoroni, there are three key practices for disposal of wastes and residues namely, stacking of waste rock from open pit mining; storage of tailings from mineral processes; and “tall-stack dispersion” of sulphur dioxide from the roasting of gold bearing concentrate. All waste disposal practices are in accordance with the guidelines in the EIES. The Environmental & Social Impact Study – “Société des Mines de Syama, Syama Gold Mine, Mali”, dated 2007 indicated there was minimal potential for acid mine drainage from waste rock due to the elevated carbonate content which buffers a potential acid generation. Resolute maintains a plan for progressive rehabilitation of waste rock landforms as part of ongoing mine development and waste rock dumping.</p> <p>The landform of tailings impoundments does not have a net acid generating potential. The largest volume is flotation tailings where the sulphide minerals have already been removed from the host rock. Its mineralogy includes carbonates which further buffer any acid-formation potential from sulphides that may also be present.</p> <p>Cyanide levels in the leached-calcine tailings are typically less than 50 ppm in the weak acid dissociable form. Groundwater away from the tailings landform is intercepted by trenches and sump pumps.</p> <p>Sulphur dioxide is generated from the roasting of gold concentrate so that gold can be extracted and refined. Tall-Stack “dispersion” of the sulphur dioxide emission is monitored continuously. Prevailing weather and dissipation of the sulphur dioxide is modelled daily to predict the need to pause the roasting process to meet the air quality criteria set out in the Environmental & Social Impact Study.</p>						
Bulk density	<ul style="list-style-type: none"> <i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i> <i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i> <i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i> 	<p>Site personnel have completed numerous bulk density comparative estimates on HQ drill core to assess variability using the Archimedes method of dry weight versus weight in water. This method was used for 71% of the bulk density measurements. The other 29% is by unknown method.</p> <p>On the basis of the data collected the following SG estimates were applied to the model by weathering type:</p> <table border="0"> <tr> <td>Oxide</td> <td>2.12 t/m3</td> </tr> <tr> <td>Transitional</td> <td>2.38 t/m3</td> </tr> <tr> <td>Fresh</td> <td>2.72 t/m3</td> </tr> </table>	Oxide	2.12 t/m3	Transitional	2.38 t/m3	Fresh	2.72 t/m3
Oxide	2.12 t/m3							
Transitional	2.38 t/m3							
Fresh	2.72 t/m3							



Classification	<ul style="list-style-type: none"> • <i>The basis for the classification of the Mineral Resources into varying confidence categories.</i> • <i>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i> • <i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i> 	<p>The Measured Mineral Resource classification is based on good confidence in the geology and gold grade continuity with 12.5 m x 12.5 m spaced drillhole density in the central part of the deposit.</p> <p>The Indicated Mineral Resource classification is based on good confidence in the geology and gold grade continuity with less than 50 m x 50 m spaced drillhole density in the central part of the deposit.</p> <p>The Inferred Mineral Resource classification is applied to extensions of mineralised zones on the margins of the deposit where drill spacing is more than 50 m x 50 m and the extents of mineralisation at depth.</p> <p>The validation of the block model has confirmed satisfactory correlation of the input data to the estimated grades and reproduction of data trends.</p> <p>The Mineral Resource estimate appropriately reflects the view of the Competent Persons.</p>
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of Mineral Resource estimates.</i> 	<p>The Mineral Resource has been audited internally and in conjunction with resource consultants at Optiro Pty Ltd as part of the routine validation process. There has been no external review of the Mineral Resource estimate.</p>
Discussion of relative accuracy/confidence	<ul style="list-style-type: none"> • <i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i> • <i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i> • <i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i> 	<p>The relative accuracy of the Mineral Resource estimate is reflected in the reporting of Measured, Indicated and Inferred resource categories as defined by 2012 JORC Code guidelines.</p> <p>The estimate is considered to be relevant to an annual level of reporting of tonnage and grade.</p> <p>The estimation was compared with the production history at Tabakoroni and it is within 15% which is within the limits for the relevant classifications.</p>