

Further High-Grade Drill Intercepts at the Gordons Gold Project

New high-grade bedrock gold intercept confirms the potential of the Malone prospect which remains open in multiple directions

Malone Prospect

- Assay results from two RC holes designed to confirm the orientation and grade of newly discovered high-grade gold mineralisation have returned a very encouraging intercept;
 - **3m @ 8.8g/t Au from 190m including 2m @ 13.0g/t Au with 1m @ 19.4g/t Au** (YRLRC0811)
- The intercept is located ~30m from the discovery RC intercept;
 - **5m @ 7.7g/t Au from 210m including 1m @ 10.9g/t Au from 210m and 1m @ 15.4g/t Au from 212m** (YRLRC0727)¹
- Mineralisation is open in multiple directions and follow-up drilling will commence as soon as possible in the June Quarter

Star of Gordon Prospect

- Results have been received from three diamond and 42 RC holes which have returned several encouraging intercepts including;
 - **4.41m @ 4.8g/t Au from 226.49m including 0.44m @ 46.4g/t Au** (YRLDD0018)
 - **28m @ 0.5g/t Au from 16m including 4m @ 1.8g/t Au** (YRLRC0763 – 4m composite)
- Planning for follow-up drilling is underway pending the return of final assay results from a further two diamond holes and a review of the geological interpretation

Yandal Resources' Managing Director; Mr Lorry Hughes commented:

"Yandal has confirmed the Malone prospect has the potential to host a significant high-grade gold discovery very close to operating mines and infrastructure and a short distance from the town of Kalgoorlie-Boulder.

With these results, the Malone prospect remains a high priority exploration target within the Gordons gold project in terms of its potential size and grade at depth. The prospect is open in most directions as the immediate location has only received shallow wide-spaced air-core drilling and no drilling into the primary zone along strike for ~2km to the north west.

A program of further testing using RC drilling with a down hole televiewer and/or oriented diamond core drilling is planned to firm up the orientation of the mineralisation prior to aggressive step out drilling."

¹ Refer to YRL ASX announcement dated 23 February 2022.



Registered Address

Yandal Resources Limited
ACN 108 753 608 ABN 86 108 753 608

A 159 Stirling Highway
Nedlands WA 6009
P PO Box 1104
Nedlands WA 6909

Board Members

Lorry Hughes	Managing Director/CEO
Katina Law	Non-Executive Director
Tim Kennedy	Chairman
Bianca Taveira	Company Secretary

T +61 8 9389 9021
E yandal@yandalresources.com.au
W www.yandalresources.com.au

Gold Projects

Ironstone Well (100% owned)	
Barwidgee (100% owned)	
Mt McClure (100% owned)	
Gordons (100% owned)	
Shares on Issue	116,091,553
Share Price	\$0.26
Market Cap	\$30M
ASX Code	YRL

Yandal Resources Ltd (ASX: YRL, “Yandal Resources” or the “Company”) is very pleased to provide an update on exploration activities at the 100%-owned Gordons gold project located 30km north of Kalgoorlie-Boulder in Western Australia (Figure 1).

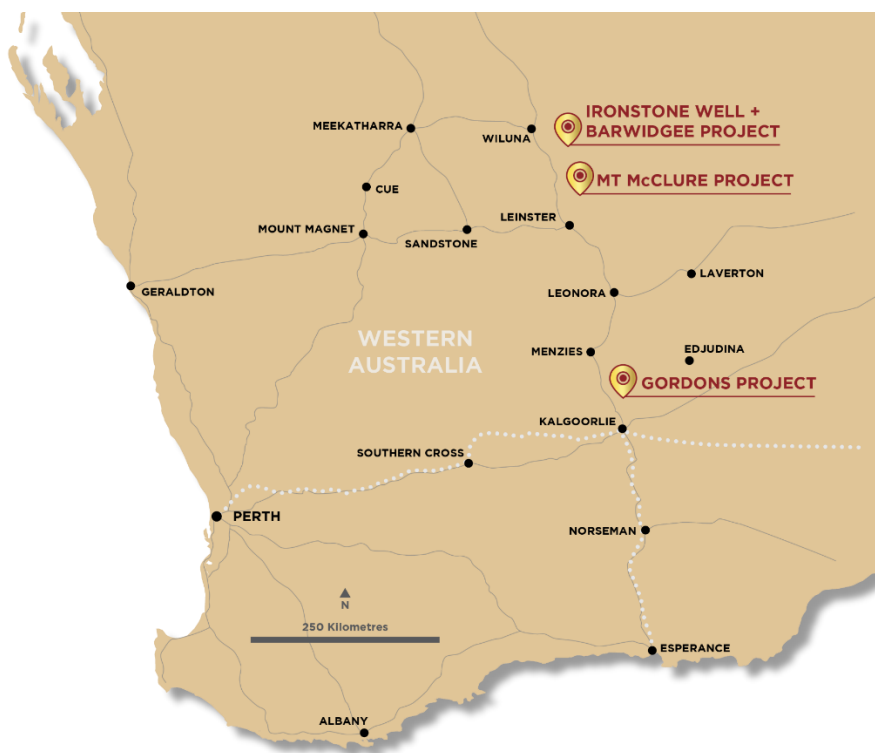


Figure 1 – Yandal Resources’ gold project locations.

Malone, Malone North and Gordons Dam Prospects (Figures 2 & 3, Tables 1 & 2)

At the **Malone Prospect** located 500m west of the Gordons Dam gold deposit (Initial Mineral Resource Estimate pending), final assay results have been received from two reverse circulation (“RC”) holes completed to follow-up a new high-grade bedrock intercept of **5m @ 7.7g/t Au** within a broader interval of **16m @ 2.8g/t Au** from 204m (YRLRC0727)¹.

Hole YRLRC0811 has successfully confirmed the presence of high-grade gold mineralisation at depth extending at least 30m from the intercept in YRLRC0727 returning;

- **3m @ 8.8g/t Au** from 190m including **1m @ 19.4g/t Au**.

The mineralisation is hosted within sheared mafic sediments including quartz veining, fuchsite (green) and sulphides which is interpreted to be very similar to the rocks hosting the high-grades in hole YRLRC0727 (Figure 2).

Recent and historic reconnaissance drilling in the immediate area and to the north along strike was not deep enough to penetrate into the primary rock and therefore this area is considered to be open and untested, providing a high-priority exploration target (Figure 3).

These new results are highly encouraging and a follow-up program of RC and diamond drilling is in the advanced planning stages and set to commence in the June Quarter. The program will be designed to firm up the interpretation of mineralisation prior to aggressive step out drilling.

¹ Refer to YRL ASX announcement dated 23 February 2022.



Figure 2 – RC drill chips from hole YRLRC0811 (190-191m) which returned a fire-assay of 19.4g/t Au. Gold mineralisation is hosted within sheared mafic sediments, quartz, fuchsite (green) and sulphides.

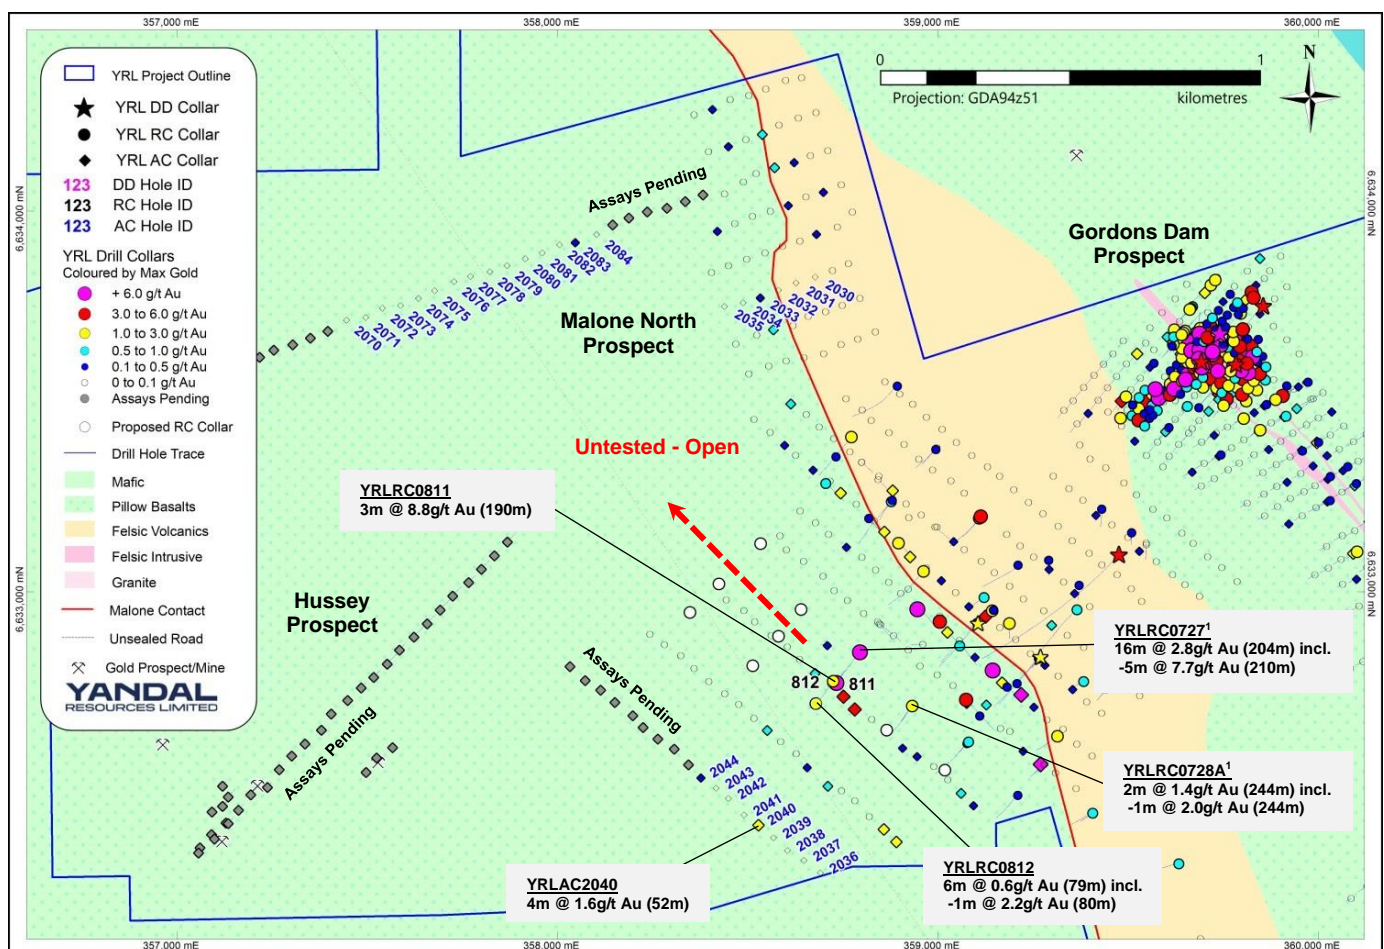


Figure 3 – Malone, Malone North, Malone West and Gordons Dam plan view map coloured by maximum gold grade (g/t Au) projected to the drill collar with interpreted geology (Refer to Tables 1 & 2 for all new results).

¹ Refer to YRL ASX announcement dated 23 February 2022.

Assay results from 30 first pass Air-core (“AC”) holes for 1,569m have been returned from the Malone and **Malone North** Prospects located along strike and adjacent to the new Malone RC intercepts (Figure 3 & Table 2). Significant intercepts from the programs included;

- **12m @ 0.2g/t Au** from 44m (YRLAC2033), **4m @ 1.6g/t Au** from 52m (YRLAC2040)
- **4m @ 0.1g/t Au** from 68m (YRLAC2044), **4m @ 0.1g/t Au** from 40m (YRLAC2083).

These results will be incorporated into the new geological model prior to follow-up drilling at Malone.

The Company is currently compiling an initial Mineral Resource Estimate for the nearby **Gordons Dam Prospect** (Figure 3)¹.

Bradman, Alderman, Gartrell, Valetta and Moody Prospects

At the **Bradman Prospect** located ~3km south along strike from Malone (Figures 4 & 6) final assay results have been returned from two diamond holes (Table 1). The holes were completed to test 250m north along strike from significant mineralisation intercepted in RC hole YRLRC0646²;

- **11m @ 2.0g/t Au** from 257m including **1m @ 9.9g/t Au** from 261m (YRLRC0646)²

Highlights from the new drilling included;

- **16m @ 1.3g/t Au** from 170m including **2m @ 8.7g/t Au** with a single metre interval of **1m @ 11.9g/t Au** from 180m (YRLDD0015)

A review of the results is underway to determine the highest priority targets for follow-up drilling.

Assay results from 184 reconnaissance AC holes for 8,330m have been returned from the Alderman, Gartrell, Valetta and Moody Prospects (Figure 6 & Table 2). Most holes returned results <100ppb Au. and a review is taking place to identify targets for future testing.

Star of Gordon, Red Dozer and Zoehrer Prospects

The prospects are located ~2km directly NNW along strike from the Gordon Sirdar underground gold mine which is owned and operated by FMR Investments Pty Ltd (“FMR”) (Figures 5 & 6). FMR are currently mining ~60,000t of ore per month using conventional underground mining methods and transporting the ore via road haulage for processing at their mill in Coolgardie.

A five hole diamond drilling program was completed for 1,144m in the March Quarter² at the **Star of Gordon Prospect** to improve the understanding of the complex geology and structural controls on previously identified high-grade mineralisation including;

- **1m @ 19.8g/t Au** from 159m (YRLRC668)³ and **45m @ 2.0g/t Au** from 18m including **10m @ 8.4g/t Au** from 43m (YRLRC630)³

Assay results have been received from the first three holes which have defined a number of significant intercepts including;

- **15.00m @ 0.4g/t Au** from 21.00m including **0.80m @ 1.5g/t Au** (YRLDD0016)
- **4.43m @ 0.5g/t Au** from 159.71m including **0.58m @ 1.6g/t Au** and **0.32m @ 1.3g/t Au**; and
- **4.41m @ 4.8g/t Au** from 226.49m including **0.44m @ 46.4g/t Au** (YRLRDD0018)

¹ Refer to YRL ASX announcements during 2018 – 2022 for details of previous drilling by Yandal, ² Refer to YRL ASX announcement dated 23 February 2022, ³ Refer to YRL ASX announcement dated 12 January 2021.

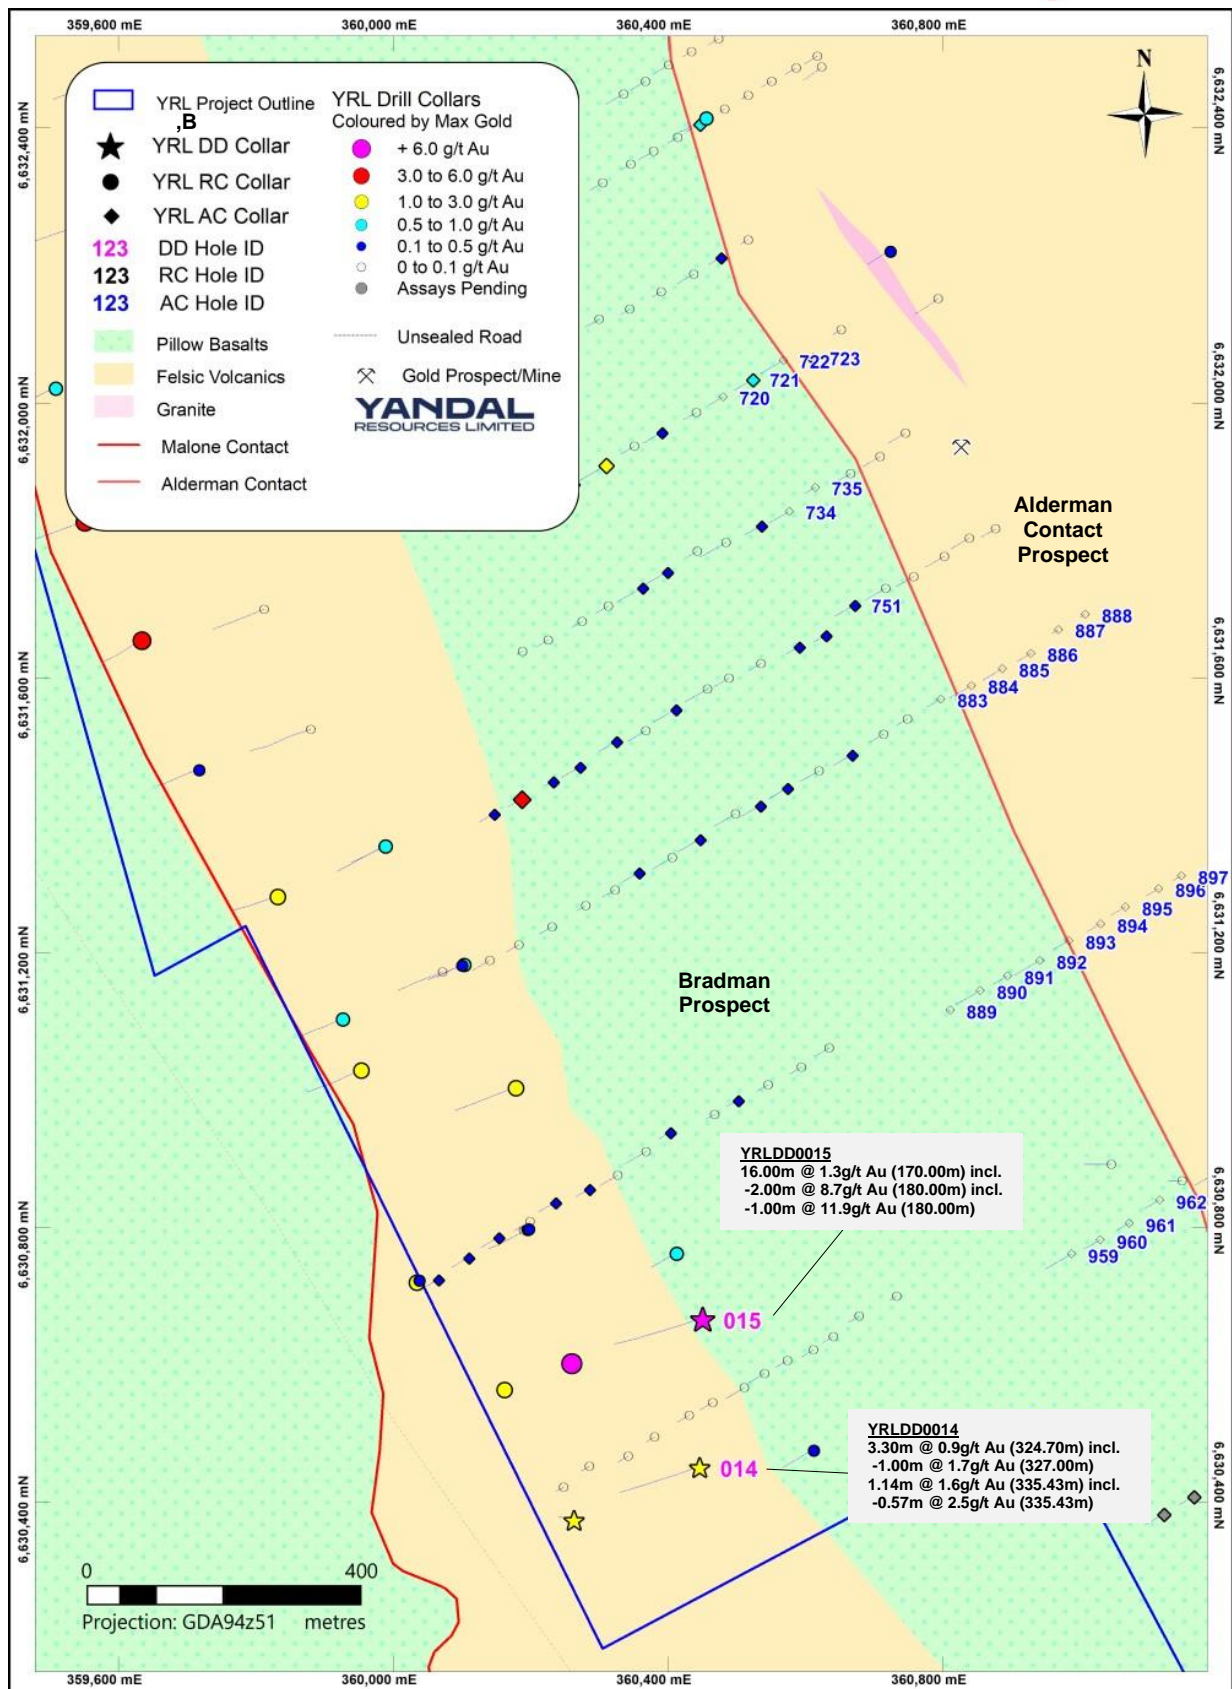


Figure 4 – Plan view drilling collar map coloured by maximum gold grade (g/t Au) projected to the drill collar with interpreted geology for the Alderman Contact and Bradman prospects (Refer to Table 1 for all new results).

¹ Refer to YRL ASX announcement dated 23 February 2022.

Final and preliminary assay results have also been received from 42 RC holes for 5,189m completed at Star of Gordon during the December Quarter 2021 and the current quarter. Highlights include;

- **8m @ 0.6g/t Au** from 148m (YRLAC0750 – 4m composite)
- **28m @ 0.5g/t Au** from 16m including **4m @ 0.7g/t Au** and **4m @ 1.8g/t Au** (YRLAC0763 – 4m composite)
- **4m @ 1.1g/t Au** from 68m (YRLAC0784 – 4m composite)

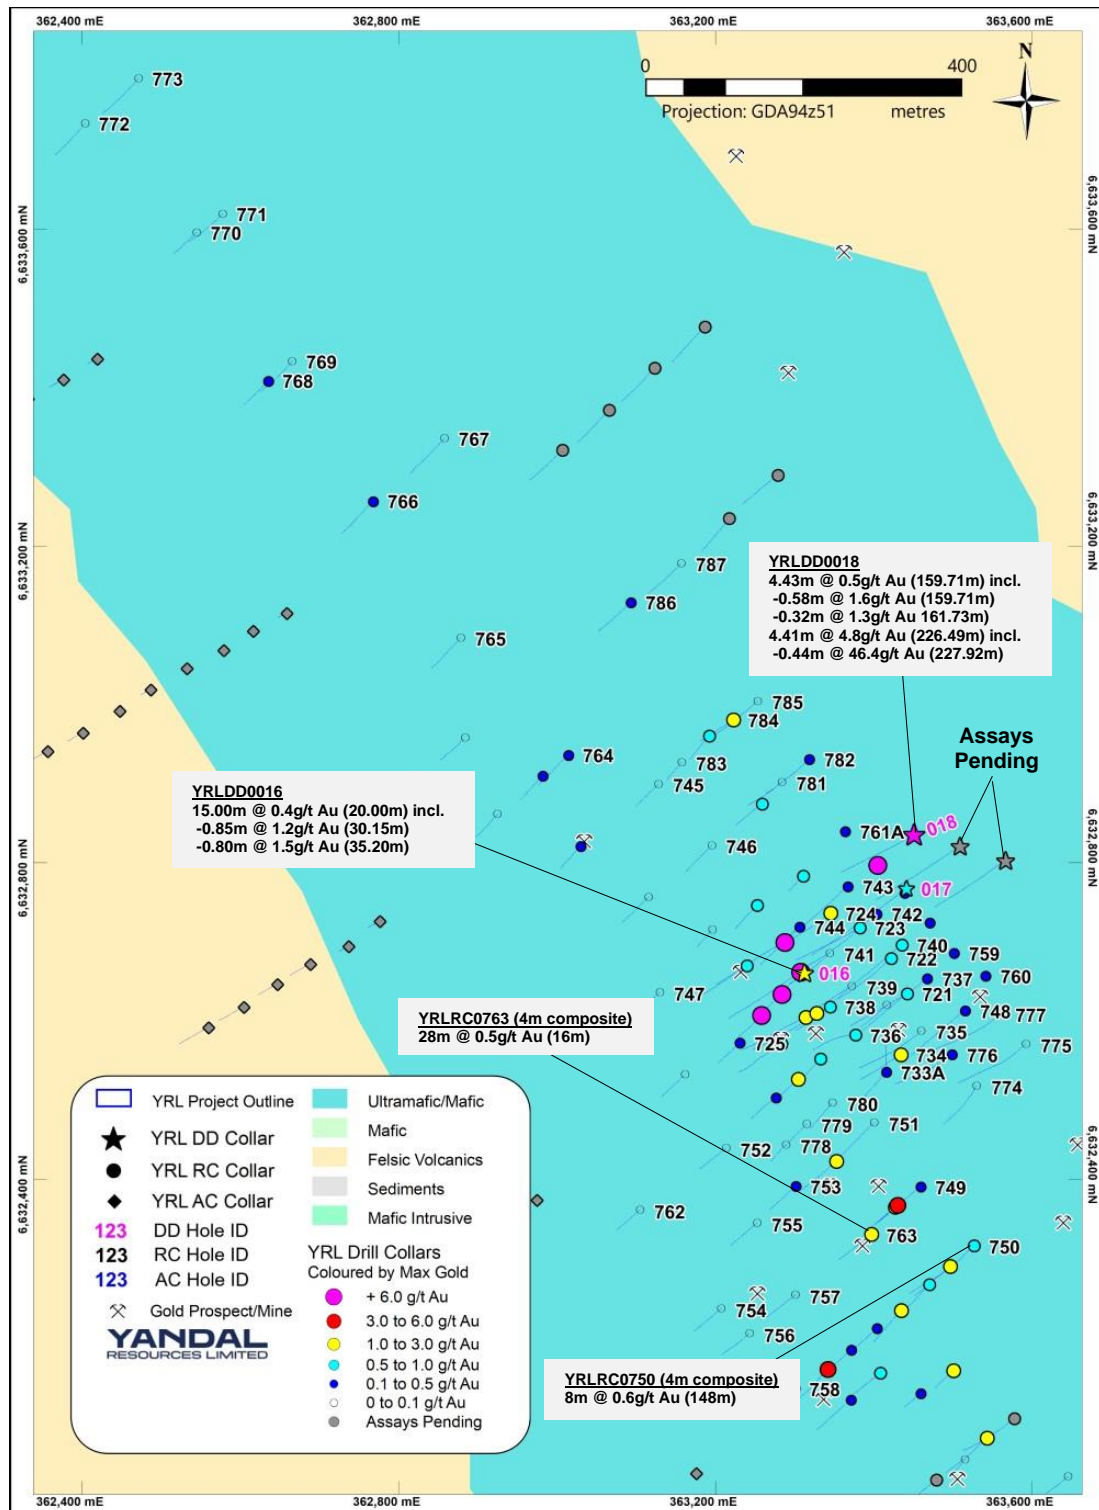


Figure 5 – Plan view drilling collar map coloured by maximum gold grade (g/t Au) projected to the drill collar with interpreted geology for the Star of Gordon prospect (Refer to Table 1 for all new results).

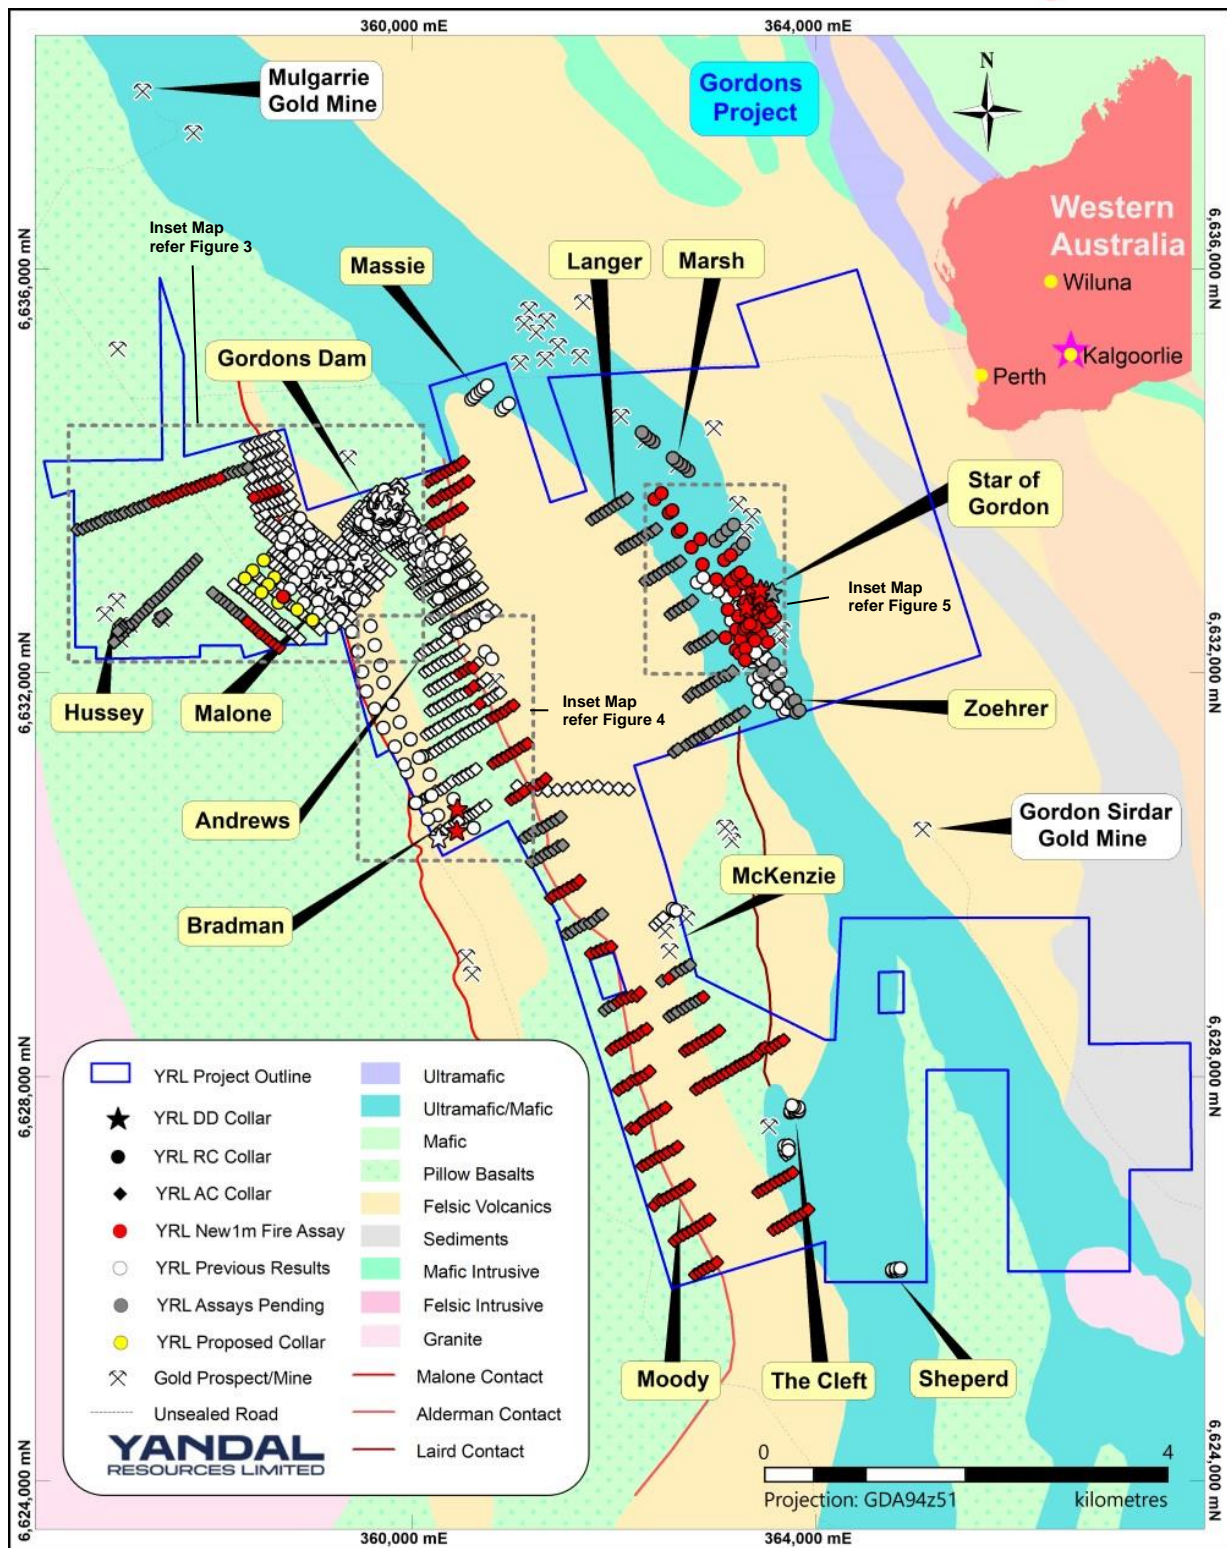


Figure 6 – Location map of key prospects within the Gordons Gold project in relation to nearby operating third party gold mines, project tenure and regional geology.

Immediately to the south of the Star of Gordon prospect ten RC holes for 1,231m were completed at the **Red Dozer and Zoehrer Prospects** (Figures 5 & 6 and Table 1) during the December Quarter. Only low-level gold results were returned. Follow-up drilling will be planned once remaining pending assay results are returned and the geological interpretation of the area is reviewed for target generation purposes.

Next Steps

Key exploration activities planned during the June Quarter include;

- Finalising design and commencing follow-up RC and diamond drilling at the Malone prospect
- Receive and interpret pending AC, RC from the Star of Gordon, Marsh, Hussey, Challenger, Parmelia, Success and HMS Sulphur prospects
- Compile an initial open pit Mineral Resource Estimate for the Gordons Dam prospect;
- Commence detailed planning and execution of heritage surveys over key prospect areas within the Ironstone Well and Barwidgee projects including priority areas within, adjacent to and along strike from the Newport, Flushing Meadows, Oblique, Quarter Moon, Flinders Park and Sims Find prospects.

Authorised by the board of Yandal Resources

For further information please contact:

Lorry Hughes

Managing Director
Yandal Resources Limited
yandal@yandalresources.com.au

Bianca Taveira

Company Secretary
+61 8 9389 9021
yandal@yandalresources.com.au

Table 1 – RC and diamond drill collar locations, depth, orientation and down hole assay results - Gordons gold project.

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
Malone Prospect RC Intervals (>0.1g/t Au)										
YRLRC0811						19	20	1	0.1	
						60	61	1	1.2	1.0
						68	71	3	0.6	
						99	100	1	0.1	
						103	105	2	0.1	
						107	108	1	0.2	
						115	117	2	0.3	
						130	136	6	0.2	
						140	142	2	1.7	
				including		140	141	1	2.9	3.1
						163	168	5	0.6	
				including		163	165	2	1.0	
						180	181	1	0.2	
						190	193	3	8.8	
				including		190	192	2	13.0	
				including		190	191	1	17.1	19.4
YRLRC0812	6632776	358735	234	-60	220	28	29	1	0.1	
						79	85	6	0.6	
				including		80	81	1	2.2	0.5
						116	117	1	0.8	
						151	153	2	0.2	
						164	166	2	0.2	
						214	215	1	0.3	
						220	223	3	0.1	
YRLRC0727	6632853	358799	252	-60	220	101	118	17	0.4	
Intercepts previously released 23 February 2022				including		101	110	9	0.7	
				including		101	102	1	1.6	1.7
				including		106	107	1	2.1	2.0
						145	160	15	0.8	
				including		147	150	3	3.1	
				including		147	148	1	5.7	6.2
						164	171	7	0.3	
						178	179	1	0.6	0.6
						204	220	16	2.8	
				including		210	218	8	5.3	
				including		210	215	5	7.7	
				including		210	213	3	9.4	
				including		210	211	1	10.0	10.9
				including		212	213	1	14.7	15.4
						229	230	1	0.9	0.9
Star of Gordon Prospect Diamond Intervals (>0.1g/t Au)										
YRLDD0016	6632659	363312	90.00	-60	230	21.00	36.00	15.00	0.4	
				including		30.15	31.00	0.85	1.2	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
				including		35.20	36.00	0.80	1.5	1.4
						39.00	40.23	1.23	0.4	
						53.91	56.00	2.09	0.3	
YRLDD0017	6632762	363435	264.80	-60	230	45.02	46.00	0.98	0.1	
						136.11	137.02	0.91	0.1	
						154.77	155.12	0.35	0.6	0.6
						176.00	176.96	0.96	0.1	
						198.00	201.00	3.00	0.1	
YRLDD0018	6632841	363453	237.70	-70	230	62.96	64.00	1.04	0.1	
						75.66	76.10	0.44	0.1	
						159.71	164.14	4.43	0.5	
				including		159.71	160.29	0.58	1.4	1.6
				including		161.73	162.05	0.32	1.3	1.2
						194.10	195.78	1.68	0.2	
						222.80	223.46	0.66	0.4	
						226.49	230.90	4.41	4.8	
				including		227.92	228.36	0.44	44.5	46.4
YRLDD0019	6632825	363510	265.10	-65	230			Assays pending		
YRLDD0020	6632807	363568	286.10	-70	230			Assays pending		
Star of Gordon Prospect RC Intervals (>0.1g/t Au)										
YRLRC0721	6632635	363440	150	-60	230	11	12	1	0.2	
						42	47	5	0.2	
						55	56	1	0.1	
						69	70	1	0.3	
						98	99	1	0.2	
						137	142	5	0.2	
				including		137	138	1	0.6	0.6
YRLRC0722	6632673	363406	150	-60	230	28	29	1	0.1	
						112	113	1	0.1	
						117	119	2	0.5	
						128	130	2	0.5	
				including		129	130	1	0.8	0.8
YRLRC0723	6632713	363376	150	-60	230	22	23	1	0.1	
						67	68	1	0.1	
						93	101	8	0.4	
YRLRC0724	6632747	363340	150	-60	230	0	2	2	0.1	
						9	10	1	1.8	1.9
						26	27	1	0.2	
						48	49	1	0.1	
						81	84	3	0.5	
				including		83	84	1	1.0	0.9
YRLRC0725	6632583	363220	78	-60	230	20	21	1	0.1	
						38	39	1	0.2	
						43	44	1	0.5	
						53	54	1	0.2	
YRLRC0733	6632546	363413	114	-60	360			NSA>100ppb or 0.1g/t Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
YRLRC0733A	6632546	363413	90	-60	230	88	90	2	0.1*#	EOH
YRLRC0734	6632572	363444	120	-60	230	102	103	1	0.7	
						106	108	2	1.2	
				including		107	108	1	2.3	2.2
YRLRC0735	6632598	363474	162	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0736	6632583	363379	108	-60	230	78	80	2	0.2	
						83	84	1	0.3	
						88	92	4	0.4	
YRLRC0737	6632660	363471	186	-60	230	19	20	1	0.2	
YRLRC0738	6632622	363345	108	-60	230	68	69	1	0.7	
						75	78	3	0.5	
YRLRC0739	6632647	363376	120	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0740	6632699	363437	186	-60	230	139	140	1	0.6	
YRLRC0741	6632687	363345	120	-60	230	51	53	2	0.2	
						55	56	1	0.6	
						68	69	1	0.3	
						71	73	2	0.3	
						75	77	2	0.3	
YRLRC0742	6632738	363406	180	-60	230	52	56	4	0.1*	0.1*
						112	116	4	0.2*	0.2*
YRLRC0743	6632773	363371	192	-60	230	152	156	4	0.4*	0.4*
YRLRC0744	6632721	363310	129	-60	230	52	64	12	0.2*	
						124	128	4	0.2*	0.3*
YRLRC0745	6632905	363134	78	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0746	6632826	363199	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0747	6632640	363132	78	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0748	6632623	363505	180	-60	230	20	24	4	0.1*	0.1*
YRLRC0749	6632392	363462	150	-60	230	52	56	4	0.3*	0.3*
YRLRC0750	6632317	363528	180	-60	230	64	68	4	0.1*	0.1*
						148	156	8	0.5*	0.6*
YRLRC0751	6632479	363410	150	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0752	6632447	363217	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0753	6632399	363321	90	-60	230	0	16	16	0.1*	
YRLRC0759	6632688	363503	174	-90	360	88	92	4	0.1*	
YRLRC0760	6632652	363538	132	-90	360	40	44	4	0.1*	0.1*
YRLRC0761	6632837	363366	32	-90	360			NSA>100ppb or 0.1g/t Au		
YRLRC0761A	6632837	363366	180	-90	360	124	128	4	0.2*	0.2*
YRLRC0763	6632338	363397	120	-60	230	16	44	28	0.5*	
				including		16	20	4	0.7*	0.7*
				including		36	40	4	1.7*	1.8*
YRLRC0778	6632445	363292	60	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0779	6632471	363323	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0780	6632496	363353	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0781	6632902	363290	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0782	6632928	363321	120	-60	230	76	80	4	0.3*	0.3*
YRLRC0783	6632928	363164	60	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0784	6632982	363228	102	-60	230	36	40	4	0.1*	0.1*

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
						68	72	4	1.1*	1.1*
						84	88	4	0.1*	0.1*
YRLRC0785	6633007	363259	126	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0786	6633134	363098	114	-60	230	48	52	4	0.2*	0.2*
YRLRC0787	6633185	363158	120	-60	230			NSA>100ppb or 0.1g/t Au		
Zoehrer Prospect RC Intervals (>0.1g/t Au)										
YRLRC0754	6632289	363210	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0755	6632350	363255	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0756	6632210	363244	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0757	6632261	363304	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0758	6632138	363309	90	-60	230	84	88	4	0.4*	0.4*
YRLRC0762	6632376	363125	90	-60	230			NSA>100ppb or 0.1g/t Au		
Langer Prospect RC Intervals (>0.1g/t Au)										
YRLRC0764	6632935	363016	120	-60	230	64	68	4	0.1*	0.1*
						84	88	4	0.1*	0.1*
YRLRC0765	6633081	362878	120	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0766	6633253	362768	120	-60	230	32	36	4	0.1*	0.1*
YRLRC0767	6633331	362860	120	-60	230	112	116	4	0.1*	0.1*
YRLRC0768	6633404	362637	90	-60	230	32	36	4	0.1*	0.1*
YRLRC0769	6633429	362667	120	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0770	6633593	362550	90	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0771	6633618	362581	120	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0772	6633730	362403	120	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0773	6633782	362465	150	-60	230			NSA>100ppb or 0.1g/t Au		
Red Dozer Prospect RC Intervals (>0.1g/t Au)										
YRLRC0774	6632519	363533	150	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0775	6632570	363594	181	-60	230			NSA>100ppb or 0.1g/t Au		
YRLRC0776	6632556	363502	150	-60	230	52	56	4	0.1*	0.1*
YRLRC0777	6632608	363563	210	-60	230			NSA>100ppb or 0.1g/t Au		
Bradman Prospect Diamond Intervals (>0.1g/t Au)										
YRLDD0014	6630453	360446	451.60	-75	250	61.00	67.00	6.00	0.4	
				including		61.00	63.20	2.20	0.7	
						84.00	85.00	1.00	0.1	
						87.80	90.00	2.20	0.1	
						157.00	158.00	1.00	0.6	
						170.00	171.00	1.00	0.4	
						196.16	197.00	0.84	0.3	
						215.00	216.15	1.15	0.2	
						236.80	243.44	6.64	0.1	
						246.00	249.00	3.00	0.1	
						254.00	255.00	1.00	0.2	
						260.00	261.90	1.90	0.1	
						273.00	275.30	2.30	0.3	
						298.00	298.55	0.55	0.2	
						313.00	314.00	1.00	0.3	
						324.70	328.00	3.30	0.9	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
				including		327.00	328.00	1.00	1.7	1.7
						335.43	336.57	1.14	1.6	
				including		335.43	336.00	0.57	2.5	2.5
						378.35	379.26	0.91	0.4	
						448.43	448.79	0.36	0.3	
YRLDD0015	6630338	360451	430.70	-75	250	121.00	122.00	1.00	0.2	
						143.00	145.00	2.00	0.3	
						152.00	153.00	1.00	0.4	
						170.00	186.00	16.00	1.3	
				including		180.00	182.00	2.00	8.7	
				including		180.00	181.00	1.00	11.4	11.9
						195.00	197.00	2.00	0.1	
						218.00	222.00	4.00	0.1	
						227.00	230.00	3.00	0.3	
						249.00	250.00	1.00	0.2	
						253.00	254.00	1.00	0.1	
						270.00	276.00	6.00	0.4	
				including		271.00	272.00	1.00	1.5	1.7
						335.00	339.00	4.00	0.1	
						345.00	348.00	3.00	0.3	
						353.00	353.65	0.65	0.1	
						367.14	367.59	0.45	2.7	
						383.00	384.00	1.00	0.2	
						400.00	401.00	1.00	0.5	
						407.00	411.00	4.00	0.5	
				including		409.00	411.00	2.00	1.0	1.1
						423.00	425.00	2.00	0.4	

Table 2 – AC drill collar locations, depth, orientation and down hole assay results - Gordons gold project.

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (AR50)	Au2 g/t (AR50)
Alderman Contact Prospect AC Intervals (>0.1g/t Au)										
YRLAC0720	6632009	360485	48	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0721	6632034	360528	67	-60	240	60	62	2	0.5	
				including		60	61	1	0.8	0.9
YRLAC0722	6632059	360571	75	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0723	6632084	360615	36	-60	240	34	36	2	0.1#	EOH
YRLAC0734	6632084	360615	36	-60	240	59	60	1	0.1	
YRLAC0735	6631853	360575	70	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0751	6631878	360618	36	-60	240	60	64	4	0.2	
YRLAC0857	6631697	360665	69	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0858	6633900	360163	40	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0859	6633925	360206	41	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0860	6633950	360249	55	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0861	6633975	360293	35	-60	240			NSA>100ppb or 0.1g/t Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (AR50)	Au2 g/t (AR50)
YRLAC0862	6634000	360336	65	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0863	6634025	360379	85	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0864	6634050	360423	69	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0865	6634075	360466	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0866	6634100	360509	43	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0867	6633706	360211	21	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0868	6633731	360254	23	-60	240	62	63	1	0.2	
YRLAC0869	6633756	360298	65	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0870	6633781	360341	38	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0871	6633806	360384	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0872	6633831	360428	58	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0873	6633856	360471	64	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0874	6633881	360514	64	-60	240	46	47	1	0.1	
YRLAC0875	6633906	360558	59	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0876	6633468	360194	31	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0877	6633493	360237	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0878	6633518	360280	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0879	6633543	360324	38	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0880	6633568	360367	18	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0881	6633593	360410	29	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0882	6633618	360453	19	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0883	6633643	360497	17	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0884	6631566	360798	48	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0885	6631591	360841	76	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0886	6631616	360885	66	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0887	6631641	360928	46	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0888	6631666	360971	24	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0889	6631691	361014	19	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0890	6631118	360811	6	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0891	6631143	360855	81	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0892	6631168	360898	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0893	6631193	360941	87	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0894	6631218	360985	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0895	6631243	361028	44	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0896	6631268	361071	48	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0897	6631293	361114	40	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0927	6631318	361158	32	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0928	6628752	362042	20	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0929	6628777	362086	22	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0930	6628794	362133	27	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0931	6628811	362180	39	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0932	6628828	362227	39	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0933	6628845	362274	39	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0934	6627889	362051	66	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0935	6627914	362095	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0936	6627939	362138	90	-60	240	61	63	2	0.3#	EOH
YRLAC0937	6627964	362181	63	-60	240			NSA>100ppb or 0.1g/t Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (AR50)	Au2 g/t (AR50)
YRLAC0938	6627989	362225	57	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0939	6628014	362268	70	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0940	6628039	362311	63	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0941	6628064	362355	81	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0942	6627124	362285	72	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0943	6627149	362329	90	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0944	6627174	362372	72	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0945	6627199	362415	47	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0946	6627224	362459	72	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0947	6627249	362502	60	-60	240	51	52	1	0.1	
YRLAC0948	6627274	362545	54	-60	240	52	53	1	0.1#	EOH
YRLAC0949	6627299	362588	53	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0950	6627324	362632	53	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0951	6626395	362602	79	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0952	6626420	362646	67	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0953	6626445	362689	74	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0954	6626470	362732	57	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0955	6626495	362776	42	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0956	6626520	362819	53	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0957	6626545	362862	33	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0958	6626570	362905	6	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0959	6626595	362949	4	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0960	6630758	360987	87	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0961	6630783	361030	56	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0962	6630808	361073	46	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0963	6630833	361117	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0964	6630883	361203	73	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0965	6630908	361247	21	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0966	6630933	361290	13	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0967	6630958	361333	4	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0968	6629781	361373	33	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC0969	6629806	361417	40	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0970	6629831	361460	36	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0971	6629856	361503	24	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0972	6629881	361547	36	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0973	6629906	361590	36	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0974	6629931	361633	50	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0975	6629956	361676	45	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0976	6629233	361784	63	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0977	6629250	361831	41	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0978	6629268	361878	45	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0979	6629285	361925	51	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0980	6629302	361972	57	-60	250			NSA>100ppb or 0.1g/t Au		
YRLAC0981	6628283	361982	59	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0982	6628308	362025	49	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0983	6628333	362069	60	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0984	6628358	362112	54	-60	240			NSA>100ppb or 0.1g/t Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (AR50)	Au2 g/t (AR50)
YRLAC0985	6628383	362155	62	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0986	6628408	362199	63	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0987	6628433	362242	72	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0988	6628458	362285	60	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0989	6628483	362328	72	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0990	6627506	362168	81	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0991	6626766	362446	29	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0992	6626791	362489	69	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0993	6626816	362532	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0994	6626841	362576	48	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0995	6626866	362619	58	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0996	6626891	362662	42	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0997	6626916	362705	42	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0998	6626941	362749	21	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC0999	6627556	362255	54	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2000	6627581	362298	21	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2001	6627606	362342	35	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2002	6627631	362385	90	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2003	6627656	362428	31	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2004	6627681	362472	43	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2005	6627706	362515	48	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2006	6627531	362212	64	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2007	6626048	362802	54	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2008	6626073	362846	65	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2009	6626098	362889	52	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2010	6626123	362932	51	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2011	6626741	362402	57	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2012	6626148	362976	50	-60	240			NSA>100ppb or 0.1g/t Au		
Malone North Prospect AC Intervals (>0.1g/t Au)										
YRLAC2030	6633832	358674	79	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2031	6633815	358627	60	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2032	6633798	358580	69	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2033	6633781	358533	57	-90	360	44	56	12	0.2*	
YRLAC2034	6633764	358486	77	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2035	6633747	358439	54	-90	360			NSA>100ppb or 0.1g/t Au		
Malone Prospect AC Intervals (>0.1g/t Au)										
YRLAC2036	6632260	358688	50	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2037	6632292	358649	60	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2038	6632324	358611	59	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2039	6632356	358573	60	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2040	6632388	358534	63	-90	360	52	56	4	1.6*	
YRLAC2041	6632420	358496	53	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2042	6632453	358458	59	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2043	6632485	358420	48	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2044	6632517	358381	74	-90	360	68	72	4	0.1*	
YRLAC2070	6633704	357444	34	-90	360			NSA>100ppb or 0.1g/t Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (AR50)	Au2 g/t (AR50)
YRLAC2071	6633721	357491	34	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2072	6633738	357538	66	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2073	6633755	357585	57	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2074	6633772	357632	48	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2075	6633789	357679	45	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2076	6633806	357726	39	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2077	6633824	357773	39	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2078	6633841	357820	21	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2079	6633858	357867	23	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2080	6633875	357914	37	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2081	6633892	357961	38	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2082	6633909	358008	43	-90	360			NSA>100ppb or 0.1g/t Au		
YRLAC2083	6633926	358055	51	-90	360	40	44	4	0.1*	
YRLAC2084	6633943	358102	72	-90	360			NSA>100ppb or 0.1g/t Au		
Gartrell Prospect AC Intervals (>0.1g/t Au)										
YRLAC2206	6628995	362534	24	-60	240			NSA>100ppb or 0.1g/t Au		
Valetta Prospect AC Intervals (>0.1g/t Au)										
YRLAC2205	6628808	362891	62	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2207	6628264	362701	14	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2208	6628289	362744	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2209	6628314	362788	87	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2210	6628339	362831	15	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2211	6628364	362874	13	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2212	6628389	362918	24	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2213	6628414	362961	53	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2214	6628439	363004	15	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2215	6628464	363048	35	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2216	6627881	362818	13	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2217	6627906	362861	15	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2218	6627931	362905	13	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2219	6627956	362948	11	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2220	6627981	362991	42	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2221	6628006	363035	15	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2222	6628031	363078	5	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2223	6628056	363121	17	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2224	6628081	363165	44	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2225	6628106	363208	60	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2226	6628131	363251	66	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2227	6628156	363294	71	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2228	6628181	363338	30	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2229	6628206	363381	47	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2230	6628231	363424	41	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2231	6628256	363468	60	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2232	6628281	363511	48	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2233	6628306	363554	42	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2234	6628331	363598	17	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2235	6628356	363641	7	-60	240			NSA>100ppb or 0.1g/t Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (AR50)	Au2 g/t (AR50)
YRLAC2236	6628381	363684	13	-60	240			NSA>100ppb or 0.1g/t Au		
Moody Prospect AC Intervals (>0.1g/t Au)										
YRLAC2237	6626870	363425	26	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2238	6626895	363469	47	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2239	6626920	363512	66	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2240	6626945	363555	43	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2241	6626970	363599	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2242	6626995	363642	31	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2243	6627020	363685	21	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2244	6627045	363728	60	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2245	6627070	363772	9	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2246	6626498	363582	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2247	6626523	363625	53	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2248	6626548	363669	39	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2249	6626573	363712	53	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2250	6626598	363755	27	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2251	6626623	363799	60	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2252	6626648	363842	3	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2253	6626673	363885	16	-60	240			NSA>100ppb or 0.1g/t Au		
YRLAC2254	6626698	363928	9	-60	240			NSA>100ppb or 0.1g/t Au		

Notes to Tables 1-3; 1. An accurate dip and strike and the controls on mineralisation are only interpreted and the true width of mineralisation is unknown at this stage. 2. For AC and RC drilling, 4m composite samples are submitted are analysed using a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit), for DD drilling samples are analysed using a 50g fire assay with ICP-MS finish gold analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia. 3. Au1 is the original assay, Au2 is the highest grade from duplicate or repeat samples if they have been completed. 4. g/t (grams per tonne). 5. Intersections are calculated over intervals >0.10g/t or as indicated. 6. Drill type AC = Air-core, RC = Reverse Circulation, DD = Diamond. 7. Coordinates are in GDA94, MGA Z51. 8. # denotes an end of hole assay. 9. ABD denotes hole abandoned before target depth. 10. NSA denotes no significant assay. 11. * denotes a 4m, 3m or 2m composite assay unless otherwise indicated.

About Yandal Resources Limited

Yandal Resources listed on the ASX in December 2018 and has a portfolio of advanced gold exploration projects in the highly prospective Yandal and Norseman-Wiluna Greenstone Belts of Western Australia.

Yandal Resources' Board has a track record of successful discovery, mine development and production.

November 2020 Mineral Resource Estimate Summary Table – Flushing Meadows Gold Deposit

Material Type	Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Oz	Tonnes	Au (g/t)	Oz	Tonnes	Au (g/t)	Oz
Laterite	89,853	1.26	3,631	86,671	1.23	3,422	176,524	1.24	7,054
Oxide	2,015,900	1.33	86,071	2,246,845	1.10	79,389	4,262,745	1.21	165,420
Transition	35,223	1.20	1,360	1,160,471	1.10	40,966	1,195,695	1.10	42,325
Fresh				1,751,484	0.95	53,440	1,751,484	0.95	53,440
Total	2,140,976	1.32	91,062	5,245,471	1.05	177,217	7,386,448	1.13	268,352

* Reported above 0.5g/t Au lower cut-off grade, refer to Yandal Resources Ltd ASX announcement dated 4 November 2020 for full details.

Competent Person Statement

The information in this document that relates to Exploration Results, geology and data compilation is based on information compiled by Mr Trevor Saul, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Saul is the Exploration Manager for the Company, is a full-time employee and holds shares and options in the Company.

Mr Saul has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Saul consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

The information in this announcement that relates to the Flushing Meadows Mineral Resource Estimate is based on information compiled and generated by Andrew Bewsher, an employee of BM Geological Services Pty Ltd ("BMGS"). Both Andrew Bewsher and BMGS hold shares in the company. BMGS consents to the inclusion, form and context of the relevant information herein as derived from the original resource reports. Mr Bewsher has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which is being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

Appendix 1 – Gordons Gold Project JORC Code (2012) Table 1, Section 1 and 2

Mr Trevor Saul, Exploration Manager of Yandal Resources compiled the information in Section 1 and Section 2 of the following JORC Table 1 and is the Competent Person for those sections. The following Table and Sections are provided to ensure compliance with the JORC Code (2012 edition) requirements for the reporting of Mineral Resources.

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> 4m composite samples taken with a sample scoop thrust into the RC sample bag which is laid out in individual metres in a plastic bag on the ground. 1m single splits taken using a cone splitter at time of drilling, if 4m composites are anomalous (>100-200ppb or lower depending on location), 1m single splits are submitted for analyses. Average sample weights about 3.0kg for 4m composites and 2.0-3.0kg for 1m samples. For AC drilling samples laid out on the ground and sampled as above. Average weights are 2.0-3.0kg for composites and 3.0-4.0kg for singles. For diamond drilling ("DD") HQ or NQ is cut in half and assayed.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	<ul style="list-style-type: none"> For RC and AC drilling regular air and manual cleaning of cyclone to remove hung up clays where present. For all drilling methods, regular standards are submitted during composite analysis and standards, blanks and duplicates for 1m samples. Based on statistical analysis and cross checks of these results, there is no evidence to suggest the samples are not representative. Standards & replicate assays taken by the laboratory.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	<ul style="list-style-type: none"> AC, RC and DD drilling was used to obtain 1m samples (or smaller in the case of DD) from which approximately 2.0-3.0kg sample was pulverised to produce a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit) for AC samples and a 50g fire assay with ICP-MS (inductively coupled plasma - mass spectrometry) finish gold analysis (0.01ppm detection limit) for RC/DD samples by Aurum Laboratories in Beckenham, Western Australia. Samples assayed for Au, As, Cu, Pb, Zn and Ag for AC composites and Au only for RC and DD. Drilling intersected oxide, transitional and primary mineralisation to a maximum drill depth below 250m.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<ul style="list-style-type: none"> RC drilling with a 4' ½ inch face sampling hammer bit. AC drilling used a 3' ½ inch blade bit. DD drilling used a roller bit down to hard then HQ and NQ sized rods.
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> RC and AC recovery and meterage was assessed by comparing drill chip volumes or (sample bags for RC) for individual meters. Estimates of sample recoveries were recorded. Routine checks for correct sample depths are undertaken every RC rod (6m). DD recoveries were estimated by the drillers and written on core blocks. RC sample recoveries were visually checked for recovery, moisture and contamination. The cyclone was routinely cleaned ensuring no material build up. Due to the generally good/standard drilling conditions and powerful drilling rig the geologist believes the RC and AC samples are representative, some bias would occur in the advent of poor sample recovery which was logged where rarely encountered. At depth there were some wet samples and these are recorded on geological logs.

Criteria	JORC Code explanation	Commentary
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<ul style="list-style-type: none"> RC, AC and DD logging is routinely completed on one metre intervals at the rig or yard by the geologist. The log was made to standard logging descriptive sheets and transferred into Micromine software on a computer once back at the office. Logging was qualitative in nature. All intervals logged for AC and RC drilling completed during drill program with a representative sample placed into chip trays.
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<ul style="list-style-type: none"> DD, AC and RC samples taken. AC and RC samples were collected from the drill rig by spearing each 1m collection bag (RC) or from the ground (AC) and compiling a 4m composite sample. Single splits were automatically taken by the rig cone splitter for RC. Wet or dry samples were noted in the logs. For Yandal Resources Ltd samples, duplicate 1m samples were taken in the field, with standards and blanks inserted with the 1m and 4m samples for analyses. 1m samples were consistent and weighed approximately 3.0-4.0kg for RC (2.0-3.0kg for AC) and it is common practice to review 1m results and then review sampling procedures to suit. Once samples arrived in Perth, further work including duplicates and QC was undertaken at the laboratory. Yandal Resources Ltd has determined that at the Gordons Dam prospect there is sufficient data for a MRE and an initial one is planned upon completion upon receipt of all pending results and QA/QC re-sample and re-assay programs (however the deposit is open in many directions). Mineralisation mostly occurs within intensely oxidised saprolitic and palaeochannel clays after altered mafic, porphyry and felsic rocks (typical greenstone geology). The sample size is standard practice in the WA Goldfields to ensure representivity.
Quality of assay data and laboratory tests	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<ul style="list-style-type: none"> The composite 4m AC samples were assayed using a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit) finish Au, Ag, As, Cu, Pb and Zn analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia for gold only. Initial 4m samples were assayed by Aqua Regia with fire assay checks (0.01ppm detection limit). RC and DD sampling assayed for Au only. No geophysical assay tools were used. Laboratory QA/QC involves the use of internal lab standards using certified reference material, blanks, splits and replicates as part of the in-house procedures. QC results (blanks, duplicates, standards) were in line with commercial procedures, reproducibility and accuracy. These comparisons were deemed satisfactory. Some re-splitting with an onsite three-tier riffle splitter has been undertaken in the palaeochannel area for analyses from RC samples. A number of samples have been selected for future metallurgical testing. A number of 1m residues from RC assays are planned to be analysed at other laboratories for comparison.
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p>	<ul style="list-style-type: none"> Work was supervised by senior Aurum Laboratory staff experienced in metals assaying. QC data reports confirming the sample quality have been supplied. Data storage as PDF/XL files on company PC in the Perth office. No data was adjusted. Significant intercepts are reported in Tables 1 & 2 by Mr Trevor Saul of Yandal Resources and were generated by compositing to the indicated downhole thickness. A 100ppb Au lower cut-off was used for reporting AC results (0.10g/t Au for RC and DD) and intersections generally calculated with a maximum

Criteria	JORC Code explanation	Commentary
	<i>Discuss any adjustment to assay data.</i>	of 2m of internal dilution.
Location of data points	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<ul style="list-style-type: none"> All drill collar locations were initially pegged and surveyed using a hand held Garmin GPS, accurate to within 3-5m. Holes were drilled at various spacings dependent on prospect assessment. All reported coordinates are referenced to the GDA. The topography is very flat at the location of the Gordons Dam prospect. Down hole surveys utilised a proshot camera at the end of hole plus every 30m while pulling out of the hole. Grid MGA94 Zone 51. Topography is very flat, small differences in elevation between drill holes will have little effect on mineralisation widths on initial interpretation. All new holes and some available historic holes have been surveyed by DGPS as well as a surveyed topographical surface for compilation of MRE's. The topographic surface has been generated by using the hole collar surveys. It is considered to be of sufficient quality to be valid for this stage of exploration.
Data spacing and distribution	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<ul style="list-style-type: none"> Holes were variably spaced in accordance with the collar details/coordinates supplied in Table 1. The hole spacing was determined by the Company to be sufficient when combined with confirmed historic drilling results to explore effectively. The sample spacing and the appropriateness of each hole to be included to make up data points for a Mineral Resource has not been determined. It will depend on results from all the drilling and geological interpretations when complete.
Orientation of data in relation to geological structure	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<ul style="list-style-type: none"> No, drilling angle or vertical holes is deemed to be appropriate to intersect the supergene mineralisation and potential residual dipping structures and is appropriate for the current stage of the prospects. At depth angle holes have been used to intersect the interpreted dipping lodes. True widths are often calculated depending upon the geometry. The relationship between the drilling orientation and the orientation of mineralised structures is not considered to have introduced a sampling bias. Given the style of mineralisation and drill spacing/method, it is the most common routine for delineating shallow gold resources in Australia. Angle holes are the most appropriate for exploration style and Resource style drilling for the type and location of mineralisation intersected.
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> Samples were collected on site under supervision of the responsible geologist. The work site is on a pastoral station. Once collected samples were wrapped and transported to Perth for analysis. Dispatch and consignment notes were delivered and checked for discrepancies. Sample security for historical samples was highly variable and dependent on the exploration company however most of the companies working in the area are considered leaders in improving the sample security, QAQC procedures and exploration procedures.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> No Audits have been commissioned.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	<ul style="list-style-type: none"> The new drilling was conducted on the following tenements: Gordons Project – M27/502, P27/2214, P27/2338, P27/2339, E27/601 and E27/570. The tenements are 100% owned by the Company. The tenements are in good standing and no known impediments exist. E27/570 is subject to a Net Smelter Royalty (“NSR”) of 2%, being payable to PVW Resources Ltd on all product mined from the tenement. Tenements E24/198, P27/2206, E27/536, M27/237 (“Mulgarrie North Tenements”) and E27/601, P27/2325, P27/2331, P27/2340-41, P27/2355-64 are subject to Heads of Agreement announced on 11 November 2021 with Moho Resources Ltd (“Moho”). Should the deal be executed in full, Moho will own 100% of the Ni-Cu-Co-PGE minerals produced and Yandal will retain a 100% interest in the gold and related metals and a 1% NSR on the Ni-Cu-Co-PGE minerals produced.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"> Previous workers in the area include among others, North Ltd, Delta Gold Ltd, Aurion Gold Ltd, Placer Dome Asia Pacific, Barmingo Investments, Mt Kersey Mining NL, Gutnick Resources NL, Pacific Arc Exploration, Geopeko, Flinders Resources Ltd, Kesli Chemicals Pty Ltd and Windsor Resources NL.
Geology	Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none"> Archaean Orogenic Gold mineralisation hosted within the Boorara domain of the Kalgoorlie Terrane within the Norseman-Wiluna Archaean greenstone belt. The granite-greenstone belt is approximately 600 km long and is characterised by very thick, possibly rift controlled accumulations of ultramafic, mafic and felsic volcanics, intrusive and sedimentary rocks. It is one of the granite / greenstone terrains of the Yilgarn Craton of WA.
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<ul style="list-style-type: none"> See Tables 1 & 2. All holes reported from the current program are listed in Table 1 or can be viewed in Yandal's other ASX releases during 2019-2022. Other hole collars in the immediate area of the Gordons Dam prospect have been included for diagrammatic purposes and Mr Saul considers listing all of the drilling details is prohibitive and would not improve transparency or materiality of the report. Plan view diagrams are shown in the report of all drilling collars in close proximity to the new drilling for exploration context in Figures 2-5. No information is excluded.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p>	<ul style="list-style-type: none"> No weighting or averaging calculations were made, assays reported and compiled are as tabulated in Tables 1 & 2. All assay intervals reported in Table 1 are typically 1m downhole intervals above 0.10g/t Au lower cut-off for RC/DD drilling (interval width as indicated for DD drilling). For AC drilling in Table 2, the interval is composited downhole interval as indicated above a 100pb Au lower cut-off. There is occasionally small samples such as 1m or 2m when the hole was completed to depth that was not a multiple of 4 for AC drilling. No metal equivalent calculations were applied.

Criteria	JORC Code explanation	Commentary
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	<ul style="list-style-type: none"> • Oxide and Transitional mineralisation is generally flat lying (blanket like) while mineralisation at depth is generally steeper dipping. Further orientation studies are required. • Drill intercepts and true width appear to be close to each other, or within reason allowing for the minimum intercept width of 1m. Yandal Resources Ltd estimates that the true width is variable but probably around 80-100% of the intercepted widths. • Given the nature of AC and RC drilling, the minimum width and assay is 1m. • Given the highly variable geology and mineralisation including supergene mineralisation and structurally hosted gold mineralisation there is no project wide relationship between the widths and intercept lengths.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	<ul style="list-style-type: none"> • See Figures 2-6 and Tables 1 & 2.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	<ul style="list-style-type: none"> • Summary results for all holes as 4m AC assays > 0.1g/t Au are shown in Table 2, all holes as 1m or less RC/DD assays > 0.10g/t Au are in Table 1 for the current drilling. • Diagrammatic results are shown in Figures 2-6.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	<ul style="list-style-type: none"> • There have been no historical Mineral Resource Estimates. • There has been no historic mining at the Gordons Dam or Malone prospects as they are new discoveries. There has been minor historic (early 1900's) underground workings on a number of lodes in proximity to the Star of Gordon prospect.
Further work	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<ul style="list-style-type: none"> • Additional exploration including AC, RC and DD drilling and or geophysical surveys to advance known prospects is warranted. Additional exploration drilling is likely if new programs can be approved by the Company.