

ASX Announcement

 11th April 2022

Excellent Metallurgical Characteristics Confirmed at the Briggs Copper Deposit

HIGHLIGHTS

- Test work results have confirmed potential for excellent metallurgical recoveries from copper mineralisation within the mineral resource at Briggs in Central Queensland (Inferred Mineral Resource 143Mt @ 0.29% Cu).
- Metallurgical test work on three representative types of mineralisation delivered broadly similar flotation results across all three types, with copper recoveries ranging from 92% to 95% and concentrate grades from 17 to 20% copper:

	MET-1 (Granodiorite, 0.2% Cu)		MET-2 (Quartz-rich, 0.9% Cu)		MET-3 (Min Sed, 0.4% Cu)	
	Grade Cu %	Recovery %	Grade Cu %	Recovery %	Grade Cu %	Recovery %
Cleaner Concentrate	17.6	95.1	19.7	91.9	17.4	93.5
Rougher Concentrate	9.7	95.7	14.0	97.9	13.3	95.4

- These results are scoping level, in that conditions are not optimised. Consequently, there is upside potential to improve concentrate grades through subsequent optimisation studies, including evaluation of grind size, selective collector use and pyrite suppression.
- Analysis of the concentrates indicates no trace metals of concern, with particularly low levels of arsenic, cadmium and uranium.
- Alma Metals Limited (ASX: ALM) is currently funding activity at Briggs under an exclusive Option and Earn-In Joint Venture Agreement, whereby it can ultimately reach 70% ownership of the project for total funding of \$16 million.
- A major diamond drilling campaign is being planned to increase the footprint of the mineralised envelope, as well as providing additional material for further metallurgical studies.
- Drilling is expected to commence during the June quarter.

Introduction

Canterbury Resources Limited (ASX:CBY, “the Company” or “Canterbury”) is pleased to announce metallurgical test work results from coarse crush residue of drill core used in the mineral resource estimate at the Briggs copper deposit within the Briggs, Mannersley and Fig Tree Hill project area in Queensland (“Project”).

Alma Metals Limited (ASX:ALM, “Alma”) has an exclusive Option to enter an Earn-In Joint Venture Agreement with Canterbury for the Project, through which Alma can ultimately reach 70% ownership by funding a total of \$16 million of assessment activity (refer CBY ASX release dated 18 August 2021).

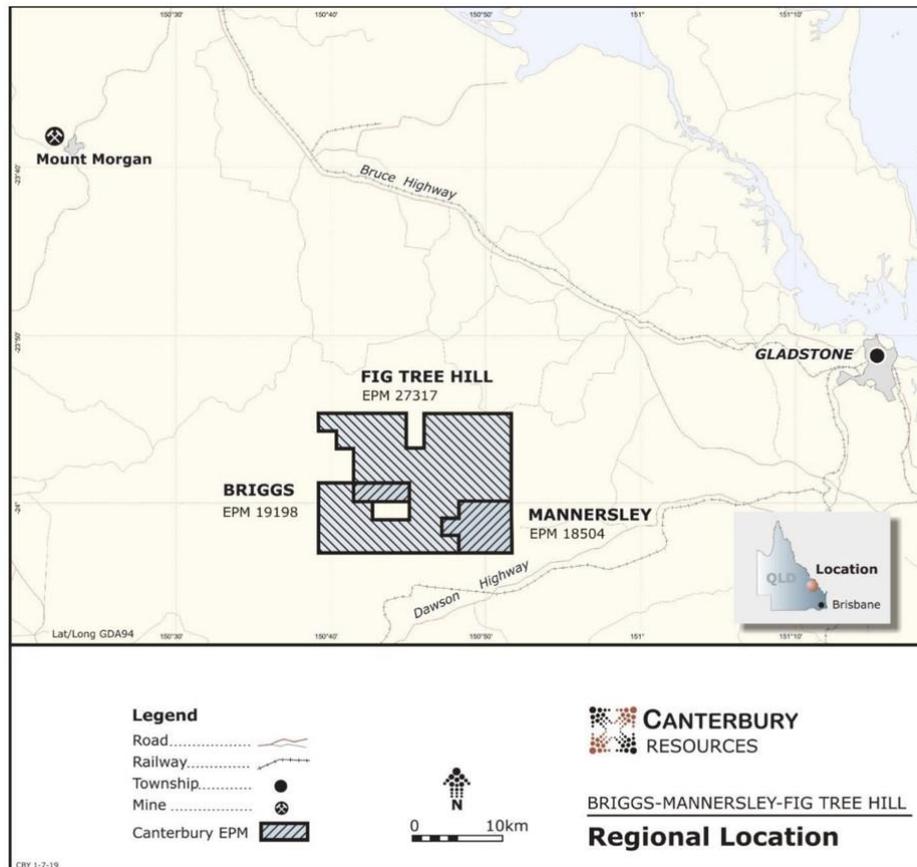


Figure 1 Location map showing proximity of the Briggs, Mannersley and Fig Tree Hill copper project area to major infrastructure including ports, rail and power.

Initial Metallurgical Test Work Results

Composite samples, representing the three frequently encountered mineralisation types, were created from coarse crush residue from drill core from BD019-003 used for the mineral resource estimate (see CBY ASX release dated 10 June 2020, and refer to Figure 2 below):

- MET-1 = 20.4kg Mineralised granodiorite calculated headgrade of 0.2% Cu
- MET-2 = 18.2kg Mineralised quartz rich zone within the granodiorite with calculated headgrade of 0.9% Cu
- MET-3 = 18.2kg Mineralised volcanic sediments adjacent to the granodiorite with calculated headgrade of 0.4% Cu

Benchtop flotation tests to evaluate copper recoveries were undertaken by ALS Metallurgy in Perth using the following parameters:

- Each sample was control-crushed to -3.35mm and homogenised in a rotary sample splitter
- Representative 2kg charges were split out and ground to 75µm prior to rougher flotation
- Perth tap water was conditioned and maintained at pH 9.50 for the duration of the tests
- SIBX was added as a 1% (w/v) solution
- No re-grind prior to cleaner flotation
- No optimisation to suppress pyrite flotation


The results to date are very promising (see Table 1 below):

- Excellent recoveries between 92% and 95% into cleaner concentrates
- Excellent first pass concentrate grades between 17.4% and 19.7% copper
- Little difference in results across the three types of mineralisation other than slightly higher concentrate grades in the higher-grade quartz-rich sample
- No regrinding between rougher and cleaner stages, use of copper selective collector or pyrite suppression indicate upside potential in metallurgical recovery through optimisation studies
- Trace metal analysis of the concentrates indicated very low levels of arsenic (<0.01%), cadmium (<5ppm) and uranium (<0.002%)
- The results above combine to indicate good potential to produce commercially attractive copper concentrates from the project
- Further metallurgical studies and optimisation studies will be undertaken after the next phase of drilling which is planned to commence later this quarter

Table 1 Initial metallurgical test work results

	MET-1 (GDP, 0.2% Cu)				MET-2 (QTZ, 0.9% Cu)				MET-3 (Min-Sed, 0.4% Cu)			
	Mass		Copper		Mass		Copper		Mass		Copper	
	G	Dist. (%)	Grade Cu %	Rec (%)	G	Dist. (%)	Grade Cu %	Rec (%)	g	Dist. (%)	Grade Cu %	Rec (%)
Cleaner Concentrate	24.3	1.21	17.6	95.1	41.1	4.09	19.7	91.9	45.0	2.26	17.4	93.5
Rougher Concentrate	44.4	2.2	9.7	95.7	61.4	6.12	14.0	97.9	60.1	3.02	13.3	95.4

Figure 2 Briggs porphyry copper system showing extensive copper anomalism in soil samples extending over >2km x 0.75km at >0.1% Cu. Results from the 2021 RC drilling and from drillholes used in the 2020 Mineral Resource estimate are shown, including BD019-003 which was used for metallurgical samples.

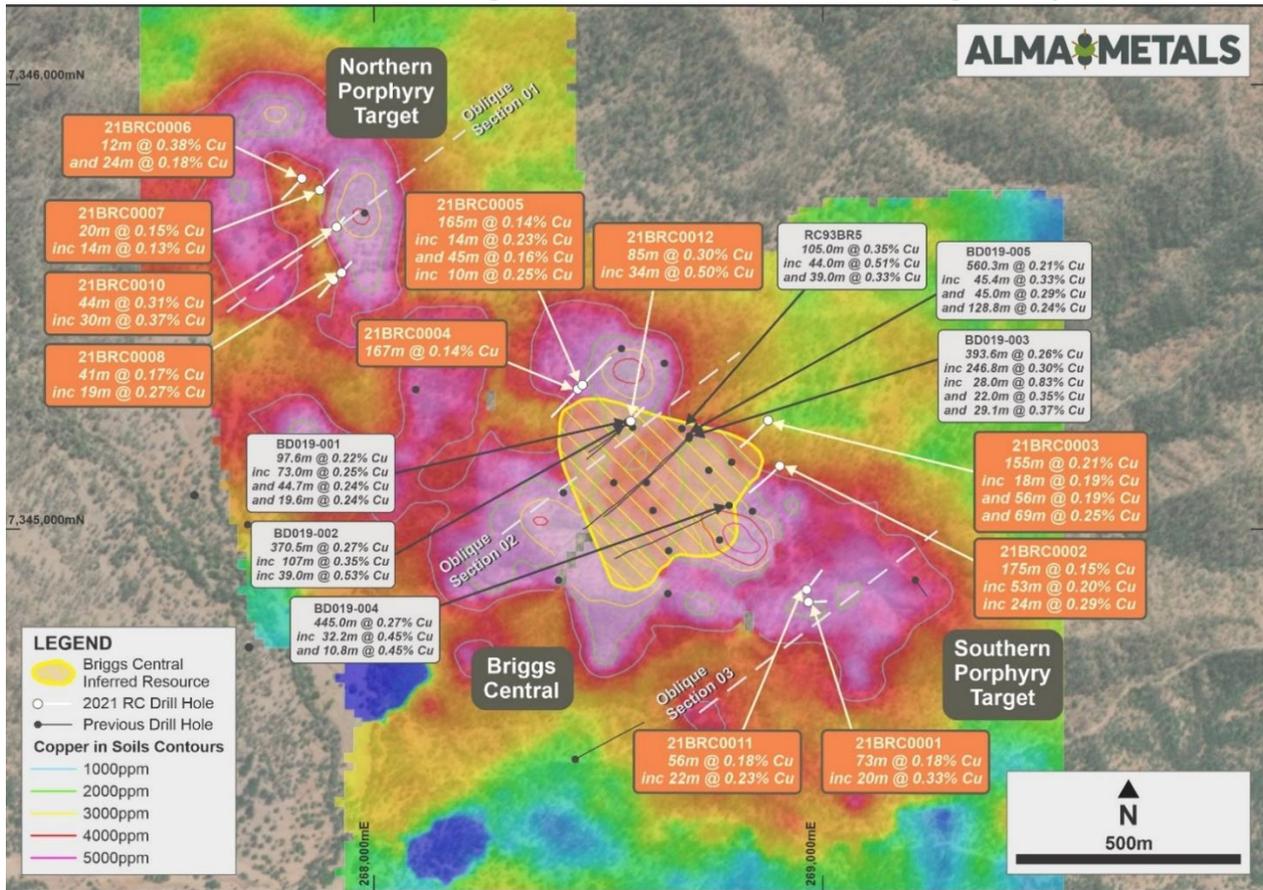

Authorised on behalf of the Board

Grant Craighead
Managing Director

Telephone: +61 9392 8020
Email: gcraighead@canterburyresources.com.au

COMPETENT PERSON'S STATEMENT - Exploration Results, Mineral Resources and Ore Reserves

The technical information in this report which relates to Exploration Results is based on information compiled by Mr Michael Erceg, MAIG RGeo. Mr Erceg is an Executive Director of Canterbury Resources Limited and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code of Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Erceg consents to the inclusion in this report of the matters based on that information in the form and context in which it appears.

COMPETENT PERSONS STATEMENT – Metallurgy

The information in this report relating to metallurgical test work results is based on and fairly reflects information reviewed by Mr Stuart Smith (consultant to Alma Metals Limited). Mr Smith is a Fellow of the Australian Institute of Mining and Metallurgy. Mr Smith is a qualified metallurgist and has sufficient experience which is relevant to the management and interpretation of test work activities undertaken to qualify as Competent Persons as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Smith consents to the inclusion in the ASX release of the matters based on their information in the form and context in which it appears.

DISCLAIMER

Forward-looking statements are statements that are not historical facts. Words such as "expect(s)", "feel(s)", "believe(s)", "will", "may", "anticipate(s)", "potential(s)" and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company's prospects, properties and business strategy. Our audience is cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and we do not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events. The term "Canterbury" must be loosely construed to include the subsidiaries of Canterbury Resources Limited where relevant.

ABOUT CANTERBURY RESOURCES LIMITED

Canterbury Resources Limited (ASX: CBY) is an ASX-listed resource company focused on creating shareholder wealth by generating and exploring potential Tier-1 copper-gold projects in the southwest Pacific.

It has a strong portfolio of projects in Australia and Papua New Guinea that are prospective for porphyry copper-gold and epithermal gold-silver deposits.

The Company is managed by an experienced team of resource professionals, with a strong track record of exploration success and mine development in the region. It periodically forms partnerships with major resource companies to defray risk and cost.

Canterbury's portfolio includes multiple projects that are at the advanced exploration phase. Each project provides potential for the discovery and/or delineation of large-scale copper (\pm gold, \pm molybdenum) resources. Initial Mineral Resources have been estimated at three deposits:



Project	Deposit	Category	Cut-off	Mt	Au (g/t)	Cu (%)	Au (Moz)	Cu (kt)
Wamum	Idzan Creek	Inferred	0.2g/t Au	137.3	0.53	0.24	2.34	327
Wamum	Wamum Creek	Inferred	0.2% Cu	141.5	0.18	0.31	0.82	435
Briggs	Central Zone	Inferred	0.2% Cu	142.8	-	0.29	-	414
Total							3.16	1,176

Refer CBY ASX releases 10 June 2020 and 25 November 2020

APPENDIX 1 - JORC TABLES
JORC Code, 2012 Edition – Table 1
Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> • <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> • Three composites for metallurgical test work were taken from laboratory coarse crush residue of diamond drill hole BD019003 drilled in the Central Porphyry. • The three composites were chosen to represent the three recognized mineralisation types in the mineral resource envelope of the Central Porphyry viz., <ul style="list-style-type: none"> ➤ MET1 granodiorite porphyry (“GDP”) ➤ MET2 massive quartz (“QTZ”) ➤ MET3 mineralised sediment (“MINSED”) • Composite were collected from approximately 20m intervals of each mineralisation type: <ul style="list-style-type: none"> ➤ Met#1 GDP BD019003 from 115 to 135m. ➤ Met#2 QTZ BD019003 from 230.5 to 250m. ➤ Met#3 MINSED BD019003 from 378 to 398m. • Drill hole BD019003 was drilled in 2019, HQ triple tube and sampled nominally on 1m intervals. The core was cut longitudinally using a core saw and half core sent for multi-element assay at ALS Laboratories. • The three metallurgical composites were prepared from coarse crush residue retained from the assaying process. The coarse crush residue had been stored in sealed plastic bags and was not affected by oxidation. The composites were prepared by: <ul style="list-style-type: none"> ➤ Roll mixing coarse crush residue to homogenise sample. ➤ Scooping approximately 1kg (actual weight measured on Adam CKT8H electronic balance and recorded). ➤ Collecting composite in labelled 20 litre plastic pales with lids for transport to ALS Metallurgical Laboratories in Perth. ➤ Weighted average grade of composites calculated from individual core assays.
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by</i> 	<ul style="list-style-type: none"> • Refer CBY ASX release 10 June 2020

Criteria	JORC Code explanation	Commentary
	<i>what method, etc).</i>	
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Refer CBY ASX release 10 June 2020
<i>Logging</i>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • Refer CBY ASX release 10 June 2020
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Refer CBY ASX release 10 June 2020
<i>Quality of assay data and</i>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in</i> 	<ul style="list-style-type: none"> • Assays of the metallurgical test work were undertaken by ALS Metallurgical Laboratories in Perth.


Criteria	JORC Code explanation	Commentary
laboratory tests	<p>determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p> <ul style="list-style-type: none"> Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020

Criteria	JORC Code explanation	Commentary
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> Composites were collected under the supervision of the Exploration Manager. Composites were collected in 20 litre plastic pales with sealable lids and transported to ALS Metallurgical Laboratories by commercial carrier.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020


Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • Refer to CBY ASX release 10th June 2020. • Alma Metals has an exclusive Option to enter an Earn-in Joint Venture Agreement to earn up to 70% of the Briggs Project.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> • <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> • Refer to CBY ASX release 10th June 2020.
<i>Geology</i>	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • Refer to CBY ASX release 10th June 2020.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • Refer to CBY ASX release 10th June 2020.
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> 	<ul style="list-style-type: none"> • Refer to CBY ASX release 10th June 2020.

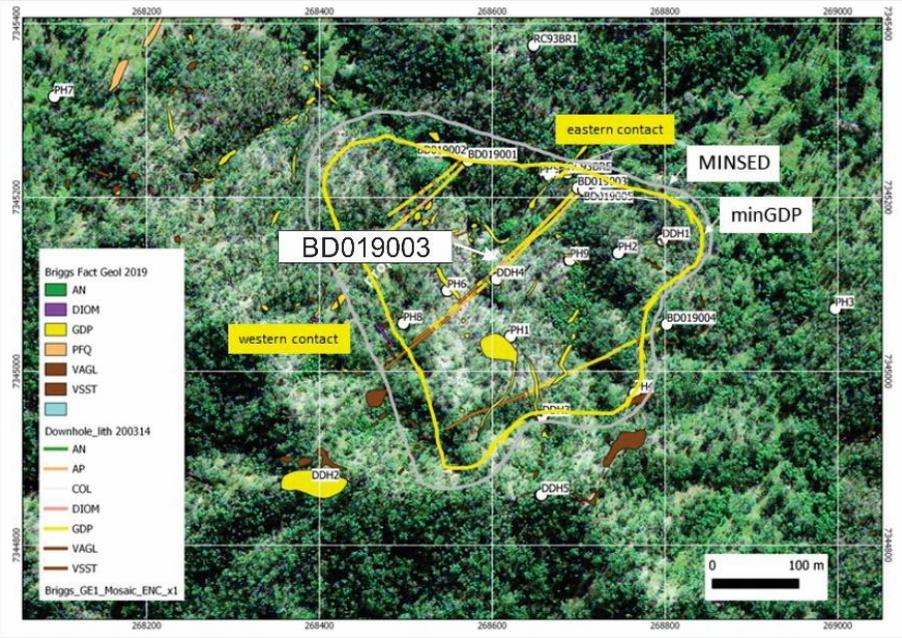Criteria	JORC Code explanation	Commentary
<p>Relationship between mineralisation widths and intercept lengths</p>	<ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
<p>Diagrams</p>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<p>Plan view of Central Porphyry indicating location of mineralisation types and BD019003:</p> 

SW-NE drill section through BD019003 viewed NW showing location of metallurgical samples:

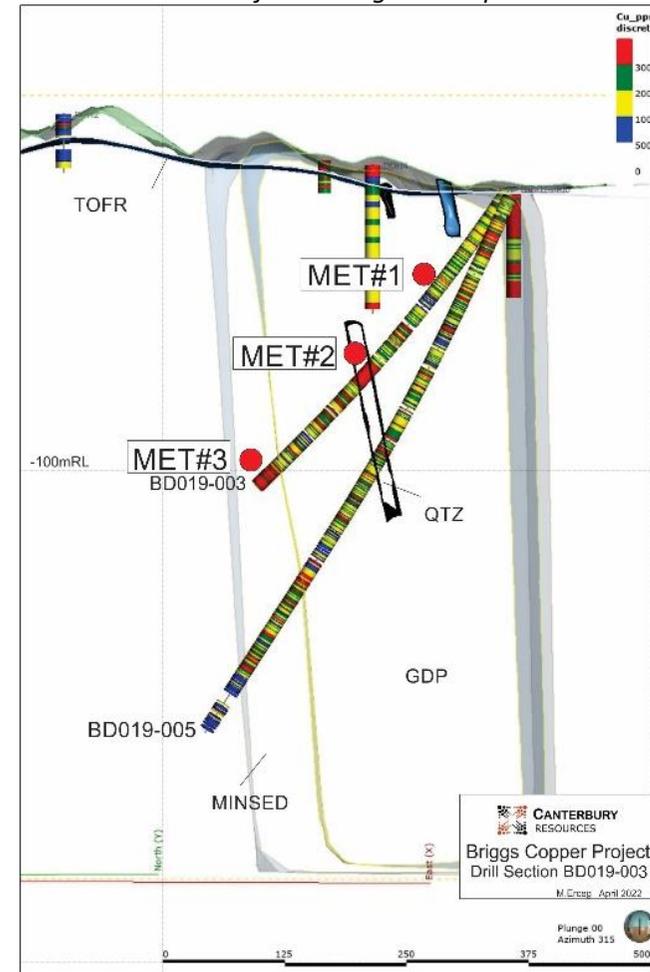

Balanced reporting

- Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.

- Refer CBY ASX release 10 June 2020

Criteria	JORC Code explanation	Commentary																																																															
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Benchtop flotation tests to evaluate copper recoveries were undertaken by ALS Metallurgy in Perth using the following parameters: <ul style="list-style-type: none"> Each sample was control-crushed to -3.35mm and homogenised in a rotary sample splitter. Representative 2kg charges were split out and ground to 75µm prior to rougher flotation Perth tap water was conditioned and maintained at pH 9.50 for the duration of the tests SIBX was added as a 1% (w/v) solution No re-grind prior to cleaner flotation No optimisation to suppress pyrite flotation Initial metallurgical test results: <table border="1"> <thead> <tr> <th rowspan="3"></th> <th colspan="4">MET-1 (GDP, 0.2% Cu)</th> <th colspan="4">MET-2 (QTZ, 0.9% Cu)</th> <th colspan="4">MET-3 (Min-Sed, 0.4% Cu)</th> </tr> <tr> <th colspan="2">Mass</th> <th colspan="2">Copper</th> <th colspan="2">Mass</th> <th colspan="2">Copper</th> <th colspan="2">Mass</th> <th colspan="2">Copper</th> </tr> <tr> <th>g</th> <th>Dist. (%)</th> <th>Grade Cu %</th> <th>Rec (%)</th> <th>g</th> <th>Dist. (%)</th> <th>Grade Cu %</th> <th>Rec (%)</th> <th>g</th> <th>Dist. (%)</th> <th>Grade Cu %</th> <th>Rec (%)</th> </tr> </thead> <tbody> <tr> <td>Cleaner Concentrate</td> <td>24.3</td> <td>1.21</td> <td>17.6</td> <td>95.1</td> <td>41.1</td> <td>4.09</td> <td>19.7</td> <td>91.9</td> <td>45.0</td> <td>2.26</td> <td>17.4</td> <td>93.5</td> </tr> <tr> <td>Rougher Concentrate</td> <td>44.4</td> <td>2.2</td> <td>9.7</td> <td>95.7</td> <td>61.4</td> <td>6.12</td> <td>14.0</td> <td>97.9</td> <td>60.1</td> <td>3.02</td> <td>13.3</td> <td>95.4</td> </tr> </tbody> </table>		MET-1 (GDP, 0.2% Cu)				MET-2 (QTZ, 0.9% Cu)				MET-3 (Min-Sed, 0.4% Cu)				Mass		Copper		Mass		Copper		Mass		Copper		g	Dist. (%)	Grade Cu %	Rec (%)	g	Dist. (%)	Grade Cu %	Rec (%)	g	Dist. (%)	Grade Cu %	Rec (%)	Cleaner Concentrate	24.3	1.21	17.6	95.1	41.1	4.09	19.7	91.9	45.0	2.26	17.4	93.5	Rougher Concentrate	44.4	2.2	9.7	95.7	61.4	6.12	14.0	97.9	60.1	3.02	13.3	95.4
	MET-1 (GDP, 0.2% Cu)				MET-2 (QTZ, 0.9% Cu)				MET-3 (Min-Sed, 0.4% Cu)																																																								
	Mass			Copper		Mass		Copper		Mass		Copper																																																					
	g	Dist. (%)	Grade Cu %	Rec (%)	g	Dist. (%)	Grade Cu %	Rec (%)	g	Dist. (%)	Grade Cu %	Rec (%)																																																					
Cleaner Concentrate	24.3	1.21	17.6	95.1	41.1	4.09	19.7	91.9	45.0	2.26	17.4	93.5																																																					
Rougher Concentrate	44.4	2.2	9.7	95.7	61.4	6.12	14.0	97.9	60.1	3.02	13.3	95.4																																																					
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> CBY/ALM are planning further drilling at the Briggs copper project commencing in the June quarter 2022. 																																																															

Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in Section 1, and where relevant in Section 2, also apply to this section.)

Criteria	JORC Code Explanation	Commentary
Database integrity	<ul style="list-style-type: none"> Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Site visits	<ul style="list-style-type: none"> Comment on any site visits undertaken by Competent Persons and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Geological interpretation	<ul style="list-style-type: none"> Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity of both grade and geology. 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Estimation and modelling techniques	<ul style="list-style-type: none"> The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data. The assumptions made regarding recovery of by-products. Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation). In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. Any assumptions behind modelling of selective mining units. Any assumptions about correlation between variables. Description of how the geological interpretation was used to control the resource estimates. <ul style="list-style-type: none"> Discussion of basis for using or not using grade cutting or 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020

Criteria	JORC Code Explanation	Commentary
	<p><i>capping.</i></p> <ul style="list-style-type: none"> <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i> 	
Moisture	<ul style="list-style-type: none"> <i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Cut-off parameters	<ul style="list-style-type: none"> <i>The basis of the adopted cut-off grades or quality parameters applied.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Mining factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible mining methods minimum mining dimensions and internal (or if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects of eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Metallurgical factors or assumptions	<ul style="list-style-type: none"> <i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical treatment process and parameters made when reporting Mineral Resources, but the assumptions made may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Environmental factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfield project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Bulk density	<ul style="list-style-type: none"> <i>Whether assumed or determined. If assumed, the basis for assumptions. If determined, the method used, whether wet or dry, the frequency of measurements, the nature, size and representativeness</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020

Criteria	JORC Code Explanation	Commentary
	<p><i>of the samples.</i></p> <ul style="list-style-type: none"> <i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i> <i>Discuss assumptions for bulk density estimates used in the evaluation process of different materials.</i> 	
Classification	<ul style="list-style-type: none"> <i>The basis for the classification of Mineral Resources into varying confidence categories.</i> <i>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data.</i> <i>Whether the data appropriately reflects the Competent Person's view of the deposit.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of Mineral Resource estimates.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020
Discussion of relative accuracy/confidence	<ul style="list-style-type: none"> <i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i> <i>The statement should specify whether it relates to global or local estimates, and, if local, state the relative tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i> <i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i> 	<ul style="list-style-type: none"> Refer CBY ASX release 10 June 2020