

PHOTON RESULTS RECEIVED FOR PENNY SOUTH

- The sample results were from the Photon Assay technique with a 0.03ppm sensitivity.
- 16 four metre interval samples reported Au above 0.03g/t from 8 holes out of 18 holes
- The reported gold falls within the two known mineralised areas, broadening the gold bearing zones.
- The 1m interval samples over these intervals will be recovered for individual fire assay analysis.

Aurum Resources Limited ('Company') provides an update to shareholders on the results of the drilling at the Penny South Project. A total of 931 samples from 19 holes (includes 1 redrilled hole) over 18 sites were analysed using the Photon Assay technique at Min Analytical Perth laboratory. Photon assaying is a non-destructive analytical technique developed by the CSIRO using high energy x-rays to analyse all sample matrices and is a nationally accredited technique. The results turn around was seven weeks, much longer than anticipated, mainly due to IT delays related to the Min Analytical takeover by global laboratory ALS.

The programme focused on two main areas, the northern offset target which has a similar structural setting to the Penny West deposit which resides immediately to the north and the southern target along the Youanmi fault and shear system. The RC drilling programme was hampered by the fractured basement with high-flow ground water which affected sample return from around the 150m (inclined) depth. It also prevented 5 holes from reaching the target depth of 200m and was compounded by equipment failures that resulted in these drill returns being compromised. These drilling equipment issues resulted in some instances where only ~10% of the expected volume of drill cuttings were recovered for the deepest intercepts.

The best grades include:

- [4m@ 0.36g/t](#) from 152m
- [4m@ 0.41g/t](#) from 140m
- [4m@ 0.30g/t](#) from 144m
- [4m@ 0.6g/t](#) from 152m
- [4m@ 0.24g/t](#) from 84m

The 16 positive gold results are compiled in Table 1 and locations shown in Figure 1.

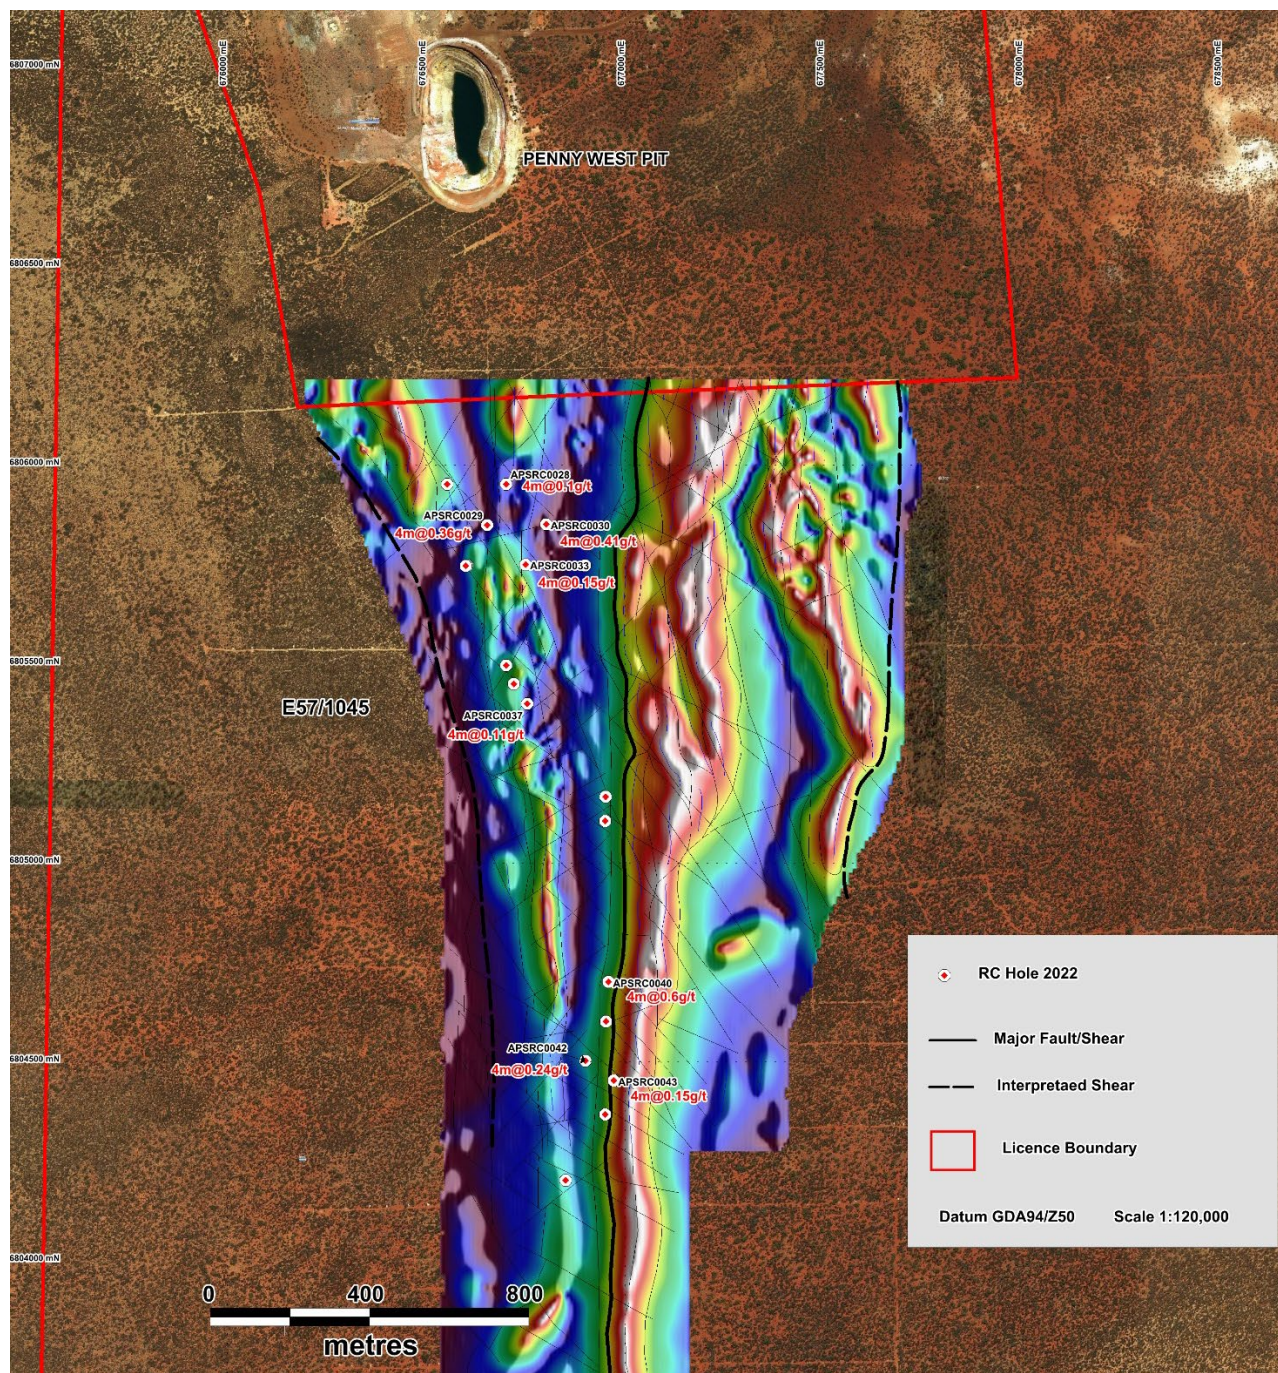


Figure 1: 2022 drilling results with the gold grades shown for the eight holes with reportable gold.

The recent gold results are consistent in the areas that historical drilling had identified and broaden the anomalous areas in the north and south. These results define a broad zone of low-grade gold mineralisation with pockets of higher-grade gold mineralisation.

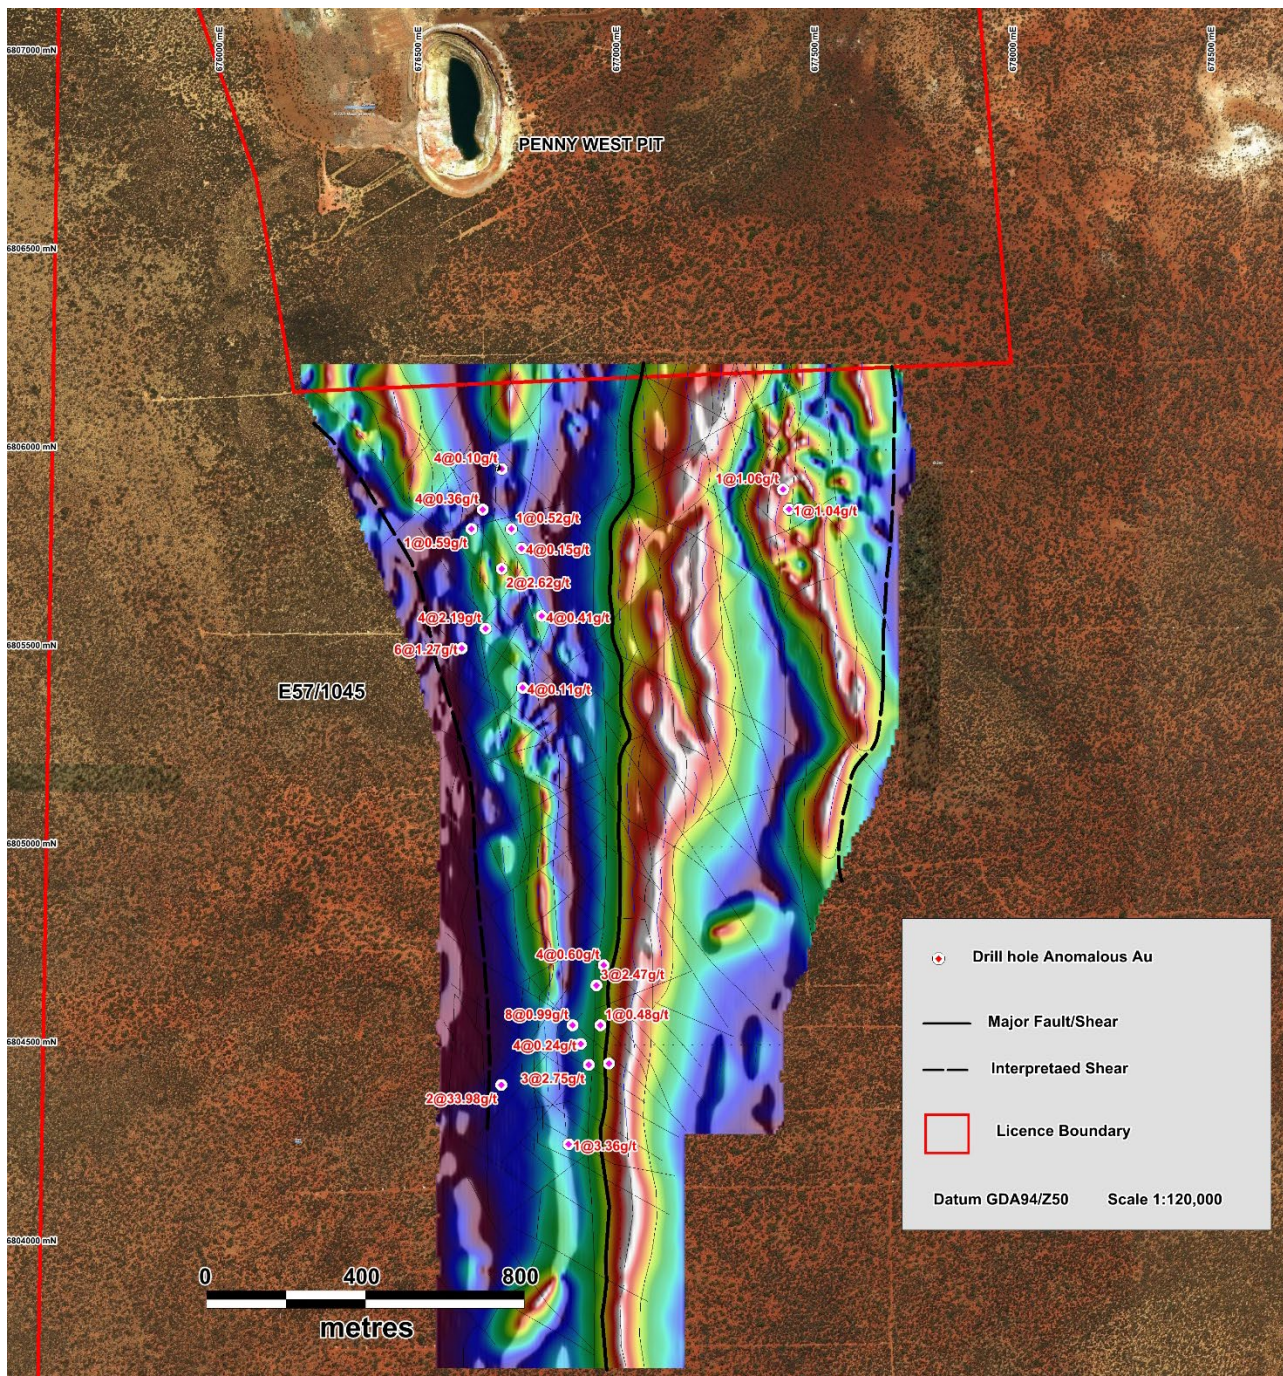


Figure 2 Historical and current drilling results showing anomalous gold intersections over the two main areas along the Youanmi north south fault.

The recommended forward work programme involves test the 1m intervals over the gold bearing 4m intervals with a Fire Assay technique to see if any sections contain higher grades of gold. This will be followed by a diamond drilling programme utilising the existing collars of the RC holes to conduct diamond tails wedged off above the wet sections of the hole. This will provide confidence in any results produced and

technical information on structure and morphology of the contact and alteration systems including the ability to reach deeper depths.

Hole ID	Easting MGA94	Northing MGA94	Sample Number	From (m)	To (m)	Interval (m)	Grade Au g/t	Host	Sulphides	Comment
APSRC0028	676701	6805952	APS2978	48	52	4	0.10	ultramafic		up to 10% quartz veining
APSRC0028			APS2980	56	60	4	0.07	basalt		sheared contact up to 15% quartz veining
APSRC0029	676653	6805849	APS3064	152	156	4	0.36	basalt		amphibolite/felsic contact, up to 8% quartz veining
APSRC0030			APS3113	140	144	4	0.41	basalt	Trace	foliated metabasalt fine grained minor quartz veining and pyrite
APSRC0030			APS3114	144	148	4	0.30	basalt	Trace	foliated metabasalt fine grained minor quartz veining and pyrite
APSRC0030			APS3116	152	156	4	0.16	basalt	Trace	foliated metabasalt fine grained minor quartz veining and pyrite
APSRC0030			APS3119	164	168	4	0.08	basalt	Trace	foliated metabasalt fine grained minor quartz veining and pyrite
APSRC0033			APS3218	72	76	4	0.12	basalt	Trace	up to 10% quartz veining moderate chloritic alteration and sulphides
APSRC0033			APS3221	84	88	4	0.09	basalt	0.10%	up to 2% quartz veining, epidote alteration minor sulphides
APSRC0033	676751	6805752	APS3222	88	92	4	0.15	basalt	Trace	up to 1% quartz veining, epidote alteration minor sulphides
APSRC0033			APS3225	96	100	4	0.11	basalt	Trace	up to 1% quartz veining, epidote alteration minor sulphides
APSRC0033			APS3242	160	164	4	0.08	amphibolite		up to 2% quartz veining, trace alteration epidote
APSRC0037	676754	6805400	APS3437	60	64	4	0.11	basalt	0.10%	limonite alteration, pyrite, trace quartz stringer
APSRC0040	676958	6804701	APS3631	152	156	4	0.60	basalt	0.50%	trace pyrite in epidote altered fractured basalt
APSRC0042	676900	6804503	APS3733	84	88	4	0.24	basalt	0.10%	schistose layers in foliated magnetic basalt with chloritic alteration
APSRC0043	676971	6804453	APS3805	156	160	4	0.15	basalt	0.10%	pyrite along annealed fractures with epidote and magnetite

Table 1: Compilation of all 16 sample composites with reportable gold content.


END

Background

Penny South Project. The project sits on the same shear structure that the high-grade Penny West (1990's open pit **121,000t at 21.8g/t for 85,000oz**) and the more recently discovered adjacent Penny North (2020 – underground **569,000t at 16.8g/t for 306,800oz**). Penny West lies just 510m north of Aurum's Penny South licence and the Penny West N-S Shear continues through the licence for a strike length of 2.5km. High grade mineralisation is associated with the sheared contacts between mafic and granodiorite(felsic) rocks and quartz veining (often associated with sulphides). Similar contacts are seen in Penny South and drilling to date has produced some hits, **2m at 33.89g/t from 38m** (historic hole 95PSR0673), **4m at 2.1g/t from 92m** (APSRC015 ARN: 28/05/2020) highlighting the potential of the area. The high-grade mineralisation at Penny West and Penny North are narrow high-grade zones so targeting has to be highly focused. While the Penny south area has been extensive drilled with 652 holes, these are generally shallow, with the average around 40m, so if a Penny North deposit, where the mineralisation starts at 80m and continues to 320m, was in the area it would likely be missed. So, the focus has been combining high resolution ground magnetics available drilling information for a detailed structural interpretation. Aurum contracted Richard Hill, who worked on the Penny North deposit for Spectrum, and Margie Hawke (Hazina Geoscience) to define targets along the structurally complex shear system. Ramelius Resources (**ASX:RMS**), to the North, have released a JORC Mineral Resource and ore reserve for enlarging the Penny West pit and planned a decline to Penny North from the open pit with **620,000t at 15.0g/t for 300,000oz** .(2g/t cut off)

About Aurum Resources Limited

Aurum Resources Ltd is an ASX-listed (**ASX:AUE**) mineral exploration and development company. Aurum has a collection of gold focused projects from early-stage reconnaissance to advanced exploration projects all located in Western Australia. The Company's flagship project is the Penny South Project, highly prospective for gold mineralisation and located adjacent to and on the same structure as Ramelius's Penny West & Penny North gold mine. The Company's other project is Ryans Find, another high prospective project adjacent to known gold deposits.

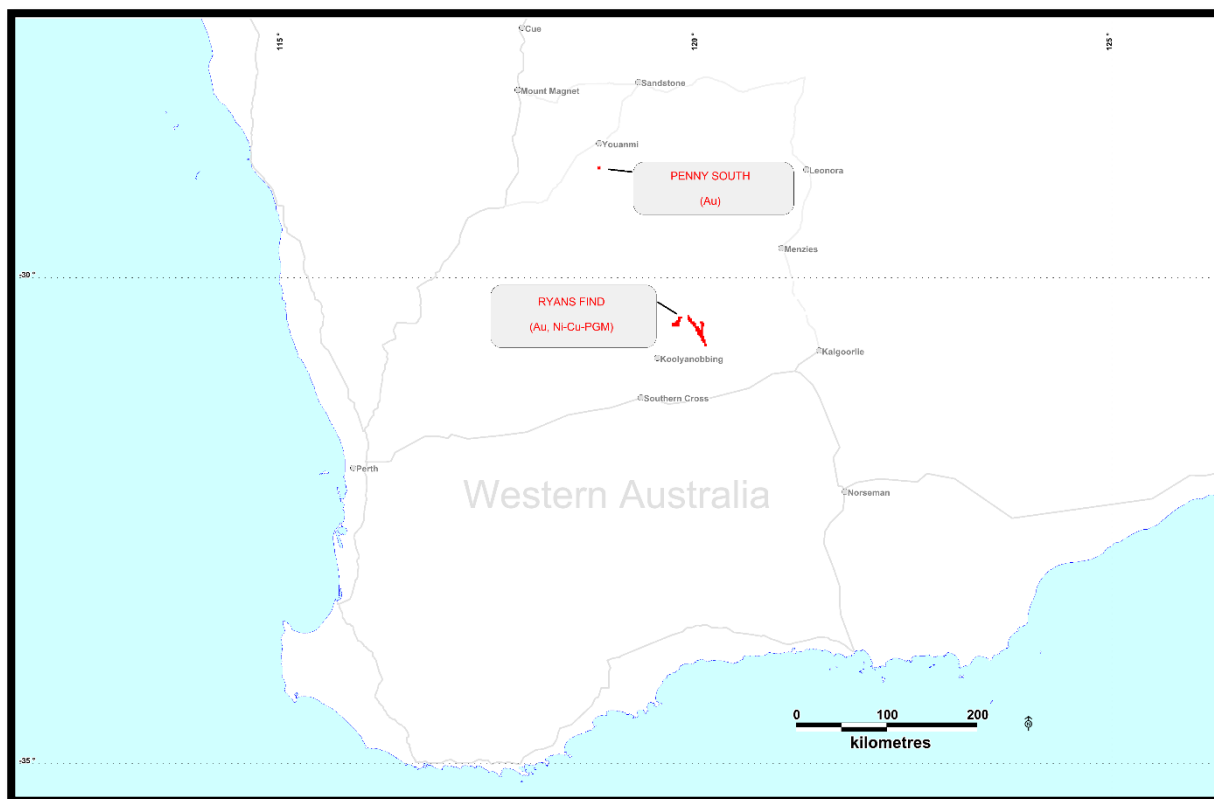

This Announcement has been approved for release by the Board of Aurum Resources Ltd

Disclaimer

Some of the statements appearing in this announcement may be in the nature of forward-looking statements. You should be aware that such statements are only predictions and are subject to inherent risks and uncertainties. Those risks and uncertainties include factors and risks specific to the industries in which Aurum operates and proposes to operate as well as general economic conditions, prevailing exchange rates and interest rates and conditions in the financial markets, among other things. Actual events or results may differ materially from the events or results expressed or implied in any forward-looking statement. No forward-looking statement is a guarantee or representation as to future performance or any other future matters, which will be influenced by several factors and subject to various uncertainties and contingencies, many of which will be outside Aurum's control. Aurum does not undertake any obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions or conclusions contained in this announcement. To the maximum extent permitted by law, none of Aurum, its directors, employees, advisors, or agents, nor any other person, accepts any liability for any loss arising from the use of the information contained in this announcement. You are cautioned not to place undue reliance on any forward-looking statement. The forward-looking statements in this announcement reflect views held only as at the date of this announcement.

This announcement is not an offer, invitation or recommendation to subscribe for, or purchase securities

by Aurum. Nor does this announcement constitute investment or financial product advice (nor tax, accounting, or legal advice) and is not intended to be used for the basis of making an investment decision. Investors should obtain their own advice before making any investment decision.

Competent Person Statement

The information in this announcement that relates to Exploration Results and other technical information complies with the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code). It has been compiled and assessed under the supervision of Mr Mark Mitchell, an employee with Aurum Resources Ltd. Mr Mitchell is a Registered Professional Geoscientist (No.10049) with the Australian Institute of Geoscientists and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the JORC Code. Mr Mitchell consents to the inclusion in the release of the statements based on his information in the form and context in which it appears.

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Reverse circulation drilling used to collect individual 1 metre samples downhole in addition to 1m magnetic susceptibility readings using a Exploranium KT-5 meter. Cyclone sample splitter used to collect 2 representative samples per metre where one sample was composited with other samples over a 4m interval, while the other sample was kept for individual analysis when required. Composite samples were sorted, dried, crushed to -2mm, linear split to obtain a homogenised sample from which a 500g sample (Jar) was used for 2 cycle Photon assay for gold with a 0.03ppm sensitivity. A quality control/quality assurance system comprising OREAS 250b gold standards, blank sand and duplicates were used at random intervals to evaluate the assay process.
Drilling techniques	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> Reverse Circulation using a Schramm T450 universal rig and a rock face sampling hammer with 127mm diameter (5"). The holes were orientated by compass and clinometer (rig). A gyro probe was sent down the hole at the end of each hole and orientation data recorded every 30m.
Drill sample recovery	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure</i> 	<ul style="list-style-type: none"> Sample recoveries assessed qualitatively, no routine weighing or other assessment processes. Standard drilling techniques used to maximise sample recovery with

Criteria	JORC Code explanation	Commentary
	<p><i>representative nature of the samples.</i></p> <ul style="list-style-type: none"> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<p>cone splitter on cyclone used to collect 2 individual splits 1/8th ratio (calico bags) and the remainder into a green plastic bag.</p> <ul style="list-style-type: none"> No relationship established as samples have not been analysed yet.
Logging	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> The 1 metre detailed logs provide fair geological descriptions but lacks geotechnical information so the level of information collected to date would not support Mineral Resource estimation It also lacks mining studies and metallurgical studies. The logging is qualitative but not quantitative The RC chips have been logged on a 1 metre basis.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> No core collected, only RC chips The RC chips were collected using a cone splitter system attached to the bottom of the cyclone. Samples varied from dry to wet, depending on the presence of the water table and the 6m rod changes. The cone splitter used on the cyclone is considered an appropriate technique for reducing bias in the sample collection. The quality control procedure for the first split sample is to take a level scoop from each of the 4 one metre splits for a composite sample. The second split will be retained whole for 1m analysis where required. Sample control duplicates were collected at various regular intervals at around every 40 samples. These will be analysed, and results compared their counterparts. Initially the first split is combined to form 4m composites for analysis, the second split is retained and may be used for individual 1m analysis It is not known whether grain size is a consideration in the sub-sampling technique as no size screening has been conducted.
Quality of assay data	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> 	<ul style="list-style-type: none"> The were assayed at MinAnalytical Laboratory Services in Perth using a NATA accredited (No.18876) Photon Assaying technique

Criteria	JORC Code explanation	Commentary
and laboratory tests	<ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<p>for gold only with a detection range of 0.03-350ppm</p> <ul style="list-style-type: none"> No geophysical tools used MinAnalytical conducted a duplicate reading every 15 samples and used blanks and standards (CDN_ME1411, OREAS229B, OREAS237, and OREAS264). These blanks and standards produced acceptable levels of accuracy and precision.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> No verification techniques have been adopted as the samples are yet to be consigned to the laboratory. No twinned holes were drilled, however an abandoned hole 3m from the final hole will be compared for the 55m overlap. Logging in the field is conducted using logging software on a tablet and will be transferred to a sever and backed up in raw format to preserve the original dataset. No samples have been consigned to the laboratory to date.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> The hole collars were located using a Garmin 66st and a compass was used to locate guidance pegs for the drill rig azimuth. At the completion of the hole an averaged reading (5-10minutes) was taken with the GPS to record the position. Down hole dip and azimuth were recorded using a gyro at 50m intervals. The datum used GDA94 zone 50 The topographic control is limited to that provided by the handheld GPS averaged reading.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> The drill hole placement was not on a regular grid as the holes were targeted interpreted structural features in the capacity of exploration drilling, not resource constraining. The holes are exploration in nature and not defining a resource which is yet to be discovered. Sample compositing has not been applied as the drilling is still in

Criteria	JORC Code explanation	Commentary
		exploration phase.
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> The holes are drilled at 270 azimuth which is approximately perpendicular to the strike of the lithology which steeply dips to the east. There is no quantitative information regarding the orientation of mineralised structures and the relationship between drilling orientation and the orientation of key mineralised structures is not known No sampling bias is considered to have been introduced however there is currently insufficient information to confirm this.
<i>Sample security</i>	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples were bagged and secured by contractor field staff • Samples were transported directly to the analytical laboratory by local courier
<i>Audits or reviews</i>	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No sampling techniques or data have been independently audited.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Tenement E57/1045 (4 graticular blocks) is currently held by Altium Metals Limited and is 100% owned and operated by Aurum Resources Limited The licence is in the process of being transferred to Aurum Resources Limited.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Gold Mines of Australia (GMA) undertook extensive exploration in the period 1989 -1996 with extensive soil sampling returning disappointing results and angled RAB drilling generating some encouraging results in the regolith. Two anomalous intercepts of 2 m

Criteria	JORC Code explanation	Commentary
		<p>@33.98g/t Au (95PSR0673;38-40m) and 1m @ 1.04 g/t Au (PSR0100;28-29m) were tested by very limited RC drilling however the majority regolith anomalies were untested.</p> <ul style="list-style-type: none"> • Lach Drummond Resources (2002-2004); Follow-up aircore drilling of the GMA generated regolith anomalies with better results including 6m @ 1.27 g/t Au (PWAC062; 29-35m) and 1m @ 1.04 g/t Au (PWAC092; 33-34m) • Beacon Minerals (2014-15); 34 angled aircore holes totaling 1820m were undertaken to test the historical regolith anomalies. Results were moderate with follow up RC drilling proposed for significant aircore results. • Aldoro Resources (2016-2021) Conducted a detailed ground magnetic survey and interpreted in conjunction with lithological information contained within historic drill logs and incorporating the Penny West and Penny North mineralisation styles. The interpretation identified 7 targets based on structural interpretation and historical mineralisation. Aircore drilling successfully highlighted the inferred extension of the Penny West Shear and granodiorite-mafic contact, with two target areas showing coincident factors of sulphidic quartz veining. RC drilling at the Southern Target within the tenement area identified a mineralised structure over 400m of strike with gold intersections of up to 6.7g/t Au. A 2021 review of all the exploration activity across the tenement found that the drilling had not been deep enough to intersect the structures and contacts hosting the mineralisation.
Geology	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • The Penny South Project is located at the southern end of the Youanmi greenstone belt, dominated by metamorphosed mafic extrusives and intrusives, minor BIF, intrusive felsic porphyries and some felsic volcanic rocks. The Youanmi intrusive complex is made up of layered mafic and ultramafic rocks and occurs to the immediate

Criteria	JORC Code explanation	Commentary
		<p>west of the main greenstone sequence.</p> <ul style="list-style-type: none"> Anomalous gold occurs in a favourable structural setting close to the Youanmi Fault, a major structure known to host or control gold mineralisation in the district. Gold is often, but not exclusively, associated with sulphides usually within alteration zones.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> See the tables attached after this section which provide collar, geology, and assay information. Drill hole information is not considered material at this stage as no assay results are yet known. Exclusion of this information does not detract from the understanding that the announcement is brief update on drilling progress with a few visual observations the significance of which will be determined once assay results are known.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> No weighted averaging techniques or truncations have been applied to the data other than the lower sensitivity cut-off for the technique. No data aggregation methods have been adopted the results are as produced from the 4m composite samples No metal equivalents were used.
Relationship between mineralisation	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	<ul style="list-style-type: none"> The mineralisation intercept lengths have been reported by not correlated with any widths from other holes. No geometry of the mineralisation has been reported All mineralisation is reported from down hole inclined depths, no

Criteria	JORC Code explanation	Commentary
<i>n widths and intercept lengths</i>	<ul style="list-style-type: none"> If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	intervals have been converted to true widths as the geometry of the hosts have not been formally defined.
<i>Diagrams</i>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Only map plans have been provided as section view are yet to be constructed.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Only exploration results with detectable gold from the photo assay technique have been provided. Results not presented all had gold below the detection technique <0.03ppm.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> No other substantive exploration data is available at this stage.
<i>Further work</i>	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> The further work programme involves testing the reportable gold intersections at 1m intervals and adding diamond tails in the 8 anomalous holes to avoid the wet RC samples and get greater depth penetration. The analytical results have only just been received and as yet have not been modelling with the historical data sets for interpretation
<i>Cut-off parameters</i>	<ul style="list-style-type: none"> The basis of the adopted cut-off grade(s) or quality parameters applied. 	<ul style="list-style-type: none"> No cut-off parameters are required at this stage of early exploration.
<i>Mining factors or assumptions</i>	<ul style="list-style-type: none"> Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider 	<ul style="list-style-type: none"> No mining factors or assumptions have been considered for this exploration stage as these are considered outside the scope at this level of exploration.

Criteria	JORC Code explanation	Commentary
	<i>potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i>	
<i>Metallurgical factors or assumptions</i>	<ul style="list-style-type: none"> <i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i> 	<ul style="list-style-type: none"> No metallurgical factors or assumptions have been considered at this stage as these are considered outside the scope of this stage of exploration
<i>Environmental factors or assumptions</i>	<ul style="list-style-type: none"> <i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i> 	<ul style="list-style-type: none"> No environmental factors or assumptions have been considered for this exploration stage as these are considered outside the scope of this stage of exploration.
<i>Bulk density</i>	<ul style="list-style-type: none"> <i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i> <i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i> 	<ul style="list-style-type: none"> No bulk density sampling has been considered at this stage of exploration

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Discuss assumptions for bulk density estimates used in the evaluation process of the different materials. 	
Classification	<ul style="list-style-type: none"> The basis for the classification of the Mineral Resources into varying confidence categories. Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). Whether the result appropriately reflects the Competent Person's view of the deposit. 	<ul style="list-style-type: none"> No Mineral resource is considered, at this stage as the project is purely an exploration play.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of Mineral Resource estimates. 	<ul style="list-style-type: none"> No Mineral Resource defined
Discussion of relative accuracy/confidence	<ul style="list-style-type: none"> Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. 	<ul style="list-style-type: none"> No Mineral Resource defined
Study status	<ul style="list-style-type: none"> The type and level of study undertaken to enable Mineral Resources to be converted to Ore Reserves. The Code requires that a study to at least Pre-Feasibility Study level has been undertaken to convert Mineral Resources to Ore Reserves. 	<ul style="list-style-type: none"> No Mineral Resource defined

Criteria	JORC Code explanation	Commentary
	<i>Such studies will have been carried out and will have determined a mine plan that is technically achievable and economically viable, and that material Modifying Factors have been considered.</i>	
<i>Cut-off parameters</i>	<ul style="list-style-type: none"> The basis of the cut-off grade(s) or quality parameters applied. 	<ul style="list-style-type: none"> No Mineral Resource defined
<i>Mining factors or assumptions</i>	<ul style="list-style-type: none"> The method and assumptions used as reported in the Pre-Feasibility or Feasibility Study to convert the Mineral Resource to an Ore Reserve (i.e. either by application of appropriate factors by optimisation or by preliminary or detailed design). The choice, nature and appropriateness of the selected mining method(s) and other mining parameters including associated design issues such as pre-strip, access, etc. The assumptions made regarding geotechnical parameters (eg pit slopes, stope sizes, etc), grade control and pre-production drilling. The major assumptions made and Mineral Resource model used for pit and stope optimisation (if appropriate). The mining dilution factors used. The mining recovery factors used. Any minimum mining widths used. The manner in which Inferred Mineral Resources are utilised in mining studies and the sensitivity of the outcome to their inclusion. The infrastructure requirements of the selected mining methods. 	<ul style="list-style-type: none"> No Mineral Resource defined
<i>Metallurgical factors or assumptions</i>	<ul style="list-style-type: none"> The metallurgical process proposed and the appropriateness of that process to the style of mineralisation. Whether the metallurgical process is well-tested technology or novel in nature. The nature, amount and representativeness of metallurgical test work undertaken, the nature of the metallurgical domaining applied and the corresponding metallurgical recovery factors applied. Any assumptions or allowances made for deleterious elements. 	<ul style="list-style-type: none"> No Mineral Resource defined

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <i>The existence of any bulk sample or pilot scale test work and the degree to which such samples are considered representative of the orebody as a whole.</i> <i>For minerals that are defined by a specification, has the ore reserve estimation been based on the appropriate mineralogy to meet the specifications?</i> 	
Environmental	<ul style="list-style-type: none"> <i>The status of studies of potential environmental impacts of the mining and processing operation. Details of waste rock characterisation and the consideration of potential sites, status of design options considered and, where applicable, the status of approvals for process residue storage and waste dumps should be reported.</i> 	<ul style="list-style-type: none"> No Mineral Resource defined
Infrastructure	<ul style="list-style-type: none"> <i>The existence of appropriate infrastructure: availability of land for plant development, power, water, transportation (particularly for bulk commodities), labour, accommodation; or the ease with which the infrastructure can be provided, or accessed.</i> 	<ul style="list-style-type: none"> No Mineral Resource defined
Costs	<ul style="list-style-type: none"> <i>The derivation of, or assumptions made, regarding projected capital costs in the study.</i> <i>The methodology used to estimate operating costs.</i> <i>Allowances made for the content of deleterious elements.</i> <i>The source of exchange rates used in the study.</i> <i>Derivation of transportation charges.</i> <i>The basis for forecasting or source of treatment and refining charges, penalties for failure to meet specification, etc.</i> <i>The allowances made for royalties payable, both Government and private.</i> 	<ul style="list-style-type: none"> No Mineral Resource defined
Revenue factors	<ul style="list-style-type: none"> <i>The derivation of, or assumptions made regarding revenue factors including head grade, metal or commodity price(s) exchange rates, transportation and treatment charges, penalties, net smelter returns, etc.</i> <i>The derivation of assumptions made of metal or commodity price(s), for the principal metals, minerals and co-products.</i> 	<ul style="list-style-type: none"> No Mineral Resource defined

Criteria	JORC Code explanation	Commentary
Market assessment	<ul style="list-style-type: none"> The demand, supply and stock situation for the particular commodity, consumption trends and factors likely to affect supply and demand into the future. A customer and competitor analysis along with the identification of likely market windows for the product. Price and volume forecasts and the basis for these forecasts. For industrial minerals the customer specification, testing and acceptance requirements prior to a supply contract. 	<ul style="list-style-type: none"> No Mineral Resource defined
Economic	<ul style="list-style-type: none"> The inputs to the economic analysis to produce the net present value (NPV) in the study, the source and confidence of these economic inputs including estimated inflation, discount rate, etc. NPV ranges and sensitivity to variations in the significant assumptions and inputs. 	<ul style="list-style-type: none"> No Mineral Resource defined
Social	<ul style="list-style-type: none"> The status of agreements with key stakeholders and matters leading to social licence to operate. 	<ul style="list-style-type: none"> No Mineral Resource defined
Other	<ul style="list-style-type: none"> To the extent relevant, the impact of the following on the project and/or on the estimation and classification of the Ore Reserves: Any identified material naturally occurring risks. The status of material legal agreements and marketing arrangements. The status of governmental agreements and approvals critical to the viability of the project, such as mineral tenement status, and government and statutory approvals. There must be reasonable grounds to expect that all necessary Government approvals will be received within the timeframes anticipated in the Pre-Feasibility or Feasibility study. Highlight and discuss the materiality of any unresolved matter that is dependent on a third party on which extraction of the reserve is contingent. 	<ul style="list-style-type: none"> No Mineral Resource defined
Classification	<ul style="list-style-type: none"> The basis for the classification of the Ore Reserves into varying confidence categories. Whether the result appropriately reflects the Competent Person's view of the deposit. 	<ul style="list-style-type: none"> No Mineral Resource defined

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> The proportion of Probable Ore Reserves that have been derived from Measured Mineral Resources (if any). 	
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of Ore Reserve estimates. 	<ul style="list-style-type: none"> No Mineral Resource defined
Discussion of relative accuracy/confidence	<ul style="list-style-type: none"> Where appropriate a statement of the relative accuracy and confidence level in the Ore Reserve estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the reserve within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors which could affect the relative accuracy and confidence of the estimate. The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. Accuracy and confidence discussions should extend to specific discussions of any applied Modifying Factors that may have a material impact on Ore Reserve viability, or for which there are remaining areas of uncertainty at the current study stage. It is recognised that this may not be possible or appropriate in all circumstances. These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. 	<ul style="list-style-type: none"> No Mineral Resource defined