

8 July 2022

Wellington North and Myall Project Update

- Final assay results now received for recent diamond drilling at the Bodangora Goldfield, located immediately to the southwest of Alkane Resource's (ASX:ALK) 10.1Moz Au equivalent Boda discovery¹
- Strong, shallow gold mineralisation intercepted on the north-western side of the Dicks Reward historic workings, including:
 - 1.7 metres at 12.9g/t Au & 8g/t Ag from 65.5m
 - 0.35 metres at 10.7g/t Au & 12g/t Ag from 78.8m
- Drilling confirms gold mineralisation remains open along strike to the northwest and at depth
- Further work on the project will focus on extensions to the existing workings and the potential for high grade repeat lodes in the broader Bodangora region
- Revised permitting approved this week for the construction of formed, all-weather drill pads for high impact drilling campaign at Myall
 - Site preparations have now commenced, including improvements to site access roads
 - Drilling will target up to four high priority target areas in the greater Kingswood prospect area
 - Subject to rainfall and access conditions, drilling is expected to commence within the next 14 days

Magmatic Resources ('ASX:MAG' or 'the Company') is pleased to provide an update to ongoing New South Wales exploration activities at its 100% owned Wellington North Project, located immediately adjacent to Alkane Resources' Boda Discovery (ASX:ALK), and at the Myall Project north of the Northparkes Cu-Au Mining District (CMOC/Sumitomo).

High grade gold mineralisation intercepted at Dicks Reward

Magmatic Resources is continuing with intensive exploration at the historic Bodangora Goldfield located in the eastern portion of the Wellington North project area (**Figure 1**), only kilometres southwest of Alkane's 10.1Moz AuEq Boda discovery (ASX ALK 30 May 2022). The Bodangora Goldfield produced an estimated 230,000 ounces of gold between 1869 and 1917, with production from multiple workings including the Mitchell's Creek Mine in the east and the Dicks Reward Mine in the west. Mining was typically from narrow, high grade quartz veins that averaged 23g/t gold (ASX MAG 17 May 2017).

The Company has completed five diamond holes totaling 714 metres at the Dicks Reward workings (ASX MAG 8 June 2022), targeting extensions along strike to the northwest and southeast of the historic workings (**Figure 2**). Final assays have now been received for this program, including the following significant intercepts:

22BNDD023	1.7 metres at 12.9g/t Au & 8g/t Ag from 65.5m
22BNDD024	1.0 metres at 0.5g/t Au from 58.0m
	0.35 metres at 10.7g/t Au from 78.8m
22BNDD025	1.0 metres at 1.4g/t Au from 62.0m
	0.3 metres at 1.3g/t Au from 66.8m

¹See ASX ALK 30 May 2022

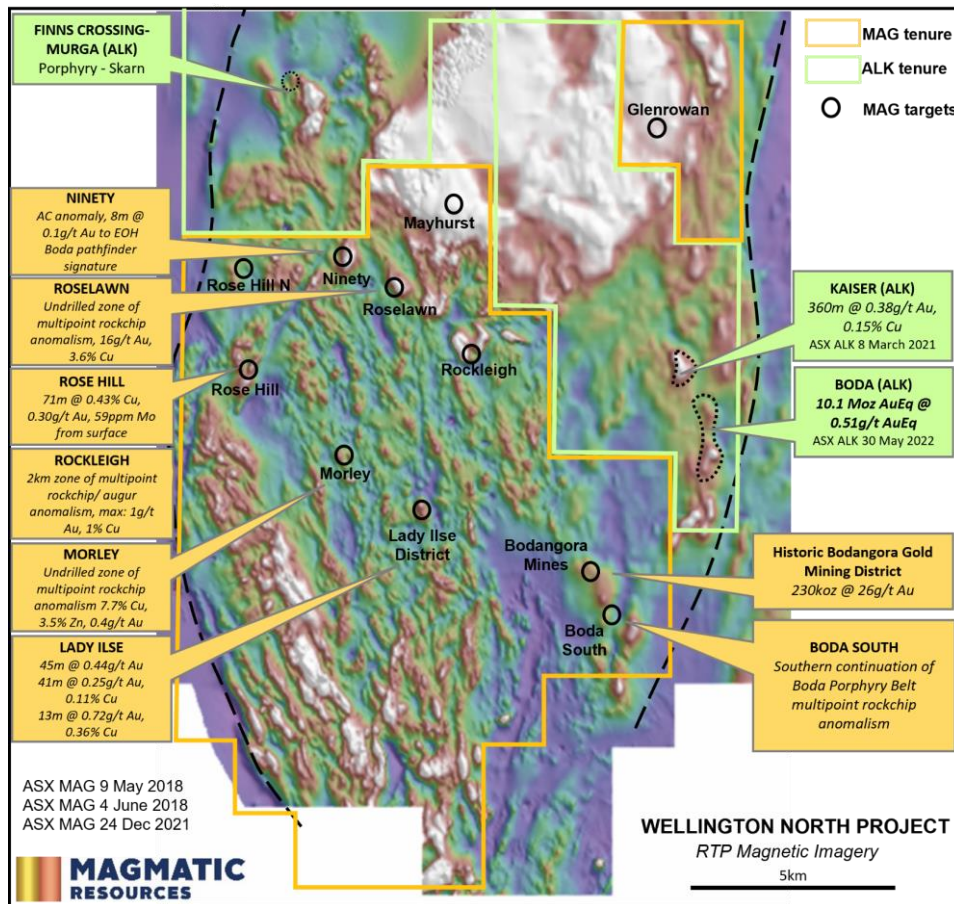


Figure 1. Aeromagnetic imagery (RTP) showing the Magmatic's target portfolio in the Wellington North Project area and highlighting the proximity to the 10.1Moz AuEq Boda discovery (ASX ALK 30 May 2022).

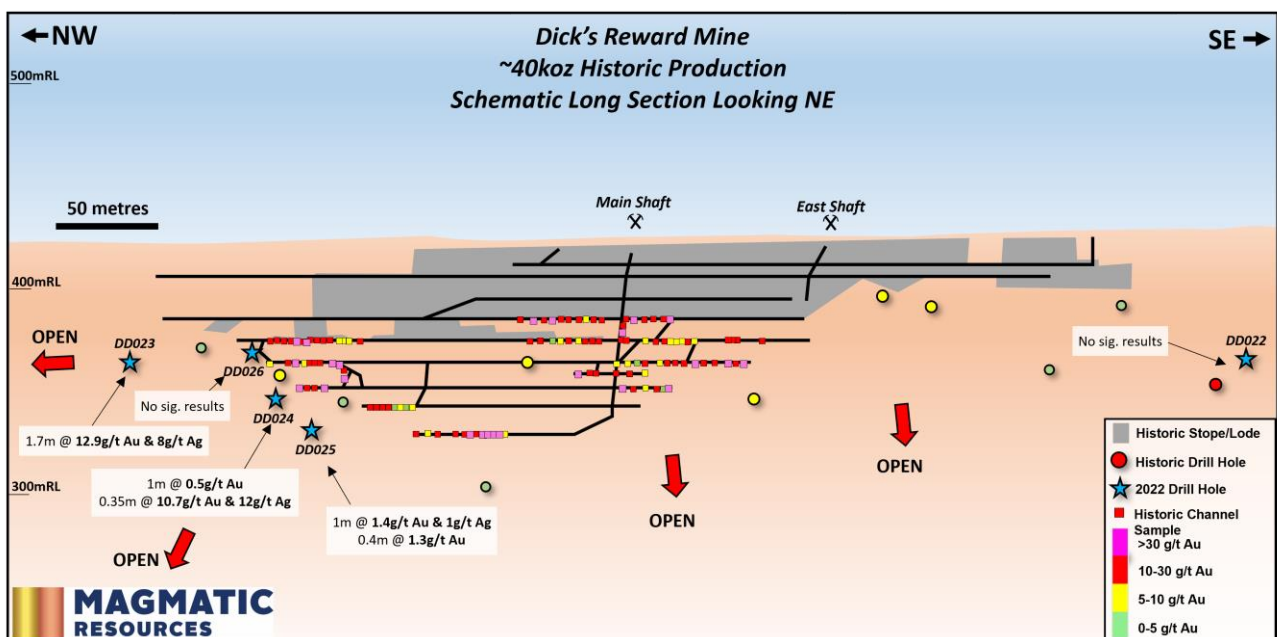


Figure 2. Schematic long section looking northeast showing the historic workings at the Dicks Reward mine in the Bodangora Goldfield showing results from recent diamond drilling.



Figure 3. Diamond core image from Dicks Reward hole 22BNDD024 showing an auriferous quartz vein with sulphides at ~79m down hole. This interval pictured returned a grade of **10.7g/t Au & 12g/t Ag**.

The Company is particularly encouraged by the results in hole 22BNDD023 (**1.7 metres at 12.9g/t Au**), which indicates that shallow, high grade mineralisation remains open to the northwest of the Dicks Reward workings (**Figure 2**). Further supporting the potential along strike, recent air core geochemical drilling (see previous ASX release on 8 June 2022) highlights a shallow, single point gold anomaly in a similar position around 80 metres west of 22BNDD023 (**Figure 4**).

The results in the holes that were drilled close to the workings (22BNDD024, 025 and 026) were quite variable but do indicate the presence of further high grade mineralisation, including **0.35 metres at 10.7g/t Au** in 22BNDD024 (**Figure 3**). Significant potential mineralisation may also be present below the central portion of the deposit, which was not able to be drilled due to the exceptionally wet conditions prevailing in the region.

The Company is currently reviewing the geological data collected from the most recent diamond drilling and the air core geochemical survey completed earlier in the year. Further work on the project will focus on extensions to the existing workings (particularly Dicks Reward) and the potential for high grade repeat lodes in the broader Bodangora region.

Drill hole details and a full list of significant intercepts associated with the recent drilling can be found in **Tables 1 & 2**, respectively.

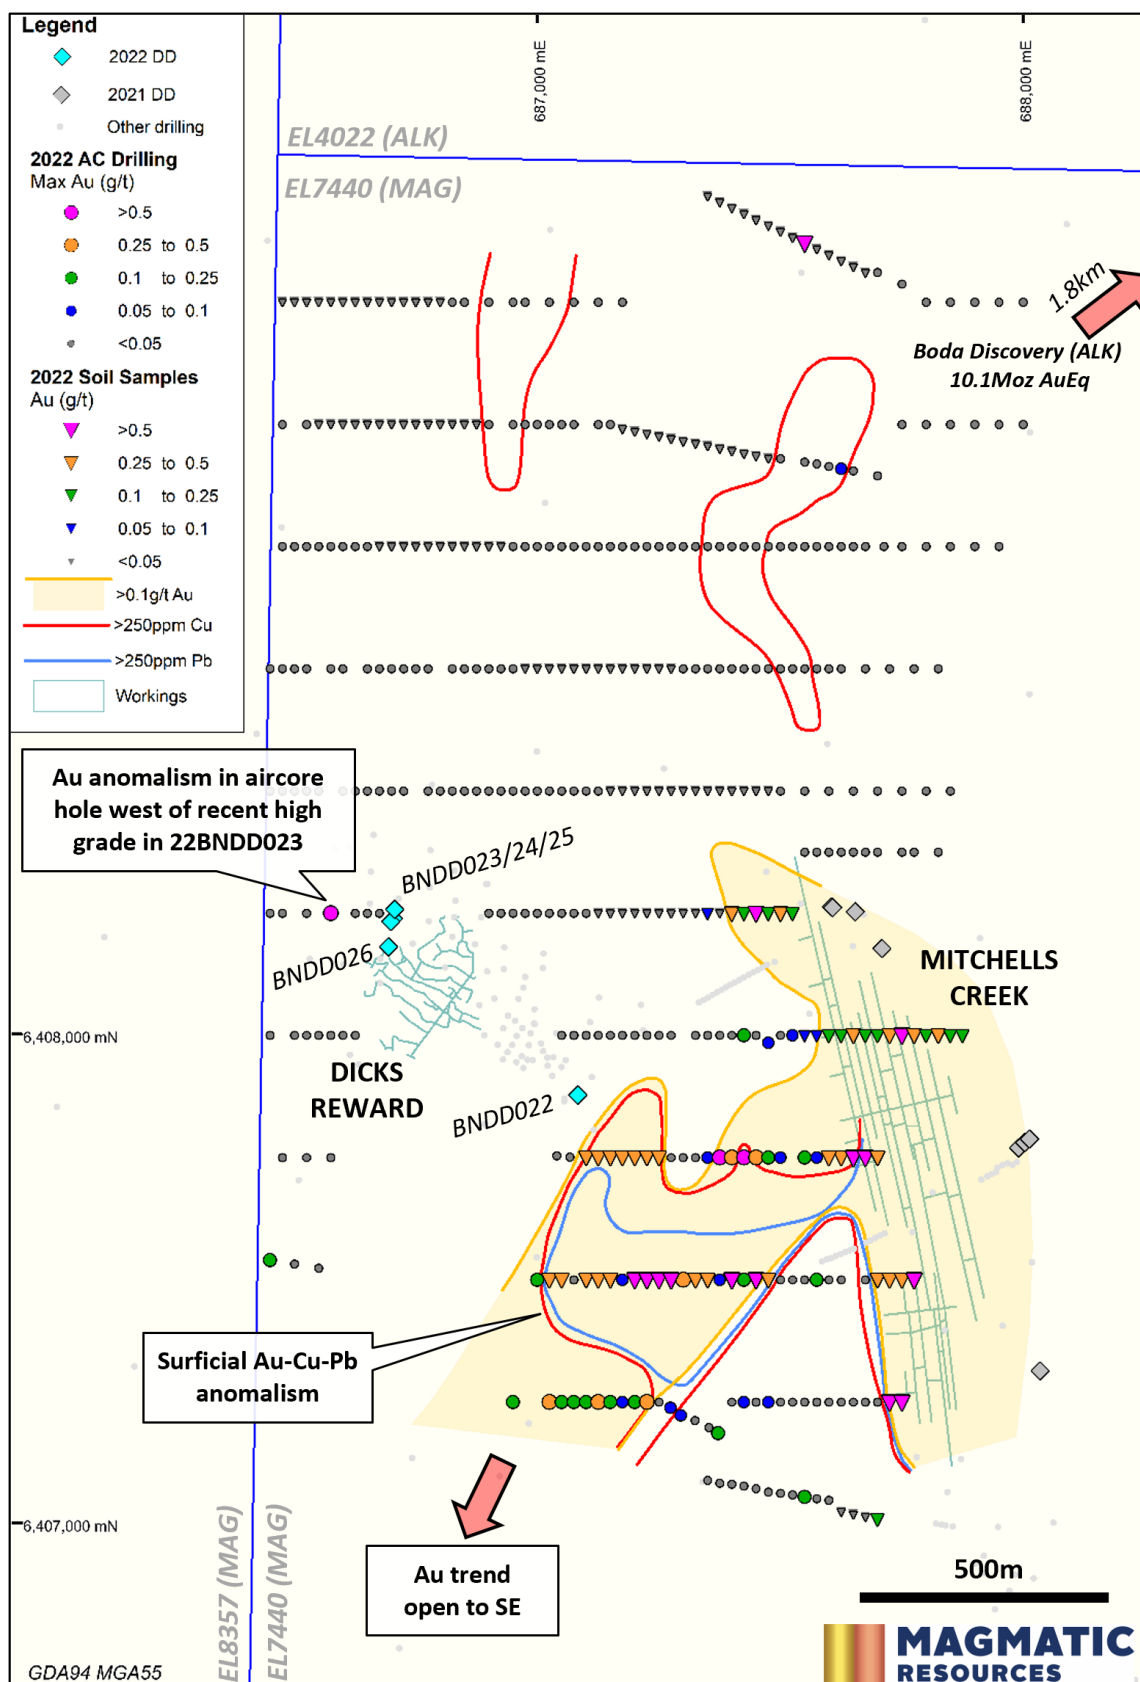


Figure 4. Plan of the Bodangora region showing the location of recently completed air-core drill holes and infill soil samples in reference to the historic Mitchell's Creek and Dick's Reward workings. Diamond collar locations are also shown for the recent Dicks Reward drilling.

Permits received for drilling program at Myall

The Myall Copper-Gold Project covers the northern extension of the Junee - Narromine Volcanic Belt, located approximately 50km north and along strike from China Molybdenum/Sumitomo's Northparkes copper-gold mine (**Figure 5**). Myall is considered highly prospective for Northparkes-style copper-gold porphyry mineralisation, with multiple strong copper-gold intercepts already drilled e.g. **70m @ 0.54% Cu, 0.15g/t Au** (MYACD001, ASX MAG 4 June 2017).

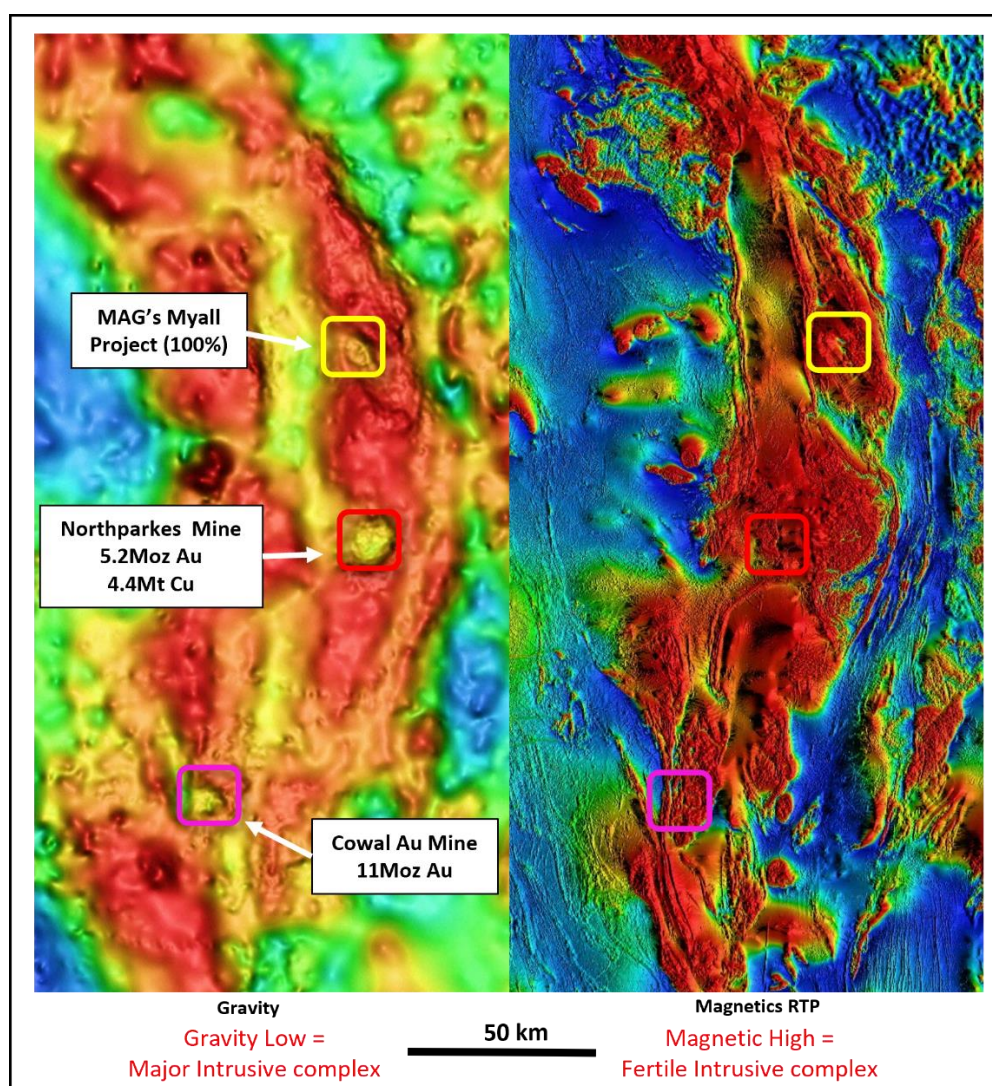


Figure 5. Regional gravity and magnetic imagery highlighting the similarities between Myall Project and the major deposits of the Junee-Narromine Belt in the East Lachlan region of New South Wales.

Following a review of the extensive copper-gold potential of the Myall Project, Magmatic has designed a high impact drilling program of ~3,000 metres targeting the broader Kingswood prospect area (**Figure 6**). Historic and recent drilling has already established an extensive footprint of porphyry-associated copper/gold mineralisation and alteration, however given the large scale of the area most prospects remain open or poorly tested in every direction (**Figure 7**). The demonstrated fertility of the igneous complex, the size and intensity of the basement copper anomaly and the tenor of the existing drill intercepts highlight the enormous potential for a major discovery.

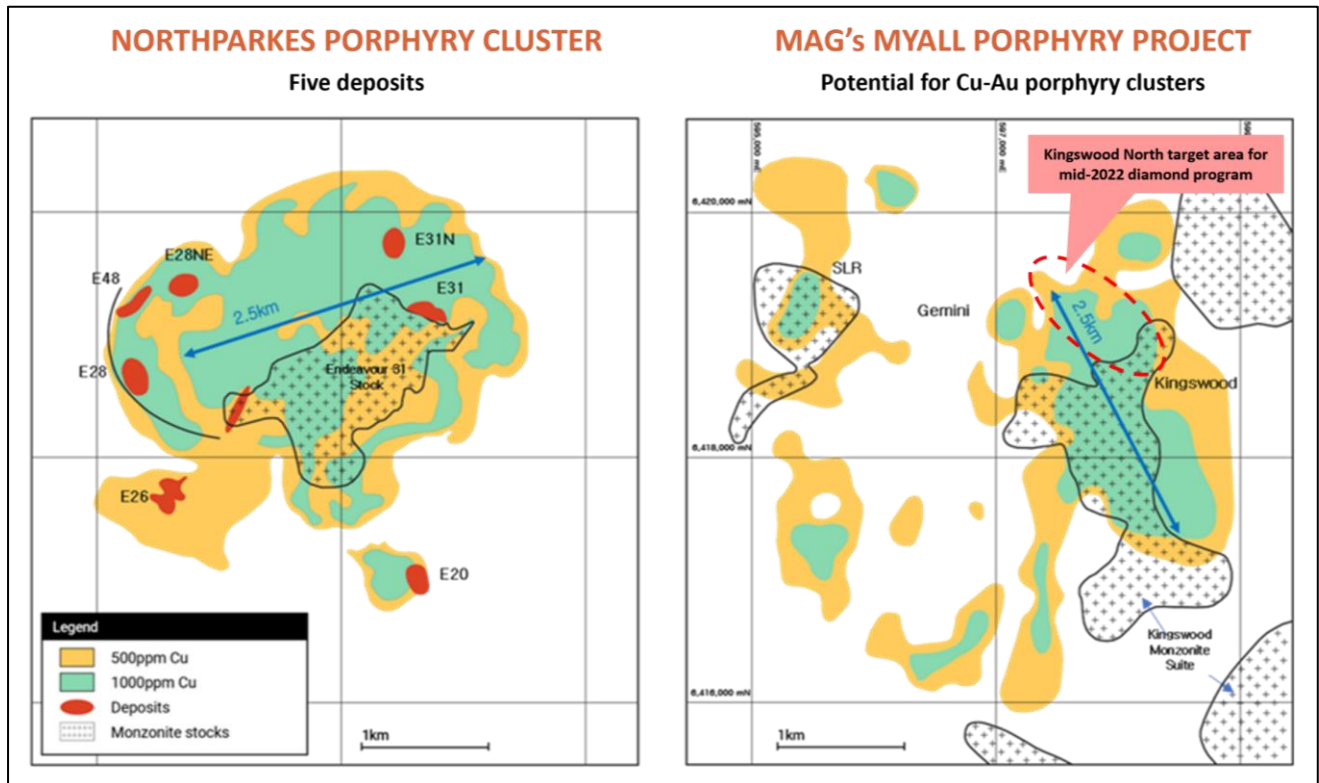


Figure 6. Comparison between the Northparkes porphyry mining district (left) and the Myall project area (right) at the same scale, showing copper regolith anomalism (MAG ASX 31 January 2019), Northparkes modified after Heithersay and Walshe (1995), Phillips (2017). The Kingswood North area to be targeted in the upcoming drilling is also shown.

The program design has now been optimised and will target major step out extensions to known mineralisation associated with holes MYACD001 and 21MYDD412 at Kingswood and both around and along strike of holes ACDNM090 to ACDNM093 (**Figures 7 & 8**). Given the pipe-like and/or irregular geometries known to occur in porphyry deposits in the region, the Company will look to employ oblique orientations and/or scissor holes around existing mineralisation to effectively test potential high grade geometries and grade profiles.

Initial drilling will target the high grade zone encountered in the historic Newcrest drill hole ACDNM090, which included multiple zones of +1% Cu, located at the contact zone between intermediate intrusives and andesitic to basaltic volcanics (**Figure 8**).

The Company is also pleased to report that a revised Assessable Prospecting Operation (APO) application to allow for the construction of formed, all-weather drilling pads at the site was approved by the New South Wales Resources Regulator this week. The revised permit was considered essential to the successful execution of the upcoming Myall program given the flat topography at Kingswood and the exceptionally high ongoing rainfall experienced in region.

Site preparation work has now commenced, including improvements to site access and drainage. The drill contractor is expected to mobilise to the prospect area within the next 14 days, with actual timing dependent on the ground conditions and any further significant rainfall events. The drilling component of the program is expected to continue for approximately eight weeks from commencement.

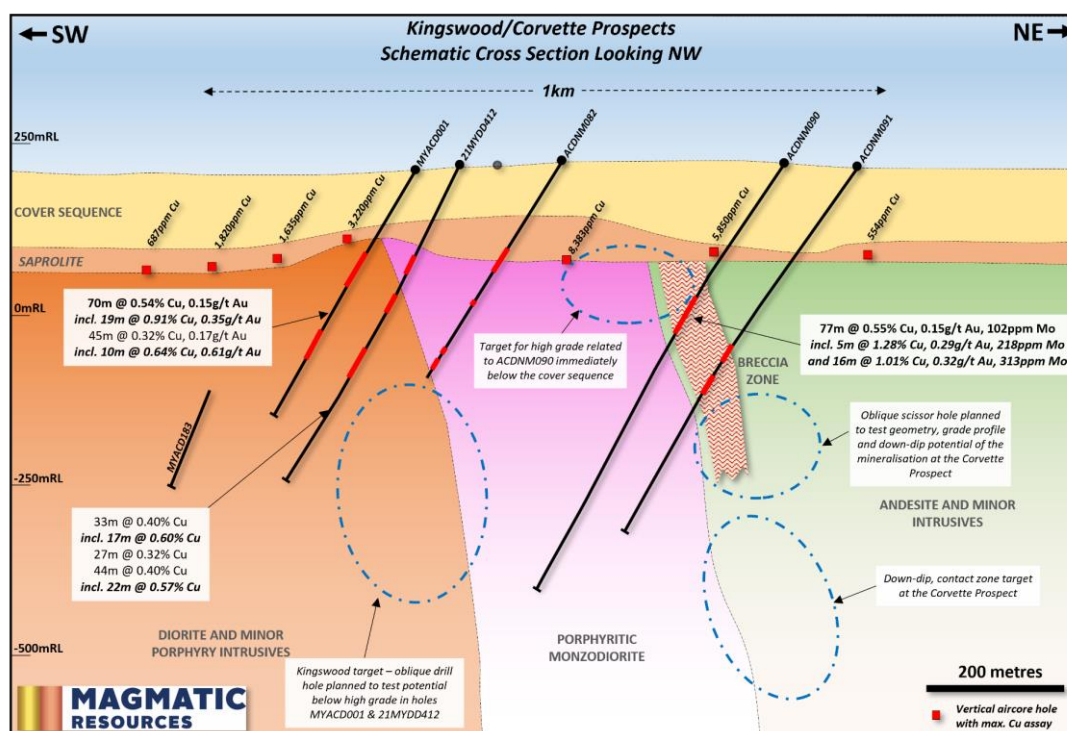
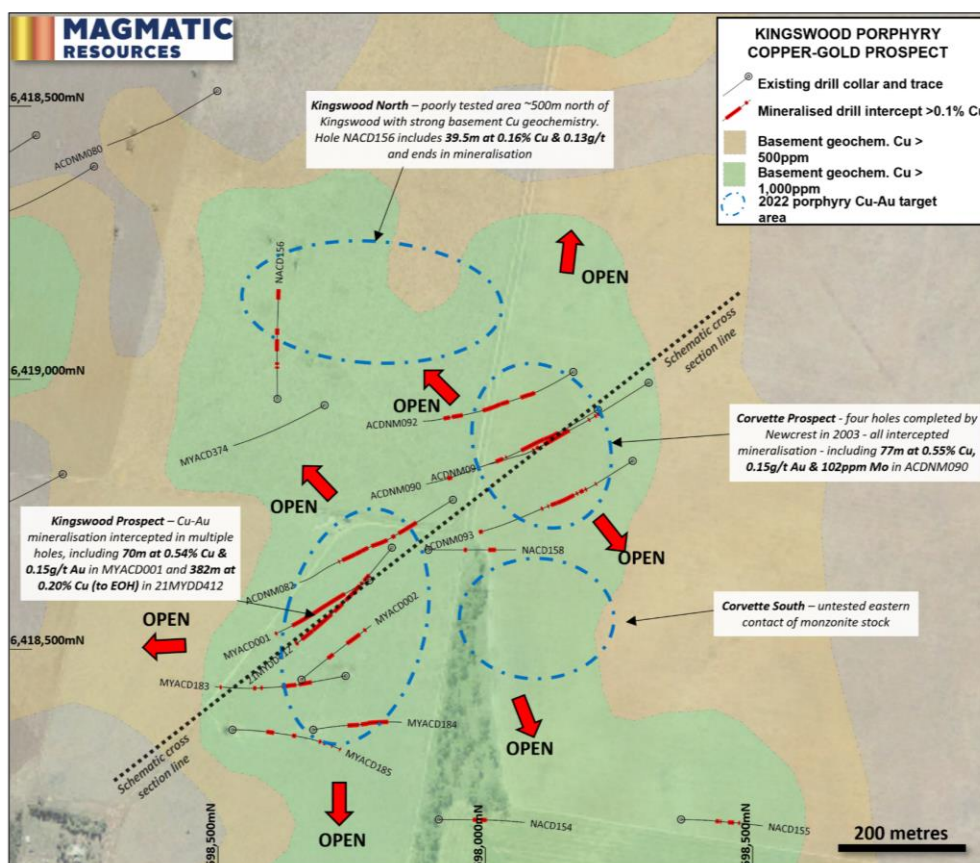


Figure 8. Schematic long section of the Kingswood/Corvette prospect areas at the Myall Project showing historic drilling and key areas to be targeted by drilling in the upcoming program.

About Magmatic Resources (ASX:MAG)

Magmatic Resources Limited (ASX: MAG) is a New South Wales-focused gold and copper explorer.

In 2014, Magmatic completed the acquisition of an advanced gold-copper portfolio in the East Lachlan from Gold Fields Limited. Gold Fields had completed a major phase of target generation across four main projects (Wellington North, Parkes, Myall, Moorefield), identifying over 60 targets.


The East Lachlan has an endowment of more than 80 million ounces of gold and 13 million tonnes of copper. It is home to Newcrest Mining's Cadia Valley District, which includes the Cadia East Mine, Australia's largest gold mine and one of the world's most profitable gold mines. The Northparkes copper-gold mine (China Molybdenum/Sumitomo) and Cowal Mine (Evolution Mining) are also significant long-life gold-copper mining operations in the region.

Magmatic's three Wellington North tenements effectively surround the recent 10.1Moz AuEq Boda discovery (ASX ALK 30 May 2022). The Bodangora tenement is located ~2km from Boda and encompasses the historic Bodangora Gold Field, where high grade gold mining occurred with recorded production of 230,000 ounces @ 26g/t Au between 1869-1917.

The Company also holds a strategic position in the Parkes Fault Zone (Parkes Project), immediately south from Alkane's Tomingley Gold Mine and recent Roswell and San Antonio gold discoveries.

The Myall Copper-Gold Project covers the northern extension of the Junee – Narromine Volcanic Belt, located ~50km north and along strike from the Northparkes copper-gold mining district (China Molybdenum/Sumitomo). Multiple existing copper-gold-molybdenum intercepts, including 70m at 0.54% Cu, 0.15g/t Au and 62m at 0.27% Cu, 0.13g/t (ASX MAG 4 June 2017) highlight near equivalent grades to the Northparkes Mine global Resource and indicate potential for a fertile porphyry cluster at Myall. Magmatic's recent drilling included 381.9m @ 0.20% Cu, 8.25ppm Mo from 150m to EOH (21MYDD412).

In 2021 MAG demerged its wholly owned subsidiary Australian Gold and Copper Limited (AGC) along with its Moorefield orogenic gold project. AGC also acquired two other NSW gold-base metals projects and listed on the ASX in January 2021. Magmatic is a major shareholder in AGC.

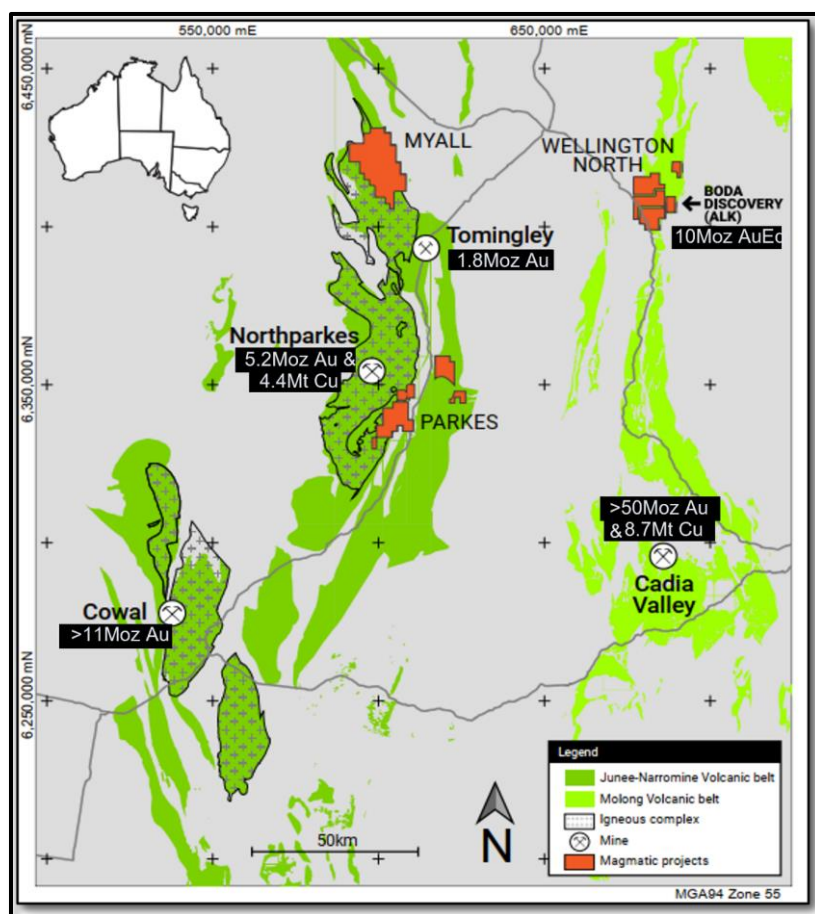

For further information:

Dr Adam McKinnon
Managing Director
Magmatic Resources Limited
+61 (0) 411 028 958
info@magmaticresources.com
www.magmaticresources.com

Authorised for release by the Board of Directors of Magmatic Resources Limited

Competent Persons Statement

The information in this document that relates to Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Dr Adam McKinnon who is a Member of the AusIMM. Dr McKinnon is Managing Director and a full-time employee of Magmatic Resources Limited, and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Dr McKinnon consents to the inclusion in this presentation of the matters based on his information in the form and context in which it appears.

Additionally, Dr McKinnon confirms that the entity is not aware of any new information or data that materially affects the information contained in the ASX releases referred to in this report.

Previously Reported Information

The information in this report that references previously reported exploration results is extracted from the Company's ASX market announcements released on the date noted in the body of the text where that reference appears. The previous market announcements are available to view on the Company's website or on the ASX website (www.asx.com.au). The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Disclaimer

This report contains certain forward-looking statements and forecasts, including possible or assumed reserves and resources, production levels and rates, costs, prices, future performance or potential growth of Magmatic Resources Limited, industry growth or other trend projections. Such statements are not a guarantee of future performance and involve unknown risks and uncertainties, as well as other factors which are beyond the control of Magmatic Resources Limited. Actual results and developments may differ materially from those expressed or implied by these forward-looking statements depending on a variety of factors. Nothing in this report should be construed as either an offer to sell or a solicitation of an offer to buy or sell securities.

This document has been prepared in accordance with the requirements of Australian securities laws, which may differ from the requirements of United States and other country securities laws. Unless otherwise indicated, all ore reserve and mineral resource estimates included or incorporated by reference in this document have been, and will be, prepared in accordance with the JORC classification system of the Australasian Institute of Mining, and Metallurgy and Australian Institute of Geoscientists.

Table 1. Hole details for recent diamond drilling at the Dicks Reward Mine.

Target	Hole ID	Easting (MGA55)	Northing (MGA55)	RL (m)	Dip	Azimuth (MGA)	Depth (m)
Dicks Reward	22BNDD022	687,083	6,407,877	430	-70	258	174.7
Dicks Reward	22BNDD023	686,703	6,408,238	422	-65	282	177.6
Dicks Reward	22BNDD024	686,698	6,408,232	422	-60	160	132.5
Dicks Reward	22BNDD025	686,707	6,408,257	423	-60	142	129.6
Dicks Reward	22BNDD026	686,694	6,408,180	421	-75	162	99.6

Table 2. Significant assay results (0.1g/t Au threshold) for recent diamond drilling at the Dick Reward Mine.

Hole_ID	Interval	Au (g/t)	Ag (g/t)	From (m)
22BNDD022	No sig. intercepts			
22BNDD023	1.7	12.9	8	65.5
22BNDD024	1.0	0.5	0	58.0
	0.35	10.7	12	78.8
22BNDD025	1.0	1.4	1	62.0
	0.4	1.3	0	66.8
	0.3	0.8	3	69.5
22BNDD026	No sig. intercepts			

Appendix I – JORC Code, 2012 Edition – Table 1

Section 1 Results of diamond drilling: Wellington North Project: Bodangora exploration programs

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	Bodangora Gold Field was drilled with diamond drilling techniques. Core sizes were PQ core (diameter: 85 mm) to fresh rock and then HQ core (diameter: 63.5mm) to end of hole (eoh). Magmatic used a reputable drilling contractor; Ophir Drilling ('Ophir') with a suitable rig. Diamond drill core provide a high-quality sample that are logged for lithological, structural, geotechnical, and other attributes. Sub-sampling of the core is carried out as per industry best practice.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	The HQ drill core was orientated using suitable core orientation tool by the drilling contractor with Magmatic Resources staff supervision. These orientations are extended onto the remainder of the core and meter marks for logging. The visible structural features (veins, bedding, foliation, faults) are measured against the core orientation marks. The mineralised interval of drill core was cut in quarter (PQ) or half (HQ) and assayed at a certified assay laboratory, ALS Laboratories. Core is prepared for analysis by cutting along the longitudinal line and then samples are numbered as per the pre-designed cut-sheet. The sample stream is selectively sampled down the drill string at 1m nominal intervals across the mineralised zones, unless selected geological or mineralisation boundaries. Selected holes are entirely sampled. Where core was incompetent due to being transported cover or weathered rock (PQ only), representative samples were collected along the axis of the core. This information is recorded in the cut-sheet and loaded into database. Additionally, for selected holes, the alluvial cover and saprolite was sampled (up to 9m depth)
	<i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where</i>	The drill core was cut by Magmatic contractors and staff. DD samples were transported to ALS Laboratory in Orange for assaying. Samples are crushed to 6mm and then pulverized to 90% passing -75 microns. A 50g split of the sample was fired assayed for gold. The lower detection limit for gold is 0.005 ppm, which is believed to be an appropriate detection level. All other elements including copper and base metals (total 48 element suite) are analysed using a 4-acid acid digest and an ICP finish (ALS code: ME-MS61 + AU-AA24).

Criteria	JORC Code explanation	Commentary
	<i>there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	Assay standards, blanks and duplicates were analysed as part of the standard laboratory analytical procedures. Company standards were also introduced into the sampling stream at a nominal ratio of about 1 standard for every 50 samples. Sample length: For selected core: 1m sample lengths except for minor changes due to geological or mineralisation boundaries. Pulps are retained by Magmatic for potential follow-up assaying.
<i>Drilling techniques</i>	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Diamond drilling using industry standard techniques. Core sizes were PQ core (diameter: 85 mm) to fresh rock and then HQ core (diameter: 63.5mm) to end of hole (eoh).
<i>Drill sample recovery</i>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Diamond drill core recoveries were recorded during drilling and reconciled during the core processing and geological logging. There was a consistent competency encountered in the rocks during drilling and no significant drill core lost occurred during drilling.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Diamond drill core is measured and marked after each drill run using wooden blocks calibrating depth. Adjusting rig procedures as necessary including drilling rate, run length and fluid pressure to maintain sample integrity.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No detailed analysis to determine relationship between sample recovery and gold or base metals grade has been undertaken for this diamond drilling.
<i>Logging</i>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Systematic geological and geotechnical logging was undertaken. Data collected includes: <ul style="list-style-type: none"> • Nature and extent of lithologies. • Relationship between lithologies. • Amount and mode of occurrence of minerals such as pyrite and chalcopyrite. • Location, extent and nature of structures such as bedding, cleavage, veins, faults etc. Structural data (alpha & beta) are recorded for orientated core. • Geotechnical data such as recovery, RQD, fracture frequency, qualitative IRS, microfractures, veinlets and number of defect sets may be collected as required. • Magnetic susceptibility recorded at 1m intervals

Criteria	JORC Code explanation	Commentary
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Drill core is logged as both qualitative (discretionary) and quantitative (volume percent). Core is photographed dry and wet. AC drilling – drill chips are logged for each meter.
	<i>The total length and percentage of the relevant intersections logged.</i>	The entire holes are geologically logged (100%).
<i>Sub-sampling techniques and sample preparation</i>	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Core was cut using an Almonte automatic core saw. All samples are collected from the same side of drill core. The full interval of half-core sample is submitted for assay analysis, except PQ where ¼ core was taken. Where core was incompetent due to being transported cover or weathered rock, representative samples were collected along the axis of the core. This information is recorded in the cut-sheet and loaded into database.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Not applicable – core drilling.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Drill core is cut in half (or quarter for PQ) along the length and the total half (or quarter) core submitted as the sample. This procedure meets industry standards where 50% (or 25%) of the total sample taken from the diamond core is submitted. All mineralised intervals and surrounding wallrock were submitted for assay. Selected holes were entirely sampled. Sample weights are recorded by the lab.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	No sub-sampling is completed by Magmatic. All sub-sampling of the prepared core is completed by the laboratory.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	The retention of the remaining half-core is an important control as it allows assay values to be viewed against the actual geology; and, where required, further samples may be submitted for quality assurance. No resampling of quarter core or duplicated samples have been completed at the project.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The sample sizes are appropriate to correctly represent the mineralization based on style of mineralisation.

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Samples are crushed in the laboratory to 6mm and then pulverized to -75 microns. A 50g split of the sample is fire assayed for gold. The lower detection limit for gold is 0.005 ppm, which is believed to be an appropriate detection level. All other elements including silver and base metals are analysed using a four-acid digest and an ICPMS finish.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools or other handheld XRF instruments were used to determine grade. Magnetic susceptibility was taken for every metre using a Terraplus KT-10 magnetic susceptibility meter.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Laboratory QAQC involves use of internal Lab standards using certified reference material, blanks, splits and replicates as part of their procedures. Magmatic submitted independent standards inserted approximately every 50 samples.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Data is loaded into an industry-standard database and standard intercepts calculated. Assay data and intercepts are cross checked internally by Magmatic geologists. Where required, significant intersections are calculated manually and cross-checked by a second geologist.
	<i>The use of twinned holes.</i>	Early stage exploration and no holes have been twinned.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Sample data was recorded on a standard sample ledger sheet and transferred to digital format. Digital sample ledgers were transferred to secure servers. Data was plotted using Micromine software against detailed aerial photography to ensure accuracy of the recorded locational data. Data was verified by Magmatic geologists. Data backups are employed both on and off site. All data is stored on an off-site industry standard database. Full exports are held onsite and backed up on secure cloud-based servers.
	<i>Discuss any adjustment to assay data.</i>	No adjustment or calibration are made on any primary assay data collected for purposes of reporting assay grade and mineralised intervals.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Drill hole collar was located using registered surveyor to $\pm 0.1\text{m}$ precision. Industry standard down hole surveys were collected every 30-60m down the drill hole during drilling using a down-hole camera, and selected holes surveyed 6m on completion of hole using a north-seeking gyro (e.g. Axis Champ Navigator).

Criteria	JORC Code explanation	Commentary
	<i>Specification of the grid system used.</i>	All coordinates are based on Map Grid Australia Zone 55, Geodetic Datum of Australia 1994.
	<i>Quality and adequacy of topographic control.</i>	Topographic control is maintained by use of widely available government datasets and survey pickups. Ground is hilly, but not steep.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	Drill holes are preferentially located in prospective areas.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	The mineralised areas are yet to demonstrate sufficient grade or continuity to support the definition of a Mineral Resource and the classifications applied under the 2012 JORC code.
	<i>Whether sample compositing has been applied.</i>	See previous section.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	The angled drill hole was directed as best as reasonably possible directly across the known lithological and interpreted mineralisation orientation.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	No orientation-based sampling bias has been identified in the data. Further structural work would be required to determine any sampling bias due to hole orientation.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Core was returned to a secure location each night and is stored in secured storage.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews have been conducted at this stage.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	EL7440 Bodangora is located 10km north of Wellington, NSW, and covers 6 graticular units with an area of 17.4km ² . The authority was granted to Gold Fields Australasia Pty Ltd for 2 years on 8/01/2010 and then subsequently renewed until 8/01/2027.

Criteria	JORC Code explanation	Commentary
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	A number of gazetted sealed and unsealed roads traverse the authority. The land use is mainly cropping with minor grazing.
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<p>Cluff (1980 - 1990) conducted detailed mapping, rock chip sampling, underground surveying and underground channel sampling. In addition, Cluff drilled RAB and DD holes.</p> <p>Rio Tinto (~1995 - 1996) drilled RAB, RC and DD holes</p> <p>Newcrest (~1997 - 1998) drilled AC holes.</p> <p>Alkane Resources (2005 - 2011) conducted high resolution airborne magnetics; re-assayed Cluff's "diamond holes and drilled RC holes.</p> <p>Historic drilling data has been largely validated with the location of historic mining activity digitised and located for the two main mining areas at Mitchells Creek and Dicks Reward.</p>
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	Bodangora EL7440 is situated on eastern margin of the Macquarie Arc where it is overlain by Silurian Mumbil Group sediments and Quaternary colluvium and alluvium. The tenement covers the Bodangora Goldfield which encompasses numerous historical workings and gold mines including Mitchells Creek and Dicks Reward. The Mitchells Creek gold mine was last worked in the late 1980s and is associated with narrow (0.2m to 1.2m) polymetallic quartz-sulphide veins which averaged 26g/t Au. The vein was mined intermittently over 1,200m of strike and up to 350m deep, with recorded production of 230koz Au across the field. The gold is associated with NNW-striking, east-dipping, polymetallic (Au-Ag-As-Cu-Pb-Zn-Bi-Te-Sb-Hg), quartz-sulphide lodes, hosted in pervasive silica-sericite-carbonate-chlorite-albite-pyrite altered volcanic-derived sediments and basaltic-andesitic volcanic rocks.
<i>Drill hole Information</i>	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i> 	See body of announcement.
	<i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Non-significant assay values were not individually reported. Lower cut-offs are shown in the results tables.

Criteria	JORC Code explanation	Commentary
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	Gold and copper intersections, with minimum cut-offs, have been calculated and are reported in the body of the report. No maximum cut-offs have been applied.
	<i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	Not applicable.
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Not reporting on metal equivalent.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i>	Down-hole lengths only, true width not known.
	<i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i>	Structural logging of the core indicates a broadly moderate dipping target zone.
	<i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	Down-hole lengths are reported for the diamond drilling. Exact true widths are unknown but are estimated to be between 75-100% of the of the down hole widths.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	See figures in body of report.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All drilling results have been reported at cut-off as shown in Tables.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater,</i>	See body of report.

Criteria	JORC Code explanation	Commentary
	<i>geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	See body of report.
	<i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	See figures in body of report.