

ASX RELEASE | 6 January 2023

Strong lithium mineralisation recorded from first Adina drill hole assays

HIGHLIGHTS

- Assays from Adina drill hole AD-22-005 show impressive lithium mineralisation, recording 1.34% Li₂O over 107.6m
- Includes exceptionally high-grade intersections of up to 2.21% Li₂O over 30.0m from 41.0m to 71.0m (AD-22-005)
- Additional significant mineralised pegmatite interval intercepted reporting 1.08% Li₂O over 30.0m from 147.0m to 177.0m (AD-22-005).
- More assays on visual lithium mineralisation in core will be reported to the market in the next a couple of weeks
- Comes on back of recent drilling identifying impressive extension of main pegmatite body strike length to 620m with further extension expected
- Spodumene pegmatites appear to follow a large and continuous gravity low anomaly, leaving it open in all directions.
- Drilling program at Adina extended significantly from 5,000m to more than 20,000m

Winsome Resources (ASX:WR1; “**Winsome**” or “**the Company**”) is pleased to announce initial assay results from its drill hole **AD-22-005** and provide an update on its ongoing diamond drilling program at its 100 per cent-owned Adina project in Quebec, Canada.

Despite initial delays in receiving assays due to high volumes being received by laboratories in Canada, the Company is satisfied assay results for drill hole AD-22-05, shown in figures 1 ,3 and 4 below, confirm previous visual estimates of lithium mineralisation (see ASX announcement dated 1 November 2022).

Assays received from the SGS Laboratory in Sudbury, Ontario, confirm the following significant lithium intercepts in drill hole AD-22-005:

- 1.34% Li₂O over 107.6m from 2.3m to 109.9m, including:
 - 1.52% Li₂O over 20.7m from 2.3m to 23.0m
 - 2.21% Li₂O over 30.0m from 41.0m to 71.0m
 - 1.05% Li₂O over 26.5m from 71.0m to 97.5m
 - 0.96% Li₂O over 6.9m from 103.0m to 109.9m

- 0.70% Li₂O over 52.1m from 124.9m to 177.0m, including:
 - 1.08% Li₂O over 30.0m from 147.0m to 177.0m

A full list of assays can be found in Appendix 3 below.

WINSOME RESOURCES MANAGING DIRECTOR CHRIS EVANS SAID:

“It is fantastic to see these impressive levels of lithium mineralisation in drill hole AD-22-005 which provide proof of the Company’s previous visual estimates of mineralisation. Having an average of 1.34% Li₂O for over 100m of pegmatite from surface speaks of a world-class lithium project and paves the way for the much expanded drill program we now have planned at Adina. It is also very encouraging for the other impressive pegmatite intersections and visual estimates from drilling of subsequent holes up until the Christmas break. We look forward to releasing these assays to the market as soon as they become available.”

Adina drilling update

As of 18 December 2022, the Company had completed 3,860m of NQ diamond core drilling across 20 holes with a large body of mineralised pegmatite being defined over a strike length of 550m, and down to 250m from surface.

The mineralised pegmatite body presents an indicative average true thickness of approximately 50m, dipping down about 60 degrees in. This pegmatite body, identified as the Jamar prospect, remains open at depth and along strike, where it appears to follow a large and continuous gravity low anomaly, suggesting it could possibly extend further east and west by approximately 1km. Numerous other gravity lows and target anomalies within the Adina project area remain to be tested throughout 2023.

In addition to the assays outlined above, the key new results from the drilling program since the last update (see ASX announcement dated 1 November 2022) are set out below in Table 1.

Hole	Intercepts
AD-22-006	• 2.2m – 77.3m pegmatite (75.1m interval)
AD-22-007	• 232.8m – 374.1m pegmatite (141.3m interval)
AD-22-011	• 28.8m – 81.4m pegmatite (52.6m interval)
AD-22-035	• 41.7m – 106.8m pegmatite (65.1m interval)
AD-22-036	• 27.0m – 83.5m pegmatite (56.5m interval)

Table 1 - New drill observations, Adina Project

The program’s full results are set out in the appendices below.

The helicopter supported drilling program at Adina has been extended significantly from an originally planned 5,000m to more than 20,000m. A second drill rig is currently being mobilised to site to assist with the expanded drilling and resource definition program.

Drilling teams finished work at Adina just prior to Christmas and will return to work in the week of 9 January 2023.



Photograph 1: Core recovery AD-22-007 – 227.0m to 244.3m

Winsome carries out logging of all drill samples at its nearby exploration project base. Visual estimates of the pegmatite mineralogy - as a percentage range of spodumene content, textures, mineralogy and omnipresent structures - are recorded by project geologists and supervisors prior to sending samples to the laboratory. Strict handling procedures and QAQC protocols are followed.

Core samples from all mineralised intervals continue to be dispatched to SGS in neighbouring Ontario for analysis. Results will be reported when they become available.

The Company also expects to provide an update on its Cancet drilling campaign, which is running concurrently with the Adina campaign, in the near term.

The Company reminds investors that the presence of spodumene crystals within pegmatite does not necessarily equate to lithium mineralisation or indicate the percentage of lithium mineralisation, which can only be accurately confirmed by chemical assays. When such laboratory results become available, they will be reported in full in a future report.

For further information please contact

INVESTORS

Chris Evans - Managing Director
Winsome Resources
E. administration@winsomeresources.com.au

MEDIA

Simon Shepherdson - Media Manager
Spoke Corporate
E. simon@spokecorporate.com
P. +61 413 809 404

This announcement has been approved for release by the Board of Directors.

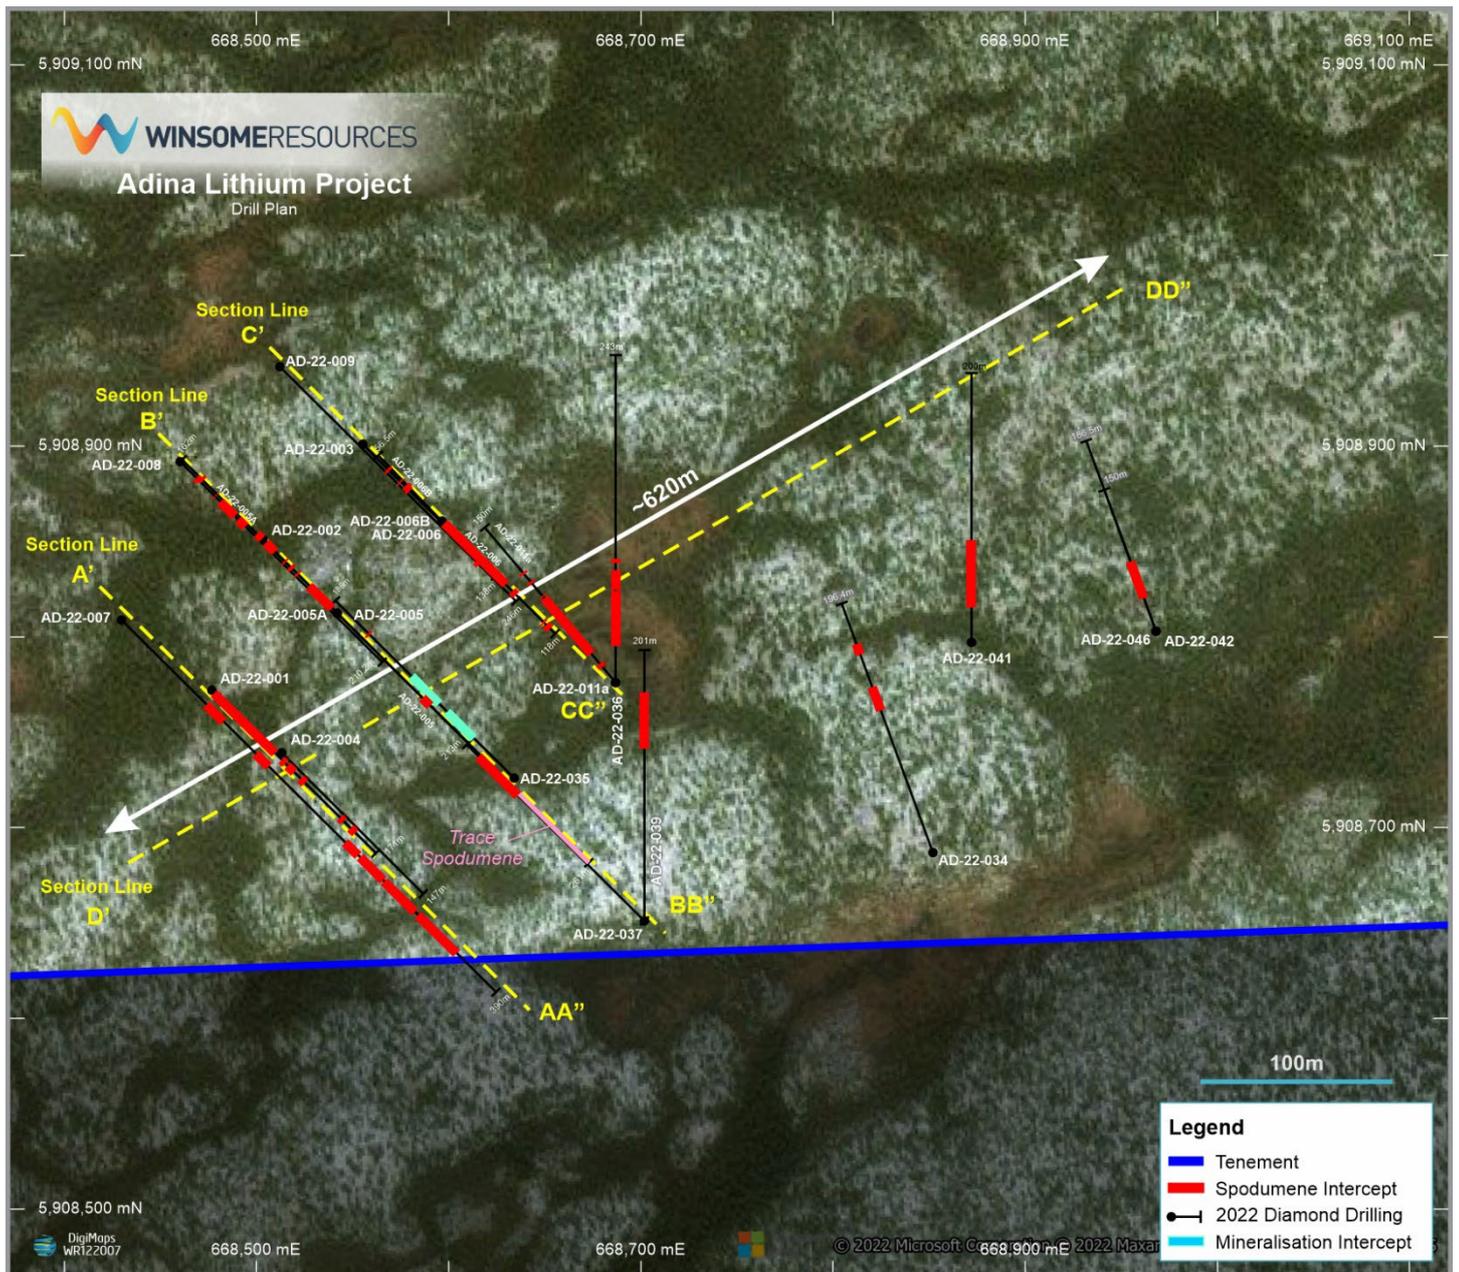


Figure 1: Plan view Adina diamond drilling campaign

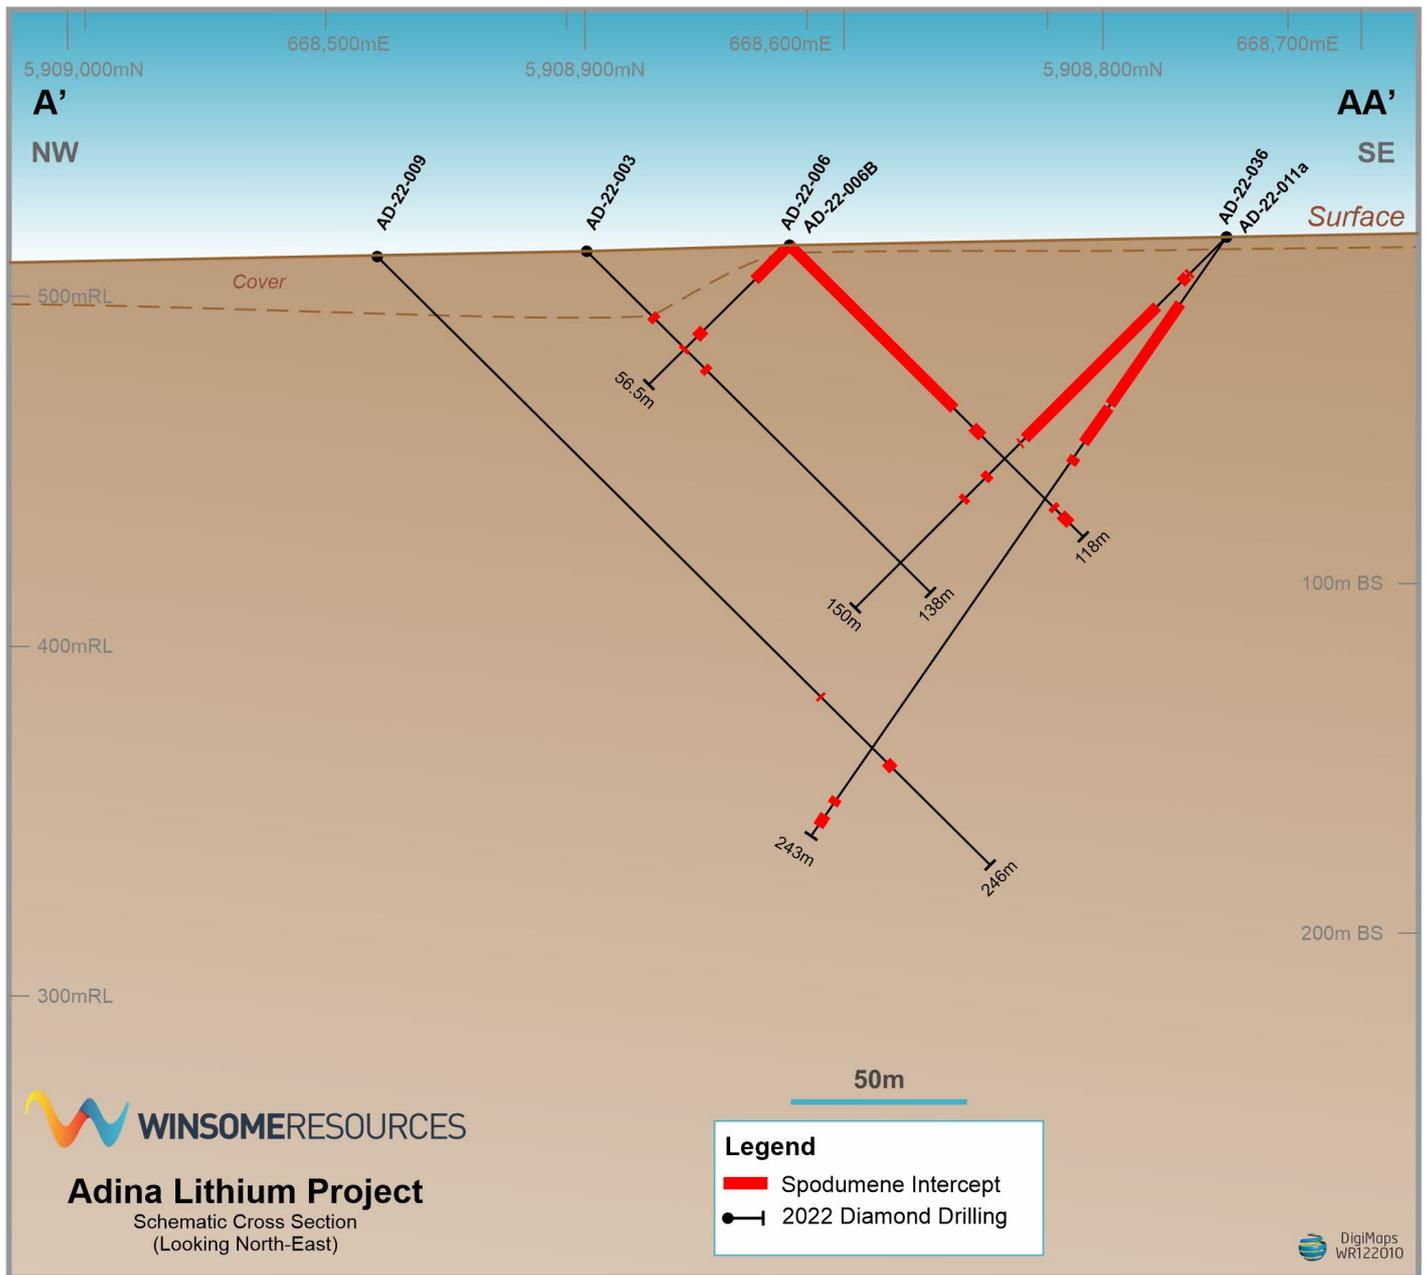


Figure 2: Section view looking North-East – Line A' – AA'

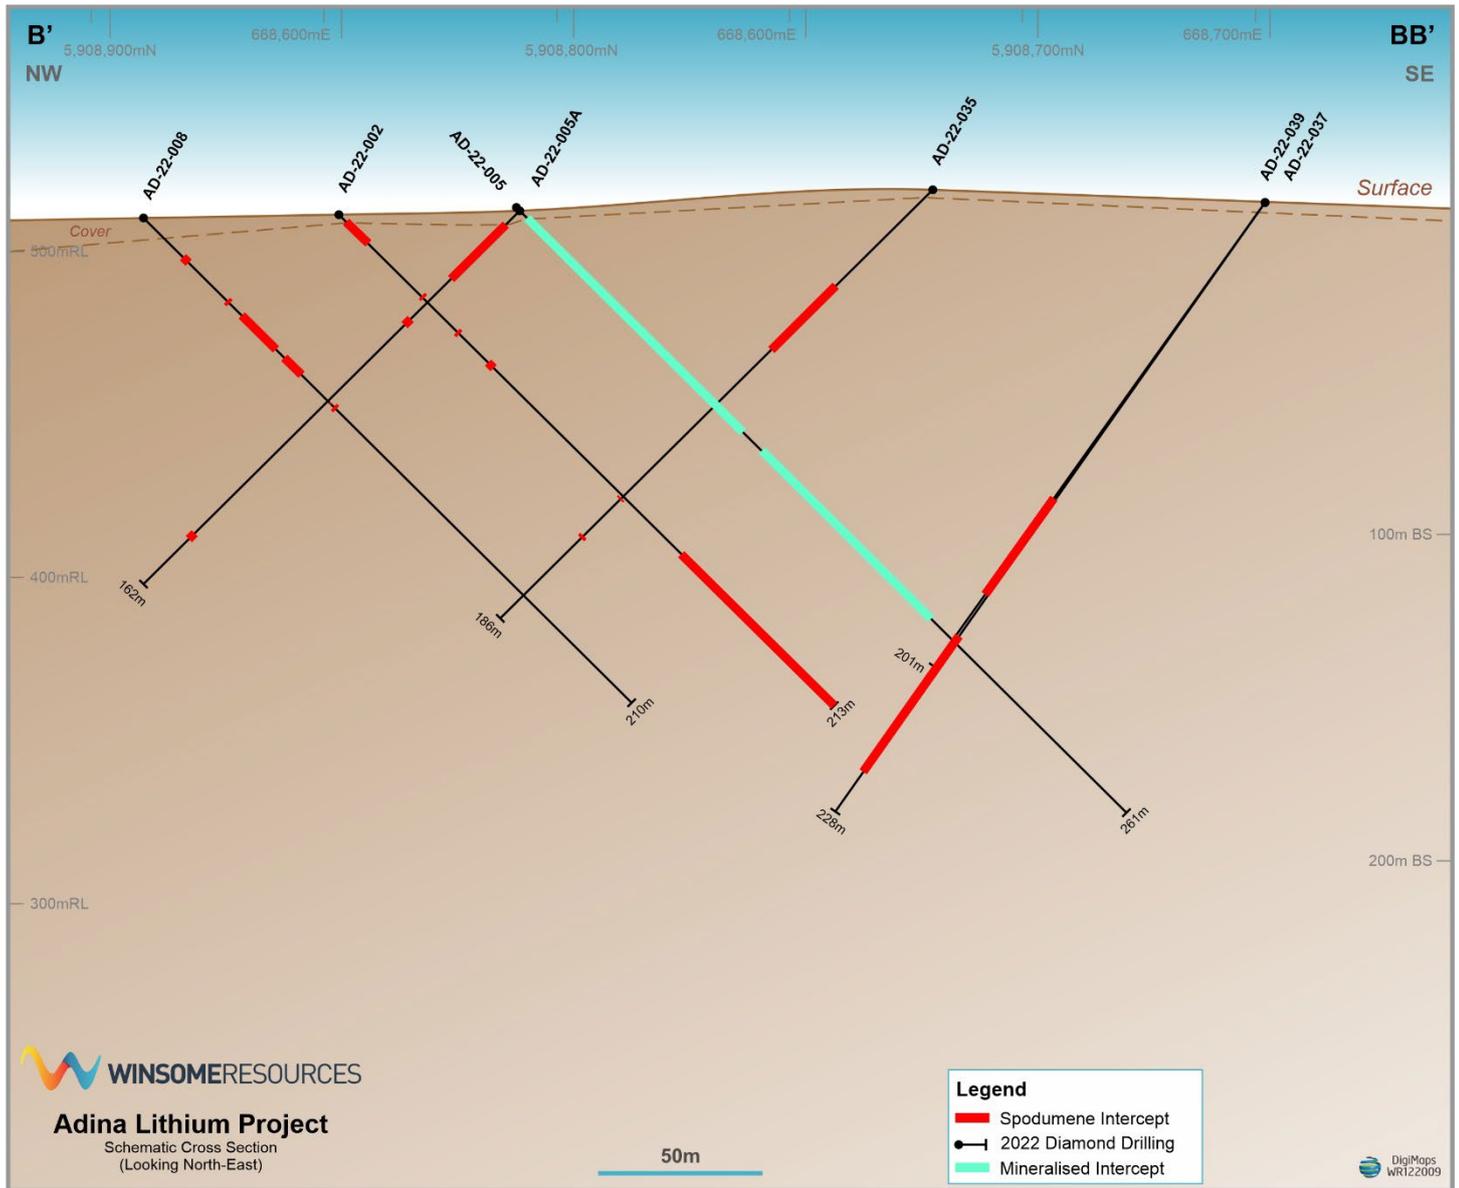


Figure 3: Section view looking North-East – Line B' – BB'

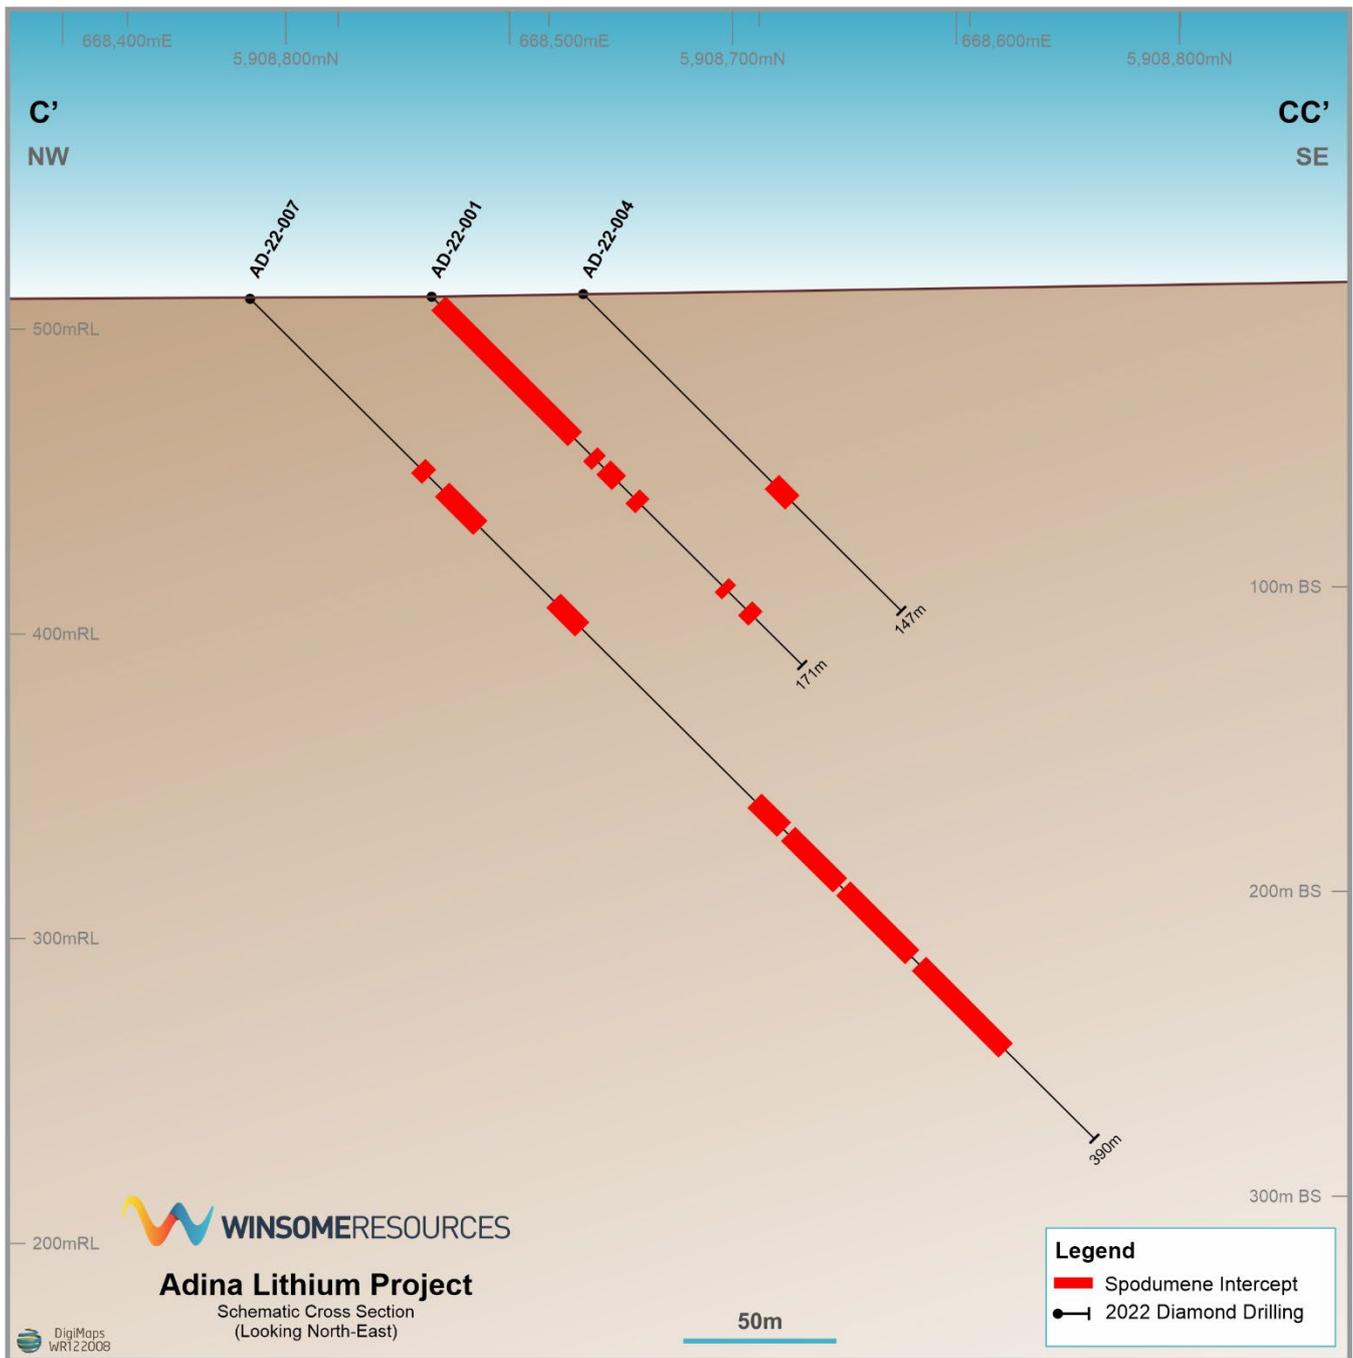


Figure 3: Section view looking North-East – Line C' – CC'

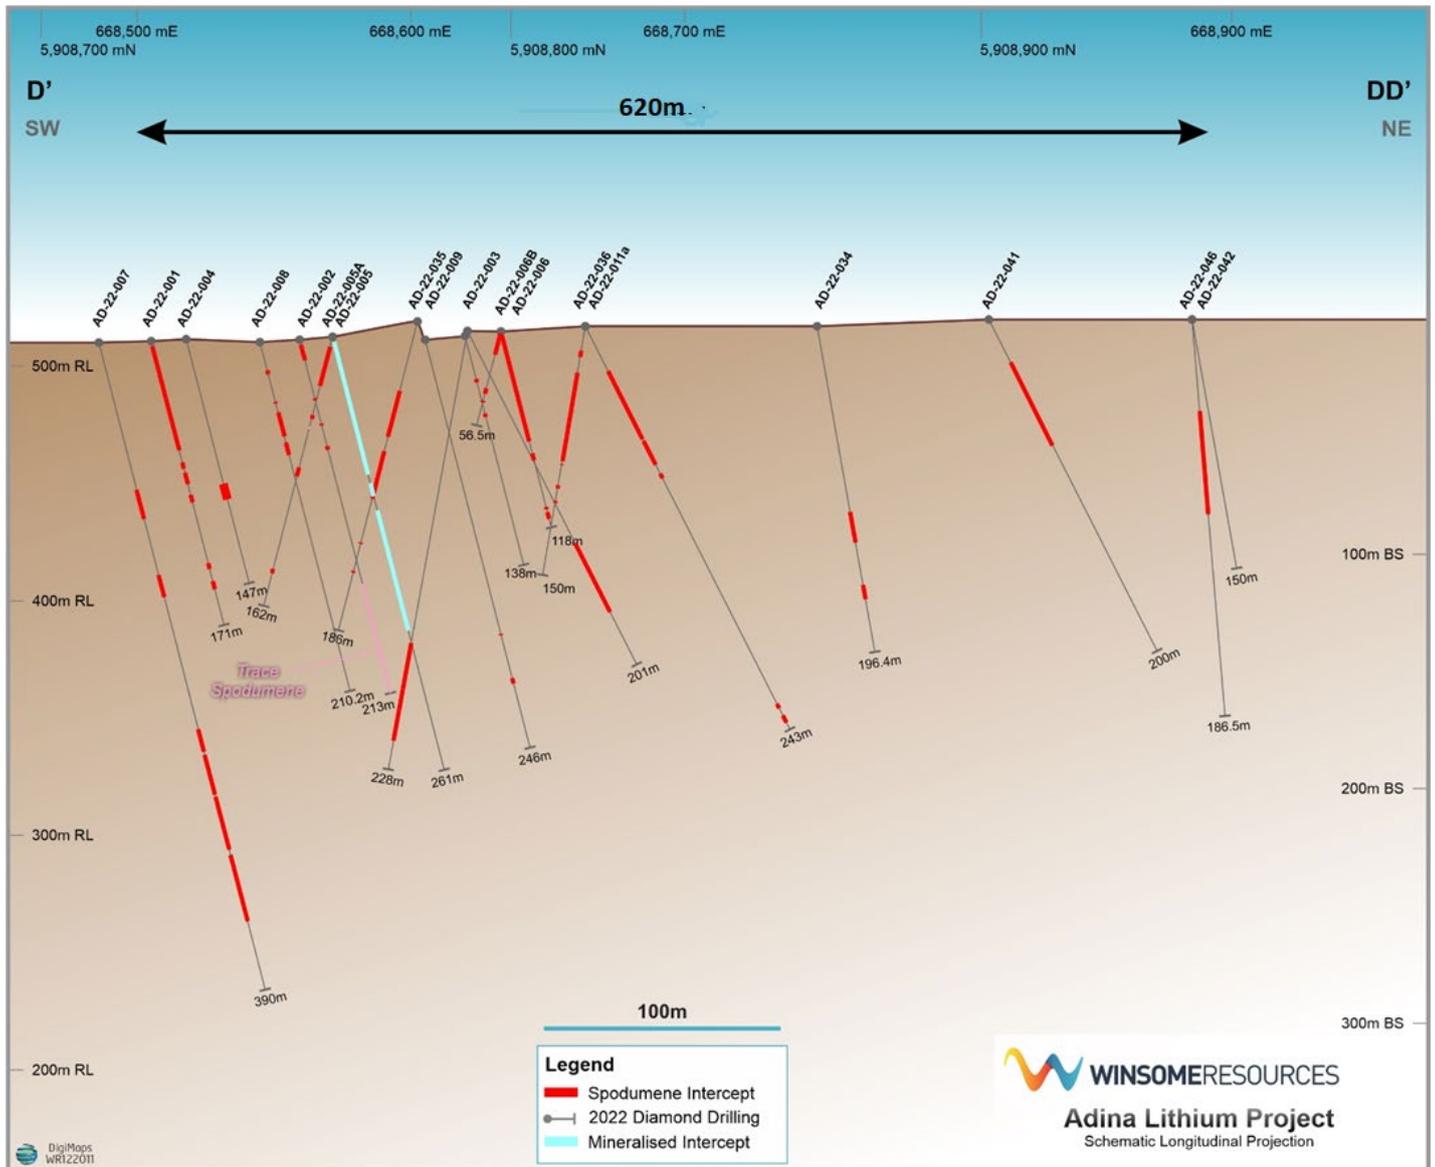


Figure 4: Long section view of Adina drilling program

ABOUT WINSOME RESOURCES

Winsome Resources (ASX: WR1) is a Perth-based, lithium focused exploration and development company with five project areas in Quebec, Canada. Three of Winsome's projects – Cancet, Adina and Sirmac-Clappier are 100% owned by the Company. The Company has also expanded its lithium footprint in Quebec, with exclusive option agreements to acquire and explore 669 claims totalling 385km² in Decelles and a further 259 claims totalling 149km² at Mazerac, located near the Quebec mining town of Val-d'Or.

The most advanced projects - Cancet and Adina, provide shallow, high grade lithium deposits and are strategically located close to established infrastructure and supply chains. Winsome is led by a highly qualified team with strong experience in lithium exploration and development as well as leading ASX listed companies.

More details: www.winsomerresources.com.au

CAUTION REGARDING FORWARD-LOOKING INFORMATION

This document contains forward-looking statements concerning Winsome. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory, including environmental regulation and liability and potential title disputes.

Forward-looking statements in this document are based on the Company's beliefs, opinions and estimates of Winsome as of the dates the forward-looking statements are made, and no obligation is assumed to update forward-looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

COMPETENT PERSON'S STATEMENT

The information in this report which relates to Exploration Results is based on, and fairly represents, information and supporting documentation prepared by Mr Carl Caumartin, VP Exploration of Winsome Resources Ltd. Mr Caumartin is a member of the Quebec Board of Professional Engineers (OIQ, Canada) and he has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which has been undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Mr Caumartin consents to the inclusion in this release of the matters based on the information in the form and context in which they appear. Mr Caumartin is a shareholder of Winsome.

Winsome confirms it is not aware of any new information or data which materially affects the information included in the original market announcements. Winsome confirms the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

-ends-

Appendix 1: Significant Drillhole Lithium Oxide Intercepts¹

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (Degrees)	Azimuth (Degrees)	From (m)	To (m)	Thickness (m)	Li ₂ O %
AD-22-005	668,542	5,908,812	513	-45	135	2.3	109.9	107.6	1.34
						2.3	23.0	20.7	1.52
						23.0	41.0	18.0	0.68
						41.0	71.0	30.0	2.21
						71.0	97.5	26.5	1.05
						103.0	109.9	6.9	0.96
AD-22-005	668,542	5,908,812	513	-45	135	124.9	177.0	52.1	0.70
						124.9	147.0	22.1	0.19
						147.0	177.0	30.0	1.08

Appendix 2: NQ Diamond Drilling Summary for the drilling program at Adina (drill holes where assays are to be received)

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (Degrees)	Azimuth (Degrees)	Total Depth (m)
AD-22-001	668,477	5,908,772	511	-45	135	171.0
AD-22-002	668,503	5,908,851	511	-45	135	213.0
AD-22-003	668,555	5,908,901	513	-45	135	138.0
AD-22-004	668,513	5,908,739	511	-45	135	147.0
AD-22-005 (Assays Received)	668,542	5,908,812	513	-45	135	261.0
AD-22-005A	668,542	5,908,812	513	-45	315	162.0
AD-22-006	668,596	5,908,861	515	-45	135	118.0
AD-22-006B	668,596	5,908,861	515	-45	315	56.5
AD-22-007	668,430	5,908,809	510	-45	135	390.0
AD-22-008	668,460	5,908,892	510	-45	135	210.2
AD-22-009	668,512	5,908,942	511	-45	135	246.0
AD-22-011	668,687	5,908,776	517	-45	320	150.0
AD-22-034	668,688	5,909,055	519	0	135	196.4
AD-22-035	668,634	5,908,726	519	-45	315	186.0
AD-22-036	668,687	5,908,776	517	-45	360	243.0
AD-22-037	668,702	5,908,651	515	-45	315	228.0
AD-22-039	668,702	5,908,651	515	-45	360	201.0
AD-22-041	668,872	5,908,797	520	-45	360	213.0
AD-22-042	668,968	5,908,803	520	-45	340	150.0
AD-22-046	668,968	5,908,803	520	-75	340	186.0

¹ Significant high-grade intercept calculated using a 0.3 % Li₂O cut-off grade, minimum 1m thickness and widths including up to 2m internal dilution.

Appendix 3 – AD-22-05 Assay Results

Hole ID	Sample	From (m)	To (m)	Li (ppm)	Li ₂ O%	Hole ID	Sample	From (m)	To (m)	Li (ppm)	Li ₂ O%
AD-22-005	C00407772	2.3	3.0	12,784	2.75	AD-22-005	C00407861	82.1	83.0	736	0.16
	C00407773	3.0	4.0	14,302	3.08		C00407862	83.0	84.0	609	0.13
	C00407774	4.0	5.0	4,386	0.94		C00407863	84.0	85.0	786	0.17
	C00407775	5.0	6.0	4,130	0.89		C00407864	85.0	86.0	961	0.21
	C00407776	6.0	7.0	4,454	0.96		C00407865	86.0	87.0	1,058	0.23
	C00407777	7.0	8.0	10,728	2.31		C00407866	87.0	88.0	950	0.20
	C00407778	8.0	9.0	10,987	2.37		C00407867	88.0	89.0	11,383	2.45
	C00407779	9.0	10.0	11,099	2.39		C00407868	89.0	90.0	12,926	2.78
	C00407781	10.0	11.0	8,661	1.86		C00407869	90.0	91.0	12,311	2.65
	C00407782	11.0	12.0	1,601	0.34		C00407871	91.0	92.0	5,522	1.19
	C00407783	12.0	13.0	10,808	2.33		C00407872	92.0	93.0	4,822	1.04
	C00407784	13.0	14.0	5,784	1.25		C00407873	93.0	94.0	6,861	1.48
	C00407785	14.0	15.0	7,521	1.62		C00407874	94.0	95.0	4,320	0.93
	C00407786	15.0	16.0	5,974	1.29		C00407875	95.0	95.5	370	0.08
	C00407787	16.0	17.0	7,345	1.58		C00407876	95.5	96.5	471	0.10
	C00407788	17.0	18.0	5,069	1.09		C00407877	96.5	97.5	408	0.09
	C00407789	18.0	19.0	899	0.19		C00407878	103.0	104.0	462	0.10
	C00407791	19.0	20.0	3,147	0.68		C00407879	104.0	104.4	646	0.14
	C00407792	20.0	21.0	6,662	1.43		C00407881	104.4	105.0	5,104	1.10
	C00407793	21.0	22.0	7,661	1.65		C00407882	105.0	106.0	5,134	1.11
	C00407794	22.0	23.0	6,221	1.34		C00407883	106.0	107.0	9,862	2.12
	C00407795	23.0	24.0	3,553	0.76		C00407884	107.0	108.0	2,992	0.64
	C00407796	24.0	25.0	469	0.10		C00407885	108.0	109.0	3,882	0.84
	C00407797	25.0	26.0	757	0.16		C00407886	109.0	109.9	5,748	1.24
	C00407798	26.0	27.0	4,240	0.91		C00407887	109.9	110.9	609	0.13
	C00407799	27.0	28.0	1,304	0.28		C00407888	110.9	111.9	446	0.10
	C00407801	28.0	29.0	8,817	1.90		C00407889	124.9	125.9	1,279	0.28
	C00407802	29.0	30.0	4,343	0.94		C00407891	125.9	126.9	1,640	0.35
	C00407803	30.0	31.0	884	0.19		C00407892	126.9	127.9	1,619	0.35
	C00407804	31.0	32.0	3,872	0.83		C00407893	127.9	128.6	734	0.16

C00407805	32.0	33.0	4,062	0.87	C00407894	128.6	129.0	766	0.16
C00407806	33.0	34.0	4,641	1.00	C00407895	129.0	130.0	1,468	0.32
C00407807	34.0	35.0	5,480	1.18	C00407896	130.0	131.0	157	0.03
C00407808	35.0	36.0	7,502	1.62	C00407897	131.0	132.0	133	0.03
C00407809	36.0	37.0	357	0.08	C00407898	132.0	133.0	181	0.04
C00407811	37.0	38.0	445	0.10	C00407899	133.0	134.0	79	0.02
C00407812	38.0	39.0	3,227	0.69	C00407901	134.0	135.0	62	0.01
C00407813	39.0	40.0	871	0.19	C00407902	135.0	136.0	81	0.02
C00407814	40.0	41.0	1,958	0.42	C00407903	136.0	137.0	72	0.02
C00407815	41.0	42.0	9,940	2.14	C00407904	137.0	138.0	199	0.04
C00407816	42.0	43.0	8,806	1.90	C00407905	138.0	139.0	175	0.04
C00407817	43.0	44.0	10,554	2.27	C00407906	139.0	140.0	8,402	1.81
C00407818	44.0	45.0	8,980	1.93	C00407907	140.0	141.0	500	0.11
C00407819	45.0	46.0	14,137	3.04	C00407908	141.0	142.0	76	0.02
C00407821	46.0	47.0	809	0.17	C00407909	142.0	143.0	396	0.09
C00407822	47.0	48.0	737	0.16	C00407911	143.0	144.0	165	0.04
C00407823	48.0	49.0	1,737	0.37	C00407912	144.0	145.0	1,091	0.23
C00407824	49.0	50.0	8,628	1.86	C00407913	145.0	146.0	172	0.04
C00407825	50.0	51.0	9,453	2.04	C00407914	146.0	147.0	235	0.05
C00408726	51.0	52.0	5,868	1.26	C00407915	147.0	148.0	7,267	1.56
C00407827	52.0	53.0	15,310	3.30	C00407916	148.0	149.0	2,922	0.63
C00407828	53.0	54.0	16,100	3.47	C00407917	149.0	150.0	4,567	0.98
C00407829	54.0	55.0	11,173	2.41	C00407918	150.0	151.0	8,312	1.79
C00407831	55.0	56.0	4,088	0.88	C00407919	151.0	152.0	226	0.05
C00407832	56.0	57.0	7,236	1.56	C00407921	152.0	153.0	1,316	0.28
C00407833	57.0	58.0	12,833	2.76	C00407922	153.0	154.0	1,437	0.31
C00407834	58.0	59.0	14,694	3.16	C00407923	154.0	155.0	10,153	2.19
C00407835	59.0	60.0	16,537	3.56	C00407924	155.0	156.0	8,132	1.75
C00407836	60.0	61.0	4,022	0.87	C00407925	156.0	157.0	2,520	0.54
C00407837	61.0	62.0	13,530	2.91	C00407926	157.0	158.0	3,716	0.80
C00407838	62.0	63.0	9,611	2.07	C00407927	158.0	159.0	3,870	0.83
C00407839	63.0	64.0	15,364	3.31	C00407928	159.0	160.0	6,060	1.30
C00407841	64.0	65.0	11,722	2.52	C00407929	160.0	161.0	10,495	2.26

C00407842	65.0	66.0	7,941	1.71	C00407931	161.0	162.0	5,934	1.28
C00407843	66.0	67.0	14,233	3.06	C00407932	162.0	163.0	1,889	0.41
C00407844	67.0	68.0	13,161	2.83	C00407933	163.0	164.0	4,671	1.01
C00407845	68.0	69.0	15,633	3.37	C00407934	164.0	165.0	11,475	2.47
C00407846	69.0	70.0	17,565	3.78	C00407935	165.0	166.0	2,246	0.48
C00407847	70.0	71.0	7,087	1.53	C00407936	166.0	167.0	16,157	3.48
C00407848	71.0	72.0	12,129	2.61	C00407937	167.0	168.0	5,482	1.18
C00407849	72.0	73.0	13,857	2.98	C00407938	168.0	169.0	360	0.08
C00407851	73.0	74.0	3,680	0.79	C00407939	169.0	170.0	5,852	1.26
C00407852	74.0	75.0	3,246	0.70	C00407941	170.0	171.0	6,313	1.36
C00407853	75.0	76.0	6,076	1.31	C00407942	171.0	172.0	4,700	1.01
C00407854	76.0	77.0	2,133	0.46	C00407943	172.0	173.0	1,086	0.23
C00407855	77.0	78.0	6,667	1.44	C00407944	173.0	174.0	5,700	1.23
C00407856	78.0	79.0	3,804	0.82	C00407945	174.0	175.0	354	0.08
C00407857	79.0	80.0	5,210	1.12	C00407946	175.0	176.0	1,282	0.28
C00407858	80.0	81.0	2,253	0.49	C00407947	176.0	177.0	5,480	1.18
C00407859	81.0	82.1	5,927	1.28	C00407948	177.0	178.0	514	0.11
					C00407949	178.0	179.0	509	0.11

Appendix 4 – Visual Estimates of intersections in Adina diamond drill holes (main sampling intervals where assays are to be received)

Hole ID	From (m)	To (m)	Thickness (m)	Visual Estimate %
AD-22-001	3.0	86.4	83.4	Pegmatite – spodumene observed
AD-22-002	3.0	12.45	9.45	Pegmatite – spodumene observed
AD-22-003	84.0	91.8	7.8	Pegmatite – spodumene observed
AD-22-004	87.1	96.6	9.5	Pegmatite – spodumene observed
AD-22-005*	2.3	109.9	107.6	Pegmatite – spodumene observed
AD-22-005*	126.9	177.0	50.1	Pegmatite – spodumene observed
AD-22-005A	4.6	29.5	24.9	Pegmatite – spodumene observed
AD-22-006	2.2	77.3	75.1	Pegmatite – spodumene observed
AD-22-006	105.6	112.8	7.2	Pegmatite – spodumene observed
AD-22-006B	1.0	14.0	13.0	Pegmatite – spodumene observed
AD-22-007	74.7	82.3	7.6	Pegmatite – spodumene observed
AD-22-007	88.6	106.5	17.9	Pegmatite – spodumene observed
AD-22-007	232.8	374.1	141.3	Pegmatite – spodumene observed
AD-22-008	41.1	65.7	24.6	Pegmatite – spodumene observed
AD-22-009	204.2	207.4	3.2	Pegmatite – spodumene observed
AD-22-011	28.8	81.4	52.6	Pegmatite – spodumene observed
AD-22-034	111.9	130.3	18.4	Pegmatite – spodumene observed
AD-22-035	41.7	106.8	65.1	Pegmatite – spodumene observed
AD-22-036	27.0	83.5	56.5	Pegmatite – spodumene observed
AD-22-036	191.0	196.5	5.5	Pegmatite – spodumene observed
AD-22-037	162.3	213.1	50.8	Pegmatite – spodumene observed
AD-22-039	128.0	169.3	41.3	Pegmatite – spodumene observed
AD-22-041	26.3	71.3	45.0	Pegmatite – spodumene observed
AD-22-042	30.7	80.5	49.8	Pegmatite – spodumene observed
AD-22-046	43.1	91.8	48.7	Pegmatite – spodumene observed

* Assays received.

The Company reminds investors that the presence of spodumene crystals within pegmatite does not necessarily equate to lithium mineralisation or indicate the percentage of lithium mineralisation, which can only be accurately confirmed by chemical assays. When such laboratory results become available, they will be reported in full in a future report.

JORC Code, 2012 edition Table 1
Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	Explanation
Sampling techniques	<ul style="list-style-type: none"> All core is NQ (76mm) in this program. Core sample intervals were geologically logged, measured for average length, photographed, and placed into numbered core trays. Sample were sent to SGS Minerals Geochemistry under standard preparation procedures.
Drilling techniques	<ul style="list-style-type: none"> NQ diamond drilling was completed at Adina. Oriented core drilling was not completed. Downhole surveying was conducted using a gyro-based system.
Drill sample recovery	<ul style="list-style-type: none"> The recovery of the diamond drilling samples was reported by the operators and supervised by our consulting geologist. No sample bias has been established.
Logging	<ul style="list-style-type: none"> NQ core was logged and cut according to geological boundaries, with ~1 m intervals targeted for individual samples. Features such as rock type, modal mineralogy, rock textures, alteration were recorded. Geological logging information was recorded directly onto the Geotic Logger system and compiled onto Database platform, with weekly backups. The core is stored in the Geological consultants (TechnoMinex) yard in Rouyn-Noranda which is a secure location. Various qualitative and quantitative logs were completed. All core has been photographed. The logging database contains lithological data for all intervals in all holes in the database.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> Drill core was split (sawn) by TechnoMinex facilities in Rouyn-Noranda("RN"), QC; half core sample intervals submitted to SGS preparation facilities in Sudbury, ON; - 250gr pulp sub-samples were analysed at SGS analytical facilities in Burnaby, BC; Pulps and coarse rejects to be returned to Winsome, for storage at TechnoMinex facilities in RN. Laboratory QC procedures for drill core assays involve the use of internal certified reference material as assay standards, along with blanks, duplicates and replicates.
Quality control & Quality of assay data and laboratory tests	<ul style="list-style-type: none"> Industry standard assay quality control techniques were used for lithium related elements. Assay and laboratory procedures have been selected following a review of techniques provided by internationally certified laboratories. Samples are submitted for multi-element ICP analysis by SGS, which is applicable for high-grade lithium analysis

Criteria	Explanation
	<ul style="list-style-type: none"> • Sodium Peroxide Fusion is used followed by combined ICP-AES and ICP-MS analyses (56 elements). Li is reported by the lab and converted to Li₂O for reporting using a factor of 2.153 • No handheld instruments were used for analysis • Comparison of results with standards indicate sufficient quality in data. No external laboratory checks have been used but are planned to be completed shortly. • Different grades of certified reference material (CRM) for lithium mineralisation were inserted, as well as field duplicates, and blanks. The CRM's submitted represented a weakly mineralised pegmatite (OREAS 750), and a moderate lithium mineralised pegmatite (AMIS 0341) to high grade lithium mineralised pegmatite (OREAS 752 & 753). Quality Assurance and Quality Control utilised standard industry practice, using prepared standards, field blanks (approximately 0.4 kg), duplicates sampled in the field and pulp duplicates at the lab. • Blank samples were submitted at a rate of approximately 5%, same for duplicates and repeat assay determinations, whereas standards were submitted at a rate of approximately 20%.
Verification of sampling and assaying	<ul style="list-style-type: none"> • Hard copy field logs are entered into and validated on an electronic Excel database, both of which are stored at the Winsome Perth office and with Technominex. • Data verification was carried out by the Project Geologist on site, and a final verification was performed by a Senior Geologist at the Technominex core handling facilities in Rouyn Noranda. • Diamond core drilled was photographed on site where a preliminary geological logging was performed. Core boxes were then crated and ship to Technominex handling facilities for detailed logging and sample splitting/cutting. • Half core samples were packaged and ship to the SGS Sudbury Laboratory facilities Ontario, for preparation. • No assays have been adjusted. A factor of 2.153 has been applied to the reported Li assays so to report as Li₂O.
Location of data points	<ul style="list-style-type: none"> • The drill holes have been reported as being located by hand-held GPS. Historical drill holes have been verified by GPS. • The grid datum is NAD83. Zone 18N. • Topographic elevation and landmarks are readily visible from a Digital Elevation Model with a 50cm grid resolution and orthophoto obtained from a Lidar survey performed in 2017 over the property. Government topographic maps have been used for topographic validation. The GPS is otherwise considered sufficiently accurate for elevation data. • Down hole dip surveys were taken at approximately 30m intervals and at the bottom of the diamond drill holes.

Criteria	Explanation
Data spacing and distribution	<ul style="list-style-type: none"> In this early delineation stage, drilling is largely set along sections at 100m spacing and aiming to intercept targeted horizon at 80-100m centres. No assessment has been made regarding the current drill hole location and intersections with respect to resources or reserve estimation. No sample compositing has been completed. However, internal dilution of non-mineralised material into calculated grade over widths reported herein may occur but is not considerable.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Drilling is designed to test potential mineralisation. They were oriented sub-perpendicular to the potential mineralised trend and stratigraphic contacts as determined by field data and cross section interpretation. Intersection widths will therefore be longer than true widths. No significant sample bias has been identified from drilling due to the optimum drill orientation described above. Where present, sample bias will be reported.
Sample security	<ul style="list-style-type: none"> The company takes full responsibility on the custody including the sampling process itself and transportation. Samples were shipped via accredited transporter KEPA Transport from project site to Technominex facilities in Rouyn-Noranda, where samples were split and then delivered to SGS facilities in Sudbury for sample preparation
Audits or reviews	<ul style="list-style-type: none"> No external audit of the database has been completed, apart for the consulting geologists acting on behalf of the company. Drill hole sample data is verified at time of entry into excel as well as when assays are linked.

Section 2 Reporting of Exploration Results

(Criteria in the preceding section also apply to this section.)

Criteria	Explanation
Mineral tenement and land tenure status	<ul style="list-style-type: none"> The Winsome Adina Lithium Project is a 100% owned by Winsome Adina Lithium Inc. All tenements are in good standing and have been legally validated by a Quebec lawyer specialising in the field.
Exploration done by other parties	<ul style="list-style-type: none"> Initial Exploration and Review was undertaken by MetalsTech Limited. Government mapping records multiple lithium bearing pegmatites within the project areas with only regional data available.
Geology	<ul style="list-style-type: none"> The mineralisation encountered at the Adina project is typical of a Lithium-Caesium-Tantalum (LCT) type of pegmatite. The pegmatite body is oriented sub-parallel to the general strike of the host rocks. The host rocks are composed of Archean Lac Guyer greenstone rocks, which include mafic and ultramafic rocks interlayered with horizons of metasedimentary and felsic volcanic rocks

Criteria	Explanation
Drill hole Information	<ul style="list-style-type: none"> For the current drill program, the following information has been included for all holes reported: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (reduced level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception level hole length A summary of drill hole information was included in the Company's prospectus within the Independent Geologists Report prepared by Mining Insights pages 19-38 and Table 3 of Appendix B, pages 69 and 70
Data aggregation methods	<ul style="list-style-type: none"> No sample weighting or metal equivalent values have been used in reporting. Aggregation issues are not considered material at this stage of project definition. No metal equivalent values were used
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> The pierce angle of the drilling varies from hole to hole, in order to attempt, wherever possible, to represent true widths
Diagrams	<ul style="list-style-type: none"> See figures and maps provided in the text of the announcement.
Balanced reporting	<ul style="list-style-type: none"> Winsome Resources Ltd will endeavour to produce balanced reports accurately detailing the results from any exploration activities. Only drilling with assay results is tabulated and shown in this announcement. The rest of the completed drill core was reported with assay results pending.
Other substantive exploration data	<ul style="list-style-type: none"> No other substantive exploration data is available at this time.
Further work	<ul style="list-style-type: none"> Winsome Resources Ltd continues to complete further site investigations. Further work planned includes comprehensive data interpretation, field mapping and exploration drilling.