



UPDATED ANNOUNCEMENT

'Geochemical survey identifies multiple Lana Corina targets'

Culpeo Minerals Limited ("Culpeo" or the "Company") (ASX:CPO, OTCQB:CPORF) notes the announcement released on 3 April 2023 titled '*Geochemical survey identifies multiple Lana Corina targets*' and provides the following replacement announcement which includes additional information relating to the visible mineralisation depicted at Figure 5.

This announcement has been authorised by the Managing Director of Culpeo Minerals Limited.

COMPANY

Max Tuesley
Managing Director
E: max.tuesley@culpeominerals.com.au
P: +61 (08) 6311 9160



GEOCHEMICAL SURVEY IDENTIFIES MULTIPLE SIGNIFICANT SURFACE COPPER AND MOLYBDENUM TARGETS AT LANA CORINA

Culpeo Minerals Limited ("Culpeo" or the "Company") (ASX:CPO, OTCQB:CPORF) is pleased to announce the generation of multiple significant surface copper targets within a >1km-long trend by a recently completed geochemical survey at the Vista Montana Prospect within the Lana Corina Copper and Molybdenum Project (the "Project") in Chile.

HIGHLIGHTS

- **5 new high priority targets for copper mineralisation generated at the Vista Montana Prospect**
- **>1km-long copper alteration zone defined by geochemistry survey (Figure 1)**
- **Two intrusive centres recognised, analogous to the setting that returned significant drill intersections including 257m @ 1.10% CuEq²**
- No previous systematic exploration at Vista Montana highlights **potential for new discoveries**

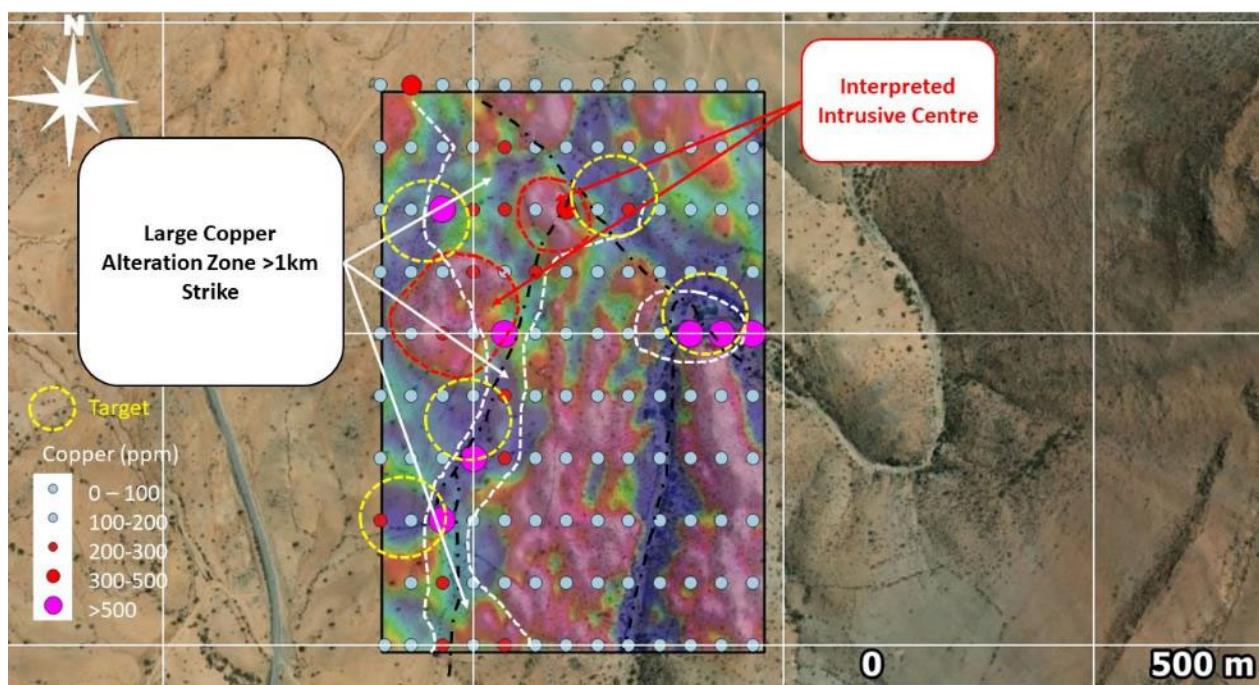


Figure 1: Plan view of the north-east sector, Vista Montana Prospect, of the Lana Corina Project, showing copper mineralisation detected in soil-geochemistry sampling program over a strike distance of >1km.



Culpeo Minerals' Managing Director, Max Tuesley, commented:

"These soil geochemistry results have significantly exceeded our expectations; to have identified 5 copper and molybdenum targets associated with a large alteration zone >1km along strike is a great result. Combined with the recent prospectivity mapping these results illustrate the potential for a significant mineralised system at the Vista Montana Prospect."

"We are confident based on the strength and scale of these new anomalies that further work at the Lana Corina Project will generate numerous targets for drill testing."

Geochemical Sampling Program

The soil geochemistry program was undertaken on a 50m x 100m grid and consisted of 321 samples in total (Appendix A). Results of sampling conducted at the Vista Montana Prospect within the Lana Corina Project have now been received (Appendix G).

The results of the sampling program and the overall pattern of the Cu, Cu + Mo, Cu/Mn and alkali signals suggest a copper bearing alteration zone is present at Vista Montana and is twice the size of the Lana Corina mineralised zone defined from drilling to date (Figure 2).

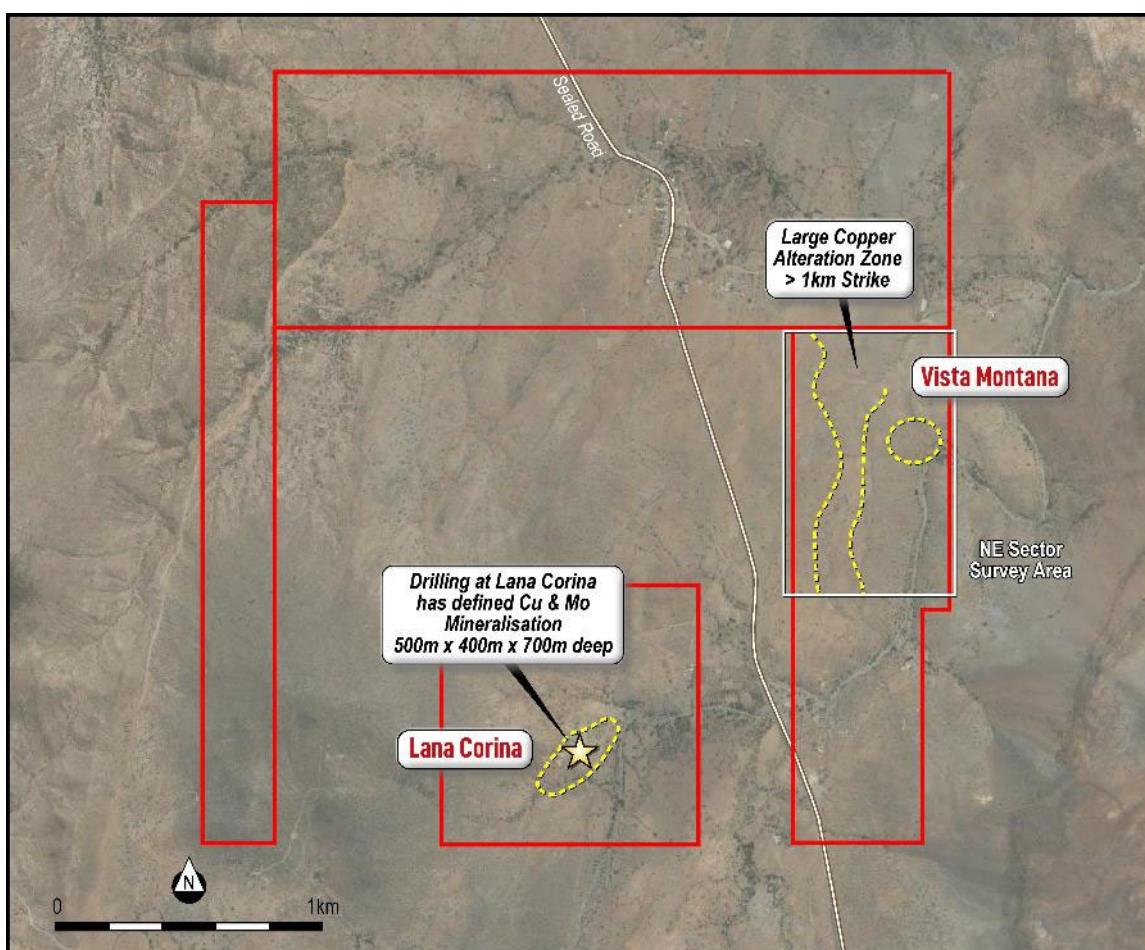


Figure 2: Lana Corina Concessions showing Vista Montana sampling area and mineralisation domains.



This large >1km copper bearing zone identified at Vista Montana is prospective for intrusive hosted copper mineralisation at surface. The metal assemblage at Vista Montana indicates a shallower erosional level, relative to porphyry style vertical and lateral zonation (Figure 3), suggesting that the mineralised system occurs at surface.

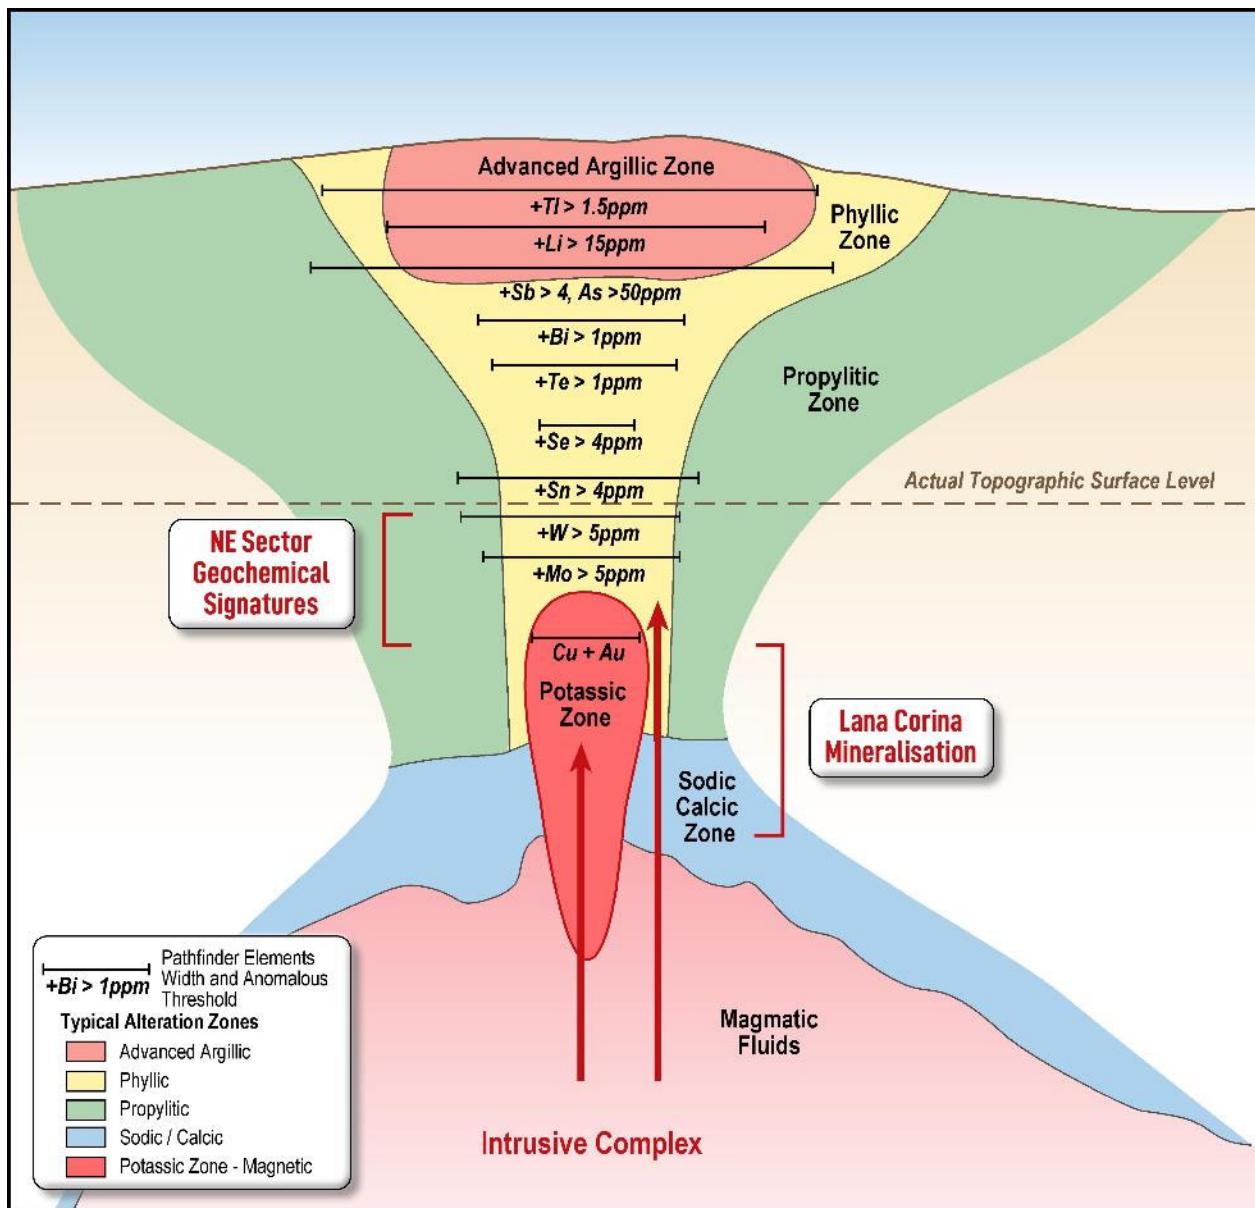


Figure 3: Schematic diagram showing the pathfinder geochemical and alteration patterns of a typical porphyry copper mineral system and the relative location of Lana Corina and the NE Sector – Vista Montana (modified from Halley et.al, 2015).

The lithologies sampled as part of the program show a strong Cu, Mo, Bi and W association with the interpreted phyllitic alteration zone, and these elements are usually derived from magmatic fluids originating from a porphyry intrusion (referred to as a "fertile" porphyry).

Mineralisation starts at surface and is expected to continue at depth, with the metal assemblage changing as the system becomes deeper and hotter, analogous to what is observed in the recent drilling at Lana Corina. It is likely that the Vista Montana Prospect could exhibit similar metal zonation, albeit at shallower depths.



Lower temperature lithium anomalism is present at elevated levels in the north-east quadrant of the survey area (Figure 4) and at this early stage is thought to be associated with clay-rich felsic volcanic rock units. Further exploration work is required to understand the significance of this anomaly and implications for further target generation within the exploration concessions for both copper and lithium.

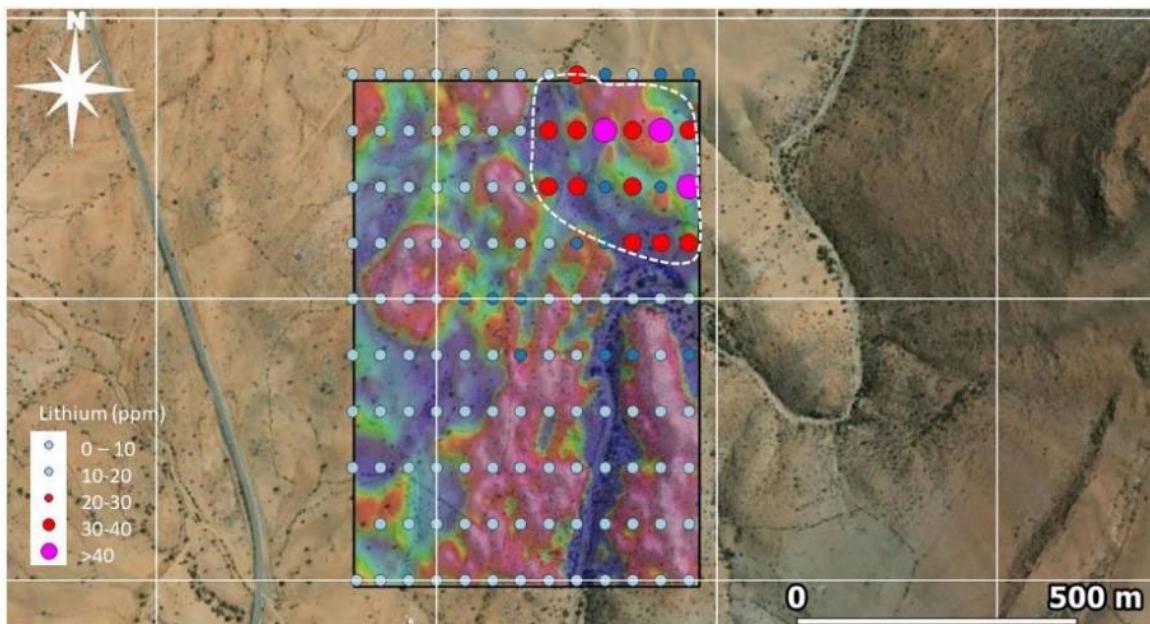


Figure 4: Plan view showing lithium detected in soil-geochemistry sampling program at Vista Montana over a 400m x 400m area.

Geological mapping efforts prior to final drillhole planning have now been initiated and will focus on the position of the outcropping surface mineralisation (Figure 5) and relationships to lithological and structural contacts.



Figure 5: Ongoing surface mapping has identified numerous areas of visible copper associated with the >1km phyllitic / copper alteration zone (*The Company notes this is based on a visual inspection only and the samples are yet to be assayed or analysed, refer Appendix B*).



In relation to the disclosure of visual mineralisation, the Company cautions that estimates of oxide copper mineral abundance from surface mapping should not be considered a proxy for quantitative analysis of a laboratory assay result. Assay results are required to determine the actual widths and grade of the visible mineralisation.

Lana Corina Copper-Molybdenum Project

Recent drilling programs undertaken at Lana Corina Project have intersected broad zones of high-grade copper and molybdenum mineralization including:

- **257m @ 1.10% CuEq** in CMLCD002 from 170m²;
- **173m @ 1.09% CuEq** in CMLCD003 from 313m³;
- **169m @ 1.21% CuEq** in CMLCD010 from 239m⁶.
- **81m @ 1.16% CuEq** in CMLCD005 from 302.1m⁴;
- **104m @ 0.81% CuEq** in CMLCD001 from 155m¹;
- **113m @ 0.68% CuEq** in CMLCD009 from 331m⁵.
- **72m @ 0.91% CuEq** in CMLCD013 from 352m⁷ with high-grade molybdenum zone:
 - **35m @ 1,704ppm Mo (0.84% CuEq)** (570-605m), including:
 - **4m @ 8,845ppm Mo (3.48% CuEq)** (589-593m); and
 - **1m@ 15,000ppm Mo (6.09% CuEq)** (591-592m).

Prospectivity modelling (Figure 6) has identified multiple target areas at the Vista Montana Prospect extending the potential mineralised corridor to >3km strike length. This work indicates significant regional potential for further copper and molybdenum discoveries and provides the Company with a pipeline of high priority drill targets, the current focus of which is Vista Montana.

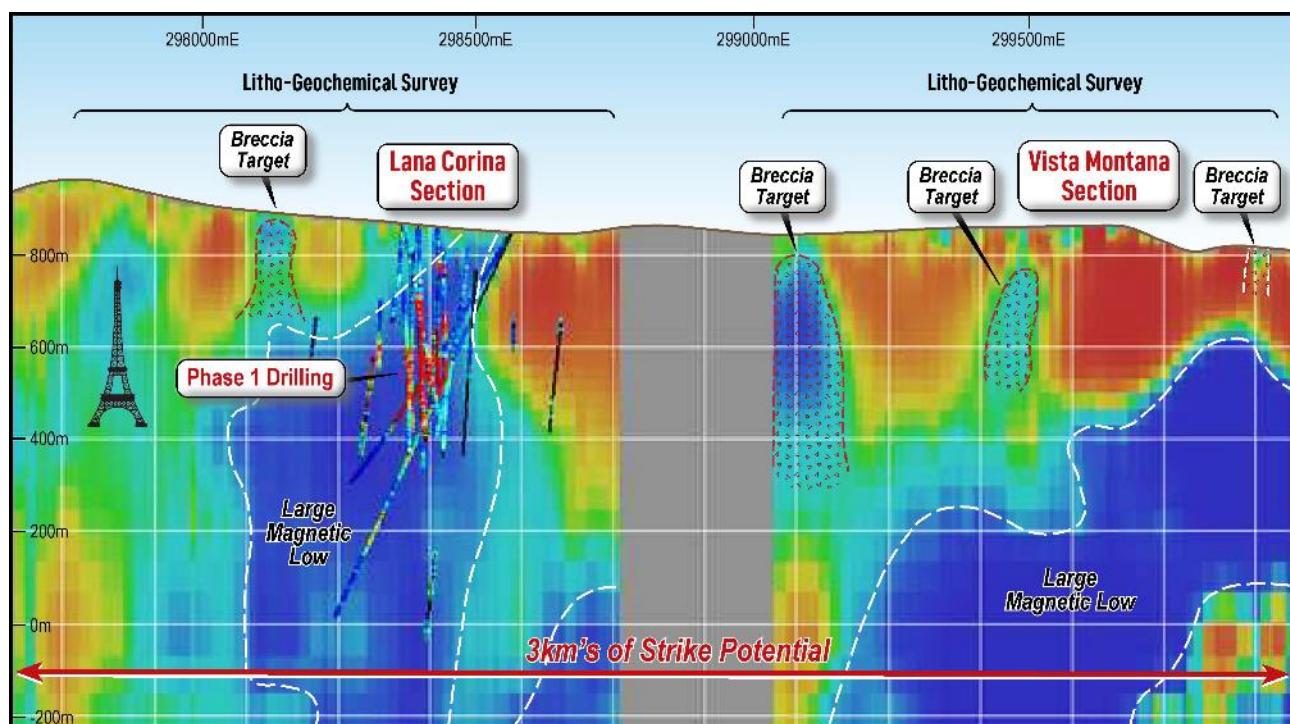


Figure 6: Litho-geochemical survey to test defined targets over >3km of strike (background image is the VOXI 3D magnetic inversion model) (Refer ASX announcement 31 August 2022).



The Lana Corina Project is located in the coastal belt, Coquimbo region of Chile, approximately 350km north of Santiago and is close to existing infrastructure with sealed road access and a high voltage power line approximately 7km to the east. The Project is in a prolific copper belt hosting multiple major deposits including Los Pelambres (6.1Bt @ 0.51% Cu, 0.016% Mo and 0.06g/t Au⁸), Andacollo (250 Mt @ 0.62% Cu and 0.25g/t Au⁹) and El Espino (123Mt @ 0.66% Cu and 0.24g/t Au¹⁰).

Lana Corina is associated within a structural zone oriented in a northeast-southwest direction with >3km of strike and up to 400m width. High grade copper mineralisation starts at surface and is associated with four known breccia pipes occurring in the upper levels of a large copper bearing porphyry hosted mineralised system. The high-grade mineralisation identified to date outcrops at surface and extends to a vertical depth of >700m.

The excellent results of Culpeo's drilling programs and the recent results of the geochemical survey in the north-east sector continue to strongly support the Company's exploration model that the Project has the potential to host a substantial mineralised system.

Copper Equivalent (Cu Eq) values: Assumed commodity prices for the calculation of Copper Equivalent (Cu Eq) is Cu US\$3.00/lb, Au US\$1,700/oz, Mo US\$14/lb and Ag US\$20/oz. Recoveries are assumed from similar deposits: Cu = 85%, Au = 65%, Ag = 65%, Mo = 80%. Cu Eq (%) was calculated using the following formula: ((Cu% x Cu price 1% per tonne x Cu recovery) + (Au(g/t) x Au price per g/t x Au recovery) + (Mo ppm x Mo price per g/t x Mo recovery) + Ag ppm x Ag price per g/t x Ag recovery) / (Cu price 1% per tonne x Cu recovery). **Cu Eq (%) = Cu (%) + (0.54 x Au (g/t)) + (0.00037 x Mo (ppm)) + (0.0063 x Ag (ppm))**

(1) Refer ASX announcement 2 May 2022 (2) Refer ASX announcement 11 May 2022 (3) Refer ASX announcement 6 June 2022 (4) Refer ASX announcement 20 June 2022 (5) Refer ASX announcement 17 August 2022 (6) Refer ASX announcement 23 November 2022 (7) Refer ASX announcement 16 January 2022. (8) Antofagasta PLC Annual Report for 2015 (9) Compañía Minera Carmen de Andacollo, Annual Report 2005 (10) López, G.; Hitzman, M.; Nelson, E. 2014. Alteration patterns and structural controls of the El Espino IOCG mining district, Chile. Mineralium Deposita 49

This announcement has been authorised by the Board of Directors of Culpeo Minerals Limited.



COMPANY

Max Tuesley
Managing Director
E: max.tuesley@culpeominerals.com.au
P: +61 (08) 6311 9160

ABOUT CULPEO MINERALS LIMITED

Culpeo Minerals is a copper exploration and development company with assets in Chile, the world's number one copper producer. The Company is exploring and developing high grade copper systems in the coastal Cordillera region of Chile.

The Company has recently acquired the Lana Corina Project situated in the Coquimbo region of Chile, where near surface breccia hosted high-grade copper mineralisation offers walk up drilling targets and early resource definition potential.

The Company has two additional assets, the Las Petacas Project, located in the Atacama Fault System near the world-class Candelaria Mine. Historic exploration has identified significant surface mineralisation with numerous outcrops of high-grade copper mineralisation which provide multiple compelling exploration targets. The Quelon Project located 240km north of Santiago and 20km north of the regional centre of Illapel, in the Province of Illapel, Region of Coquimbo. Historical artisanal mining has taken place within the Quelon Project area, but modern exploration in the project area is limited to rock chip sampling and geophysical surveys.

Culpeo Minerals has a strong board and management team with significant Chilean country expertise and has an excellent in-country network. All these elements enable the company to gain access to quality assets in a non-competitive environment. We leverage the experience and relationships developed over 10 years in-country to deliver low cost and effective discovery and resource growth. We aim to create value for our shareholders through exposure to the acquisition, discovery and development of mineral properties which feature high grade, near surface copper mineralisation.

COMPETENT PERSONS' STATEMENTS


The information in this announcement that relates to Exploration Results is based on information compiled by Mr Maxwell Donald Tuesley, BSc (Hons) Economic Geology, MAusIMM (No 111470). Mr Tuesley is a member of the Australian Institute of Mining and Metallurgy and is a shareholder and Director of the Company. Mr Tuesley has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Tuesley consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

The information in this announcement that relates to Geophysical Results is based on information compiled by Nigel Cantwell. Mr Cantwell is a Member of the Australian Institute of Geoscientists (AIG) and the Australian Society of Exploration Geophysics (ASEG). Mr Cantwell is a consultant to Culpeo Minerals Limited. Mr Cantwell has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources & Ore Reserves. The Company confirms that it is not aware of any new information or data that materially affects the historical geophysical results included in the original report.





Appendix A Sample Point Locations for the 2023 Soil Geochemistry Program

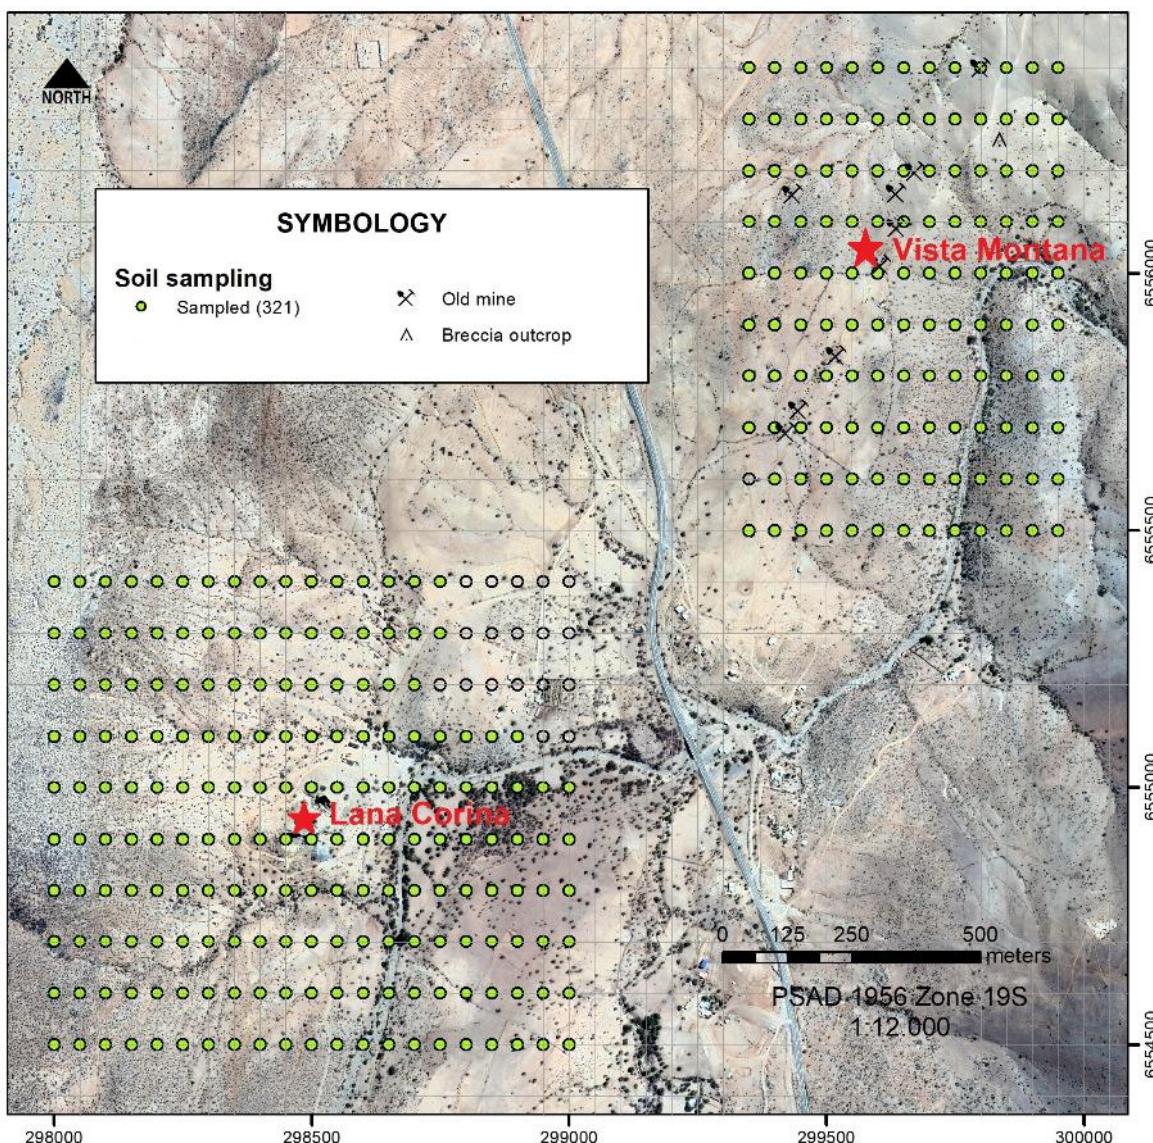

Appendix B Visual Estimates of Copper Mineralisation in Outcrop

Sample #	Copper Mineralisation	%	Description
VM_Grab_001	Malachite	5	Quartz vein / Breccia approximately 3m wide showing moderate malachite as infill and disseminations.
VM_Grab_002	Malachite/Chalcopyrite	3	Breccia with moderate iron oxides, visible malachite and chalcopyrite present as disseminations.
VM_Grab_003	Malachite	4	Quartz vein / Breccia approximately 2m wide showing moderate malachite as infill.



Appendix C JORC Code Table 1 – Lana Corina Project

SECTION 1 SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation’ drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> 2022 drillcore samples are collected usually at 1m sample intervals, some smaller intervals if geology warranted it. Assayed routinely for Cu, Mo, Ag and Au by ALS laboratories in Chile. Historic Drill core has been routinely assayed for Cu, and to a lesser extent Mo, Ag and Au. Historic Drill samples were collected as either 1 m or 2 m samples. Half core sampling was undertaken for both the 2022 program and the historic drilling. Ground Magnetic Data was collected using a GEM GSM-19W Magnetometer, data were quality checked by Quantec and geophysical consultants in Perth, Australia, and were considered to be of excellent quality. Geochemical sampling was undertaken in an area of 800 x 700 m for a sample spacing of 50 x 50 m and sometimes 25 x 25 m. 192 samples were extracted and 192 copper analyses and 70 molybdenum analyses were performed. The 2023 geochemical survey was completed on a 50mx100m grid with 321 samples taken, multi-element analysis of the samples was undertaken. Ground truthing and mapping is now in progress to follow up the results of the geochemical survey. Several areas of outcropping copper mineralisation have been identified, the mineralisation in out crop is present predominantly as malachite with minor chalcopyrite. The mineralisation is noted to occur as both vein style and present as infill within the matrix of breccias.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, facesampling bit or other type, whether core is oriented and if so, by what method, etc.).	<ul style="list-style-type: none"> The 2022 drill program uses diamond core drill techniques. 17 historic drillholes have been completed at the Project for a total of approximately 6,000 m by previous operators. All the drillholes have been undertaken using diamond core drilling techniques.
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> For the 2022 drilling program core recoveries have exceeded 95%. For the 2022 program all HQ3 drilling is oriented, with bottom of hole marked. The historic drill samples were taken before Culpeo's involvement, and no records are available detailing drill core recovery. Core from 5 historic drillholes has been preserved and these have been inspected by the Company's geologist, core recoveries appear on the order of +90%.
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<ul style="list-style-type: none"> For the 2022 drilling program, logging is undertaken for Lithology, Alteration, Mineralisation and Structural Controls. Partial records exist for the historic drill core logs.
Sub-sampling techniques and	If core, whether cut or sawn and whether quarter, half or all core taken.	<ul style="list-style-type: none"> For the 2022 program half core is sampled. No records available for the historic drilling.



Criteria	JORC Code explanation	Commentary
sample preparation	<i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i>	
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<ul style="list-style-type: none"> For the 2022 drilling program standards and blanks are routinely inserted in sample batches and a QAQC program is in place. Multi-element analysis was undertaken on CMLCD003, The ALS procedure for this is ME-MS61m, for 49 elements with four-acid digestion. The sample preparation techniques for historical drilling are unknown. Historical analysis has focussed on Cu, but some of the samples were also analysed for Mo, Ag and Au. Magnetic surveys were ground-based surveys, measuring Total Magnetic Intensity, with a 1s recording interval. <ul style="list-style-type: none"> Data units were nanotesla (nT). Data was collected by Quantec Geoscience (Chile), covering 150 line kms at a 25m spacing. The Magnetometer was a GEM GSM-19W with a Overhauser Effect Sensor Type, mounted on a 2m staff. The control point location was 296647 E, 6555150 N (PSAD56, Zone 19S) (repeated at beginning and end of survey each day)
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	<ul style="list-style-type: none"> For the 2022 drilling program, a high-quality database is maintained, and protocols are in place to ensure this data is checked by both the Senior Geologist and Geology Manager. Previous company staff reviewed the historic intersections. Due to the early nature of the Project, Culpeo staff have not independently verified the sampling and assaying. No twin holes have been completed due to the early stage of the project. Company geologists have verified the visible copper mineralisation present in stockpiles at the project site.
	<i>The use of twinned holes.</i>	
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	
	<i>Discuss any adjustment to assay data.</i>	
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<ul style="list-style-type: none"> For the 2022 drilling program, hole collars are established using a hand held GPS, downhole surveys are undertaken using a north seeking gyroscope. Historic Location of drillhole collars and surface samples were recorded by handheld GPS. Accuracy is not known but is considered reasonable for early-stage exploration.
	<i>Specification of the grid system used.</i>	
	<i>Quality and adequacy of topographic control.</i>	
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	<ul style="list-style-type: none"> The 2022 drilling program is being undertaken on approximately a 50m x 60m grid where drilling is focused on the Lana-Corina mineralised zone. The historical drilling and surface sampling are widely spaced and no systematic sampling/drilling grid has been implemented. In general, the mineralisation strikes in a north-east direction and drilling has been undertaken perpendicular to that.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied</i>	
	<i>Whether sample compositing has been applied.</i>	



Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	<ul style="list-style-type: none"> Drilling orientations are not considered to be biased with several drilling orientations used.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> For the 2022 drilling program, samples are delivered to the laboratory and chain of custody protocols are followed. No records available for the historic samples.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> No records are available for the historic sampling, but it is assumed no audits have been completed.



SECTION 2 REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<ul style="list-style-type: none"> The project area comprises nine exploitation concessions, which cover a total area of approximately 550 Hectares. Culpeo Minerals has agreements in place to earn up to 80%.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<ul style="list-style-type: none"> Historically three companies have undertaken exploration in the project area. These include: <ul style="list-style-type: none"> Minera Centinela (1982 to 1985) Antofagasta Minerals (2005) SCM Antares (2010 to 2018)
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<ul style="list-style-type: none"> The prospect is associated with a structural belt orientated in a NE-SW direction, about 1,000m long and 400m wide. The near surface part of the mineralised system is associated with three breccia pipes and below this a mineralised copper / molybdenum porphyry. Around the edges of the main mineralisation are a series of gold, gold-copper and barite veins.
Drillhole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i></p> <ul style="list-style-type: none"> <i>easting and northing of the drillhole collar</i> <i>elevation or RL (elevation above sea level in metres) of the drillhole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth hole length</i> 	<ul style="list-style-type: none"> A summary of the historic drillholes is provided in Appendix D and E. A summary of the 2022 drilling program is provided in Appendix F.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	<ul style="list-style-type: none"> No sample weighting or metal equivalent values have been used in reporting. Only raw assay results have been reported.
Relationship between mineralisation widths and intercept lengths	<p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	<ul style="list-style-type: none"> Only down hole lengths have been reported with respect to drilling intercepts, true width of mineralisation is unknown.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	<ul style="list-style-type: none"> Diagrams are included in the main body of the report.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practised to avoid misleading reporting of Exploration Results.</i>	<ul style="list-style-type: none"> Results have been reported for the main elements targeted (Cu and Mo). All drillhole locations are reported for context.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	<ul style="list-style-type: none"> A ground magnetic survey has recently been completed, covering 150 line kms at a 25m spacing. Historic geochemical survey undertaken in an area of 800 x 700 m for a sample spacing of 50 x 50 m and sometimes 25 x 25 m. 192 samples were taken (192 copper and 70 molybdenum analyses Two programs of geophysics have been undertaken over the project area. In 2015 an IP survey was undertaken by Geodatos, where data was collection over



Criteria	JORC Code explanation	Commentary
		<p>7.6 line km. A second IP survey was carried out in 2018, also by Geodatos with data being collected over 12.2 line km.</p> <ul style="list-style-type: none"> • A mapping program has recently been completed over the project area at 1:5000 scale and covering an area of 2km². • The Phase 1 drilling program to test the near surface breccia pipe hosted mineralisation and deeper porphyry style mineralisation is now complete. • The 2023 geochemical survey was completed on a 50mx100m grid with 321 samples taken, multi-element analysis of the samples was undertaken. • Phase 2 drilling program is complete. • Ground truthing and mapping is now in progress to follow up the results of the geochemical survey. Several areas of outcropping copper mineralisation have been identified, the mineralisation in outcrop is present predominantly as malachite with minor chalcopyrite. The mineralisation is noted to occur as both vein style and present as infill within the matrix of breccias.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none"> • The recently acquired ground magnetic data is now being modelled and target ranking will be undertaken. • Implicit modelling of geological and assay information is underway. • Additional multi-element surface geochemical sampling program completed in March 2023, with 321 samples taken. Assay results expected by mid-April 2023.

Appendix D - Historical Drilling Summary – Lana Corina Project

Hole #	Northing	Easting	Azimuth	Dip	Hole Depth (m)
COR-1	6,554,938	298,424	40	-60	Unknown
COR-2	6,554,937	298,425	85	-60	71
LAN-1	6,555,003	298,496	103	-70	80
LC-1	6,555,000	298,507	228	-45	160
LCO-1	6,554,776	298,605	321	-50	545.3
LCO-2	6,555,118	298,297	140	-60	596.35
LCO-3	6,555,360	298,537	130	-60	300
LCO-4	6,555,409	298,560	123	-50	300
LCD-11	6,554,949	298,586	315	-70	518.7
LCD-12	6,554,634	298,778	315	-61	1028.75
LCD-13	6,554,710	298,516	315	-55	675.80
LCD-14	6,555,003	298,791	315	-60	486.95
LCD-15	6,554,676	298,375	315	-55	401.30



Appendix E - Historical Significant Intercept Table – Lana Corina Project

Hole #	Significant Intercept Width (m)	Cu %	Mo ppm	From	To
COR-2	70	1.23	-	0	70
LAN-1	80	0.67	-	0	80
LC-1	154	0.70	-	0	154
LCO-1	132	0.56	51	324	456
LCO-2	178	0.72	284	356	534
LCO-3	4	0.18	75	228	232
LCO-4	6	0.25	17	232	238
LCD-11	3	0.69	16	312	315
LCD-12	4	0.55	59	759	763
LCD-13	207	0.41	124	274	481
LCD-14	3	0.47	10	416	419

Notes: No top cut has been applied, grade intersections are generally calculated over intervals >0.2% Cu where zones of internal dilution are not weaker than 2m < 0.1% Cu. Bulked thicker intercepts may have more internal dilution between high-grade zones.

Appendix F - Recent Drillhole Locations and Significant Intercepts

Table E1: Drill Hole Locations

Prospect	Hole No.	Easting	Northing	Elevation	Azimuth	Inclination	Total depth
Lana Corina	CMLCD001	298380	6554936	873	124	-75	456
Lana Corina	CMLCD002	298418	6554934	872	135	-85	534
Lana Corina	CMLCD003	298613	6555007	850	244	-60	654
Lana Corina	CMLCD004	298452	6554958	865	135	-80	102 (void)
Lana Corina	CMLCD005	298413	6555026	863	135	-70	555
Lana Corina	CMLCD006	298364	6554953	869	150	-60	530.7
Lana Corina	CMLCD007	298478	6554832	855	318	-71	651
Lana Corina	CMLCD008	298472	6555060	875	160	-70	500
Lana Corina	CMLCD009	298323	6554993	875	130	-70	550
Lana Corina	CMLCD001A	298380	6554936	873	124	-60	103.9 (void)
Lana Corina	CMLCD005A	298413	6555026	863	135	-55	134.4 (void)
Lana Corina	CMLCD010	298546	6554838	851	317	-63	451
Lana Corina	CMLCD011	298495	6554700	866	315	-55	510
Lana Corina	CMLCD012	298720	6554885	851	315	-60	296.8
Lana Corina	CMLCD013	298615	6555008	850	244	-65	922.8

Table E2: Significant Downhole Intersections 2022/23 Drilling Program

Hole_ID	From (m)	To (m)	Interval	Cu (%)	Mo (ppm)	Re (ppm)	Ag (g/t)	Au (g/t)
CMLCD001	52	52.4	0.4	0.347	10		1	0.0025
CMLCD001	64	65	1	0.232	20		3	0.01
CMLCD001	65	66	1	0.847	10		5	0.09
CMLCD001	66	66.3	0.3	0.553	40		3	0.06
CMLCD001	105.2	106	0.8	0.231	20		1	0.01
CMLCD001	128	129	1	0.219	10		1	0.01
CMLCD001	129	130	1	0.396	20		3	0.05
CMLCD001	130	131	1	0.279	20		2	0.03
CMLCD001	131	132	1	3.514	20		23	0.23
CMLCD001	132	133	1	0.924	20		6	0.05
CMLCD001	155	259	104	0.74	73		4.8	0.02
CMLCD001	265	266	1	1.297	20		10	0.02
CMLCD001	266	267	1	0.162	20		0.05	0.01



CMLCD001	269	270	1	0.23	10		1	0.01
CMLCD001	277	278	1	0.241	10		1	0.02
CMLCD001	278	279	1	0.265	20		1	0.01
CMLCD001	280	281	1	0.262	20		1	0.0025
CMLCD001	284	285	1	0.332	40		4	0.01
CMLCD001	288	289	1	0.228	20		1	0.01
CMLCD001	289	290	1	0.446	10		2	0.01
CMLCD001	291	292	1	0.245	10		3	0.01
CMLCD001	296.8	384	87.2	0.57	51		2.34	0.02
CMLCD001	393	394	1	0.753	10		4	0.02
CMLCD001	394	395	1	0.367	10		1	0.02
CMLCD001	406	407	1	0.309	10		2	0.01
CMLCD002	90.85	91.4	0.55	0.60	20		6	0.0025
CMLCD002	94	95	1	0.32	10		4	0.005
CMLCD002	96	97	1	0.39	10		3	0.0025
CMLCD002	106	107	1	1.44	20		9	0.006
CMLCD002	123.2	125	1.8	1.92	10		11.22	0.03
CMLCD002	127	128	1	0.77	20		8	0.011
CMLCD002	156.3	157	0.7	0.45	170		106	0.015
CMLCD002	161	162	1	1.61	10		13	0.14
CMLCD002	170	427	257	0.95	81		3.70	0.02
CMLCD002	434	435	1	0.61	30		4	0.025
CMLCD002	436.7	437.4	0.7	0.29	20		3	0.0025
CMLCD002	440	441	1	0.28	10		3	0.0025
CMLCD002	443	444	1	0.35	10		2	0.011
CMLCD002	444	444.5	0.5	0.55	5		3	0.01
CMLCD002	469	470	1	0.71	20		2	0.0025
CMLCD002	473	474	1	0.40	10		2	0.007
CMLCD002	474	474.5	0.5	0.30	20		1	0.006
CMLCD002	508	509	1	0.39	20		2	0.012
CMLCD002	518	518.5	0.5	0.59	20		3	0.012
CMLCD003	30	30.6	0.6	0.38	20		5	0.04
CMLCD003	260	261	1	0.27	10		1	0.02
CMLCD003	271.5	272.06	0.56	0.52	50		5	0.03
CMLCD003	281	281.91	0.91	0.67	10		5	0.03
CMLCD003	307	308	1	0.23	20		0.1	0.02
CMLCD003	308	309	1	0.24	20		3	0.03
CMLCD003	313	486	173	1.05	50		3	0.01
CMLCD003	486	571	85	0.07	1369	0.77	0.5	0.003
CMLCD005	125	126	1	0.38	10		3	0.02
CMLCD005	152	153	1	0.60	5		13	0.04
CMLCD005	187.32	189.5	2.18	0.66	10		2.3	0.03



CMLCD005	194	196	2.0	1.39	10		4	0.03
CMLCD005	201	212	11	0.83	63		2.3	0.02
CMLCD005	216	265	49	0.83	41		4.2	0.03
CMLCD005	302.13	383	80.87	1.06	145		5.3	0.02
CMLCD005	487.4	488	0.6	0.35	20		1	0.02
CMLCD005	125	126	1	0.38	10		3	0.02
CMLCD005	152	153	1	0.60	5		13	0.04
CMLCD005	187.32	189.5	2.18	0.66	10		2.3	0.03
CMLCD005	194	196	2.0	1.39	10		4	0.03
CMLCD005	201	212	11	0.83	63		2.3	0.02
CMLCD005	216	265	49	0.83	41		4.2	0.03
CMLCD005	302.13	383	80.87	1.06	145		5.3	0.02
CMLCD005	487.4	488	0.6	0.35	20		1	0.02
CMLCD007	276.1	369	92.9	0.39	183		3.04	0.006
CMLCD007	376	390	14	0.45	168		2.57	0.015
CMLCD007	405	455	50	0.34	206		2.88	0.010
CMLCD007	458.4	549.7	91.3	0.63	79		2.90	0.011
CMLCD007	565	571	6	0.28	22		1.50	0.004
CMLCD007	573.4	590.7	17.3	0.35	21		3.23	0.007
CMLCD007	612	628	16	0.33	62		1.18	0.004
CMLCD008	104	107	3	1.15	10		6	0.050
CMLCD009	31.2	34.7	3.5	0.27	27		3	0.007
CMLCD009	289.5	324	34.5	0.46	90		2	0.012
CMLCD009	331	444	113	0.60	122		4	0.010
CMLCD009	464	467.5	3.5	0.57	16		4	1.010
CMLCD009	536	539	3	0.48	12		3	0.003
CMLCD001A	96	103.9	7.9	1.20	30		6	0.02
CMLCD004	82	102.1	20.1	1.13	56		4.1	0.05
CMLCD005A	118	134.4	16.4	1.32	30		8.9	0.04
CMLCD010	239	408	169	1.08	225		6.3	0.02
CMLCD010	434	438	4	1.13	10		4.25	0.02
CMLCD011	334	434	100	0.35	36		2.10	0.012
CMLCD012	169	170	1	0.25	20		0.05	0.018
CMLCD013	321	342	21	0.40	14		1.92	0.019
CMLCD013	352	424	72	0.85	24		3.87	0.063
CMLCD013	513	560	47	0.24	51		1.62	0.007
CMLCD013	570	605	35	0.14	1704		1.84	0.118
CMLCD013	674	691	17	0.46	48		1.53	0.005
CMLCD013	698	711	13	0.33	32		1.73	0.003
CMLCD013	721	726	5	0.52	80		0.78	0.003
CMLCD013	734	752	18	0.29	91		0.69	0.003

Notes: No top cut has been applied, grade intersections are generally calculated over intervals >0.2% Cu where zones of internal dilution are not weaker than 2m < 0.1% Cu. Bulked thicker intercepts may have more internal dilution between high-grade zones.



Appendix G – Results of Multi-Element Geochemical Survey Vista Montana

				Au-AA24	ME-MS61	Hg-MS42	ME-MS61	ME-MS61	ME-MS61	ME-MS61	ME-MS61	ME-MS61																
EASTING	NORTHING	ELEVATION	SAMPLE_ID	Au	Ag	Al	As	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
				ppm	ppm	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm													
299357	6555500	859	CPO0008201	<0.005	0.26	8.58	3.5	390	0.7	0.17	3.29	0.09	19.25	21.5	22	0.62	133	5.18	17.95	0.06	1.1	0.028	0.059	0.7	7.5	9.9	1.72	994
299400	6555500	858	CPO0008202	<0.005	0.12	10.05	7.5	330	0.76	0.17	3.29	0.09	20.2	22.8	43	0.89	117	7.6	16.7	0.1	0.8	0.059	0.116	0.57	8.5	12.2	1.53	1350
299450	6555500	855	CPO0008203	0.017	0.65	11.1	42.7	820	0.99	0.23	2.17	0.07	18.2	13.5	19	2.09	247	4.65	20.1	0.1	1.3	0.182	0.236	1.87	7.3	15.5	0.77	1270
299500	6555500	856	CPO0008204	0.007	0.15	10.1	6.8	430	0.97	0.07	3.74	0.08	27	22.4	36	1.56	90.5	6.37	20.7	0.12	0.9	0.025	0.068	1.19	11.3	9	1.79	1045
299550	6555500	856	CPO0008205	0.007	0.29	10.4	11.6	390	0.8	0.18	3.48	0.22	23.5	28.8	68	2.32	262	7.34	20	0.13	1	0.023	0.099	0.88	10.5	11.7	1.98	1535
299600	6555500	853	CPO0008206	0.013	0.27	10.2	19.4	570	1	0.24	2.77	0.15	38	25.7	33	3.96	169.5	6.84	22	0.14	1	0.058	0.103	1.63	16.6	13.1	1.43	1715
299650	6555500	846	CPO0008207	<0.005	0.12	10.9	13.2	310	1.2	0.05	3.84	0.07	27.8	17.8	21	0.96	51.7	5.82	23.4	0.12	1	0.042	0.059	1.02	10.8	7.8	1.99	1165
299700	6555500	834	CPO0008208	0.008	0.09	9.2	13.8	580	0.97	0.1	3.61	0.14	37.9	24.1	50	1.53	50.7	9.42	19.35	0.14	0.8	0.031	0.062	1.78	16	7.9	1.79	1410
299750	6555500	813	CPO0008209	<0.005	0.07	9.16	13.6	740	1	0.08	3.28	0.17	42	22.2	37	2.14	52.6	7.9	19.45	0.14	0.7	0.031	0.054	2.11	18.4	9.1	1.52	1425
299800	6555500	823	CPO0008211	<0.005	0.22	12.65	10.2	800	1.01	0.1	1.77	0.35	29.8	20	11	4.89	74.9	5.6	22.4	0.11	0.2	0.035	0.037	6.45	12.6	15.4	2.11	740
299850	6555500	841	CPO0008212	<0.005	0.1	8.84	15.6	1190	1.01	0.19	2.17	0.12	44.5	26	50	3.32	92.9	6.29	18.35	0.15	0.8	0.04	0.051	3.33	21.4	11.3	1.59	1500
299900	6555500	853	CPO0008213	<0.005	0.06	9.21	12.2	970	1.18	0.09	3.2	0.05	50.5	26	52	1.23	101	5.92	20.4	0.17	0.9	0.066	0.058	2.89	21.6	4.5	1.95	1385
299950	6555500	858	CPO0008214	<0.005	0.06	9.05	16	1190	0.97	0.05	3	0.06	41.6	22.3	47	1.98	24	5.83	17.85	0.14	0.8	0.021	0.049	3.97	20.1	6.4	1.76	1115
299400	6555600	873	CPO0008215	<0.005	0.12	8.09	9.6	430	0.73	0.25	3.43	0.27	34.1	25.2	80	1.84	153	8.49	16.7	0.15	1.1	0.036	0.146	1.02	15.4	9	1.37	1460
299450	6555600	872	CPO0008216	0.023	0.11	8.82	9.6	450	0.86	0.58	3.17	0.27	37.2	27	62	1.9	203	9.22	19.05	0.16	1	0.078	0.094	1.26	16.6	10.4	1.38	1470
299500	6555600	864	CPO0008217	0.01	0.16	9.5	11.6	580	0.98	0.22	2.77	0.34	41.7	25.3	38	2.99	192.5	7.37	20.4	0.16	1.1	0.034	0.099	1.55	19	13.1	1.26	2090
299550	6555600	864	CPO0008218	0.045	1.65	9.26	65.7	820	0.76	1.96	0.83	0.21	38.5	16.8	7	4.12	171.5	6.57	20.2	0.13	0.3	0.609	0.119	3.59	17	16.7	0.52	842
299600	6555600	861	CPO0008219	0.005	0.15	10.5	11.4	560	1.2	0.11	3.29	0.11	40.5	24.2	36	2.06	41	6.28	21.9	0.14	0.6	0.035	0.059	1.97	17.1	11.4	1.75	1465
299650	6555600	854	CPO0008221	0.008	0.12	10.15	11.7	620	1.17	0.07	3.18	0.08	37.9	19.4	18	1.65	39.6	5.95	22.4	0.13	0.6	0.05	0.05	1.65	16.6	9.9	1.52	1075
299700	6555600	843	CPO0008222	0.022	0.15	8.95	16.9	760	0.96	0.28	2.75	0.19	38	24.7	47	2.73	100	7.28	18.3	0.14	0.7	0.777	0.061	2.28	16.6	12.3	1.47	1540
299750	6555600	813	CPO0008223	<0.005	0.07	9.44	12	810	1.01	0.08	2.88	0.28	44.8	24.5	25	2.81	57.7	6.26	20.1	0.16	0.7	0.018	0.052	2.48	19.8	11.7	1.49	1495
299800	6555600	816	CPO0008224	<0.005	0.08	9.09	15	1110	1.1	0.12	2.02	0.15	44.3	20.7	39	3.12	45.6	5.33	19.1	0.14	0.8	0.061	0.069	3.21	21.2	12.5	1.25	1405
299850	6555600	839	CPO0008225	<0.005	0.1	9.53	16.8	1600	1.19	0.1	1.91	0.21	48.9	23.8	40	2.73	61.8	5.83	19.8	0.14	0.8	0.09	0.061	3.97	22.5	11.5	1.18	1705
299900	6555600	853	CPO0008226</td																									



299600	6555800	880	CPO0008248	<0.005	0.07	9.84	13.3	480	1.17	0.05	3.7	0.15	32.7	22.9	38	3.68	45.9	7.33	21.8	0.15	0.7	0.066	0.068	1.23	15.4	16.1	1.52	1480
299650	6555800	876	CPO0008249	<0.005	0.11	9.91	17.8	800	0.88	0.11	2.95	0.3	24.6	25.2	49	3.44	29.1	7.53	18.5	0.13	0.5	0.032	0.052	2.63	10.6	15.3	2.18	1935
299700	6555800	858	CPO0008251	<0.005	0.12	10.15	15.6	1070	1.29	0.05	2.51	0.27	41.9	26.9	36	2.66	57.9	7.32	23	0.16	0.6	0.034	0.054	4.16	19.6	15.3	1.06	1585
299750	6555800	836	CPO0008252	<0.005	0.09	8.71	13.2	1030	0.99	0.14	2.14	0.35	42	23.3	39	2.84	46.5	6.53	18.65	0.15	0.8	0.034	0.051	3.57	20.1	11.5	1.25	1825
299800	6555800	810	CPO0008253	<0.005	0.11	9.44	17.8	910	1.11	0.2	2.18	0.58	39.9	28.5	82	4.09	57.2	6.51	21.4	0.17	0.8	0.166	0.067	3.33	18.4	15.8	1.4	2140
299850	6555800	819	CPO0008254	<0.005	0.06	11	11.8	830	1.26	0.04	2.8	0.15	41.8	21.6	13	2.76	36.9	5.46	21.6	0.16	0.7	0.028	0.044	2.93	19	12.8	1.44	1045
299900	6555800	840	CPO0008255	<0.005	0.06	10.05	17.4	1410	1.26	0.06	1.58	0.11	48.2	22	16	2.53	54.2	6.3	23	0.17	1.1	0.03	0.061	5.04	21.6	9.5	0.82	1195
299950	6555800	841	CPO0008256	<0.005	0.1	10.15	16.7	1020	1.22	0.07	1.75	0.24	39.7	22.2	14	4.45	47.2	5.64	22	0.15	1.1	0.04	0.052	2.84	16.4	18.3	0.93	1230
299950	6555900	877	CPO0008257	<0.005	0.13	10.35	2.9	280	0.74	0.13	4.22	0.22	21.2	25.3	115	1.07	136	6.94	19.05	0.13	0.8	0.02	0.069	0.48	8.6	6.9	2.06	1455
299940	6555900	873	CPO0008258	<0.005	0.1	9.73	5.6	370	0.78	0.09	3.82	0.44	27.4	26.4	65	1.65	153.5	7.26	18.2	0.13	0.9	0.058	0.07	1.07	11.2	9.1	1.77	1400
299945	6555900	873	CPO0008259	<0.005	0.14	9.78	9	1040	0.67	0.1	3.25	0.15	18.25	32.3	100	2.58	180	7.72	17.75	0.11	0.9	0.11	0.066	0.82	7.6	12.6	2.42	1330
299950	6555900	873	CPO0008261	<0.005	0.13	9.9	6.4	530	0.68	0.12	3.26	0.15	20.5	28.4	84	3	181	8.04	17.95	0.11	0.8	0.139	0.069	0.96	8.6	14.3	1.94	1375
299950	6555900	872	CPO0008262	<0.005	0.19	8.77	20.4	480	0.93	0.19	2.48	0.23	34.6	25.4	43	3.23	205	6.69	17.65	0.14	1.1	0.089	0.057	1.49	16.1	14.7	1.43	1350
299960	6555900	873	CPO0008263	<0.005	0.1	9.68	8.7	660	1.03	0.06	3.4	0.15	34.4	22.4	19	2.91	49.7	7.28	17.7	0.12	0.4	0.024	0.035	2.13	14.5	16.1	1.51	1445
299960	6555900	867	CPO0008264	0.011	0.28	8.98	49.1	690	0.92	0.08	6.59	0.46	28.1	27.2	13	7.55	179.5	6.26	18.35	0.12	0.3	0.776	0.046	2.2	12.2	25.9	0.84	2890
299970	6555900	851	CPO0008265	<0.005	0.18	9.42	21.6	830	0.97	0.08	2.59	0.2	35.2	23.6	24	4.27	79.7	7.31	19.1	0.14	0.5	0.062	0.047	2.34	15.7	14.9	1.4	1635
299975	6555900	829	CPO0008266	<0.005	0.12	9.91	13.6	740	0.99	0.05	2.4	0.2	33.3	29.2	33	3.76	54.4	6.38	21	0.13	0.5	0.038	0.042	2.37	14.8	16.9	2.35	1325
299980	6555900	811	CPO0008267	0.045	0.12	8.11	13.7	690	0.84	0.09	7.48	0.21	27.8	15	69	3.41	74	5.96	12.95	0.12	0.8	0.134	0.035	1.65	12.6	29.2	1.34	1730
299985	6555900	828	CPO0008268	<0.005	0.13	11.4	18	1110	1.24	0.41	1.74	0.7	39.2	19.4	16	5.44	108.5	5.84	20.9	0.13	0.9	0.053	0.048	4.33	16	20.3	1.16	1710
299990	6555900	831	CPO0008269	<0.005	0.09	9.69	16	1100	1.16	0.07	1.94	0.26	45.9	17.6	16	3.76	44.8	5.52	19.75	0.15	0.8	0.032	0.043	3.06	20.7	15.2	0.89	1255
299995	6555900	821	CPO0008271	<0.005	0.12	9.42	18.4	1190	1.13	0.05	1.6	0.21	47.7	20	21	5.63	40.8	5.89	21.1	0.15	0.8	0.054	0.048	2.41	22.4	27.2	0.75	1655
299995	6556000	875	CPO0008272	0.01	0.04	9.53	3.9	320	0.79	0.03	3.82	0.08	25.5	23.3	68	0.74	145.5	7.44	19.05	<0.05	0.6	0.005	0.062	0.67	10.6	6.2	1.61	1025
299940	6556000	877	CPO0008273	<0.005	0.08	10.6	2.6	300	0.55	0.08	4.94	0.09	14.95	22.9	18	0.77	121	6.3	19.5	0.12	0.6	0.014	0.063	0.74	6	7.2	1.64	1095
299945	6556000	875	CPO0008274	<0.005	0.09	10.05	3.4	330	0.84	0.04	3.36	0.07	26	23.3	46	1.56	201	7.48	20.9	0.13	0.9	0.009	0.067	0.71	11.2	9.5	1.21	1155
299950	6556000	875	CPO0008275	<0.005	0.16	9.84	4.5	310	0.69	0.04	4.25	0.07	22.7	25	76	1.02	159	6.64	19.2	0.14	0.7	0.012	0.055	0.82	9.9	7.2	1.94	1175
299950	6556000	872	CPO0008276	0.259	1.54	9.61	47.8	760	1.12	10.85	2.82	0.37	34.9	28	11	5.34	519	6.32	21	0.13	0.6	1.045	0.066	1.73	14.8	22.4	1.14	2040
299960	6556000	875	CPO0008277	<0.005	0.26	10.05	23	990	0.92	0.17	2.32	0.4	33	31.7	15	5.92	65.5											



299400	6556200	856	CPO0008302	<0.005	0.09	8.94	2.5	370	0.88	0.07	3.68	0.07	34.6	23	26	2.74	130	5.76	21	0.11	0.6	0.009	0.055	1.57	14.6	14.3	1.74	1075
299450	6556200	855	CPO0008303	0.028	0.19	8.97	5.4	350	0.86	0.12	2.64	0.07	30.6	25	68	1.65	753	9.13	23.4	0.14	1	0.02	0.093	0.98	13.5	9.4	1.11	1285
299500	6556200	851	CPO0008304	<0.005	0.1	8.32	4.1	310	0.72	0.07	4.1	0.13	29	26.1	72	1.33	254	9.8	21.3	0.12	0.8	0.009	0.062	0.99	12.6	7.6	1.62	1515
299550	6556200	850	CPO0008305	0.007	0.18	8.2	5.7	470	0.91	0.04	3.09	0.1	29	19	22	2.11	231	4.34	20	0.09	0.6	0.093	0.04	0.99	12.2	10.6	1.38	1125
299600	6556200	851	CPO0008306	<0.005	0.12	9.21	5.4	420	0.71	0.04	3.55	0.08	23.4	24.4	25	2.08	139.5	6.18	20.3	0.09	0.8	0.048	0.045	0.88	10.1	11.6	1.72	1315
299650	6556200	857	CPO0008307	0.007	0.11	8.26	15.4	750	0.88	0.05	2.03	0.08	30.2	27.3	13	2.21	311	4.22	20.1	0.12	1.6	0.071	0.019	1.98	11.5	9.6	0.86	411
299700	6556200	865	CPO0008308	<0.005	0.17	8.97	19.6	450	0.77	0.09	2	0.23	27.4	29.5	44	5.82	119.5	6.63	20.6	0.11	0.8	0.095	0.051	1.03	11.9	34.9	1.31	1460
299750	6556200	870	CPO0008309	<0.005	0.23	9.02	17.2	360	0.7	0.11	3.83	0.23	24.6	23.9	50	8.12	254	5.32	20	0.11	1	0.105	0.09	0.95	10.2	31.5	1.52	1670
299800	6556200	869	CPO0008311	0.01	0.22	7.83	13.2	690	0.95	0.06	5.39	0.18	40.2	19.8	41	6.85	87.7	5.16	19	0.11	0.9	0.1	0.043	1.89	17.1	24.7	0.81	1480
299850	6556200	861	CPO0008312	<0.005	0.14	8.66	19.5	540	0.96	0.05	3.37	0.25	33.1	24.3	24	8.35	90.8	5.84	21.3	0.12	0.8	0.072	0.052	1.47	14.1	36.6	0.71	2080
299900	6556200	840	CPO0008313	<0.005	0.13	9.61	15.1	310	1.01	0.03	1.91	0.14	35.6	18.4	8	6.52	54.8	5.15	22.1	0.12	0.5	0.035	0.033	1.23	14.3	26.2	0.99	1175
299950	6556200	834	CPO0008314	<0.005	0.07	10.6	26.2	350	1.03	0.05	1.89	0.46	28.9	20.5	43	5.37	44.9	6.56	26.3	0.11	0.9	0.102	0.067	0.75	11.5	77.5	0.27	1880
299350	6556300	863	CPO0008315	<0.005	0.06	9.26	2	260	0.65	0.02	4.17	0.07	20.6	23.8	45	0.73	159.5	6.53	20	0.1	1.1	0.012	0.054	0.78	8.9	7.6	2.03	1005
299400	6556300	862	CPO0008316	<0.005	0.1	9.35	3.2	320	0.75	0.03	3.55	0.11	26.6	22.7	21	1.05	157	6.22	21.2	0.1	0.9	0.013	0.05	0.78	10.8	7.8	1.56	1170
299450	6556300	853	CPO0008317	<0.005	0.08	8.35	3	310	0.81	0.05	3.82	0.09	29.7	24.4	42	1.87	168.5	6.98	20.4	0.11	1	0.009	0.055	1.14	12.5	8	1.76	1275
299500	6556300	846	CPO0008318	0.009	0.04	8.42	4.3	350	0.85	0.05	3.59	0.11	29.8	22.3	38	1.63	164.5	6.77	21	0.12	0.8	0.009	0.053	1.3	12.5	7.8	1.51	1150
299550	6556300	841	CPO0008319	<0.005	0.05	8.81	4.4	340	0.88	0.06	3.3	0.17	30.2	25.6	48	1.96	240	8.22	22.3	0.12	0.9	0.013	0.054	1.24	12.8	9.2	1.54	1305
299600	6556300	837	CPO0008321	0.011	0.07	8.56	3.8	380	0.81	0.03	4.36	0.06	25.2	22.8	22	2.16	132	5.13	20.9	0.09	0.6	0.013	0.044	1.13	10.9	11.9	1.7	956
299650	6556300	833	CPO0008322	<0.005	0.2	8.33	6.9	530	0.83	0.04	3.92	0.06	30.7	29.6	56	2.55	170.5	7.05	22	0.11	0.6	0.089	0.053	1.09	14.1	12.3	2.01	1185
299700	6556300	846	CPO0008323	<0.005	0.09	8.02	24.6	770	0.65	0.04	6.54	0.18	30.8	25.4	12	9.2	26.6	5.33	19.3	0.1	0.2	0.087	0.029	3.11	13.8	33.3	1.24	1550
299750	6556300	855	CPO0008324	0.007	0.07	8.02	22.4	420	0.78	0.05	8.78	0.27	29.1	25.5	15	5.77	40.8	6.3	20.2	0.1	0.5	0.081	0.036	0.89	13.3	34.6	0.68	1680
299800	6556300	864	CPO0008325	0.01	0.12	9	27.8	570	1.02	0.08	3.89	0.66	19.1	31.4	8	5.8	62.5	7.08	27.1	0.09	0.9	0.128	0.088	0.97	8.3	69.3	0.22	3690
299850	6556300	857	CPO0008326	0.006	0.14	9.82	22.1	780	1.15	0.08	1.46	0.23	38.8	26.8	10	7.46	93.8	5.96	24.7	0.13	0.8	0.113	0.06	2.35	16.2	34.6	0.55	2060
299900	6556300	842	CPO0008327	0.006	0.12	8.03	25.3	630	0.97	0.06	5.01	0.24	26.5	25.4	9	7.68	91.3	5.56	21.2	0.1	0.5	0.062	0.039	1.9	10.7	43.7	0.27	1755
299950	6556300	822	CPO0008328	<0.005	0.09	10.1	11.5	360	1.01	0.04	8.75	0.15	52.3	23	6	11.15	67.5	5.11	22.7	0.13	0.6	0.033	0.043	1.96	22.4	32.6	1.6	1595
299350	6556400	862	CPO0008329	<0.005	0.04	8.42	2.6	360	0.9	0.04	3.33	0.07	31.7	20.2	33	2	121.5	6.13	19.75	0.12	0.9	0.007	0.047	1.36	14	7.4	1.36	1055
299400	6556400	863	CPO0008331	<0.005	0.11	8.94	2.6	440	0.92	0.04	3.87	0.04	28.4	22.9	24	2.27	400	5.21	21.5	0.1	0.8	0.013	0.06	1.56				



299650	6555500	846	CPO0008207	0.36	2.91	3.5	12.5	820	7.9	13	<0.002	<0.01	0.67	20.4	1	1.2	410	0.26	<0.05	4.05	0.45	0.08	0.6	221	0.7	17.2	79	24.4
299700	6555500	834	CPO0008208	1.3	2.17	3.6	20.5	1040	10.9	36.5	<0.002	<0.01	1.39	24.4	1	1.6	454	0.27	0.07	4.62	0.563	0.13	0.9	361	0.6	19.8	112	17.6
299750	6555500	813	CPO0008209	1.08	2.27	3.4	15.6	990	11.6	54.9	<0.002	0.01	1.42	23.3	1	1.2	469	0.25	0.09	4	0.521	0.17	0.8	300	0.7	19.4	121	39.2
299800	6555500	823	CPO0008211	0.99	1.46	2.3	10.5	1220	9.9	107.5	<0.002	0.02	0.72	15	1	1.5	272	0.17	0.12	3.1	0.392	0.43	0.5	111	0.4	11.3	129	4.4
299850	6555500	841	CPO0008212	0.83	1.95	3.6	18	690	13.1	108	<0.002	0.01	2.11	26.1	1	1.1	356	0.28	0.05	5.98	0.505	0.28	1	247	1	18.7	129	25
299900	6555500	853	CPO0008213	0.5	2.88	3.8	22.1	670	8.9	62.6	<0.002	<0.01	1.4	28.2	1	1.3	461	0.27	0.05	5.54	0.495	0.16	1.1	253	0.6	23.9	86	28.2
299950	6555500	858	CPO0008214	0.82	2.68	3.5	18.8	800	10.6	87.1	<0.002	0.01	1.62	26.8	<1	1.2	542	0.26	<0.05	5.27	0.484	0.24	1.3	247	0.8	18.6	91	27.5
299400	6555600	873	CPO0008215	1.28	1.41	3.5	20.6	590	14.5	39	<0.002	0.01	2.77	25.2	1	1.4	364	0.25	0.14	3.73	0.608	0.14	0.9	341	1.1	22.9	143	31.9
299450	6555600	872	CPO0008216	1.48	1.59	4.3	20.6	830	17.7	45	<0.002	0.01	2.89	25.1	1	1.3	335	0.3	0.12	4.73	0.63	0.14	1.1	374	0.9	24	151	24.3
299500	6555600	864	CPO0008217	1.15	1.44	4.3	18.3	700	30.2	57.8	<0.002	0.01	2.38	25.3	1	1.2	329	0.31	0.21	5.18	0.554	0.2	1.3	261	1.1	24.1	217	26.7
299550	6555600	864	CPO0008218	6.12	0.34	1.8	6.9	950	36.8	122	<0.002	0.33	8.03	18.4	2	2.2	360	0.12	1.4	2.8	0.379	0.43	0.5	230	2.9	10.2	179	6.1
299600	6555600	861	CPO0008219	0.38	1.89	3.3	17.5	1010	12.2	41.5	<0.002	0.01	0.95	27.2	1	1.2	504	0.23	0.07	4.65	0.497	0.16	0.7	259	0.5	19.6	121	12.2
299650	6555600	854	CPO0008221	0.45	2.67	3.4	11.6	720	11.1	37.3	<0.002	<0.01	0.88	21.4	<1	1.2	531	0.24	<0.05	4.86	0.428	0.12	0.7	220	0.3	18.3	96	12
299700	6555600	843	CPO0008222	0.9	1.72	3.1	17.3	710	22.5	67.1	<0.002	0.01	3.06	24.2	<1	1	402	0.21	0.08	4.39	0.504	0.18	0.9	284	0.8	18.4	136	16.2
299750	6555600	813	CPO0008223	0.74	2.11	3.4	15.4	870	16.6	80.4	<0.002	0.01	1.49	23.2	<1	1.3	427	0.25	0.05	4.48	0.491	0.2	0.8	228	0.6	20	150	16.6
299800	6555600	816	CPO0008224	0.67	2.02	3.7	16	610	16.6	83.2	<0.002	0.01	2.36	22.9	<1	1.1	372	0.29	0.06	6.67	0.435	0.26	1.6	221	0.8	18.6	130	26.5
299850	6555600	839	CPO0008225	0.79	2.04	3.9	16.8	540	21.8	93.4	<0.002	0.01	2.84	24.1	<1	1.4	359	0.31	0.08	6.72	0.469	0.31	1.7	235	0.9	19.5	165	23.7
299900	6555600	853	CPO0008226	0.6	2.04	3.2	8.4	620	10.7	64.5	<0.002	0.01	1.05	16	<1	1	407	0.24	<0.05	5.34	0.456	0.19	1.1	209	0.8	16.2	110	23.6
299950	6555600	853	CPO0008227	0.85	1.98	4.1	10.6	660	13.3	72.1	<0.002	<0.01	1.26	19.4	<1	1.5	426	0.32	<0.05	6.56	0.513	0.23	1.5	239	0.6	19.6	118	30.9
299350	6555700	866	CPO0008228	1.13	1.36	2.8	22	700	60.7	16	<0.002	0.01	2.88	24.9	1	1.1	406	0.21	0.38	2.61	0.519	0.12	0.8	239	1.5	19.8	467	22.4
299400	6555700	864	CPO0008229	1.64	1.61	3.6	24	680	24.3	35.2	<0.002	0.01	2.99	27.2	1	1.7	364	0.28	0.15	4.33	0.621	0.13	1.1	384	1.2	23.2	242	23.8
299450	6555700	864	CPO0008231	2.89	1.27	3.9	18.4	680	28.3	47	<0.002	0.02	9.99	22.4	<1	1.4	283	0.3	0.17	5.16	0.617	0.19	1.5	396	1.5	21.8	182	22.5
299500	6555700	865	CPO0008232	1.21	1.71	4.6	17.3	560	17.7	60.1	<0.002	0.01	1.83	21.2	1	1.9	377	0.36	0.08	8.28	0.604	0.19	1.8	356	0.9	25	129	26.4
299550	6555700	867	CPO0008233	0.82	1.96	3.2	12.3	960	17	41.1	<0.002	0.01	1.8	21.4	<1	1.3	457	0.22	0.09	3.91	0.558	0.18	0.7	280	0.6	20.8	144	12.7
299600	6555700	870	CPO0008234	0.49	1.85	3.7	18.8	800	51.8	51	<0.002	0.01	1.46	25.3	<1	1.5	479	0.25	0.06	5.03	0.542	0.19	1.1	269	0.6	23.2	222	17.7
299650	6555700	867	CPO0008235	0.75	1.83	3.3	11.4	830	20.6	123.5	<0.002	0.01	1.54	19.6	<1	1.2	331	0.25	0.07	4.9	0.463	0.35	0.8	220	0.5	17	166	13.4
299700	6555700	849	CPO0008236	0.64	2.12	3.6	17.2	750	25.8	72.3	<0.002	<0.01	1.4	24.2	<1	1.1	393	0.27	0.07	5.33	0.523	0.27	1.1	267	0.6	17.9	200	18.3
299750	6555700	825	CPO0008237	0.37	2.05	3																						



299500	6555900	873	CPO0008261	0.84	1.36	2.4	26.4	370	11.3	23.2	<0.002	0.01	2.11	26.5	<1	0.9	280	0.19	<0.05	2.4	0.514	0.14	0.6	316	0.6	19	113	17.2
299550	6555900	872	CPO0008262	1.22	1.38	4.1	28.3	510	18.6	56.2	<0.002	0.01	4.91	22.5	<1	1.3	279	0.33	0.12	7.82	0.502	0.19	1.7	246	1	24.2	140	22.4
299600	6555900	873	CPO0008263	0.58	2.11	2.4	11.6	1270	17.2	54.4	<0.002	0.01	0.79	17.2	<1	1	601	0.16	<0.05	3.09	0.46	0.21	0.5	234	0.3	16.2	138	7.9
299650	6555900	867	CPO0008264	1.44	0.61	1.9	13.6	1030	46.5	78.9	<0.002	0.01	9.47	20.8	<1	1	221	0.13	0.07	1.58	0.442	0.3	0.3	242	3.1	14.8	210	5.9
299700	6555900	851	CPO0008265	0.89	1.82	2.9	14.5	1140	35	62.1	<0.002	0.01	3.49	22.8	1	1.1	477	0.21	0.08	3.65	0.507	0.24	0.6	257	1.2	17.4	182	12.2
299750	6555900	829	CPO0008266	0.44	2.03	3.2	18.8	810	21.1	50.5	<0.002	<0.01	1.97	24.1	<1	1.1	397	0.22	<0.05	3.91	0.502	0.27	0.6	234	0.6	16.1	152	12.8
299800	6555900	811	CPO0008267	1.28	1.39	2.4	14.4	850	15.6	43.9	<0.002	0.02	1.78	15.8	<1	0.7	412	0.16	<0.05	3.15	0.433	0.15	0.7	226	0.8	13.6	130	20.3
299850	6555900	828	CPO0008268	0.91	2.05	4.1	10.6	780	32.9	93.1	<0.002	0.01	3.07	19.2	<1	1.4	354	0.29	<0.05	5.44	0.489	0.28	1.3	225	1.2	18.4	286	25.2
299900	6555900	831	CPO0008269	0.76	2.41	4.1	9.8	690	32.5	87.4	<0.002	0.01	2.66	19	<1	1.2	386	0.33	<0.05	6.05	0.484	0.22	1.4	223	1	19.8	159	24.1
299950	6555900	821	CPO0008271	0.77	1.43	3.6	11	710	19.3	77.4	<0.002	0.01	2.83	21.6	<1	1.2	302	0.26	<0.05	5.88	0.461	0.21	1.3	226	1	20.4	170	24.4
299350	6556000	875	CPO0008272	0.78	1.78	3	23.4	600	7.7	14.1	<0.002	0.01	0.48	22.8	1	1.2	404	0.21	<0.05	2.38	0.487	0.1	0.6	252	0.5	19.9	71	15.9
299400	6556000	877	CPO0008273	0.74	1.7	1.8	12.2	440	7.9	10.2	<0.002	<0.01	0.44	36.9	<1	0.8	351	0.13	<0.05	1.67	0.538	0.08	0.4	332	0.4	16.2	79	13.9
299450	6556000	875	CPO0008274	0.89	1.61	3.9	21.7	450	6.8	13.8	<0.002	0.01	0.58	26.5	<1	1.3	344	0.29	<0.05	4.74	0.591	0.11	0.9	284	0.6	21.4	84	20.8
299500	6556000	875	CPO0008275	0.57	1.76	2	25.8	530	4.7	20.7	<0.002	0.01	0.5	23.6	1	0.8	394	0.14	<0.05	2.05	0.436	0.13	0.5	190	0.4	18.5	81	16.6
299550	6556000	872	CPO0008276	3.48	1.2	3.5	7.8	610	46.3	42.8	<0.002	0.01	14.05	21.3	<1	1.2	430	0.25	0.14	6.22	0.51	0.23	1	271	1.4	19	240	12.3
299600	6556000	875	CPO0008277	0.63	1.06	2.1	11.2	920	44.3	100.5	<0.002	0.01	2.89	26.8	1	1	472	0.14	0.11	2.39	0.536	0.35	0.5	288	0.9	19	223	8
299650	6556000	862	CPO0008278	0.78	0.8	3.2	14.6	820	33.2	104	<0.002	0.01	3.36	27.1	<1	1.2	312	0.2	0.06	2.37	0.55	0.35	0.4	272	1.2	18	212	6.8
299700	6556000	852	CPO0008279	0.68	2.09	3.2	13.5	960	29.4	90.5	<0.002	0.01	2.22	25.1	<1	1.1	464	0.21	<0.05	4.41	0.479	0.27	0.9	266	0.5	20	172	13
299750	6556000	837	CPO0008281	1.69	1.4	3.4	8.1	590	29.9	41.3	<0.002	0.01	7.24	19.9	<1	1.1	483	0.23	0.11	5.29	0.499	0.22	0.9	257	0.9	18.1	199	10.3
299800	6556000	825	CPO0008282	0.46	1.77	1.9	24	530	4.1	24.4	<0.002	<0.01	0.38	22.9	<1	0.9	389	0.13	<0.05	2.38	0.432	0.12	0.5	191	0.3	18.1	72	15.4
299850	6556000	808	CPO0008283	2.49	1.14	4.1	17.6	760	77.5	58.5	<0.002	0.02	9.07	22	<1	1.4	261	0.33	0.19	7.9	0.529	0.2	1.7	337	1.5	23.3	361	26.8
299900	6556000	810	CPO0008284	6.64	0.99	3.1	13.6	790	64.4	77.6	<0.002	0.05	19.4	21.4	1	1.4	211	0.23	1.42	5.81	0.39	0.27	1.9	163	2.3	19.6	349	55
299950	6556000	807	CPO0008285	6.59	1.01	3.2	17.4	810	65.1	76.1	<0.002	0.04	18.85	21.7	1	1.2	213	0.23	1.32	5.8	0.391	0.28	2.1	162	2.5	20.1	365	17.2
299350	6556100	871	CPO0008286	1.19	1.74	4.8	20.1	800	12.6	39.1	<0.002	0.01	0.8	20.5	<1	1.7	369	0.35	<0.05	7.34	0.63	0.17	1.7	362	0.7	22.6	109	18.9
299400	6556100	868	CPO0008287	0.9	1.92	4.5	18	690	7	16	<0.002	0.01	0.46	24.3	1	1.2	431	0.33	<0.05	4.89	0.543	0.15	1.2	213	0.6	21.6	88	13.6
299450	6556100	870	CPO0008288	0.43	1.68	1.8	18.8	540	6.1	11.5	<0.002	0.01	0.51	30.1	<1	1	381	0.12	<0.05	1.86	0.499	0.09	0.5	290	0.4	16.6	81	17.4
299500	6556100	868	CPO0008289	0.35	1.63	2.1	14.8	570	32.3	24.4	<0.002	<0.01	2.38	32.3	<1	1	414	0.18	0.07	3.17	0.487	0.15	0.6	256	0.5	18.9	157	24.3
299550	6556100	864	CPO0008291	0.7																								



299950	6556200	834	CPO0008314	4.08	0.18	3.8	11.9	1490	32.8	27.3	<0.002	0.01	21.6	28.4	<1	1.6	59.7	0.27	0.05	4.07	0.586	0.14	0.7	301	10	15.6	205	28.4
299350	6556300	863	CPO0008315	0.51	1.73	2.4	21.6	330	4	17.6	<0.002	<0.01	0.29	24.4	<1	1.1	349	0.19	<0.05	2.56	0.477	0.11	0.5	215	0.4	19.6	52	23.7
299400	6556300	862	CPO0008316	0.57	1.7	2.8	11.7	630	7.6	18	<0.002	0.01	0.59	22.2	<1	1.3	364	0.21	<0.05	2.98	0.444	0.12	0.6	177	0.5	21	70	22.4
299450	6556300	853	CPO0008317	0.95	1.72	4.5	15.1	710	9.8	33.7	<0.002	<0.01	0.61	25	<1	1.4	359	0.36	<0.05	7.32	0.551	0.16	1.2	263	0.7	22.8	88	22.8
299500	6556300	846	CPO0008318	1.23	1.96	4.4	14.8	720	7.2	33.9	<0.002	<0.01	0.67	21.8	<1	2	418	0.34	<0.05	6.26	0.527	0.15	1.3	253	0.8	21.6	82	18.9
299550	6556300	841	CPO0008319	1.24	1.6	4.9	17.7	830	7.7	35.1	<0.002	0.01	0.71	23.1	<1	1.5	362	0.37	0.05	6.67	0.611	0.15	1.4	322	1	21.9	95	20.1
299600	6556300	837	CPO0008321	0.62	1.93	3.3	15.6	400	7.5	24.5	<0.002	<0.01	0.51	19.3	<1	1.1	434	0.27	<0.05	4.99	0.435	0.14	0.9	158	0.4	19	68	11.8
299650	6556300	833	CPO0008322	0.73	2.07	3.2	23.8	690	7.5	18.8	<0.002	<0.01	1.31	28	<1	1.3	534	0.22	<0.05	3.25	0.533	0.14	0.9	272	0.6	17.4	95	12.4
299700	6556300	846	CPO0008323	1.04	0.23	1.6	9.4	810	14.2	104	<0.002	0.01	2.49	22.1	1	1	179	0.11	<0.05	1.93	0.441	0.37	0.4	190	1	14	137	5.3
299750	6556300	855	CPO0008324	0.69	0.53	1.9	11	950	19	38.1	<0.002	0.01	4.96	22.1	1	1.1	172.5	0.12	<0.05	2.47	0.462	0.13	0.4	247	1.5	15.8	150	9.7
299800	6556300	864	CPO0008325	1.34	0.12	1.7	13.4	720	44.9	29.4	<0.002	0.01	8.79	24.9	1	1.4	83.7	0.12	0.08	1.8	0.496	0.19	0.6	312	2.3	12.6	299	21.8
299850	6556300	857	CPO0008326	0.77	0.91	2.7	8.6	780	42.7	71.8	<0.002	0.01	4.49	23.4	<1	1.3	210	0.19	0.07	3.8	0.45	0.23	0.9	221	1.5	20.2	133	20.4
299900	6556300	842	CPO0008327	0.85	0.46	2.5	8.4	1050	34.6	53.3	<0.002	0.01	4.82	15.9	1	1.4	116.5	0.17	0.05	2.96	0.419	0.25	0.6	237	0.8	14.1	123	15.9
299950	6556300	822	CPO0008328	0.34	1.51	2.4	5.5	1400	13.3	92.9	<0.002	0.01	1.55	16.8	<1	1	273	0.15	0.05	3.15	0.41	0.35	0.7	193	0.7	22.1	136	18.3
299350	6556400	862	CPO0008329	1	1.96	4.5	17.3	560	7	52	<0.002	<0.01	0.45	19.6	<1	1.3	361	0.34	<0.05	7.45	0.498	0.17	1.5	227	0.6	22.2	73	21.1
299400	6556400	863	CPO0008331	0.8	2.05	3.9	14.7	720	8.6	39.5	<0.002	0.01	0.56	21.9	<1	1.4	360	0.33	<0.05	7.79	0.536	0.18	1.7	169	0.7	20.8	57	16.1
299450	6556400	863	CPO0008332	0.75	1.68	4.9	16	770	7.5	41.5	<0.002	0.01	0.48	25.8	<1	1.3	323	0.35	<0.05	6.77	0.584	0.2	1.2	218	0.8	23	77	19
299500	6556400	857	CPO0008333	1.23	1.81	6.3	15.4	730	10.5	65.2	<0.002	0.01	0.79	21.8	<1	1.6	322	0.46	<0.05	11.05	0.599	0.21	1.9	235	0.9	25.6	101	20.4
299550	6556400	858	CPO0008334	0.51	2.02	3.3	17.5	990	4.4	25	<0.002	<0.01	0.53	24.9	<1	1.6	528	0.23	<0.05	5.37	0.506	0.12	0.9	244	0.4	20.8	68	12.1
299600	6556400	852	CPO0008335	0.53	1.98	2.9	14.8	980	6.1	27.4	<0.002	<0.01	0.66	26.7	<1	1.2	554	0.18	<0.05	2.43	0.533	0.12	0.5	232	0.3	19	73	10.8
299650	6556400	843	CPO0008336	0.29	2.28	2.4	12.3	990	6.5	29	<0.002	<0.01	0.73	24.7	<1	1	554	0.17	0.06	2.67	0.542	0.13	0.5	288	0.3	17.6	83	11.2
299700	6556400	836	CPO0008337	0.34	0.82	1.9	17.8	840	13.4	52.8	<0.002	0.01	1.95	27	<1	0.8	231	0.13	0.05	2.52	0.517	0.21	0.6	266	1	16	140	10
299750	6556400	834	CPO0008338	0.4	1.21	1.8	21.8	840	12.7	45.9	<0.002	0.01	1.95	30.2	<1	1	429	0.12	0.08	2.12	0.559	0.22	0.7	306	0.8	17.8	117	10.8
299800	6556400	840	CPO0008339	0.5	1	2.5	10.4	1330	22.5	74.5	<0.002	0.01	2.26	21.7	<1	1.1	231	0.17	<0.05	3.32	0.448	0.26	0.7	225	1	19.4	147	16.9
299850	6556400	846	CPO0008341	0.86	1.73	3.5	12.4	790	14.1	64.5	<0.002	0.01	1.73	21.6	<1	1.2	352	0.24	<0.05	6.62	0.441	0.21	1.1	215	0.6	22.3	104	27.3
299900	6556400	844	CPO0008342	1	1.35	3.1	14.4	600	17.9	39	<0.002	0.01	2.23	23.4	<1	1.2	342	0.21	<0.05	4.99	0.455	0.16	0.9	225	0.9	19.9	136	25.3
299950	6556400	847	CPO0008343	0.47	0.54	2.7	13.3	760	13	118.5	<0.002	0.01	2.93	19.5	<1	1.2	148.5	0.18	0.11	4.17	0.447	0.34	0.6	246	0.8	17.6	128	21.8