

Black Cat Syndicate Limited ("Black Cat" or "the Company") is pleased to provide an update on underground diamond drilling at the 100% owned Paulsens Gold Operation ("Paulsens"). Paulsens underground is one of Australia's highest grade gold deposits with a current JORC 2012 Mineral Resource ("Resource") of 322koz @ 10.1g/t Au¹ (58% Measured & Indicated).

### **HIGHLIGHTS**

- Ongoing infill and extensional diamond drilling of the Gabbro Veins continues to return high-grade assays from lower parts of the mine, including:
  - 2.77m @ 7.20g/t Au from 6.00m and;
    - 2.35m @ 7.63g/t Au from 49.65m (PGRD23030) extensional
  - 1.20m @ 13.30g/t Au from 47.76m extensional, and;
    - 1.80m @ 13.87g/t Au from 50.20m (PGRD23032) extensional
  - 1.00m @ 7.98g/t Au from 84.00m (PGRD23034)
  - 1.61m @ 50.73g/t Au from 64.39m including;
    - 0.80m @ 100.00g/t Au from 65.20m (PGRD23041)
  - 1.73m @ 14.32g/t Au from 20.46m (PGRD23046) extensional
- Importantly, the drilling continues to intersect multiple mineralised lodes as shown in Table 1. These latest results
  have not been included in the recently updated Resource (ASX 10 May 2023).
- Underground drilling at Paulsens continues to focus on extending the Gabbro Veins, infilling lodes currently not in the Resource and testing for new lodes. Additionally, near-mine exploration drill planning for other targets, including the Paulsens Repeat, is advancing ahead of commencement in H2 2023.
- The Restart Study to support a potential decision to resume mining remains on target for completion in mid-2023.
   Selective mining methods will be used to extract areas of the high-grade Resource in the Main Zone and the Gabbro Veins.



Figure 1: Underground diamond drilling at Paulsens

Black Cat's Managing Director, Gareth Solly, said: "These latest results demonstrate the upside in the Gabbro Veins at Paulsens following the recent Resource upgrade. When we acquired Paulsens in mid-2022 there was virtually no Resource for the Gabbro Veins so we are pleased with the rate of growth to 133koz at an exceptional grade of 9.2g/t Au. The Main Zone has similarly grown to a Resource of 154koz @ 10.7g/t Au. These two areas are likely to provide the bulk of the initial mineable resources in the Restart Study which is to date progressing as expected."

### SNAPSHOT - PAULSENS GOLD OPERATION

### Large Scale Area, 100% Owned by Black Cat

• >1,000km<sup>2</sup> of highly prospective ground, 100% owned by Black Cat.

#### **Background**

- Paulsens underground is already one of Australia's highest-grade gold deposits with a current Resource of 322koz @ 10.1g/t Au (58% Measured & Indicated) including 154koz @ 10.7g/t Au in the Main Zone, 133koz @ 9.2g/t Au in the Gabbro Veins and 35koz @ 11.1g/t Au in the Hangingwall Zone.
- Underground mining at Paulsens produced 907koz @ 7.3g/t Au at an average of 75koz pa and recovery of 92%.
- Over 12 years of production, the underground mine had a Resource high of 540koz and low of 125koz with an average Resource
  of ~270koz. This demonstrates the robust nature of the current Resource.
- Previous regional exploration largely involved surface activities with numerous gold and base metal anomalies identified but with only limited follow-up. Open pit and Underground Resources at Paulsens total 465koz @ 3.6g/t Au.

#### Infrastructure in Place, Ready for a Low-Cost Restart

- On care and maintenance since 2018.
- Well maintained, 450ktpa processing facility requiring minimal restart capital.
- +110-person camp.
- · Mine and advanced Resources on Mining Licences, minimal barriers to restart.
- Underground mine fully dewatered and ventilated.
- Excellent access with sealed road and gas pipeline within 7km.

## Significant Opportunities at All Stages - Multi-metal Potential

- Paulsens has multi-metal potential with numerous base-metal (Cu, Pb and Zn) targets, Australia's third largest antimony deposit
  at Mt Clement (along with Au, Cu, Pb and Ag Resource) and thermal coal at Kazput.
- Paulsens is an under-explored orogenic gold region with four main prospect areas the 15km long Paulsens Structural Corridor ("PSC"), the Northern Anticline, Mt Clement and Electric Dingo (Figure 1).
- The PSC is a complex zone of faults with the main structure through the PSC being the Hardey Fault. All gold mined at the
  Paulsens underground mine comes from where the Hardey Fault (and related fault splays) cut through the Paulsens Mine Gabbro.
  Finding similar faulted-off gabbro is a priority given the obvious grade and scale potential. This includes open pit potential at:
  - Belvedere, located within the PSC only 5km from the processing facility, is a Paulsens-style target with >2km of mineralised strike. Minimal drilling has identified a shallow Resource of 30koz @ 3.9g/t Au.
- Underground drilling in 2023 includes: new mining fronts located close to existing infrastructure being the Gabbro Veins and Apollo
  with potential for readily accessible ounces; and Paulsens Repeat located 200-300m from the decline and representing a largescale, faulted-off gabbro targeting "Another Paulsens".

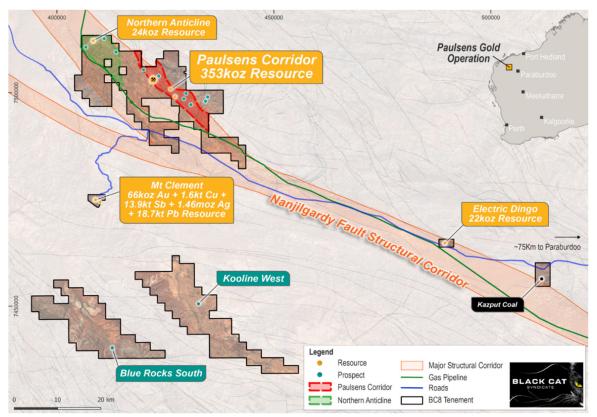


Figure 2: Regional map of the Paulsens Gold Operation showing the location of Resources and large-scale fault architecture.

<sup>&</sup>lt;sup>1</sup> Refer to ASX Announcement 10 May 2023

### **Gabbro Veins Drilling Update**

The Gabbro Veins are relatively narrow zones of high-grade mineralisation within the Paulsens system which sit within the footwall and form in swarms up to 4m wide. Recent drilling into the Gabbro Veins continues to demonstrate the extent of this system, with multiple mineralised veins along a ~1,200m plunge length and across a ~150m width (see Table 1). The Gabbro Veins are generally located within ~200m of the existing development and contain attractive mining opportunities. Current drilling into the Gabbro Veins is focussed on extending the strike extent of mineralisation and discovery of additional veins farther into the Paulsens Mine Gabbro.

Additional infill and extensional drilling of the Gabbro Veins continues to demonstrate the continuity and Resource growth potential of the Gabbro Veins, with significant results including:

- 2.77m @ 7.20g/t Au from 6.00m and;
  - 2.35m @ 7.63g/t Au from 49.65m (PGRD23030)
- 1.20m @ 13.30g/t Au from 47.76m and;
  - 1.80m @ 13.87g/t Au from 50.20m (PGRD23032)
- 0.79m @ 9.86g/t Au from 13.96m and;
  - 4.29m @ 2.53g/t Au from 66.53m and;
  - 1.00m @ 7.98g/t Au from 84.00m (PGRD23034)
- 0.67m @ 2.19g/t Au from 55.50m and;
  - 1.61m @ 50.73g/t Au from 64.39m including;
  - 0.80m @ 100.00g/t Au from 65.20m (PGRD23041)
- 1.73m @ 14.32g/t Au from 20.46m (PGRD23046)
- 3.60m @ 2.56g/t Au from 47.00m (PGRD23078)
- 0.56m @ 5.46g/t Au from 31.50m and;
  - 1.76m @ 4.26g/t Au from 42.67m and;
  - 0.62m @ 3.67g/t Au from 59.75m (PGRD23082)

These results from the Gabbro Veins complement previous results, that include<sup>2</sup>:

- 0.55m @ 73.00g/t Au from 98.48m (PGRD23120)
- 0.55m @ 36.20g/t Au from 37.3m (PGRD23073)
- 0.47m @ 24.30g/t Au from 67.53m (PGRD23084)
- 2.00m @ 39.90g/t Au from 18.75m (22PGRD038)
- 0.86m @ 58.50g/t Au from 102.14m (22PGRD004)
- 0.55m @ 67.20g/t Au from 47.63m (22PGRD002)
- 0.88m @ 37.28g/t Au from 52.00m (22PGRD021)
- 0.80m @ 32.20g/t Au from 17.73m (22PGRD025)
- 0.59m @ 30.80g/t Au from 5.14m and;
  - 0.50m @ 47.20g/t Au from 20.80m (22PGRD011)
- 0.56m @ 64.87g/t Au from 64.87m (PGRD23002)

An updated underground Resource was recently announced of 322koz @ 10.1g/t Au, including 133koz @ 9.20g/t Au from the Gabbro Veins. Engineering and mining studies are advancing based on the recent Resource to support a potential restart decision in mid-2023. The Restart Study is predominantly focused on the Resource in the Main Zone and the Gabbro Veins (see Figure 3). The Study is being completed under the supervision of Mark Davies, the recently appointed General Manager – Paulsens, to focus on the application of the most appropriate selective mining methods to extract the high-grade resource.

<sup>&</sup>lt;sup>2</sup> Refer to ASX Announcement dated 13/1/2023, 6/2/2023 28/2/2023 23/3/2023, 28/4/2023, 8/5/2023

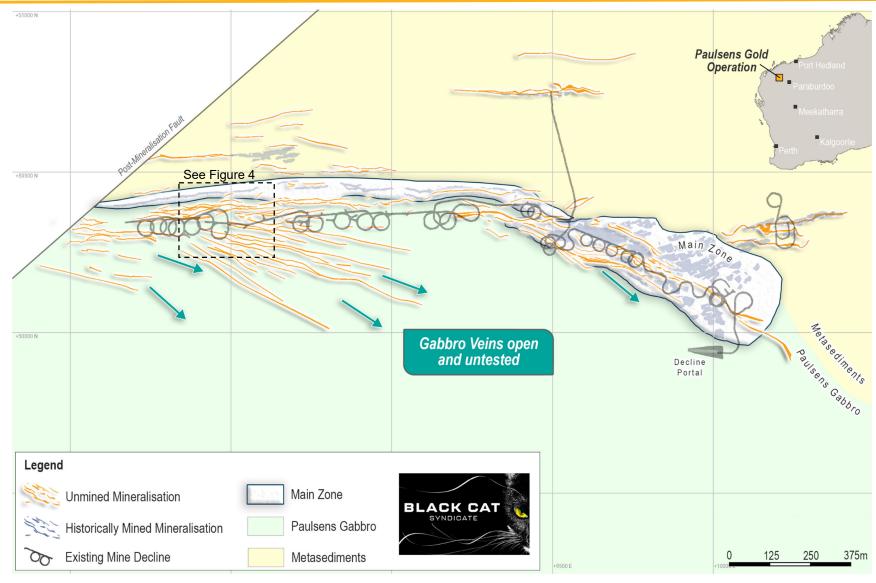


Figure 3: Plan view showing the location of the unmined, high-grade Gabbro Veins, the mined and unmined portions of the Main Zone, which produced ~1,000 oz per vertical metre from narrow lodes. Recent drilling has focused on deeper targets (Figure 4). The 7km long dewatered decline provides ready access for mining. View is in mine grid.

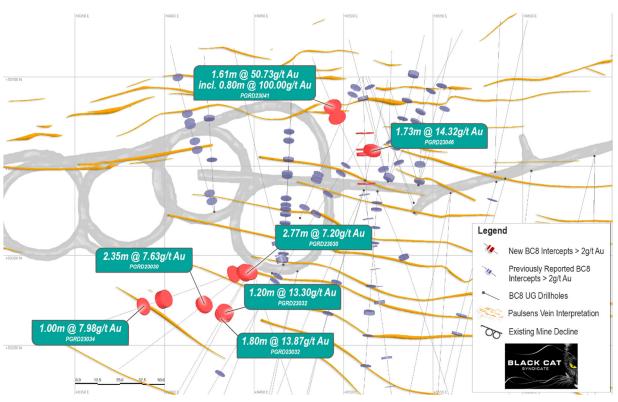


Figure 4: Recent results in the Gabbro Veins located in the lower part of the mine showing numerous mineralised veins with high-grade intercepts highlighted (see Figure 3 for location)

## **Near-mine Exploration Plans**

Near-mine exploration drilling will be ongoing, testing several Resource extension and geophysical targets, including:

- Follow up drilling targeting the Paulsens Repeat<sup>3</sup>, which is a ~1,250m long interpreted structure located approximately 200m 300m below the current mine workings. Paulsens Repeat was identified in a \$2M, 3D seismic survey from 2018. A downhole EM survey is being investigated to further refine drill targets with a trial survey anticipated for mid-2023.
- Ongoing drilling further into the footwall targeting additional Gabbro Veins, as well as drilling targeting lateral extensions to identified Gabbro Veins.
- Testing the Paulsens Offset target on the other side of the post-mineralisation fault at the bottom of the current decline.
- Testing for along strike and up dip extensions of the Apollo Lode to the north of the main Paulsens underground workings<sup>4</sup>.

<sup>&</sup>lt;sup>3</sup> Refer to ASX Announcement 9 February 2023

<sup>&</sup>lt;sup>4</sup> Refer to ASX Announcement 14 March 2023

#### 2023 PLANNED ACTIVITIES

Ongoing 2023: Ongoing underground drilling results - Paulsens

May - Jun 2023: Regional exploration program - Coyote

Jun - Sep 2023: Paulsens regional exploration program

Jun - Jul 2023: Paulsens Repeat drilling

Mid - 2023: Potential Paulsens restart study

19 - 21 Jul 2023: Noosa Mining Investment Conference - Noosa

7- 9 Aug 2023: Diggers and Dealers Mining Forum - Kalgoorlie

Sep 2023: Apollo drilling

Sep - Nov 2023: Paulsens regional drilling

For further information, please contact:

Gareth Solly Managing Director +61 458 007 713 admin@bc8.com.au Michael Vaughan Fivemark Partners +61 422 602 720

michael.vaughan@fivemark.com.au

This announcement has been approved for release by the Board of Black Cat Syndicate Limited.

### **COMPETENT PERSON'S STATEMENT**

The information in this announcement that relates to geology, and planning was compiled by Dr. Wesley Groome, who is a Member of the AIG and an employee, shareholder and option holder of the Company. Dr. Groome has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Dr. Groome consents to the inclusion in the report of the matters based on the information in the form and context in which it appears.

The Company confirms that it is not aware of any new information or data that materially affects the information in the original reports, and that the form and context in which the Competent Person's findings are presented have not been materially modified from the original reports.

Where the Company refers to the exploration results, Mineral Resources, and Reserves in this report (referencing previous releases made to the ASX), it confirms that it is not aware of any new information or data that materially affects the information included in that announcement and all material assumptions and technical parameters underpinning the Mineral Resource and Reserve estimates with that announcement continue to apply and have not materially changed.

Table 1: Drill Hole Locations – Paulsens Gold Operation

	Paulsens L	Jnderground Dia		g	Azimuth			Downhole	
Hole ID	Local East	Local North	RL Local	Dip	Azimuth Local	From (m)	To (m)	Interval (m)	Au Grade (g/
PGRD23001	8816	50345	460	-19	237			No Significant Results	
PGRD23001A	8816	50345	460	22	237	13.00	14.28	1.28	1.57
						54.98	56.42	1.44	4.84
						59.30	60.20	0.90	9.32
						62.17	62.63	0.46	1.96
						67.96	69.00	1.04	4.14
PGRD23002	8816	50345	460	10	221	6.55	7.06	0.51	1.53
						40.00	40.66	0.66	2.58
						50.34	50.54	0.20	1.13
						57.00	59.43	2.43	2.89
						61.47	63.43	1.96	5.71
						64.87	66.50	1.63	16.05
						99.05	100.25	1.20	6.56
						106.00	107.00	1.00	1.74
						111.02	111.36	0.34	4.74
PGRD23002A	8816	50345	460	-9	221	73.90	74.36	0.46	1.54
						92.90	94.00	1.10	8.95
						108.94	110.11	1.17	4.81
						160.45	161.45	1.00	1.12
						164.17	164.83	0.66	1.25
						167.33	169.00	1.67	4.84
PGRD23003	8816	50345	460	2	201	47.24	47.56	0.32	62.00
						48.85	49.11	0.26	3.71
						67.19	67.80	0.61	1.06
						70.10	70.50	0.40	1.06
						108.98	109.43	0.45	1.55
						116.85	117.70	0.85	3.34
PGRD23005	8816	50345	460	4	179	78.30	79.00	0.70	13.00
						91.50	92.00	0.50	14.00
						157.00	158.00	1.00	1.09
PGRD23006	8816	50345	460	-5	178	92.59	92.74	0.15	1.62
						107.61	107.91	0.30	2.47
						58.84	59.20	0.36	8.69
PGRD23007	9998	50084	1082	24	256	61.55	63.00	1.45	4.92
						69.50	71.50	2.00	2.00
PGRD23008	9999	50083	1081	21	231	70.94	71.40	0.46	2.19
PGRD23009	9998	50084	1081	10	254			No Significant Assays	
PGRD23014	9848	50123	1032	16	228	32.13	32.53	0.40	1.36
PGRD23015	9842	50129	1031	44	271			No Significant	
						5.63	6.14	Assays 0.51	4.73
PGRD23016	9844	50127	1031	9	244	29.20	29.50	0.30	3.53
7 071020070	0011	00727	7007		211	55.10	56.29	1.19	3.27
DCDD22017	0040	50121	1020	10	275	00.70	00.20	No Significant	0.27
PGRD23017	9842	50131	1030	13	275		A	Assays	
PGRD23018	9842	50129	1030	25	257	59.50	61.50	2.00	1.87
						63.80	64.45	0.65	4.87
PGRD23019	9842	50132	1029	-8	292	63.40	64.5	1.10	3.66
						98.00	99.00	1.00 No Significant	1.49
PGRD23020	9730	50199	966	37	190			No Significant Assays	
PGRD23021	9725	50199	966	27	230	77.59	78.02	0.43	2.71
PGRD23022	9725	50200	965	20	241			No Significant	
								Assays No Significant	
PGRD23023	9725	50202	965	8	251			Assays	
				_		47.32	47.63	0.31	2.26
PGRD23024	9725	50201	964	0	258	84.15	84.37	0.22	9.14
		_				89.39	89.67	0.28	4.63
PGRD23025	9725	50202	964	-7	263	77.00	78.00	1.00	6.01

	Paulsens L	Jnderground Dia	mond Drillir	ng				Downhole	
Hole ID	Local East	Local North	RL Local	Dip	Azimuth	From (m)	To (m)	Interval (m)	Au Grade (g/t)
			Local		Local	45.90	46.26	0.36	1.16
PGRD23026	9728	50199	964	36	218	70.50	72.00	1.50	1.76
						74.86	75.42	0.56	10.40
						49.65	50.30	0.65	54.30
PGRD23027	9665	50249	942	-12	269	98.00	99.00	1.00	1.88
						107.00	108.00	1.00	29.50
PGRD23028	9666	50246	942	-5	256			No Significant	
						6.00	8.77	Assays 2.77	7.20
PGRD23030	8449	50293	323	-47	233	49.65	52.00	2.35	7.63
						62.08	63.10	1.02	1.33
PGRD23031	8448	50293	322	-33	209			Assays Pending	
						5.00	6.00	1.00	2.02
						8.38	9.02	0.64	1.16
PGRD23032	8449	50293	323	-53	212	47.76	48.96	1.20	13.30
						50.20	52.00	1.80	13.87
PGRD23033	8449	50293	323	-42	164			Assays Pending	
						13.96	14.75	0.79	9.86
DCDD22024	0440	50000	202	20	250	16.33	17.00	0.67	1.71
PGRD23034	8449	50293	323	-39	250	66.53	70.82	4.29	2.53
						84.00	85.00	1.00	7.98
PGRD23035	8460	50290	319	-54	202			Assays Pending	
PGRD23036	8474	50291	318	-45	193			Assays Pending	
PGRD23037	8474	50291	318	15	192			Assays Pending	
						26.10	26.95	0.85	1.23
						30.00	31.00	1.00	1.00
PGRD23041	8512	50342	339	-46	335	39.40	40.50	1.10	1.51
						55.50	56.17	0.67	2.19
						64.39	66.00	1.61	50.73
					Incl.	65.20	66.00	0.80	100.00
						6.78	7.17	0.39	1.52
						9.00	10.00	1.00	3.54
						24.03	24.43	0.40	1.75
						30.07	31.00	0.93	5.77
PGRD23042	8511	50336	338	30	185	37.15	38.50	1.35	2.18
						69.00	69.66	0.66	2.38
						104.70	105.27	0.57	2.81
						106.53	107.00	0.47	8.31
						122.69	123.24	0.55	2.35
								0.53	1 00
						125.73	126.26		1.09
						1.22	1.50	0.28	1.04
						1.22 4.28	1.50 4.50	0.28 0.22	1.04 1.73
						1.22 4.28 9.21	1.50 4.50 9.72	0.28 0.22 0.51	1.04 1.73 1.39
						1.22 4.28 9.21 12.00	1.50 4.50 9.72 13.00	0.28 0.22 0.51 1.00	1.04 1.73 1.39 1.65
						1.22 4.28 9.21 12.00 20.00	1.50 4.50 9.72 13.00 20.29	0.28 0.22 0.51 1.00 0.29	1.04 1.73 1.39 1.65 2.07
						1.22 4.28 9.21 12.00 20.00 25.26	1.50 4.50 9.72 13.00 20.29 26.04	0.28 0.22 0.51 1.00 0.29 0.78	1.04 1.73 1.39 1.65 2.07 8.03
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79	1.50 4.50 9.72 13.00 20.29 26.04 40.50	0.28 0.22 0.51 1.00 0.29 0.78 0.71	1.04 1.73 1.39 1.65 2.07 8.03 7.34
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50 111.60	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95 112.40	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45 0.80	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60 1.32
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50 111.60 163.40	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95 112.40 164.02	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45 0.80 0.62	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60 1.32 2.82
PGRD23043	8511	50367	338	-19	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50 111.60 163.40 50.13	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95 112.40 164.02 50.52	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45 0.80 0.62 0.39	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60 1.32 2.82 1.55
						1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50 111.60 163.40 50.13 56.30	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95 112.40 164.02 50.52 57.02	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45 0.80 0.62 0.39 0.72	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60 1.32 2.82 1.55 3.06
PGRD23043 PGRD23044	8511 8511	50367 50336	338	-19 21	212	1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50 111.60 163.40 50.13 56.30 59.66	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95 112.40 164.02 50.52 57.02 59.90	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45 0.80 0.62 0.39 0.72 0.24	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60 1.32 2.82 1.55 3.06 1.48
						1.22 4.28 9.21 12.00 20.00 25.26 39.79 46.40 53.00 65.40 97.00 100.50 111.60 163.40 50.13 56.30	1.50 4.50 9.72 13.00 20.29 26.04 40.50 47.08 54.60 66.18 97.67 100.95 112.40 164.02 50.52 57.02	0.28 0.22 0.51 1.00 0.29 0.78 0.71 0.68 1.60 0.78 0.67 0.45 0.80 0.62 0.39 0.72	1.04 1.73 1.39 1.65 2.07 8.03 7.34 1.03 9.34 3.30 8.16 11.60 1.32 2.82 1.55 3.06

	Paulsens l	Inderground Dia	mond Drillir	na				Downhole	
Hole ID	Local East	Local North	RL	Dip	Azimuth	From (m)	To (m)	Interval (m)	Au Grade (g/t)
Hole ID	LOCAI East	Local North	Local	Dib	Local	<u> </u>			
						75.00	75.68	0.68	19.50
						84.10	84.56 87.25	0.46	1.48
						88.55	89.83	1.28	8.14
						91.74	93.14	1.40	1.15
PGRD23044	8511	50336	338	21	185	110.86	111.56	0.70	1.16
						144.00	145.00	1.00	1.03
						154.91	155.13	0.22	1.57
						172.50	173.56	1.06	5.36
						176.14	176.47	0.33	5.96
						2.28	2.78	0.50	2.04
						16.00	16.51	0.51	2.00
						19.81	20.09	0.28	1.37
						28.15	29.80	1.65	1.62
PGRD23045	8511	50337	338	-2	171	31.52	32.31	0.79	15.30
						44.80	45.00	0.20	6.38
						47.25	47.73	0.48	1.26
						54.70	54.91	0.21	2.32
						62.57	64.25	1.68	2.05
						72.33	72.61	0.28	1.57
						93.87	94.97	1.10	3.83
000000045	0544	50007	000		474	96.48	96.73	0.25	1.75
PGRD23045	8511	50337	338	-2	171	110.43	110.68	0.25	17.70
						114.00	114.26	0.26	1.54
						116.59	117.00	0.41	5.27
						16.77	17.42	0.65	1.16
						20.46	22.19	1.73	14.32
DCDD22046	0540	50242	220	20	40	38.72	39.31	0.59	1.00
PGRD23046	8512	50342	339	-36	13	55.00	56.41	1.41	1.41
						60.00	61.00	1.00	1.84
						62.46	62.66	0.20	1.29
						69.57	69.87	0.30	8.17
PGRD23047	9526	50296	871	-7	166	94.00	94.74	0.74	1.28
1 GND23041	3320	30290	071	-7	700	96.14	97.25	1.11	2.76
						100.60	101.06	0.46	1.32
PGRD23048	9533	50303	872	-6	161			No Significant Assays	
PGRD23049	9525	50295	871	-12	185	60.35	61.00	0.65	2.73
						36.86	37.24	0.38	1.06
PGRD23050	9521	50296	870	1.5	180	63.85	64.23	0.38	5.30
						81.45	82.33	0.88	5.29
PGRD23051	9513	50296	868	10	203			No Significant	
								Results No Significant	
PGRD23052	9517	50296	868	42	180			Results	
PGRD23053	9508	50298	868	-50	210			No Significant Results	
00000001	0.4.40	50.400	740	4.4	404	1.00	1.50	0.50	8.63
PGRD23054	9446	50400	719	-14	124	3.15	4.10	0.95	1.56
PGRD23055	9436	50391	718	-33	139	0.00	1.70	1.70	2.47
PCDD22056	0426	50201	710	27	190	0.00	0.26	0.26	13.00
PGRD23056	9436	50391	718	37	180	7.86	8.16	0.30	1.04
PGRD23057	9411	50397	714	-10	167	0.68	2.02	1.34	5.74
F GND 23037	J+11	50397	114	-10	107	3.36	3.86	0.50	3.02
PCDD220574	0/11	50207	710	10	167	1.00	2.00	1.00	1.59
PGRD23057A	9411	50397	713	10	167	7.86	12.00	4.14	2.89
PGRD23058	9386	50395	709	11	180	8.00	9.00	1.00	2.57
PGRD23059	9357	50395	708	-46	175	4.06	5.00	0.94	1.06
PGRD23060	9333	50395	701	8	167	14.27	14.88	0.61	9.68
PGRD23061	9333	50395	704	-45	180	11.12	13.21	2.09	1.02
F GRD23001	9333	50395	104	-40	100	18.53	19.03	0.50	2.48

	Paulsens	Underground Dia	amond Drilli	ng				Downhole	
Hole ID	Local East	Local North	RL Local	Dip	Azimuth Local	From (m)	To (m)	Interval (m)	Au Grade (g/t)
PGRD23061	9333	50395	704	-45	180	22.20	25.41	3.21	2.33
						36.92	37.68	0.76	1.83
						4.98	5.97	0.99	2.47
PGRD23062	9310	50397	700	-40	185	12.42	13.33	0.91	1.83
						24.00	24.25	0.25	5.09
						8.15	8.36	0.21	1.15
						11.65	13.53	1.88	13.76
						15.05	16.00	0.95	1.13
PGRD23063	9280	50403	695	-27	186	23.70	24.22	0.52	2.23
						33.80	34.31	0.51	2.4
						37.38	37.92	0.54	2.02
						40.49	42.13	1.64	1.13
						7.78	8.90	1.12	5.65
DCDD00064	0007	50404	604	-	400	13.76	14.37	0.61	1.37
PGRD23064	9287	50401	694	-5	183	18.59	19.07	0.48	1.67
						31.63	32.20	0.57	3.26
						14.50	15.00	0.50	4.31
505500005	0050	50.407	000	0.0	400	21.67	21.87	0.20	2.05
PGRD23065	9259	50407	689	20	186	37.70	38.00	0.30	1.38
						38.00	38.33	0.33	6.89
						15.72	16.3	0.58	4.25
PGRD23066	9259	50407	690	-26	185	16.65	16.87	0.22	2.52
						44.16	44.54	0.38	4.95
						5.76	6.28	0.52	1.00
						9.85	10.10	0.25	6.19
						11.00	12.00	1.00	1.15
PGRD23067	9226	50413	685	20	175	18.00	18.40	0.40	9.76
						23.00	24.00	1.00	1.34
						49.00	49.63	0.63	1.56
						15.00	15.52	0.52	6.47
						46.00	46.50	0.50	2.11
						47.00	47.50	0.50	2.57
						47.50	48.00	0.50	2.22
PGRD23068	9225	50412	685	-17	173	48.00	48.37	0.37	2.06
						48.37	49.00	0.63	1.68
						49.00	49.55	0.55	2.12
						63.00	64.00	1.00	1.02
						47.48	48.00	0.52	23.6
PGRD23069	9184	50408	680	-28	165	48.00	48.70	0.70	1.36
						3.18	4.05	0.87	2.39
						6.10	6.87	0.77	2.84
PGRD23070	9189	50409	679	26	163	10.11	10.34	0.23	2.31
1 GND23010	3103	30409	073	20	703	26.70	27.30	0.60	3.13
PGRD23071	9172	50407	677	-4	178	53.16	54.00 39.00	0.84	1.35 4.87
r-GND230/1	9172	30407	677	-4	1/0	38.10			
						0.92	1.45	0.53	1.11
						12.05	13.00	0.95	2.57
						41.15	41.57	0.42	1.10
						61.35	61.87	0.52	1.75
PGRD23072	8560	50335	347	-10	183	77.95	78.65	0.70	1.69
						81.27	82.18	0.91	2.93
						84.24	85.00	0.76	1.87
						132.20	133.00	0.80	2.62
						139.00	140.00	1.00	1.01
						144.00	145.00	1.00	2.04

Mole   10		Paulsens L	Jnderground Dia	mond Drillir	ng				Downhole	
PGR023074 8605 50347 360 -17 184 18707 18917 105 -214 176 185 -185 -185 -185 -185 -185 -185 -185	Hole ID	Local East	Local North		Dip		From (m)	To (m)	Interval (m)	Au Grade (g/t)
PGRD23073 8590 50342 352 1 166 54.58 0.92 5.01 PGRD23073 8590 50342 352 1 169 62.302 7.141 4.46 PGRD23073 8590 50342 352 1 169 88.00 88.55 1.55 3.05 98.76 96.28 0.52 1.15 177.10 177.79 0.69 4.78 171.10 177.79 0.69 4.78 171.10 177.79 0.69 4.78 171.10 177.79 0.69 4.78 171.10 171.79 0.79 171.10 171.79 0.79 171.10 171.79 0.79 171.10 171.79 0.79 171.10 171.79 0.79 171.10 171.79 0.79 171.10 171.79							37.30	37.85	0.55	36.20
PGRD23073 8590 50342 352 1 196 60.50 8110 0.50 2.49  PGRD23073 8590 50342 352 1 196 60.50 8110 0.50 2.49  88.00 89.56 1.55 3.00  88.00 89.56 1.55 3.00  117.10 117.79 0.69 4.78  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.69 0.21  117.10 117.79 0.89 0.22  117.10 117.79 0.89							43.59	43.88	0.29	4.07
PGRD23073 8590 50342 352 1 196 86.60 8710 0.50 2.49 8.60 805 1.55 3.05 9.67 86.28 0.52 1.15 117.00 117.79 0.69 4.78 121.00 121.44 0.44 1.08 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 122.20 123.74 1.54 1.07 125.61 137.60 137.6 1.37 157.61 157.98 0.37 16.5 191.81 193.06 1.29 1.04 195.14 195.43 0.29 1.30 97.77 87.98 0.21 5.55 124.22 124.74 0.62 1.14 195.14 195.43 0.29 1.30 175.09 125.3 0.21 1.02 128.47 138.94 0.47 2.10 128.47 138.9							53.66	54.58	0.92	5.01
PGRD23073 8590 50342 352 1 196 80.00 81.10 0.50 2.49							62.51	63.92	1.41	4.46
B8 00							77.59	78.11	0.52	2.17
PGRD23074 8605 50347 360 -17 194 122-02 123.74 1.54 1.07 1.07 1.07 1.07 1.07 1.07 1.07 1.07	PGRD23073	8590	50342	352	1	196	80.60	81.10	0.50	2.49
PGRD23074 8605 50357 360 -17 194 197.79 0.69 4.78 121.00 121.44 0.44 1.06 122.04 12.07 121.44 0.44 1.06 122.04 12.07 121.44 0.44 1.07 132.26 132.70 0.44 1.79 132.26 132.70 0.44 1.79 132.26 132.70 0.44 1.79 157.61 157.61 137.07 189.17 2.10 2.31 191.81 192.06 1.26 1.04 195.43 0.29 1.30 195.44 195.43 0.29 1.30 195.44 195.43 0.29 1.30 195.44 195.43 0.29 1.30 195.44 195.43 0.29 1.30 195.44 195.43 0.29 1.30 195.45 195.44 195.45 0.29 1.30 195.45 195.44 195.45 0.29 1.30 195.45 195.							88.00	89.55	1.55	3.05
PGRD23074 8605 50347 360 -17 194 121-44 0.44 1.06 122-20 123-74 1.54 1.07 1.07 150-161 167-98 0.37 16.5 167-98 16.5 16.5 167-98 16.5 16.5 16.5 16.5 16.5 16.5 16.5 16.5							95.76	96.28	0.52	1.15
PGRD23074 8605 50347 360 -17 194 157.79 0.37 16.5 16.5 16.5 16.5 16.5 16.5 16.5 16.5							117.10	117.79	0.69	4.78
PGRD23074 8605 50347 360 -17 194 197.07 189.17 2.10 2.31 1.79 197.08 0.37 16.5 197.08 1.20 1.24 197.07 189.17 2.10 2.31 197.07 189.17 2.10 2.31 197.07 189.17 2.10 2.31 197.07 189.17 2.10 2.31 197.07 197.08 0.37 1.30 1.30 197.77 97.08 0.21 5.55 1.30 197.77 97.08 0.21 5.55 124.22 124.74 0.52 1.14 197.08 197.09 197.09 197.09 0.21 5.55 124.22 124.74 0.52 1.14 197.09 1							121.00	121.44	0.44	1.06
PGRD23074 8605 50347 360 -17 194 187.07 189.17 2.10 2.31 10.4 187.07 189.17 2.10 2.31 10.4 195.14 195.43 0.29 1.30 195.14 195.14 195.43 0.29 1.30 195.14 195.14 195.43 0.29 1.30 195.14 125.09 1.25 1.04 195.14 195.14 195.13 0.29 1.30 195.14 125.09 1.25 1.04 195.14 195.13 0.29 1.30 195.14 125.09 1.25 1.05 1.05 1.05 1.05 1.05 1.05 1.05 1.0							122.20	123.74	1.54	1.07
PGRD23074 8605 50347 360 -17 194 187.07 189.17 2.10 2.31 191.01 1							132.26	132.70	0.44	1.79
PGRD23075 8640 50355 360 -3 180 180 193.06 1.25 1.04 195.43 0.29 1.30 1.30 1.25 1.04 195.44 195.43 0.29 1.30 1.30 1.30 1.30 1.30 1.30 1.30 1.30							157.61	157.98	0.37	16.5
PGRD23076 8640 50355 359 10 160 160 160 177 526 171.00 171	PGRD23074	8605	50347	360	-17	194	187.07	189.17	2.10	2.31
PGRD23075							191.81	193.06	1.25	1.04
PGRD23075 8640 50355 360 -3 180 146.06 146.66 0.86 1.16  PGRD23076 8640 50355 360 -3 180 146.06 146.66 0.86 1.16  156.07 156.65 0.58 20.83  161.32 163.09 1.77 5.89  1771.05 1771.53 0.48 2.99  186.62 186.93 0.31 1.07  162.12 163.00 0.88 3.06  229.30 229.56 0.88 3.06  8640 50356 359 10 180 162.12 163.00 0.88 3.06  86.00 68.65 0.65 2.34  86.00 68.65 0.30 1.85  86.00 7.78.85 179.06 0.21 1.05  86.00 7.78.85 179.06 0.21 1.05  86.00 7.78.85 179.06 0.21  86.00 7.78.85 179.06 0.21  86.00 68.65 0.30 1.85  86.00 7.78.85 1.26  86.00 68.65 0.30 1.85  86.00 7.78.85 1.26  86.00 68.65 0.30 1.85  86.00 7.78.85 1.26  86.00 7.78.85 1.26  86.00 68.65 0.36  86.00 7.78.85 1.26  86.00 7.78.85  86.00 7.78.85							195.14	195.43	0.29	1.30
PGRD23075 8640 50355 360 -3 180							97.77	97.98	0.21	5.55
PGRD23075 8640 50355 360 -3 180 146.00 146.86 0.66 1.16 156.07 156.65 0.58 20.83 161.32 163.09 1.77 5.89 171.05 171.53 0.48 2.99 186.62 186.93 0.31 1.07 180 180 180 180 180 180 180 180 180 180							124.22	124.74	0.52	1.14
PGRD23075 8640 50355 360 -3 180							125.09	125.3	0.21	1.62
PGRD23076 8640 50356 359 10 180 180 161.32 163.09 1.77 5.89  PGRD23076 8640 50356 359 10 180 229.30 229.58 0.28 1.83  68.00 68.65 0.65 2.34  88.09 90.86 1.77 5.26  110.00 110.60 0.60 2.12  111.90 112.26 0.36 1.39  128.30 128.51 0.21 1.28  PGRD23077 8640 50355 359 11 180 137.06 137.36 0.30 1.98  PGRD23078 8695 50455 378 21 7 18.85 179.06 0.21 1.05  PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23082 8510 50400 308 -2.7 178 18.48 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 18.48 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 18.48 19.55 0.58 1.26  11.00 77.75 0.85 1.40							138.47	138.94	0.47	2.10
PGRD23076 8640 50356 359 10 180 180 166.32 163.09 1.77 5.89  PGRD23076 8640 50356 359 10 180 229.30 229.58 0.28 1.83  REAL REAL REAL REAL REAL REAL REAL REAL	PGRD263075	8640	50355	360	-3	180	146.00	146.86	0.86	1.16
PGRD23076 8640 50356 359 10 180 162.12 163.00 0.88 0.06  229.30 229.58 0.28 1.83  68.00 68.65 0.65 2.34  89.09 90.86 1.77 5.26  110.00 110.60 0.60 2.12  111.90 112.26 0.36 1.39  128.30 128.51 0.21 1.28  128.30 128.51 0.21 1.28  128.30 141.65 0.42 40.35  152.24 152.47 0.23 9.91  158.84 159.49 0.65 2.61  158.84 159.49 0.65 2.61  158.84 159.49 0.65 2.61  162.85 163.12 0.26 1.16  178.85 179.06 0.21 1.05  PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85  PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23081 8513 50400 307 0 161 184 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 184 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 184 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 184 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 184 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 184 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 184 19.55 1.07 1.72  25.67 26.95 1.28 1.53  14.07 14.65 0.56 1.26  31.50 32.06 0.56 5.46  40.50 41.20 0.70 3.22  42.67 44.43 1.76 4.26  57.00 57.26 0.26 1.05  59.75 60.37 0.62 3.67  4.26 57.00 57.26 0.26 1.05  59.75 60.37 0.62 3.67  14.00 15.00 7.77 0.81 1.40							156.07	156.65	0.58	20.83
PGRD23076  8640  50356  359  10  180  180.12  162.12  163.00  0.88  3.06  229.30  229.58  0.28  1.83  68.00  68.65  0.65  2.34  89.09  90.86  1.77  5.26  110.00  110.60  0.60  2.12  111.90  112.26  0.36  1.39  128.30  128.51  0.21  1.28  141.23  141.65  0.42  40.35  152.24  152.47  0.23  9.91  158.84  159.49  0.65  2.61  162.86  163.12  0.26  1.16  178.85  179.06  0.21  1.05  PGRD23078  8695  50455  378  21  7  178.85  179.06  0.21  1.05  128.30  1.85  179.06  0.21  1.05  162.86  0.30  1.85  179.06  0.21  1.05  185.84  159.49  0.65  0.65  0.65  0.71  1.05  162.86  163.12  0.26  1.16  178.85  179.06  0.21  1.05  185.84  159.49  0.65  0.65  0.71  1.05  185.84  159.49  0.65  0.71  1.05  185.84  159.49  0.65  0.71  1.05  185.84  159.49  0.65  0.71  1.05  185.84  159.49  0.65  0.71  1.05  1.05  1.07  1.05  1.07  1.05  1.07  1.07  1.07  1.07  1.07  1.08  1.07  1.09  1.09  1.09  1.09  1.00  1.0							161.32	163.09	1.77	5.89
PGRD23076 8640 50356 359 10 180 162.12 163.00 0.88 3.06 229.30 229.58 0.28 1.83 68.00 68.65 0.65 2.34 89.09 90.86 1.777 5.26 6110.00 110.60 0.60 0.60 2.12 111.90 112.26 0.36 1.39 128.30 128.51 0.21 1.28 128 141.23 141.65 0.42 40.35 152.24 152.47 0.23 9.991 158.84 159.49 0.65 2.61 162.86 163.12 0.26 1.16 178.85 179.06 0.21 1.05 162.86 163.12 0.26 1.16 162.86 163.12							171.05	171.53	0.48	2.99
PGRD23076 8640 50356 359 10 180 229.30 229.58 0.28 1.83							186.62	186.93	0.31	1.07
PGRD23077 8640 50355 359 11 180 110.00 110.60 0.60 2.12 111.90 112.26 0.36 1.39 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.20 1.99 128.30 128.51 0.20 1.99 128.30 128.51 0.20 1.99 128.30 128.51 0.20 1.65 128 1.65 128 128.51 128 1.53 128 128.51 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 128 1.53 1.50 1.50 1.50 1.50 1.50 1.50 1.50 1.50							162.12	163.00	0.88	3.06
PGRD23077 8640 50355 359 11 180 110.00 110.60 0.60 2.12 111.90 112.26 0.36 1.39 128.30 128.51 0.21 1.28 141.65 0.42 40.35 141.23 141.65 0.42 40.35 141.23 141.65 0.42 152.47 0.23 9.91 158.84 159.49 0.65 2.61 162.86 163.12 0.26 1.16 162.86 163.12 0.26 1.16 162.86 163.12 0.26 1.16 178.85 179.06 0.21 1.05 1.05 178.85 179.06 0.21 1.05 1.05 1.05 1.05 1.05 1.05 1.05 1.0	PGRD23076	8640	50356	359	10	180	229.30	229.58	0.28	1.83
PGRD23077 8640 50355 359 11 180 137.06 137.36 0.30 1.98 141.23 141.65 0.42 40.35 152.24 152.47 0.23 9.91 158.84 159.49 0.65 2.61 162.86 163.12 0.26 1.16 178.85 179.06 0.21 1.05 168 169.20 18.85 179.06 0.21 1.05 178.85 179.06 0.20 1.05 178.85 179.06 0.20 1.05 178.85 179.06 178.85 179.							68.00	68.65	0.65	2.34
PGRD23077 8640 50355 359 11 180 112.26 0.36 1.39 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128.30 128.51 0.21 1.28 128 128.30 128.51 0.21 1.28 128 128 128 128 128 128 128 128 128 1							89.09	90.86	1.77	5.26
PGRD23077 8640 50355 359 11 180 137.06 137.36 0.30 1.98  141.23 141.65 0.42 40.35  152.24 152.47 0.23 9.91  158.84 159.49 0.65 2.61  162.86 163.12 0.26 1.16  178.85 179.06 0.21 1.05  1.62.86 163.12 0.26 1.16  178.85 179.06 0.21 1.05  1.85							110.00	110.60	0.60	2.12
PGRD23077 8640 50355 359 11 180 137.06 137.36 0.30 1.98  141.23 141.65 0.42 40.35 152.24 152.47 0.23 9.91 158.84 159.49 0.65 2.61 162.86 163.12 0.26 1.16 178.85 179.06 0.21 1.05  PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85  PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 14.07 14.65 0.58 1.26  PGRD23082 8510 50400 308 -2.7 178 40.50 41.20 0.70 3.22  42.67 44.43 1.76 4.26 57.00 57.26 0.26 1.05 59.75 60.37 0.62 3.67							111.90	112.26	0.36	1.39
PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85 1.79 0.0 0.70 1.31 1.40 1.40 1.40 1.40 1.40 1.40 1.40 1.4							128.30	128.51	0.21	1.28
PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85 47.00 50.60 3.60 2.56 50.60 3.60 2.56 50.60 3.60 2.5	PGRD23077	8640	50355	359	11	180	137.06	137.36	0.30	1.98
PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85  PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72  PGRD23082 8510 50400 308 -2.7 178 14.07 14.65 0.58 1.26  PGRD23082 8510 50400 308 -2.7 178 42.67 44.43 1.76 4.26  FGRD23082 8510 50400 308 -2.7 178 6.80 7.15 0.35 2.12							141.23	141.65	0.42	40.35
PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85 PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31 PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72 PGRD23082 8510 50400 308 -2.7 178 14.07 14.65 0.58 1.26 PGRD23082 8510 50400 308 -2.7 178 42.67 44.43 1.76 4.26 FGRD23082 8510 50400 308 -2.7 178 6.80 7.15 0.35 2.12 FGRD23082 8510 50400 308 -2.7 178 16.96 17.77 0.81 1.40							152.24	152.47	0.23	9.91
PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85 PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31 PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72 PGRD23082 8510 50400 308 -2.7 178 14.07 14.65 0.58 1.26 PGRD23082 8510 50400 308 -2.7 178 42.67 44.43 1.76 4.26 FGRD23082 8510 50400 308 -2.7 178 6.80 7.15 0.35 2.12 FGRD23082 8510 50400 308 -2.7 178 16.96 17.77 0.81 1.40							158.84	159.49	0.65	2.61
PGRD23078 8695 50455 378 21 7 12.36 12.66 0.30 1.85  PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72  25.67 26.95 1.28 1.53  PGRD23082 8510 50400 308 -2.7 178 40.50 41.20 0.70 3.22  42.67 44.43 1.76 4.26  57.00 57.26 0.26 1.05  59.75 60.37 0.62 3.67  6.80 7.15 0.35 2.12									0.26	1.16
PGRD23078 8695 50455 378 21 7 47.00 50.60 3.60 2.56  PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72  25.67 26.95 1.28 1.53  14.07 14.65 0.58 1.26  31.50 32.06 0.56 5.46  40.50 41.20 0.70 3.22  42.67 44.43 1.76 4.26  57.00 57.26 0.26 1.05  59.75 60.37 0.62 3.67  6.80 7.15 0.35 2.12							178.85	179.06	0.21	1.05
PGRD23079 8687 50456 377 -24 327 8.30 9.00 0.70 1.31  PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72  25.67 26.95 1.28 1.53  14.07 14.65 0.58 1.26  31.50 32.06 0.56 5.46  40.50 41.20 0.70 3.22  42.67 44.43 1.76 4.26  57.00 57.26 0.26 1.05  59.75 60.37 0.62 3.67  6.80 7.15 0.35 2.12							12.36	12.66	0.30	1.85
PGRD23081 8513 50400 307 0 161 18.48 19.55 1.07 1.72 25.67 26.95 1.28 1.53 1.26 25.67 26.95 1.28 1.53 1.26 25.67 26.95 1.28 1.26 25.67 26.95 1.28 1.26 25.67 26.95 1.28 1.26 25.67 26.95 1.28 1.26 25.67 26.95 1.28 1.26 25.67 26.95 1.28 25.67 26.95 1.28 25.67 26.95 1.28 25.67 26.95 25.46 25	PGRD23078	8695	50455	378	21	7	47.00	50.60	3.60	2.56
PGRD23081 8513 50400 307 0 161 25.67 26.95 1.28 1.53 1.26 25.67 26.95 1.28 1.53 25.67 26.95 1.28 1.53 25.67 26.95 1.28 25.67 26.95 2	PGRD23079	8687	50456	377	-24	327				
PGRD23082 8510 50400 308 -2.7 178 25.67 26.95 1.28 1.53 1.26 31.50 32.06 0.56 5.46 40.50 41.20 0.70 3.22 42.67 44.43 1.76 4.26 57.00 57.26 0.26 1.05 59.75 60.37 0.62 3.67 6.80 7.15 0.35 2.12 16.96 17.77 0.81 1.40							18.48	19.55	1.07	1.72
PGRD23082 8510 50400 308 -2.7 178 40.50 32.06 0.56 5.46 40.50 41.20 0.70 3.22 42.67 44.43 1.76 4.26 57.00 57.26 0.26 1.05 59.75 60.37 0.62 3.67 6.80 7.15 0.35 2.12 16.96 17.77 0.81 1.40	PGRD23081	8513	50400	307	0	161	25.67	26.95	1.28	1.53
PGRD23082 8510 50400 308 -2.7 178 40.50 41.20 0.70 3.22 42.67 44.43 1.76 4.26 57.00 57.26 0.26 1.05 59.75 60.37 0.62 3.67 6.80 7.15 0.35 2.12 16.96 17.77 0.81 1.40							14.07	14.65	0.58	1.26
PGRD23082 8510 50400 308 -2.7 178 40.50 41.20 0.70 3.22 42.67 44.43 1.76 4.26 57.00 57.26 0.26 1.05 59.75 60.37 0.62 3.67 6.80 7.15 0.35 2.12 16.96 17.77 0.81 1.40							31.50	32.06		5.46
42.67     44.43     1.76     4.26       57.00     57.26     0.26     1.05       59.75     60.37     0.62     3.67       6.80     7.15     0.35     2.12       16.96     17.77     0.81     1.40										3.22
57.00     57.26     0.26     1.05       59.75     60.37     0.62     3.67       6.80     7.15     0.35     2.12       16.96     17.77     0.81     1.40	PGRD23082	8510	50400	308	-2.7	178				
59.75     60.37     0.62     3.67       6.80     7.15     0.35     2.12       16.96     17.77     0.81     1.40										
6.80 7.15 0.35 2.12 16.96 17.77 0.81 1.40										
16.96 17.77 0.81 1.40										
PGRD23083 8512 50400 307 19 159										
41.45 41.65 0.20 3.60	PGRD23083	8512	50400	307	19	159				
54.50 55.25 0.75 2.01										

	Paulsens L	Inderground Dia		ıg				Downhole	
Hole ID	Local East	Local North	RL Local	Dip	Azimuth Local	From (m)	To (m)	Interval (m)	Au Grade (g/
			Local		Local	7.00	8.00	1.00	2.09
						11.98	12.35	0.37	2.93
						41.00	41.50	0.50	1.00
						42.43	42.70	0.27	1.54
						50.42	51.00	0.58	1.14
PGRD23084	8509	50400	350	25	504	65.47	65.86	0.39	2.57
						67.53	68.00	0.47	24.30
						69.18	70.30	1.12	9.54
						87.77	88.46	0.69	8.95
						91.11	91.39	0.28	1.33
PGRD23090	8212	50310	135	16	200			Assays Pending	
PGRD23092	8212	50310	135	22	216			Assays Pending	
	*=					35.60	36.07	0.47	1.12
PGRD23100	9583	50372	774	-11	42	49.36	49.72	0.36	37.10
						34.70	35.30	0.60	3.76
PGRD23101	9584	50372	774	6	41	46.85	47.40	0.55	2.46
TONDZOTOT	3004	00072	117	O	71	49.00	50.70	1.70	33.03
					Incl.	50.24	50.50	0.26	197.00
					11101.	53.00	54.00	1.00	1.84
						59.48	60.00	0.52	1.20
						62.23	63.00	0.77	2.66
						64.35	64.90	0.55	6.75
DCDD22402	0500	50270	774	24	20	66.72	67.40	0.68	1.74
PGRD23102	9583	50372	774	21	32	65.33	66.00	0.67	1.36
PGRD23103	9583	50372	774	-47	34	20.80	21.01	0.21	21.90
						25.13	26.46	1.33	2.03
PGRD23104	9546	50351	778	-20	350	8.98	9.34	0.36	4.73
PGRD23105	9546	50351	779	-44	350	18.90	19.34	0.44	19.50
						30.13	32.23	2.10	1.84
PGRD23106	9546	50351	779	-28	337	21.00	21.50	0.50	1.29
PGRD23107	9728	50199	964	5	172	75	76	1	3.06
						107	107.75	0.75	2.58
PGRD23108	9728	50199	964	-4	182	66.6	67.6	1	1.72
PGRD23109	9728	50199	964	-3	192			No Significant Assays	
PGRD23110	9728	50199	964	20	174			No Significant	
						44.00	44.04	Assays	0.54
PGRD23111	9728	50199	964	19	188	41.69	41.91	0.22	2.51
						9.62	10.58	0.96	6.36
						28.00	29.00	1.00	2.48
						71.34	71.54	0.20	3.81
PGRD23112	8816	50345	460	0	234	80.06	80.84	0.78	3.62
						105.23	106.30	1.07	2.33
						116.00	118.15	2.15	2.45
						129.89	130.11	0.22	16.8
						132.80	133.42	0.62	9.23
						51.15	51.45	0.30	35.90
PGRD23113	8816	50346	460	-25	218	58.78	59.00	0.22	1.44
						75.72	75.98	0.26	2.57
PGRD23114	8816	50346	460	20	204	156.13	156.46	0.33	2.15
						42.70	43.00	0.30	1.07
						64.20	64.60	0.40	1.3
PGRD23115	8816	50346	460	-30	194	72.00	72.25	0.25	1.19
						74.76	77.00	2.24	2.19
						95.15	95.71	0.56	5.38
DODDOO440	0000	50057	F70	4.2	400	161.00	162.00	1.00	1.23
PGRD23116	9096	50357	579	11	196	167.39	167.62	0.23	20.60
TONDESTIO									
PGRD23117	9096	50357	579	-8	205			No Significant Results	

	Paulsens l	Underground Dia		ng				Downhole	
Hole ID	Local East	Local North	RL Local	Dip	Azimuth Local	From (m)	To (m)	Interval (m)	Au Grade (g/t)
						157.00	158.00	1.00	1.46
						160.70	161.83	1.13	5.62
PGRD23119	9096	50357	579	-6	224	212.27	212.85	0.58	1.06
						223.77	224.51	0.74	1.63
						253.20	253.63	0.43	1.49
DODD22420	9096	50357	579	12	220	98.48	99.03	0.55	73.00
PGRD23120	9096	50357	579	12	230	138.00	139.00	1.00	2.70
DODD22424	0006	50257	579	40	225	147.21	148.06	0.85	1.07
PGRD23121	9096	50357	579	-12	235	155.00	155.73	0.73	1.33
PGRD23122	9096	50357	579	21	240			No Significant Results	
						143.46	143.74	0.28	38.50
000000100	0000	50357	579	,	0.44	150.71	151.18	0.47	2.56
PGRD23123	9096	50357	579	-4	244	159.95	160.20	0.25	26.60
						170.85	171.08	0.23	10.60
						4.15	4.90	0.75	2.89
PGRD23124	8511	50337	338	-27	205	6.00	6.37	0.37	2.90
PGRD23124	0311	50337	330	-21	205	18.00	19.00	1.00	1.30
						42.36	44.00	1.64	10.23
						0.00	0.56	0.56	2.57
						28.20	28.61	0.41	2.16
						38.08	38.46	0.38	1.93
PGRD23125	8560	50335	347	-20	192	44.17	45.50	1.33	3.09
						70.28	70.63	0.35	1.00
						75.30	76.73	1.43	1.29
						118.00	119.00	1.00	2.80

#### Notes:

All significant intercepts are reported at 1 g/t Au cut with a maximum of 1m continuous internal dilution, Negative Dip points down

Light grey intercepts have been previously reported. Refer to ASX Announcement dated 23 March 2023, 17 April 2023, 28 April 2023, 10 May 2023

## **ABOUT BLACK CAT SYNDICATE (ASX: BC8)**

Key pillars are in place for Black Cat to become a multi operation gold producer at its three 100% owned operations. The three operations are:

**Paulsens Gold Operation:** Paulsens is located 180km west of Paraburdoo in WA. Paulsens consists of an underground mine, 450,000tpa processing facility, +110 person camp, numerous potential open pits and other related infrastructure. The operation is currently on care and maintenance, has a Resource of 4.0Mt @ 3.6g/t Au for 465koz and significant exploration and growth potential.

**Coyote Gold Operation:** Coyote is located in Northern Australia, ~20km on the WA side of the WA/NT border, on the Tanami Highway. There is a well-maintained airstrip on site that is widely used by government and private enterprises. Coyote consists of an open pit and an underground mine, 300,000tpa processing facility, +180 person camp and other related infrastructure. The operation is currently on care and maintenance and has a Resource of 3.7Mt @ 5.5g/t Au for 645koz with numerous high-grade targets in the surrounding area.

**Kal East Gold Project:** comprises ~1,015km² of highly prospective ground to the east of the world class mining centre of Kalgoorlie, WA. Kal East contains a Resource of 18.8Mt @ 2.1g/t Au for 1,294koz, including a preliminary JORC 2012 Reserve of 3.7Mt @ 2.0 g/t Au for 243koz.

Black Cat plans to construct a central processing facility near the Majestic Mining Centre, ~50km east of Kalgoorlie. The 800,000tpa processing facility will be a traditional carbon-in-leach gold plant which is ideally suited to Black Cat's Resources as well as to third party free milling ores located around Kalgoorlie.

## **Coyote Gold Operation**

- Landholding ~885sqkm
- Gold Resources: 3.7Mt @ 5.5 g/t for 645koz
- Mill: 300ktpa only mill in Western Tanami region (expandable) operational <u>+180 person</u> camp
- Historical Production: >35kozpa (211koz @ 4.9 g/t)
- · C&M, multiple open pits & underground potential

#### **Paulsens Gold Operation**

- Landholding ~1,000sqkm
- Gold Resources: 4.0Mt @ 3.6 g/t for 465koz
- Critical/Base Metals: 14kt Sb, 19kt Pb, 1.6kt Cu, 1.5Moz Ag
- Mill: 450ktpa regionally strategic location; +110 person camp
- Historical Production: ~75kozpa (907koz @ 7.3 g/t)
- · C&M, multiple open pits & underground potential

### Kal East Gold Project -

- Landholding ~1,015sqkm
- Gold Resources: 18.8Mt @ 2.1 g/t for 1,294koz
- Proposed Mill: ~800ktpa designed, permitted, components acquired;
- spare 700ktpa mill to expand to 1.5Mtpa
- Historical Production: ~600koz
   Pre-development, open pit & undergro
- · Pre-development, open pit & underground potential



Strategic Landholding ~2.900 km<sup>2</sup>

Gold Resources 2.4Moz @ 2.8 g/t Au

Milling Capacity 1.55Mtpa (expandable to 2Mtpa)

Potential Pathway to +150kozpa

APPENDIX A - JORC 2012 GOLD RESOURCE TABLE - BLACK CAT (100% OWNED)

Ballania	. Cantus	Meas	ured Res	ource	Indic	ated Res	ource	Infer	red Reso	ource	То	tal Reso	urce
Milning	g Centre	Tonnes ('000)	Grade (g/t Au)	Metal ('000 oz)									
Kal East													
	Open Pit	-	-	-	1,000	2.7	86	1,380	1.8	79	2,380	2.1	164
Bulong	Underground	-	-	-	230	4.6	34	937	3.5	107	1,167	3.8	141
	Sub Total	-	-	-	1,230	3.0	120	2,316	2.5	185	3,546	2.7	305
	Open Pit	13	3.2	1	7,198	1.8	407	6,044	1.5	291	13,253	1.6	699
Mt Monger	Underground	-	-	-	1,178	4.5	169	710	4.6	104	1,888	4.5	274
	Sub Total	-	-	-	8,375	2.1	576	6,754	1.8	395	15,142	2.0	972
Rowes Find	Open Pit	-	-	-	-	-	-	148	3.6	17	148	3.6	17
Kal East Resou	rce	13	3.2	1	9,605	2.3	696	9,219	2.0	597	18,836	2.1	1,294

### **Coyote Gold Operation**

	Open Pit	_	-	_	608	2.8	55	203	3.0	19	811	2.9	75
Coyote Central	Underground	-	-	-	240	23.4	181	516	10.5	175	757	14.6	356
	Sub Total	-	-	-	849	8.7	236	719	8.4	194	1,568	8.5	430
-	Open Pit	-	-	-	560	2.8	51	613	3.2	63	1,174	3.0	114
Bald Hill	Underground	-	-	-	34	2.7	3	513	5.0	82	547	4.8	84
	Sub Total	-	-	-	594	2.8	54	1,126	4.0	145	1,721	3.6	198
Stockpiles		-	-	-	375	1.4	17	-	-	-	375	1.4	17
Coyote Resource	е	-	-	-	1,818	5.3	307	1,845	5.7	339	3,664	5.5	645

### **Paulsens Gold Operation**

TOTAL Resour	ce	153	10.1	50	12,073	3.0	1,160	14,324	2.6	1,196	26,551	2.8	2,405
Paulsens Resour	ce	140	10.8	49	650	7.5	157	3,260	2.5	259	4,051	3.6	465
Electric Dingo	Open Pit	-	-	-	98	1.6	5	444	1.2	17	542	1.3	22
Northern Anticline	Open Pit	-	-	-	-	-	-	523	1.4	24	523	1.4	24
Belvedere	Open Pit	-	-	-	129	3.1	13	111	4.8	17	240	3.9	30
	Sub Total	-	-	-	-	-	-	1,741	1.2	66	1,741	1.2	66
Mt Clement	Underground	-	-	-	-	-	-	492	0.3	5	492	0.3	5
	Open Pit	-	-	-	-	-	-	1,249	1.5	61	1,249	1.5	61
	Sub Total	140	10.8	49	423	10.2	139	441	9.5	135	1,005	10.0	323
Paulsens	Stockpile	11	1.6	1	-	-	-	-	-	-	11	1.6	1
	Underground	129	11.5	48	423	10.2	139	441	9.6	135	994	10.1	322

## Notes on Resources:

- The preceding statements of Mineral Resources conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
- 2. All tonnages reported are dry metric tonnes
- Data is rounded to thousands of tonnes and thousands of ounces gold. Discrepancies in totals may occur due to rounding.
- 4. Resources have been reported as both open pit and underground with varying cut-offs based off several factors discussed in the corresponding Table 1 which can be found with the original ASX announcements for each Resource
- Resources are reported inclusive of any Reserves
- Paulsens Inferred Resource includes Mt Clement Eastern Zone Au of 7koz @ 0.3g/t Au accounting for lower grades reported

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Resources are:

- - Boundary Black Cat ASX announcement on 9 October 2020 "Strong Resource Growth Continues including 53% Increase at Fingals Fortune'
  - Trump Black Cat ASX announcement on 9 October 2020 "Strong Resource Growth Continues including 53% Increase at Fingals Fortune'
  - Myhree Black Cat ASX announcement on 9 October 2020 "Strong Resource Growth Continues including 53% Increase at Fingals Fortune'
  - Strathfield Black Cat ASX announcement on 31 March 2020 "Bulong Resource Jumps by 21% to 294,000 oz"
  - Majestic Black Cat ASX announcement on 25 January 2022 "Majestic Resource Growth and Works Approval Granted"

  - Sovereign Black Cat ASX announcement on 11 March 2021 "Mallion Oz in Resource & New Gold Targets" Imperial Black Cat ASX announcement on 11 March 2021 "1 Million Oz in Resource & New Gold Targets" Jones Find Black Cat ASX announcement 04 March 2022 "Resource Growth Continues at Jones Find" Crown Black Cat ASX announcement on 02 September 2021 "Maiden Resources Grow Kal East to 1.2Moz"
  - Fingals Fortune Black Cat ASX announcement on 23 November 2021 "Upgraded Resource Delivers More Gold at Fingals Fortune"
  - Fingals East Black Cat ASX announcement on 31 May 2021 "Strong Resource Growth Continues at Fingals"
  - Trojan Black Cat ASX announcement on 7 October 2020 "Black Cat Acquisition adds 115,000oz to the Fingals Gold Project".
  - Quéen Margaret Black Cat ASX announcement on 18 February 2019 "Robust Maiden Mineral Resource Estimate at Bulong" Melbourne United – Black Cat ASX announcement on 18 February 2019 "Robust Maiden Mineral Resource Estimate at Bulong"
  - Anomaly 38 Black Cat ASX announcement on 31 March 2020 "Bulong Resource Jumps by 21% to 294,000 oz"

- Wombola Dam Black Cat ASX announcement on 28 May 2020 "Significant Increase in Resources Strategic Transaction with Silver 15. Lake
- Hammer and Tap Black Cat ASX announcement on 10 July 2020 "JORC 2004 Resources Converted to JORC 2012 Resources" 16.
- Rowe's Find Black Cat ASX announcement on 10 July 2020 "JORC 2004 Resources Converted to JORC 2012 Resources Coyote Gold Operation
- Coyote OP&UG Black Cat ASX announcement on 16 January 2022 "Coyote Underground Resource increases to 356koz @ 14.6g/t One of the highest-grade deposits in Australia"
  - Sandpiper OP&UG Black Cat ASX announcement on 25 May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
  - Kookaburra OP Black Cat ASX announcement on 25 May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed" Pebbles OP Black Cat ASX announcement on 25 May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed"
- Stockpiles SP (Coyote) Black Cat ASX announcement on 25 May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed" Paulsens Gold Operation:
  - Paulsens UG Black Cat ASX announcement on 10 May 2023 "Paulsens Resource continues to grow"
- Paulsens SP Black Cat ASX announcement on 19 April 2022 "Funded Acquisition of Coyote & Paulsens Gold Operations Supporting Documents"
- Belvedere OP Black Cat ASX announcement on 19 April 2022 "Funded Acquisition of Coyote & Paulsens Gold Operations Supporting Documents'
- Mt Clement Black Cat ASX announcement on 24 November 2022 "High-Grade Au-Cu-Sb-Ag-Pb Resource at Paulsens"

Merlin – Black Cat ASX announcement on 25 May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed" Electric Dingo - Black Cat ASX announcement on 25 May 2022 "Coyote & Paulsens High-Grade JORC Resources Confirmed

### APPENDIX B - JORC 2012 POLYMETALLIC RESOURCES - BLACK CAT (100% OWNED)

The current in-situ, drill-defined polymetallic Resources for Black Cat Syndicate are listed below.

		<b>T</b>			Grade			Contained Metal					
Deposit	Resource Category	Tonnes (,000 t)	Au (g/t)	Cu (%)	Sb (%)	Ag (g/t)	Pb (%)	Au (koz)	Cu (kt)	Sb (kt)	Ag (koz)	Pb (kt)	
\A/+	Inferred	415	-	0.4	0.2	76.9	-	*	1.6	0.7	1,026	-	
Western	Total	415	-	0.4	0.2	76.9	-	*	1.6	0.7	1,026	-	
0	Inferred	532	-	-	-	-	-	*	-	-	-	-	
Central	Total	532	-	-	-	-	-	*	-	-	-	-	
Fastama	Inferred	794	-	-	1.7	17.0	2.4	*	-	13.2	434	18.7	
Eastern	Total	794	-	-	1.7	17.0	2.4	*	-	13.2	434	18.7	
Total		1,741	-	-	-	-	-	*	1.6	13.9	1,460	18.7	

## Notes on Resources:

3.

- The preceding statements of Mineral Resources conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
- 2. All tonnages reported are dry metric tonnes
- 3. Data is rounded to thousands of tonnes and thousands of ounces/tonnes for copper, antimony, silver, and lead, . Discrepancies in totals may occur due to rounding.
- 4. Resources have been reported as both open pit and underground with varying cut-offs based off several factors discussed in the corresponding Table 1 which can be found with the original ASX announcements for each Resource
- 5. Resources are reported inclusive of any Reserves
- Gold is reported in the previous table for Mt Clement, and so is not reported here. A total of 66koz of gold is contained within the Mt Clement Resource

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Resources are:

- Paulsens Gold Operation:
  - Mt Clement Black Cat ASX announcement on 24th November 2022 "High-Grade Au-Cu-Sb-Ag-Pb Resource at Paulsens"

## APPENDIX C - JORC 2012 GOLD RESERVE TABLE - BLACK CAT (100% OWNED)

The current in-situ, drill-defined Reserves for the Kal East Gold Project are listed below.

	Р	roven Reserv	/e	Pro	obable Rese	rve		Total Reserv	'e
	Tonnes ('000s)	Grade (g/t Au)	Metal ('000s oz)	Tonnes ('000s)	Grade (g/t Au)	Metal ('000s oz)	Tonnes ('000s)	Grade (g/t Au)	Metal ('000s oz)
Open Pit Reserves	-	-	-	3,288	1.8	193	3,288	1.8	193
Underground Reserves	-	-	-	437	3.6	50	437	3.6	50
TOTAL Resource	-	-	-	3,725	2.0	243	3,725	2.0	243

### Notes on Reserve:

- The preceding statements of Mineral Reserves conforms to the 'Australasian Code for Reporting of Exploration Results Mineral Resources and Ore Reserves (JORC Code) 2012 Edition'.
- 2 All tonnages reported are dry metric tonnes
- Data is rounded to thousands of tonnes and thousands of ounces gold. Discrepancies in totals may occur due to rounding. 3.
- 4. Cut-off Grade:
  - Open Pit The Ore Reserves are based upon an internal cut-off grade greater than or equal to the break-even cut-off grade.
  - Underground The Ore Reserves are based upon an internal cut-off grade greater than the break-even cut-off grade.
- The commodity price used for the Revenue calculations was AUD \$2,300 per ounce. 5.
- The Ore Reserves are based upon a State Royalty of 2.5% and a refining charge of 0.2%.

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating for the 2012 JORC compliant Reserves are:

- Kal East:
- Black Cat ASX announcement on 03 June 2022 "Robust Base Case Production Plan of 302koz for Kal East"

## APPENDIX D - PAULSENS DRILLING UNDERGROUND- JORC TABLE 1

Section 1: Sampling Technique		Communitaria
Criteria	JORC Code Explanation  Nature and quality of sampling (e.g. cut channels, random chips, or specific	Commentary  Diamond core is sampled based on geological logging of mineralised intervals. Samples range in width from 0.10m to
	specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	1.20m. Adequate buffers of surrounding non-mineralised rock are sampled around primary samples of between 1 and 5m depending on the nature of the interval to characterise the mineralised boundaries as "hard" or "soft". Samples are collected on half NQ2 core with cutting off the orientation line (where available) and half core routinely selected to sample the same side of the cut line to avoid bias.
		Historically, core samples were collected from whole core for resource definition holes and half-core, similar to what is outlined above, for exploration holes.
Sampling techniques	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Core is aligned and measured by tape, comparing back to down hole core blocks consistent with industry practice. For the current drill program, downhole orientation of the core is done via True Core and hole orientation is measured downhole using a Devi Gyro.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems.  Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	Diamond core is sampled on intervals ranging from 0.10 to 1.20m depending on the nature of the logged interval. Core is half-cut along a cut line just off the orientation line (where available) and core from the same side of the cut line is submitted for assay to avoid human bias of sample selection. Samples are crushed and pulverised at a commercial lab to produce an ~200g pulp sub sample to use in the assay process. Samples are analysed via fire assay using a 40g charge. Visible gold has been reported in recent and historic logging.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Current core drilling is via NQ2 core size. Core is currently oriented using a True Core tool, which is a commercially available product.
		Historic diamond drilling was a mixture of NQ2 and LTK48 core sizes.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	Diamond drill recoveries are recorded as a percentage calculated from measured core versus drilled intervals. Achieving >95% recovery. Greater than 0.2 metre discrepancies are resolved with the drill supervisor.
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	Standard diamond drilling practice results in high recovery due to competent nature of the ground.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	There is no known relationship between sample recovery and grade, sample recovery is very high.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Core logging is carried out by company and contract geologists. Holes are routinely logged for lithology, alteration and mineralisation and where oriented and appropriate structural measurements are collected. Geotechnical logging is limited to recording RQD data for exploration holes.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	Logging is qualitative and all core is photographed. Visual estimates are made of sulphide, quartz vein and alteration percentages.
	The total length and percentage of the relevant intersections logged.	100% of the drill core is logged.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	Current sampling is via half core, which is cut using an Almonte diamond core saw with the right half consistently sampled to intervals delineated by the logging geologist. The left half is archived. All major mineralised zones are sampled plus associated visibly barren host rock between 1 and 5m depending on the thickness of the primary sample interval. Sample intervals range from 0.1 to 1.2m in length.
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	Historic sampling was a mixture of whole core and half core sampling as above.  Current drilling is only via diamond coring.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Sample preparation is conducted at a commercial laboratory to an acceptable standard. Blank samples are routinely submitted to assess the preparation QAQC.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	For drill core the external labs coarse duplicates are used. CRM standards are inserted into the sample stream on a 1:20 ratio in addition to internal laboratory CRMs. Blanks are inserted into the sample stream routinely to assess the QAQC of the sample preparation stage.

Criteria	JORC Code Explanation	Commentary
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second half sampling.	Field duplicates are not utilised in the current drill program. Routine other half core sampling is not undertaken, but hal core is archived for re-sampling if deemed necessary. Duplicate lab analysis is routinely undertaken at regular samplin intervals on crushed material.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Sample sizes are considered appropriate.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	For all drill core samples, gold concentration is determined by fire assay using the lead collection technique with a 40 gram sample charge weight. An AAS finish is used, considered to be total gold.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	No other sources of data reported.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	The QAQC protocols used include the following for all drill samples: Commercial coarse blanks are inserted at an incidence of 1 in 40 samples or after intervals of significant visual mineralisation.  Commercially prepared certified reference materials are inserted at an incidence of 1 in 20 samples. The CRM used is not identifiable to the laboratory.  The primary laboratory QAQC protocols used include the following for all drill samples:  Repeat of pulps at a rate of 5%.  Screen tests (percentage of pulverised sample passing a 75µm mesh) are undertaken on 1 in 100 samples.  Failed standards are followed up by re-assaying a second 40 g pulp sample of the failed standard ± 10 samples either side by the same method at the primary laboratory.  Both the accuracy component (CRM's and umpire checks) and the precision component (duplicates and repeats) are deemed acceptable.
	The verification of significant intersections by either independent or alternative company personnel.	Significant intercepts have been reviewed by the competent person as part of the due diligence process
Verification of sampling and	The use of twinned holes.	No twinned holes have been drilled as part of this drill program.
assaying	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Current logging is done via a protected Excel spreadsheet and uploaded into an external Access database at the completion of each drillhole. The original logs are archived.
	Discuss any adjustment to assay data.	No adjustments to assay data have been made.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down- hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Drill hole collar positions are picked up by survey using a calibrated total station Leica 1203+ instrument. Drill hole, downhole surveys are recorded at the collar and then every 50m downhole using a Devi Gyro, north-seeking tool with the Paulsens Local Grid transformation pre-loaded.
	Specification of the grid system used.	A local grid system (Paulsen Mine Grid) is used. It is rotated 41.7 degrees to the west of GDA94 – MGA zone 50 grid. Local origin is 50,000N and 10,000E Conversion.  MGA E = (East_LOC*0.75107808+North_LOC*0.659680194+381644.16)  MGA N = (North_LOC*0.75107808-East_LOC*0.659680194+7571963.75)  MGA RL = mRL_LOC-1000
	Quality and adequacy of topographic control.	Topographic control is not relevant to the underground mine. For general use, an airborne survey was flown in 2023. Resolution is +/- 0.5m.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Exploration result data spacing can be highly variable, up to 100m and down to 10m.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	Measured data spacing is better than 7m x 7m and restricted to areas in immediate proximity to mined development. Data spacing for indicated material is approximately, or better than, 20m x 20m.  All other areas where sample data is greater than 20m x 20m, or where intercept angle is low, is classified as inferred.
Orientation of data in relation to geological structure	Whether sample compositing has been applied.	Core sampling is conducted on geologic intervals and is not field-composited. Assay data is composited using a 1g/t cut-off with up to 2m total internal dilution and 1m continuous dilution.
	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Drilling is designed to be as close to perpendicular to the known mineralised trend being tested as achievable given dril collar location constraints. Core is routinely oriented and structural measurements taken of significant mineralisation zones to calculate true thickness during Resource Estimation.  Hanging-wall drill drives provide excellent intercept orientation to the geological structures used in the estimate.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	The drill orientation to mineralised structures biases the number of samples per drill hole. It is not thought to make a material difference in the Resource estimation as opportunity arises, better angled holes are drilled with higher intersection angles.

Criteria	JORC Code Explanation	Commentary
Sample security	The measures taken to ensure sample security.	All samples are selected, cut and bagged in tied pre-numbered calico bags, grouped in larger tied plastic bags, and placed in large bulka bags with a sample submission sheet.  The bulka bags are transported via freight truck to Perth, with consignment note and receipts.  Sample pulp splits are returned to BC8 via return freight and stored in shelved containers on site.  Pre BC8 operator sample security assumed to be similar and adequate.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Recent external review confirmed core and face sampling techniques are to industry standard.  Data handling is considered adequate and was further improved recently with a new database.  Pre BC8 data audits found less QAQC reports, though in line with industry standards at that time.
Section 2: Reporting of Exploration	on Results	
Criteria	JORC Code Explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as Joint Ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	Paulsens Gold Mine is located on tenements M08/99 and M08/196, both of which are held by Black Cat (Paulsens)Pty Ltd, a subsidiary of Black Cat Syndicate Ltd and are in good standing.  All production is subject to a Western Australian state government Net Smelter Return ("NSR") royalty of 2.5%.  There are several registered heritage sites on surface around the Paulsens Gold Mine, but they do not impact underground operations.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	No known impediment to obtaining a licence to operate exists and the remainder of the tenements are in good standing
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Extensive exploration and development have been conducted around Paulsens dating from the 1970s for variou commodities, including gold and base metals. Several operators have conducted exploration, much of which is recorder digitally in the Black Cat database.  Most recently, Paulsens was owned by Northern Star, who conducted significant underground and surface exploration which Black Cat has in digital form. Work activities included:  - Extensive underground drilling and development work  - Surface RC and diamond drilling around Paulsens Gold Mine and on regional tenure  - Several campaigns of surface and underground bedrock mapping to constrain the local and district-scall structural architecture as an aid in exploration targeting  - Several rounds of geophysical acquisitions including airborne magnetics and radiometrics, surface gravit surveys, ground and airborne EM surveying and 2D and 3D seismic surveys over the Paulsens Gold Mine
Geology	Deposit type, geological setting and style of mineralisation.	Paulsens is a narrow vein orogenic gold deposit hosted in the Wyloo dome within the Ashburton Basin. Mineralisation i hosted in quartz-sulphide (pyrite, pyrrhotite, chalcopyrite and galena) veins ranging in thickness from a few centimetres to several metres, as well as in semi-massive sulphidic shear zones containing milled sulphides (primarily pyrite and chalcopyrite). Most of the mined ore zone at Paulsens is hosted in veins within a highly sheared argillic sandstone/siltstone within a broad shear zone that forms a subsidiary structure to the regionally extensive Nanjilgardy Fault system. A second set of mineralised quartz veins are hosted in tension gash structures within the Paulsens Mine Gabbro, which is a medium grained gabbro/dolerite sill that intrudes the sedimentary succession. The mined portion of the Paulsens Deposit is hosted in a shear zone that cuts through the Paulsens Mine Gabbro and offsets the gabbro several 10s to 100s of metres.
Drill hole information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:  • easting and northing of the drill hole collar;  • elevation or Reduced Level ("RL") (elevation above sea level in metres) of the drill hole collar;  • dip and azimuth of the hole;  • down hole length and interception depth;  • hole length; and  • if the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	All drill collar location details are reported in the body of this report.

Section 2: Reporting of Exploration Results			
Criteria	JORC Code Explanation	Commentary	
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high-grades) and cut-off grades are usually Material and should be stated.	Composite assay results are reported using a 1g/t Au lower cut-off. No top-cut is applied to assay data.	
	Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	All composites are reported with a maximum total internal waste of 2m, with up to 1m of contiguous waste included between mineralised intervals. The minimum composite grade reported is 1g/t. Internal high grades are reported in the body of the text as "including" intervals. Typically, these high-grade sub-intervals are reported if they are more than 10x the composite grade	
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	Not applicable, as no metal equivalent values have been reported.	
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.  If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.  If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	All intercepts are reported as downhole depths which is considered close to true width for most intercepts.	
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate diagrams have been included in the body of the announcement.	
Balanced reporting	Where comprehensive reporting of all Exploration.  Results are not practicable, representative reporting of both low and high- grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All significant results have been tabulated in this release, including drillholes with no significant results	
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Geophysical surveys including aeromagnetic surveys and seismic have been carried out by previous owners to highlight and interpret prospective structures in the project area.	
Further work	The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).  Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Black Cat is continuing an exploration program which will target extension of mineralisation and regional targets within the Paulsens area	