

TEASING OUT THE POTENTIAL AT EAST TROUGH

4 JULY 2023

KEY POINTS

- **2.0m @ 4.96% Ni with significant Cu, Co, Pd and Pt values (>1.0% Ni cut-off)**
- **Hosted within broader 6.0m @ 2.83% Ni (> 0.5% Ni cut-off)**
- **East and West Trough both accessible from future Baker development**

Lunnon Metals Limited (**ASX: LM8**) (the **Company** or **Lunnon Metals**) is pleased to update successful exploration results for surface diamond drilling (**DD**) and reverse circulation percussion drilling (**RC**) targeting the East Trough prospect, located to the immediate south-west of the Company's cornerstone asset and first discovery, the Baker deposit.

The Company's first significant nickel intercept after its June 2021 Initial Public Offering was at East Trough, with an intersection of **2m @ 5.07% Ni** in ECO21RC_005 (see announcement dated 28 September 2021). This initial exploration program was surpassed by the subsequent discovery of Baker in December 2021 with the Company principally focussing on the rapid drill out of the deposit and subsequent Mineral Resource declarations in 2022. The recent reporting of an initial Ore Reserve and positive results of the Preliminary Feasibility Study (**PFS**) on 22 May 2023, topped off a busy 18 months at Baker.

The focus for exploration activities in and around that discovery has now shifted to defining additional sources of nickel mineralisation in proximity to the potential future underground development. With this objective in mind, a recent DD and RC program targeting the East Trough prospect has been completed which has returned the following significant intercepts (>1.0% Ni cut off, see Annexure 2a for full assay results for minor elements):

- ECO23RC_098 - **5.00m @ 1.51% Ni** (from 182.0m);
- ECO23RC_100 - **2.00m @ 2.03% Ni** (from 209.0m);
- ECO23RC_103 - **1.00m @ 5.01% Ni** (from 262.0m); and
- ECO23RC_103 - **2.00m @ 4.96% Ni** (from 266.0m);
- ECO23RC_111 - **1.00m @ 3.53% Ni** (from 138.0m);
- ECO23DD_025 - **0.85m @ 1.41% Ni** (from 308.4m); and
- ECO23DD_025 - **0.30m @ 3.08% Ni** (from 314.0m).

These intervals were returned from approximately 400m of plunge extent that was targeted in the interpreted trough, in the locality of, and extending up-plunge from, ECO23DD_023 (reported to ASX on 19 April 2023) and also broadly between a number of historical WMC Resources Ltd (**WMC**) DD holes. These intercepts sit at the contact between the Kambalda Komatiite and Lunnon Basalt, the more traditional mineralisation setting associated with channel hosted "Kambalda style" nickel deposits, with structural complexity apparent at this East Trough prospect. The East Trough prospect remains open down plunge.

Managing Director, Edmund Ainscough, commenting said: *"The Baker PFS results were excellent and present only an initial case for the potential future exploitation of that deposit. Not only is Baker open down plunge, but the nearby East Trough prospect is developing nicely and promising to provide a meaningful addition to the available nickel metal, just 300m-450m away."*

EAST TROUGH PROGRAMME SUMMARY

The East Trough prospect, located just 300m to 450m to the south-west of the Baker deposit (see **Figure 1**), is currently recognised to extend for at least 1.2km between historical holes CD230 to CD546 (see **Figure 2**). Over this distance, the depth to the mineralised basalt contact ranges from 100m to 680m below surface. A near surface elongate 650m long nickel oxide anomaly greater than 0.3% Ni is positioned immediately above the trough trend at its north-western extent.

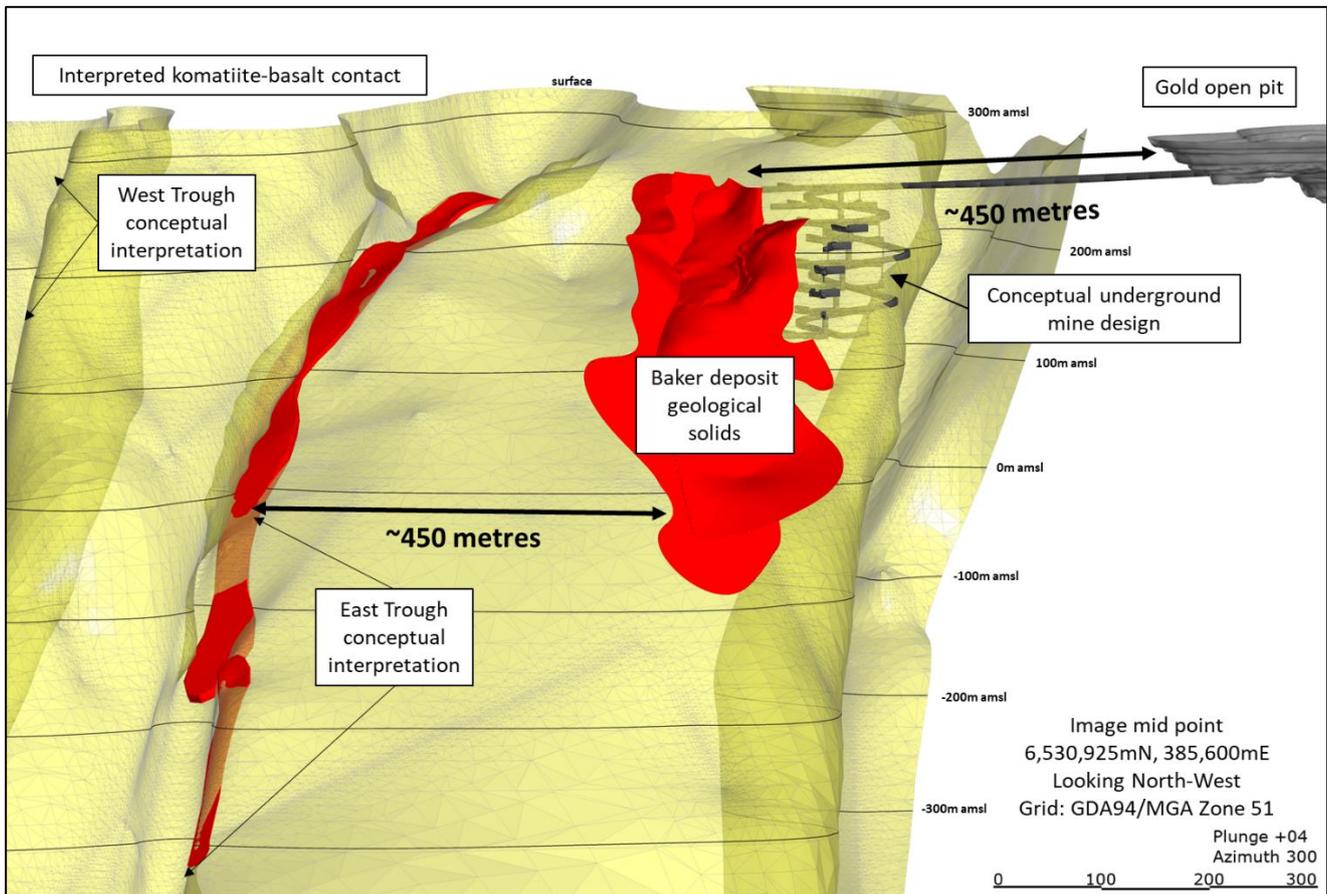


Figure 1: Perspective view looking (NW) from the komatiite hanging wall towards the basalt footwall illustrating spatial relationship between West & East Troughs (to the left) and Baker (right).

Historically, this trend has been poorly tested with irregular, WMC vintage (~1970s) drill hole spacing of approximately 250m at depth and 125m where shallow. Mineralised intercepts to date have tended to be relatively narrow however the presence of massive nickel sulphide at the important komatiite-basalt contact is a key indicator for prospectivity. WMC historical East Trough intercepts (> 1.0% Ni cut off; see **Figure 2** for location; see announcements dated 27 July 2021 and 1 October 2021 for further details) include:

- CD555 - **0.40m @ 9.41% Ni** (from 197.25m);
- CD587 - **2.25m @ 3.37% Ni** (from 285.00m);
- CD315 - **3.33m @ 2.75% Ni** (from 479.90m); and
- CD315W4 - **0.78m @ 4.94% Ni** (from 482.80m).

Each of these intercepts contain zones of massive nickel sulphides in what are otherwise intervals of matrix to disseminated sulphides, consistent with the typical “Kambalda style” nickel sulphide mineralisation profile.

With the understanding that Kambalda style nickel sulphide deposits tend to form in trough or channel structures with large length to width aspect ratios, the East Trough prospect presents itself as a compelling target. This, coupled with the recent understanding at Baker, where narrow mineralised intercepts can be indicative of much thicker and higher-grade zones nearby, has encouraged Lunnon Metals to further test the East Trough prospect in follow up to its 2021 early success with drill hole ECO21RC_005.

Over recent months the approach has been to test the broader gaps in the historical drilling with DD where target depths are modest while testing on a closer spacing when target depths are permissive using RC.

In addition to ECO23DD_023 and ECO23DD_020 (see ASX announcement dated 19 April 2023), a further three reconnaissance DD holes have been completed returning narrow, modest grades in ECO23DD_025 immediately above the komatiite-basalt contact, while both ECO23DD_022 and ECO23DD_024 drilled too far to the west and missed the interpreted trough position (see Annexure 2a for full assays).

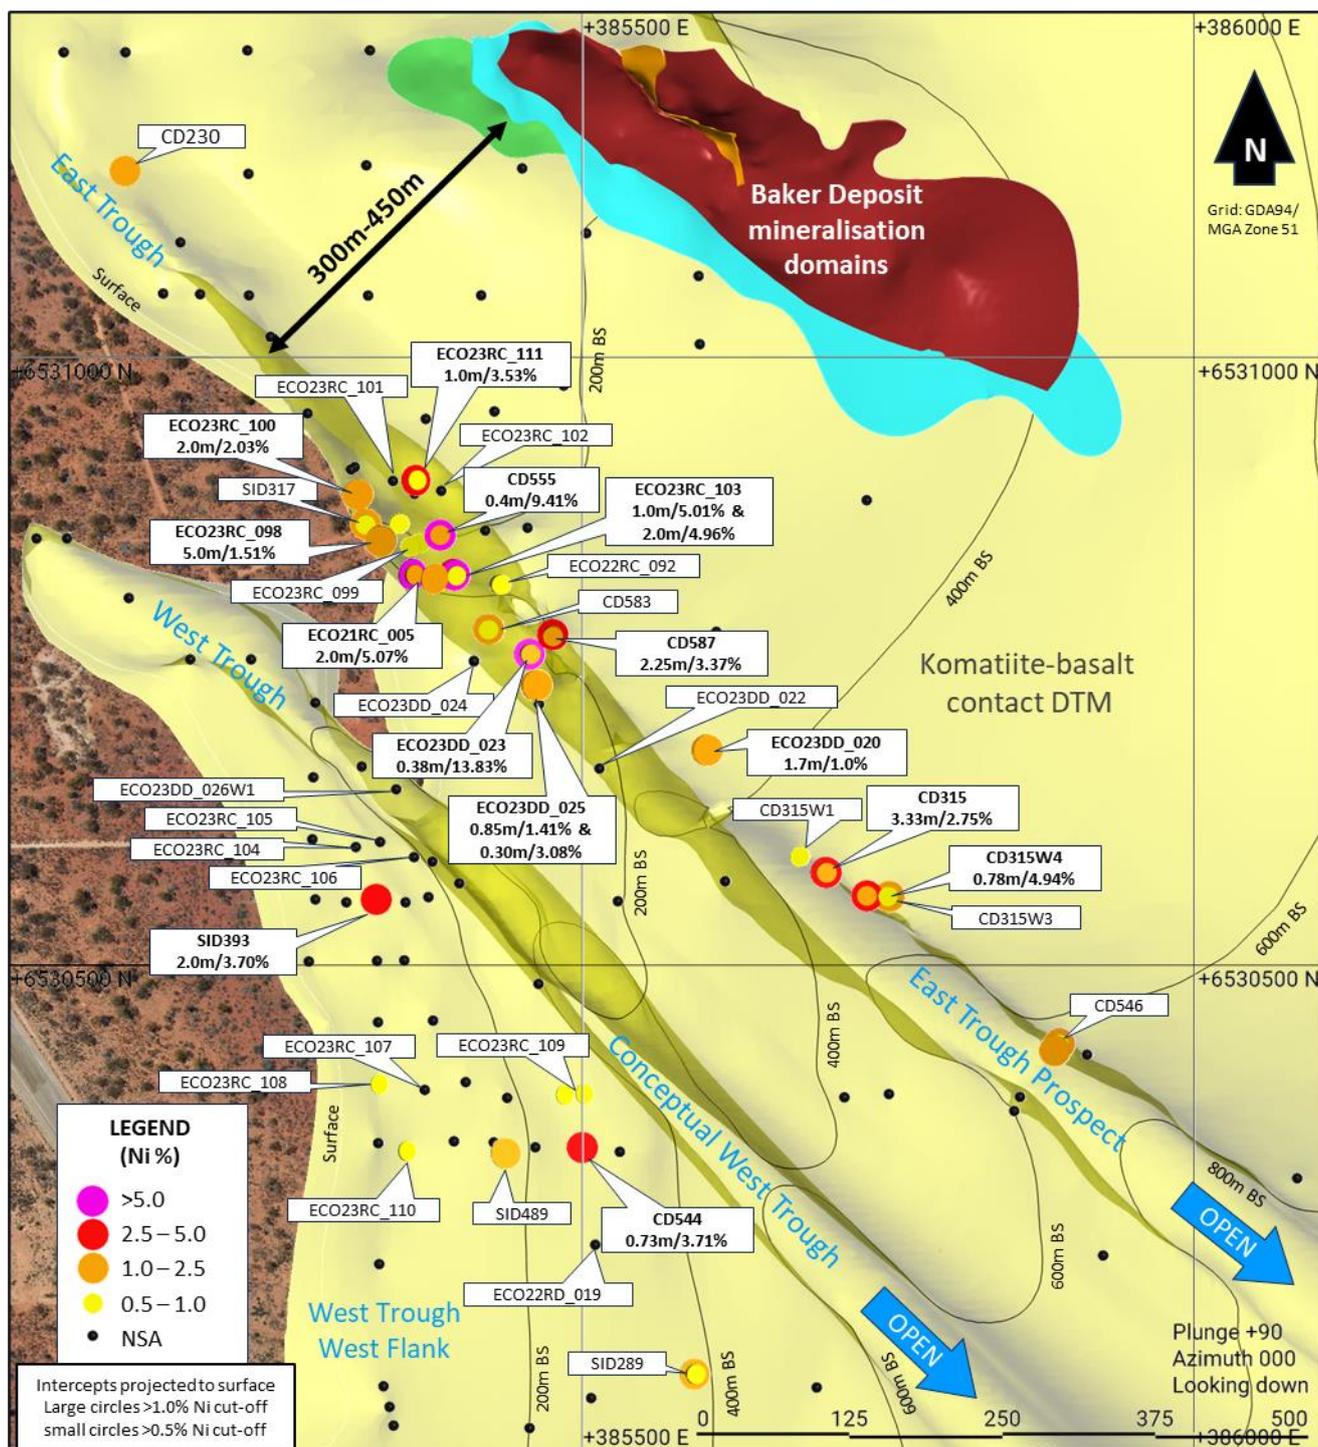


Figure 2: Plan view of East and West Trough targets highlighting recent results. The yellow wireframe Digital Terrain Model (DTM) surface is the interpreted komatiite-basalt contact with contours in metres below surface (m BS). Note: annotated drill holes without m/Ni % labels are reported in Annexure 2a and 2b and omitted for ease of viewing.

A more recent RC program targeting the trough structure up-plunge of ECO21RC_005 has intersected multiple mineralised positions at the important komatiite-basalt contact which appears to be possibly fault repeated and potentially overturned in some positions. Significant intercepts >1.0% Ni cut off (see Annexure 2a for full assay results for all holes including minor elements) include:

- ECO23RC_098 - **5.00m @ 1.51% Ni** (from 182.0m);
- ECO23RC_100 - **2.00m @ 2.03% Ni** (from 209.0m);
- ECO23RC_103 - **1.00m @ 5.01% Ni** (from 262.0m); and
- ECO23RC_103 - **2.00m @ 4.96% Ni** (from 266.0m);
- ECO23RC_111 - **1.00m @ 3.53% Ni** (from 138.0m);
- ECO23DD_025 - **0.85m @ 1.41% Ni** (from 308.4m); and
- ECO23DD_025 - **0.30m @ 3.08% Ni** (from 314.0m).

The structural complexity recorded is both challenging and exciting with the possibility of so-called “blind positions” emplaced within the footwall basalt that are not yet identified by drilling.

WEST TROUGH CONCEPTUAL TARGET

In addition to the East Trough prospect a conceptual West Trough target has been interpreted based on historical drilling data that identifies an elongated embayment in the komatiite-basalt contact. A near surface elongate 800m long nickel oxide anomaly greater than 0.3% Ni is positioned immediately above and along the interpreted trough. This interpretation is supported by anomalous historical drill intercepts in what would be the western flank position to this West Trough target (> 1.0% Ni cut off – see **Figure 2** for location and Annexure 2b for fuller assay results) which include:

- SID393 - **2.0m @ 3.70% Ni** (from 110.00m);
- SID489 - **1.48m @ 1.48% Ni** (from 194.66m);
- CD544 - **0.73m @ 3.71% Ni** (from 285.6m); and
- SID289 - **0.82m @ 1.52% Ni** (from 393.95m).

To date Lunnon’s drill testing of this target has been limited to the flank position with the base of the trough not yet successfully intersected.

Annexure 1 details which DD and RC holes have been drilled to date at West Trough whilst Annexure 2a records that thus far, no significant assay results above a 1.0% Ni cut-off have been returned from the program on this target.



FUTURE PLANS

As previously highlighted, the East Trough prospect had a wide framework of DD completed by WMC, predominantly in the 1970s. As the Company discovered at nearby Baker, significant nickel sulphide mineralisation, if present, may be able to be delineated within such broad spaced drilling by applying modern exploration techniques and revised geological interpretations coupled with closer spaced drilling. This remains the objective at East and West Trough.

This latest set of drilling results at East and West Trough will now be incorporated into an updated litho-structural model of the area to fully appreciate the opportunity presented, particularly by the East Trough prospect. Geophysical modelling, not yet completed, for downhole transient electro-magnetic (**DHTEM**) survey data collected from four of the recent East Trough RC holes and five of the West Trough holes will be included in the interpretation to help guide future targeting efforts.

Subject to ongoing success and positive DD and RC results, the goal at East Trough is to complete a Mineral Resource estimation (MRE) exercise and seek to report an initial Inferred Mineral Resource. This will enable the East Trough nickel mineralisation to be factored into considerations for any potential future Baker underground operation.

Approved and authorised for release by the Board.

Edmund Ainscough
Managing Director
Phone: +61 8 6424 8848
Email: info@lunnonmetals.com.au



Annexure 1: Diamond and RC Drill Hole Collar Table

Hole ID	Easting	Northing	Elev. (m ASL)	Dip	Azi.	EOH Drill Depth (m)	Hole Type	Grid	Prospect
CD230*	386347.7	6528563.0	338.0	-90	0	121.9	DD	MGA94_51	ET
CD544	385503.5	6530355.0	332.1	-90	0	317.8	DD	MGA94_51	WT
CD546*	385826.7	6530358.0	335.2	-90	0	771.0	DD	MGA94_51	ET
SID289	385635.4	6530156.0	335.5	-90	0	493.06	DD	MGA94_51	WT
SID393	385331.7	6530554.0	328.9	-90	0	119	DD	MGA94_51	WT
SID489	385483.3	6530355.0	332.9	-87	255.0	417.2	DD	MGA94_51	WT
ECO22RD_019	385,637.5	6,530,263.6	334.1	-70.3	271.4	352.0	DD	MGA94_51	WT
ECO23DD_022	385,731.0	6,530,659.6	328.4	-60.8	270.1	465.6	DD	MGA94_51	ET
ECO23DD_023*	385,506.6	6,530,753.8	325.5	-79.9	269.2	338.0	DD	MGA94_51	ET
ECO23DD_024	385,505.3	6,530,753.5	325.5	-69.9	272.1	339.4	DD	MGA94_51	ET
ECO23DD_025	385,508.2	6,530,752.7	325.4	-79.6	240.4	348.9	DD	MGA94_51	ET
ECO23DD_026	385,513.4	6,530,751.3	325.4	-59.4	233.0	388.4	DD	MGA94_51	WT
ECO23DD_026W1	385,513.4	6,530,751.3	325.4	-59.4	233.0	389.7	DD	MGA94_51	WT
ECO23RC_098	385,320.9	6,530,839.9	322.7	-84.8	93.1	264.0	RC	MGA94_51	ET
ECO23RC_099	385,321.4	6,530,839.9	322.7	-78.1	94.3	264.0	RC	MGA94_51	ET
ECO23RC_100	385,370.2	6,530,856.7	322.8	-72.1	295.1	234.0	RC	MGA94_51	ET
ECO23RC_101	385,372.5	6,530,854.4	322.9	-85.3	279.3	246.0	RC	MGA94_51	ET
ECO23RC_102	385,423.3	6,530,902.9	322.7	-68.0	252.8	250.0	RC	MGA94_51	ET
ECO23RC_103	385,496.1	6,530,805.9	324.4	-67.3	277.0	300.0	RC	MGA94_51	ET
ECO23RC_104	385,377.6	6,530,593.4	327.3	-59.5	273.8	162.0	RC	MGA94_51	WT
ECO23RC_105	385,419.5	6,530,594.5	327.3	-60.6	273.6	204.0	RC	MGA94_51	WT
ECO23RC_106	385,472.5	6,530,593.4	327.7	-61.0	267.5	300.0	RC	MGA94_51	WT
ECO23RC_107	385,437.8	6,530,401.7	331.3	-61.1	268.2	168.0	RC	MGA94_51	WT
ECO23RC_108	385,383.9	6,530,401.1	331.7	-61.0	271.4	138.0	RC	MGA94_51	WT
ECO23RC_109	385,539.4	6,530,395.8	331.2	-60.1	267.6	246.0	RC	MGA94_51	WT
ECO23RC_110	385,430.5	6,530,351.6	332.3	-61.0	269.5	168.0	RC	MGA94_51	WT
ECO23RC_111	385,422.4	6,530,901.3	322.7	-65.5	269.7	258.0	RC	MGA94_51	ET

ET = East Trough Prospect, WT = West Trough Target, * Previously reported.



Annexure 2a: LM8 Drill Intercepts

Hole ID	From (drill depth) (m)	Width ^ (m)	Ni %	Cu %	Co %	Fe %	Mg %	As ppm	Pd g/t	Pt g/t	Cut-off % Ni
ECO22RD_019	NSA										
ECO23DD_022	NSA										
ECO23DD_023*	291.00	2.45	0.69	0.04	0.02	6.08	18.07	<10	0.11	0.05	0.50
and*	297.20	1.47	3.93	0.15	0.06	14.76	10.96	<109	0.44	0.21	0.50
including*	298.29	0.38	13.83	0.52	0.21	39.12	0.50	15	1.49	0.73	1.00
ECO23DD_024	NSA										
ECO23DD_025	308.40	0.85	1.41	0.06	0.02	7.93	17.77	<10	0.27	0.15	1.00
and	314.00	0.30	3.08	0.23	0.05	12.34	10.55	13	0.37	0.08	1.00
ECO23DD_026	NSA										
ECO23DD_026W1	NSA										
ECO23RC_098	182.00	5.00	1.51	0.08	0.02	6.92	15.02	<10	n/a	n/a	1.00
and	200.00	5.00	0.52	0.02	0.01	6.15	16.34	<10	n/a	n/a	0.50
ECO23RC_099	173.00	1.00	0.81	0.05	0.01	9.04	6.81	<10	n/a	n/a	0.50
and	206.00	1.00	0.57	0.03	0.02	7.12	18.23	<10	n/a	n/a	0.50
ECO23RC_100	209.00	2.00	2.03	0.14	0.03	11.22	7.71	<10	0.33	0.13	1.00
ECO23RC_101	202.00	5.00	0.55	0.03	0.01	7.77	13.96	<10	n/a	n/a	0.50
ECO23RC_102	NSA										
ECO23RC_103	258.00	2.00	0.63	0.04	0.01	7.60	15.59	<10	0.10	0.04	0.50
and	262.00	6.00	2.83	0.26	0.05	15.87	11.12	<10	0.38	0.16	0.50
including	262.00	1.00	5.01	0.12	0.10	27.90	7.89	<10	0.54	0.21	1.00
and including	266.00	2.00	4.96	0.67	0.08	19.46	8.20	<10	0.71	0.32	1.00
ECO23RC_104	NSA										
ECO23RC_105	NSA										
ECO23RC_106	NSA										
ECO23RC_107	NSA										
ECO23RC_108	102.00	1.00	0.51	0.01	0.02	6.00	18.83	<10	n/a	n/a	0.50
ECO23RC_109	78.00	1.00	0.84	0.09	0.05	26.38	8.54	<10	n/a	n/a	0.50
and	112.00	1.00	0.60	0.19	0.03	16.50	10.25	<10	n/a	n/a	0.50
ECO23RC_110	148.00	2.00	0.63	0.02	0.01	6.51	14.37	<10	n/a	n/a	0.50
ECO23RC_111	135.00	1.00	0.67	0.01	0.01	6.39	8.87	<10	n/a	n/a	0.50
and	138.00	2.00	2.10	0.36	0.04	9.82	8.59	13	n/a	n/a	0.50
including	138.00	1.00	3.53	0.69	0.07	13.98	6.40	13	n/a	n/a	1.00

^true widths are interpreted to be approximately 75% of drilled widths subject to final interpretation.

n/a means these elements were not assayed by LM8; NSA = no significant assays.

* Previously reported.



Annexure 2b: WMC Drill Intercepts

Hole ID	From (drill depth) (m)	Width ^ (m)	Ni %	Cu %	Co %	Fe %	Mg %	As ppm	Pd g/t	Pt g/t	Cut- off % Ni
CD230*	85.90	0.12	1.26	0.04	n/a	n/a	n/a	n/a	n/a	n/a	1.00
CD544	285.60	0.73	3.71	0.12	n/a	n/a	n/a	n/a	n/a	n/a	1.00
CD546*	744.00	1.00	1.15	0.07	n/a	n/a	n/a	n/a	n/a	n/a	1.00
and*	746.42	0.14	12.2	0.19	n/a	n/a	n/a	n/a	n/a	n/a	1.00
SID289	393.95	0.82	1.52	0.03	n/a	n/a	n/a	n/a	n/a	n/a	1.00
SID393	110.00	2.00	3.70	0.10	n/a	n/a	n/a	n/a	n/a	n/a	1.00
SID489	194.66	1.48	1.48	0.05	n/a	n/a	n/a	n/a	n/a	n/a	1.00

^true widths are interpreted to be approximately 75% of drilled widths subject to final interpretation.

n/a means these elements were not assayed by WMC.


* Drill hole previously reported as either composite interval of those noted above or above a lower cut-off.

ABOUT THE KAMBALDA NICKEL PROJECT (KNP)

Lunnon Metals currently holds 100% of the mineral rights at the Foster and Baker elements of the KNP, subject to certain rights retained by St Ives Gold Mining Co Pty Ltd (**SIGM**)*. Full details of the Company's IPO and the transactions involved are in the Prospectus submitted to the ASX dated 22 April 2021 and lodged with the ASX on 11 June 2021.

KNP, shown in its regional location in **Figure 3**, inclusive of the rights acquired as detailed in the announcement dated 12 April 2022, is approximately 47km² in size comprising two parcels of 19 (Foster and Baker or **FBA**) and 20 (Silver Lake and Fisher or **SLF**) contiguous granted mining leases situated within the Kambalda Nickel District which extends for more than 70 kilometres south from the township of Kambalda (**Tenements**).

This world-renowned nickel district has produced in excess of 1.4 million tonnes of nickel metal since its discovery in 1966 by WMC. In addition, close to 15Moz of gold in total has been mined with WMC accounting for 5.9Moz and over 8.3Moz produced by Gold Fields Ltd since the purchase of the operation in December 2001 from WMC, making the Kambalda/St Ives district a globally significant gold camp in its own right.

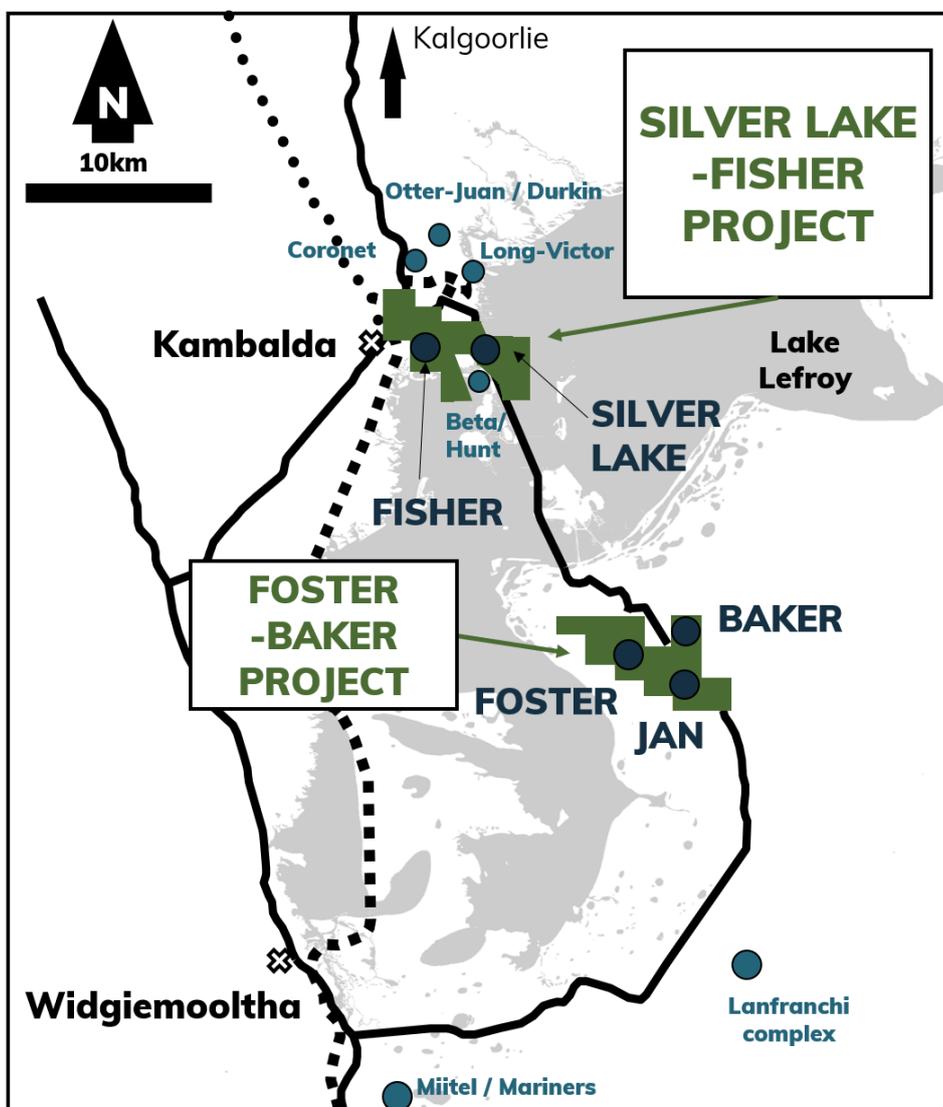

**SIGM retains rights to explore for and mine gold in the "Excluded Areas" on the Tenements at the Foster and Baker elements of the expanded KNP, as defined in the subsisting agreements between Lunnon Metals and SIGM.*

This right extends to gold mineralisation which extends from the Excluded Area to other parts of the FBA Tenements with select restrictions which serve to prevent interference with, or intrusion on, Lunnon Metals' existing or planned activities and those parts of the FBA Tenements containing the historical nickel mines.

SIGM has select rights to gold in the remaining areas of the FBA Tenements in certain limited circumstances as described in detail in the Company's Solicitor Report attached to the Prospectus submitted to the ASX dated 22 April 2021 and lodged with the ASX on 11 June 2021.

Figure 3: Regional Location of the Kambalda Nickel Project and other nearby nickel deposits.



COMPETENT PERSON'S STATEMENT & COMPLIANCE

The information in this announcement that relates to nickel geology, nickel Mineral Resources and Exploration Results, is based on, and fairly represents, information and supporting documentation prepared by Mr. Aaron Wehrle, who is a Member of the Australasian Institute of Mining and Metallurgy (**AusIMM**). Mr. Wehrle is a full-time employee of Lunnon Metals Ltd, a shareholder and holder of employee options; he has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that he is undertaking to qualify as Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Wehrle consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

Any information in this announcement that relates to the mining, metallurgical and environmental modifying factors or assumptions as they may apply to the Company's MREs is based on, and fairly represents, information and supporting documentation prepared by Mr. Max Sheppard, Mr. Wehrle and Mr. Edmund Ainscough, who are Competent Persons and Members of the AusIMM and full time employees of Lunnon Metals Ltd. Mr. Wehrle and Mr. Ainscough are shareholders and all three are holders of employee options/performance rights. All three employees have sufficient experience that is relevant to the style of mineralisation, the types of deposit under consideration, the activity that they are undertaking and the relevant factors in the particular location of the prospect area, the historical Foster mine and the KNP generally, to qualify as Competent Persons as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Sheppard, Mr. Wehrle and Mr. Ainscough consent to the inclusion in this announcement of the matters based on their information in the form and context in which it appears.

MINERAL RESOURCES

The detailed breakdown of the Company's Mineral Resources as updated 31 March 2023, is as follows:

	Cut-off (Ni %)	Indicated Ni			Inferred Ni			Total Ni		
		Tonnes	%	Ni Tonnes	Tonnes	%	Ni Tonnes	Tonnes	%	Ni Tonnes
FOSTER MINE										
Warren	1.0	345,000	2.6	8,800	100,000	2.4	2,400	445,000	2.5	11,200
Foster Central										
85H	1.0	387,000	3.3	12,800	300,000	1.3	3,800	687,000	2.4	16,600
N75C	1.0	270,700	2.6	6,900	142,000	1.9	2,600	412,700	2.3	9,500
S16C / N14C	1.0	-	-	-	64,000	5.7	3,700	64,000	5.7	3,700
South	1.0	223,000	4.7	10,500	116,000	4.8	5,500	340,000	4.7	16,000
Sub total		1,225,700	3.2	39,000	722,000	2.5	18,000	1,948,700	2.9	57,000
BAKER AREA										
Baker	1.0	638,000	3.8	24,000	291,000	2.3	6,800	929,000	3.3	30,800
Sub total		638,000	3.8	24,000	291,000	2.3	6,800	929,000	3.3	30,800
TOTAL		1,863,700	3.4	63,000	1,013,000	2.4	24,800	2,877,700	3.1	87,800

Note: Figures have been rounded and hence may not add up exactly to the given totals.

ORE RESERVES

The detailed breakdown of the Company's Baker Ore Reserve as at 22 May 2023, is as follows:

Baker	tonnes	Ni %	Cu %	Co %	Pd g/t	Pt g/t	As ppm	Ni metal
Proved	-	-	-	-	-	-	-	-
Probable	612,000	2.86	0.24	0.052	0.49	0.20	110	17,500
TOTAL	612,000	2.86	0.24	0.052	0.49	0.20	110	17,500



DISCLAIMER

References in this announcement may have been made to certain previous ASX announcements, which in turn may have included Exploration Results, Exploration Targets and Mineral Resources. For full details, please refer to the said announcement on the said date. The Company is not aware of any new information or data that materially affects this information. Other than as specified in this announcement and mentioned announcements, the Company confirms it is not aware of any new information or data that materially affects the information included in the original market announcement(s), and in the case of estimates of Mineral Resources that all material assumptions and technical parameters underpinning the estimates in the relevant announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcement.

JORC Table 1

SECTION 1 SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
<p>Sampling techniques</p>	<p><i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> All drilling and sampling were undertaken in an industry standard manner both historically by WMC Resources Ltd (WMC) and by Lunnon Metals Ltd (Lunnon Metals or the Company) in 2021, 2022 and 2023. Lunnon Metals' diamond drill (DD) and reverse circulation (RC) holes were completed by Blue Spec Drilling Pty Ltd (Blue Spec) following protocols and QAQC procedures aligned with industry best practice. <p><u>RC Lunnon Metals</u></p> <ul style="list-style-type: none"> RC samples were collected directly into calico sample bags on a 1.0m basis from a cone splitter mounted on the drill rig cyclone. 1.0m sample mass typically averages 3.0kg splits. Duplicate samples were also collected directly into calico sample bags from the drill rig cyclone, at a rate of 1 in every 25 samples and more frequently in the expected mineralised zones. Sub-sampling techniques and sample preparation are described further below in the relevant section. Sample sizes are considered appropriate for the material sampled. The samples are considered representative and appropriate for this type of drilling. RC samples are appropriate for use in a resource estimate. <p><u>DD Lunnon Metals</u></p> <ul style="list-style-type: none"> Core samples are collected with a DD rig typically drilling HQ (63.5mm core diameter) and/or NQ2 (51mm core diameter) either from surface or as tails from RC pre-collars. All DD core is stored in industry standard plastic core trays labelled with the drill hole ID and core depth intervals. Sub-sampling techniques and sample preparation are described further below in the relevant section. Sample sizes are considered appropriate for the material sampled. The samples are considered representative and appropriate for this type of drilling. DD core samples are appropriate for use in any future Mineral Resource estimate. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> Sampling procedures followed by WMC in the drilling, retrieval, and storage of diamond drill core are in line with industry standards at the time (1966 to 2001). Surface diamond drill obtaining NQ and/or BQ diameter drill core, were the standard exploration sample techniques employed by WMC. The drill core was typically collected in steel core trays of 1.0m lengths comprising five to seven compartments depending on drill core diameter. The core trays were labelled with the drill hole number and numbered with the downhole meterage for the start of the first 1 m run and the end of the last 1 m run on the lip of the core tray and typically included core blocks within the core trays demarcating the depth meterage of rod pull breaks. The earlier drilling was collected in wooden, and hybrid wooden/steel core trays and occasionally depths recorded in feet.

Criteria	JORC Code explanation	Commentary
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i>	<p><u>RC Lunnon Metals</u></p> <ul style="list-style-type: none"> • RC holes were drilled with a 5 1/2-inch bit and face sampling hammer. • Holes are drilled dry with use of booster/auxiliary air when/if ground water is encountered. <p><u>DD Lunnon Metals</u></p> <ul style="list-style-type: none"> • Core samples are collected with a DD rig typically drilling HQ (63.5mm core diameter) and/or NQ2 (51mm core diameter) either from surface or as tails from RC pre-collars. • The DD core was orientated during the drilling process by Blue Spec, using a down hole Reflex ACTIII™ Rapid Descent Digital Core Orientation Tool, and then reconstructed over zones of interest by Lunnon Metals field staff for structural and geotechnical logging. <p><u>WMC Historical Drilling</u></p> <ul style="list-style-type: none"> • Historical DD completed by WMC comprised surface NQ and BQ size drill core. Pre-collars to the surface diamond drillholes are typically PQ and HQ size and occasionally comprised RC drilling techniques. The pre-collars are not typically mineralised. • Although no documentation is available to describe the drilling techniques used by WMC at the time it is understood that the various drilling types used conventional drilling methods consistent with industry standards of the time. • None of the historical WMC diamond drill core was oriented.
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> • Every RC sample is assessed and recorded for recovery and moisture by Lunnon Metals field staff in real time during the drilling process. Samples are monitored for possible contamination during the drilling process by Lunnon Metals geologists. • DD core recovery is measured for each drilling run by the driller and then checked by the Lunnon Metals geological team during the mark up and logging process. • No sample bias is observed. • There is no relationship between recovery and nickel grade nor bias related to fine or coarse sample material. • There are no available records for sample recovery for diamond or RC drilling completed by WMC; however, re-logging exercises completed by Lunnon Metals of surface diamond drillholes from across the KNP between 2017 and present found that on average drill recovery was good and acceptable by industry standards.
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p><u>For both Lunnon Metals RC and DD:</u></p> <ul style="list-style-type: none"> • Geology logging is undertaken for the entire hole recording lithology, oxidation state, mineralisation, alteration, structural fabrics, and veining. • DD orientated structural logging, core recovery, and Rock Quality Designation (RQDs) are all recorded from drill core over intervals of interest and relevance. • Detailed geotechnical logging and rock property test work is completed over intervals of relevance by independent MineGeoTech Pty Ltd (MGT) contractor geotechnical engineers. • Geological logging (and where required, geotechnical logging) is completed in sufficient detail to support future Mineral Resource estimation, mining and metallurgical studies. • Metallurgical test work in the broader project area is ongoing in addition to the geological logging and element assaying detailed below.

Criteria	JORC Code explanation	Commentary
Logging (continued)		<ul style="list-style-type: none"> • General logging data captured are qualitative (descriptions of the various geological features and units) and quantitative (numbers representing structural attitudes, and vein and sulphide percentages, magnetic susceptibility and conductivity). • DD core is photographed in both dry and wet form. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> • There is no available documentation describing the logging procedures employed by WMC geologists in the KNP area. • However, the historical graphical hardcopy logs and other geoscientific records available for the project are of high quality and contain significant detail with logging intervals down to as narrow as 0.01 m. • The geological logs document lithology, textures, structures, alteration, and mineralisation observed in drill core captured both graphically and in a five-character logging code (Lunnon Metals notes that a previous logging legend employed at WMC's Kambalda nickel operations utilised a 3-letter code which is often represented on hard copy plans and cross sections of an older vintage and which was converted by WMC to the latter 5-character code at some later time). • Stratigraphy is also captured in a three-character logging code. Sample intervals are recorded on the graphical log. These logging legends are well documented in lieu of a recorded procedure and are utilised by Lunnon Metals in current logging practices. • In regard geotechnical logging or procedures, there is no record of any formal relevant procedures or logging and based on personal experience of the Competent Person, such logging was not routinely completed prior to the introduction of Regulation 10:28 in the WA Mine Safety and Inspection Act, requiring the same in approximately 1996. • Based on the personal experience of the Competent Person to this announcement, having worked for WMC in Kambalda between 1996 and 2001, it is known that WMC had a rigorous and regimented system for storing and archiving the graphical logs physically, microfilmed, and drafted on to master cross sections, plans, and long sections as well as capturing the interval data (logging and assays) digitally in database format. • Lunnon Metals sourced historical diamond core from the St Ives Gold Mining Co Pty Ltd (SIGM) Kambalda core yard on Durkin Road where relevant to its investigations.
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <hr/> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i></p> <hr/> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <hr/> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <hr/> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for</i></p>	<p><u>Lunnon Metals RC</u></p> <ul style="list-style-type: none"> • Dry RC samples were collected directly into calico sample bags on a 1.0m basis from a cone splitter mounted on the drill rig cyclone. 1.0m sample mass typically averages 3.0kg splits. • Industry prepared certified reference material (CRM), or standard samples, of various grades appropriate to the mineralisation expected are inserted into the sample batches, approximately every 50 samples and more frequently in the expected mineralised zones. • Lunnon Metals prepared blank samples are inserted, approximately every 50 samples and more frequently in the expected mineralised zones. Blank samples are prepared from barren reject RC chips as verified by laboratory analysis and geological logging. • Duplicate samples were also collected from the drill rig

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation (continued)	<p><i>instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>cyclone, at a rate of 1 in every 25 samples and more frequently in the expected mineralised zones.</p> <ul style="list-style-type: none"> After receipt of the samples by the independent laboratory the samples are dried and pulverised with >85% pulverised to 75micron or better. For sample weights > 3kg the sample is dried, split and pulverised up to 3kg. <p><u>Lunnon Metals DD</u></p> <ul style="list-style-type: none"> DD core samples were collected with a diamond drill rig drilling HQ and/or NQ2 size core. After logging, sample interval mark-up, photographing, and geotechnical rock property test work, selected sample intervals of drill core were cut in half along the length of the drill core with a diamond saw in a Discoverer® Automatic Core Cutting Facility using a Corewise Auto Core Saw. Typically, one half of the drill core is sent to the laboratory for assay and the other half retained in its original core tray. In zones of potential metallurgical interest, the half core sample is vacuum sealed and stored refrigerated for later use, the remaining half core is further cut into quarters with one quarter sent to the laboratory for assay and the remaining quarter retained in its original core tray. Holes were marked-up and sampled for assaying over mineralised and surrounding intervals at a typical minimum sample interval of 0.3m to ensure adequate sample weight and a typical maximum sample interval of 1.0m, constrained by geological boundaries. Specific Gravity – density measurements were taken for each mineralised DD sample for the Lunnon drill holes. Sample weights vary depending on core diameter, sample length and density of the rock. Industry prepared certified reference material (CRM), or standard samples, of various grades appropriate to the mineralisation expected are inserted into the sample batches, approximately every 50 samples and more frequently in the identified mineralised zones. Lunnon prepared blank samples are inserted, approximately every 50 samples and more frequently in the identified mineralised zones. Blank samples are prepared from barren non-ultramafic Proterozoic Dyke DD core acquired locally and verified by geological logging. Field duplicate samples were collected at a rate of 1 in 25 samples, and more frequently in the identified mineralised zones, by cutting the core into quarters and submitting both quarters to the laboratory for analysis as two separate samples. After receipt of the DD core samples by the independent laboratory the samples are dried, crushed to ~2mm, and pulverised with >85% pulverised to 75micron or better. For sample weights >3kg the sample is dried, crushed to ~2mm, split, and pulverised up to 3kg. Sample sizes are considered appropriate for the style of mineralisation (potentially nickeliferous massive, matrix and disseminated sulphides, hosted in komatiite and basalt). Samples were submitted to Intertek Genalysis in Kalgoorlie for sample preparation i.e. drying, crushing where necessary, and pulverising. Pulverised samples were then transported to Intertek Genalysis in Perth for analysis. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> All historical core that was relevant to the mineralisation drilled and sampled by WMC as sighted by Lunnon Metals was sawn with half or quarter core sampling practices. It is

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation (continued)		<p>assumed that all samples otherwise contributing to any estimation of nickel mineralisation by Lunnon Metals were processed with this standard methodology.</p> <ul style="list-style-type: none"> • Portions of drill core distal to the main high-grade mineralisation were sometimes ‘chip sampled’ by WMC. Lunnon Metals has chosen not to utilise such samples in any estimation of grade or mineralisation. • WMC typically sampled in interval lengths relevant to the underlying lithology and mineralisation such that sample interval lengths may vary from between minima of 0.05m and maxima up to 2.00m approximately within any mineralised zone. • Intervals of no mineralisation or interest were not sampled. • Review of historical drill core by Lunnon Metals indicated that there were no areas of interest relevant to nickel mineralisation that were not half or quarter core sawn and sampled by WMC and that the sample sizes were appropriate for the type, style and thickness of mineralisation being tested with sample breaks corresponding to lithological or mineralisation breaks being the norm. Although faded through time, sample depth intervals are evident as marked on the remaining half core as observed by Lunnon Metals and these correlate to sample interval depths in the original paper graphical drill logs and the database. • While the WMC procedure for logging, sampling, assaying and QAQC of drillhole programs was not available at the time of this announcement it is interpreted that it was of high quality and in line with industry standards at that time. • It is the opinion of the Competent Person that the sample preparation, security, and analytical procedures pertaining to the above-mentioned historical WMC drilling are adequate and fit for purpose based on: <ul style="list-style-type: none"> - WMC’s reputation in geoscience stemming from their discovery of nickel sulphides in Kambalda in the late 1960s; - identification of procedures entitled “WMC QAQC Practices for Sampling and Analysis, Version 2 – adapted for St Ives Gold” dated February 2001 and which includes practices for nickel; and - the first-hand knowledge and experience of the Competent Person of this announcement whilst working for WMC at Kambalda between 1996 and 2001.
Quality of assay data and laboratory tests	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <hr/> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <hr/> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<ul style="list-style-type: none"> • Samples were submitted to Intertek Genalysis in Kalgoorlie for sample preparation i.e. drying, crushing where necessary, and pulverising. • Pulverised samples were then transported to Intertek Genalysis in Perth for analysis. • Samples were analysed for a multi-element suite including, as a minimum, Ni, Cu, Co, Cr, As, Fe, Mg, Pb, S, Ti, Zn. Analytical techniques used a four-acid digest (with ICP-OES or ICP-MS finish) of hydrofluoric, nitric, perchloric and hydrochloric acids, suitable for near total dissolution of almost all mineral species including silica-based samples. • Within the nickel mineralised zones, the platinum group elements (Pd, Pt, Au) were also analysed using a 50g charge lead collection fire assay method with ICP-MS finish. • These techniques are considered quantitative in nature. • As discussed previously, CRM standard, and blank samples are inserted by Lunnon Metals into sample batches, and the laboratory also carries out internal standards in individual

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests (continued)		<p>batches.</p> <ul style="list-style-type: none"> The resultant Lunnon Metals and laboratory QAQC data is reviewed upon receipt to determine that the accuracy and precision of the data has been identified as acceptable prior to being cleared for upload to the database. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> There is no data available at the time of this announcement pertaining to the assaying and laboratory procedures nor the historical field or laboratory quality assurance and quality control (QAQC), if any, undertaken by WMC drilling programs in the KNP area; however, it is expected that industry standards as a minimum were likely to have been adopted in the KNP area and the analytical laboratory.
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <hr/> <p><i>The use of twinned holes.</i></p> <hr/> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <hr/> <p><i>Discuss any adjustment to assay data.</i></p>	<ul style="list-style-type: none"> No twin holes have been drilled in the East Trough area. Prior to drilling, all planned collar data is captured in a digital drillhole collar register stored on a secure site-based server which is backed up to Perth based server continuously. The collar register is updated as drilling progresses. Logging and sample intervals are captured in digital QAQC'd spreadsheets via "tough" books (rugged tablet, field-based laptops). After internal sign-off, these digital sampling and logging registers are saved by geologists in the designated folder on the server. After further data validation by the database administrator, the items in the upload folder are uploaded to a secure digital database on a separate sequel sever. Assays from the laboratory are sent directly to the database administrator via a dedicated Lunnon Metals assays email address where they are all checked and verified by the Lunnon Metals database administrator before accepting the batches into the database. No adjustments are made to the original assay data. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> Diamond core data – across the KNP, Lunnon Metals has undertaken exhaustive assessment of historical WMC underground and surface diamond drill core to inspect and visually validate significant drill assays and intercepts, and re-sample and re-assay to validate historical assay data in the KNP database. No significant or systematic anomalies have been identified and the Competent Person is satisfied that the original data in the project area is representative of the geology and mineralisation modelled; thus no adjustments to assay data have been deemed necessary or made. No twin holes of historical intercepts have been completed to date. Lunnon Metals notes that the Kambalda style of nickel mineralisation is highly visible permitting the nickel grade to be relatively accurately estimated by experienced geologists to validate the laboratory assay grade; this is a practise that is not uncommon in the nickel mining industry.
Location of data points	<p><i>Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <hr/> <p><i>Specification of the grid system used.</i></p> <hr/> <p><i>Quality and adequacy of topographic control.</i></p>	<ul style="list-style-type: none"> RC and DD hole collar locations are located initially by handheld GPS to an accuracy of +/- 3m. Subsequently, drill hole collar locations are then picked up by a licensed surveyor using DGPS methods following the completion of the drilling. All drill holes were surveyed downhole at 5m intervals using the REFLEX gyro Spirit-IQ (north seeking gyro) or EZ-Gyro systems for both azimuth and dip measurements.

Criteria	JORC Code explanation	Commentary
Location of data points (continued)		<ul style="list-style-type: none"> Downhole surveys are uploaded by Blue Spec to the IMDEXHUB-IQ, a cloud-based data management programme where surveys are validated and approved by trained Lunnon Metals staff. Approved exports are then downloaded to the server. After additional QAQC checks and sign off the survey data is uploaded to the digital database. The grid projection is GDA94/ MGA Zone 51. Diagrams and location data tables have been provided in the previous reporting of exploration results where relevant. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> Historical methods of drill collar survey pick-up are not known however WMC did employ surface surveyors dedicated to the collection of exploration collar data. The easting, northing and elevation values were originally recorded in local KNO ('Kambalda Nickel Operations') grid and later converted to the currently used GDA94/MGA Zone 51 grid. Both the original KNO grid coordinates and the converted coordinates are recorded in the database. A representative number of historical drill collars were located in the field and their locations cross checked via differential GPS and/or handheld GPS to validate the database collar coordinates. Historical hardcopy downhole survey data is generally available for the majority of surface drillholes and the records show that single shot magnetic instruments were used. A representative number of these hardcopy downhole survey records have been cross checked against the digital records in the database. No new downhole surveys have been conducted however Lunnon Metals has corrected where necessary incorrect data in the database where down hole measurements from the hardcopy data were incorrectly processed. No other significant errors or inconsistencies were deemed present or capable of being detrimental to any interpretation of nickel mineralisation.
Data spacing and distribution	<p><i>Data spacing for reporting of Exploration Results.</i></p> <hr/> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied</i></p> <hr/> <p><i>Whether sample compositing has been applied.</i></p>	<ul style="list-style-type: none"> The RC and DD programmes at KNP comprise drillhole spacings that are dependent on the target style, orientation and depth. Drillholes are not drilled to set patterns or spacing at the exploration stage of the programme. Previous drill spacing varies greatly, again subject to the target style dimensions, orientation and depth and inherent geological variability and complexity. All holes have been geologically logged and provide a strong basis for geological control and continuity of mineralisation. No sample compositing has been applied except at the reporting stage of drill intercepts within a single hole. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> The typical spacing for the early WMC DD surface drill traverses is approximately 200m apart with drillhole spacing along the traverses at 100m. In areas of shallower RC drilling this drill spacing is sometimes improved to 100m by 50m
Orientation of data in relation to geological structure	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p>	<ul style="list-style-type: none"> The preferred orientation of drilling at KNP is designed to intercept the target approximately perpendicular to the strike and dip of the mineralisation where/if known. Subsequent sampling is therefore considered representative of the mineralised zones if/when intersected. In the broader project area, the majority of historical drill holes were collared vertically and lifted/drifted in towards

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure (continued)	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<p>close to perpendicular to the mineralisation with depth as the nickel contact was approached.</p> <ul style="list-style-type: none"> The chance of bias introduced by sample orientation relative to structures, mineralised zones or shears at a low angle to the drillhole is possible, however quantified orientation of the intercepted interval allows this possible bias to be assessed. Where drilling intercepts the interpreted mineralisation as planned, bias is considered non-existent to minimal. Lunnon Metals does not consider that any bias was introduced by the orientation of sampling resulting from either drilling technique. Where drilling intercepts the interpreted mineralisation as planned, bias is considered non-existent to minimal.
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> Lunnon Metals' geologists mark up the drill core for cutting and sampling and record the sample intervals against unique sample numbers in a digital sample register. A Lunnon Metals core farm technician then collects the cut core samples into calico bags guided by the sample register and sampling information contained therein. The calico samples are collected sequentially in groups of five and placed into polyweave bags which are labelled and secured with cable ties. The polyweave bags are in turn placed in bulka bags which are secured on wooden pallets and transported directly via road freight to the laboratory with a corresponding submission form and consignment note. The laboratory checks the samples received against the submission form and notifies Lunnon Metals of any inconsistencies. Once the laboratory has completed the assaying, the pulp packets, pulp residues and coarse rejects are held in the laboratory's secure warehouse until collected by Lunnon Metals or approval is provided for them to be discarded. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> There is no documentation which describes the historical sample handling and submission protocols during the WMC drilling programmes; however, it is assumed that due care was taken with security of samples during field collection, transport and laboratory analysis. The historical drill core remaining after sampling was stored and catalogued at the KNO core farm (now Gold Fields, SIGM core farm) and it remains at this location to the present day.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> No external audits or reviews have been undertaken at this stage of the programme. <p><u>WMC Historical data</u></p> <ul style="list-style-type: none"> Cube Consulting Pty Ltd (Cube) are independent of Lunnon Metals and have been previously retained by Lunnon Metals to complete the grade estimation for nickel mineralisation models and MRE exercises but also to review and comment on the protocols developed by Lunnon Metals to deal with, and thereafter utilise, the historical WMC Resources' data, in particular the re-sampling and QAQC exercise completed by Lunnon Metals such that the data is capable of being used in accordance with current ASX Listing Rules where applicable and JORC 2012 guidelines and standards for the generation and reporting of MREs. Cube has documented no fatal flaws in the work completed by Lunnon Metals in this regard.

SECTION 2 REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
<p>Mineral tenement and land tenure status</p>	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<ul style="list-style-type: none"> The property is located on granted Mining Leases. Although all of the tenements wholly or partially overlap with areas the subject of determined native title rights and interests in the two Ngadju determinations, the Company notes that the original grant of the right to mine pre-dates 23 December 1996 and as such section 26D of the Native Title Act will be applied to exempt any future renewals or term extensions from the right to negotiate in Subdivision P of the Act. KNP, shown in its regional location in the body of the preceding report above, inclusive of the newly acquired rights as detailed in the announcement dated 12 April 2022, is approximately 47km² in size comprising two parcels of 19 (Foster and Baker or FBA) and 20 (Silver Lake and Fisher or SLF) contiguous granted mining leases situated within the Kambalda Nickel District which extends for more than 70 kilometres south from the township of Kambalda. The Company currently holds 100% of the mineral rights and title to its leases at the FBA element of the KNP, subject to certain rights retained by SIGM, principally relating to the right to gold in defined areas and the rights to process at their nearby Lefroy Gold Plant any future gold ore mined. Full details of the Company's IPO and the transactions involved are in the Prospectus submitted to the ASX dated 22 April 2021 and lodged with the ASX on 11 June 2021. Gold Fields Ltd's wholly owned subsidiary, SIGM, was the registered holder and the beneficial owner of the FBA area until the Lunnon IPO in 2021. The FBA area comprises 19 tenements, each approximately 1,500m by 800m in area, and three tenements on which infrastructure may be placed in the future. The KNP area tenement numbers are as follows: M15/1546; M15/1548; M15/1549; M15/1550; M15/1551; M15/1553; M15/1556; M15/1557; M15/1559; M15/1568; M15/1570; M15/1571; M15/1572; M15/1573; M15/1575; M15/1576; M15/1577; M15/1590; M15/1592; and additional infrastructure tenements: M15/1668; M15/1669; M15/1670. There are no known impediments to potential future development or operations, subject to relevant regulatory approvals, over the leases where significant results have been reported. The tenements are in good standing with the Western Australian Department of Mines, Industry Regulation and Safety.
<p>Exploration done by other parties</p>	<p><i>Acknowledgment and appraisal of exploration by other parties.</i></p>	<ul style="list-style-type: none"> In relation to nickel mineralisation, WMC, now BHP Nickel West Pty Ltd and a wholly owned subsidiary of BHP Group Limited, conducted all relevant exploration, resource estimation, development and mining of the mineralisation at Foster and Jan mines from establishment of the mineral licences through to sale of the properties to SIGM in December 2001. SIGM has conducted later gold exploration activities on the FBA area since 2001, however until nickel focused work recommenced under Lunnon management, no meaningful nickel exploration has been conducted since the time of WMC ownership and only one nickel focussed surface diamond core hole (with two wedge holes), was completed

Criteria	JORC Code explanation	Commentary
Exploration done by other parties (continued)		<ul style="list-style-type: none"> in total since WMC ownership and prior to the Company's IPO, which was at Foster South. On the FBA, past total production from underground was: Foster 61,129 nickel tonnes and Jan 30,270 nickel tonnes.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<ul style="list-style-type: none"> The FBA area is host to both typical 'Kambalda' style, komatiitic hosted, nickel sulphide deposits and Archaean greenstone gold deposits such as routinely discovered and mined in Kambalda/St Ives district. The project area is host to nickel mineralisation and elements associated with this nickel mineralisation, such as Cu, Co, Pd and Pt.
Drillhole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i></p> <ul style="list-style-type: none"> <i>easting and northing of the drillhole collar</i> <i>elevation or RL (elevation above sea level in metres) of the drillhole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth hole length.</i> 	<ul style="list-style-type: none"> Drill hole collar location and directional information has been provided within the body of related previous ASX reports and also within the relevant Additional Details Table in the Annexures of those reports. A representative proportion of historical drilling completed by WMC as recorded in the drilling database and relevant to the report ,has been verified. DD drilling previously reported has included plan and cross-sectional orientation maps to aid interpretation.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	<ul style="list-style-type: none"> Grades have been reported as intervals recording down-hole length and interpreted true width where this estimation was able to be made. Any grades composited and reported to represent an interpreted mineralised intercept of significance were reported as sample-length weighted averages over that drill intercept. The Company currently considers that grades above 0.5% Ni and/or 1.0% Ni are worthy of consideration for individual reporting in any announcement of Exploration Results in additional details tables provided. Composite nickel grades may be calculated typically to a 0.5% Ni cut-off with intervals greater than 1.0% reported as "including" in any zones of broader lower grade mineralisation. Other composite grades may be reported above differing cut-offs however in such cases the cut off will be specifically stated. Reported intervals may contain minor internal waste however the resultant composite must be greater than either the 0.5% Ni or 1.0% Ni as relevant (or the alternatively stated cut-off grade). As per other Kambalda style nickel sulphide deposits the Lunnon Metals composites reported may include samples of very high nickel grades down to lower grades approaching the 0.5% Ni or 1.0% Ni cut-off as relevant. No top-cuts have been applied to reporting of drill assay results. No metal equivalent values have been reported. Other elements of relevance to the reported nickel mineralisation, such as Cu, Co, Fe, Mg, Pd and Pt and the like, are reported where the nickel grade is considered significant, if they have been assayed for. Historical WMC drilling in the project area was typically only assayed for Ni and less frequently for Cu, Zn and Co.

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	<ul style="list-style-type: none"> • In regard nickel exploration, the general strike and dip of the Lunnon Basalt footwall contact and by extension any hanging wall related nickel mineralised surfaces, if present, are considered to be well defined by past drilling which generally allows for true width calculations to be made regardless of the density or angle of drilling. • For nickel exploration in the broader project area, if possible due to the shallow depth, drillhole design has generally allowed drill holes to intersect target surfaces at approximately perpendicular to the strike of mineralisation. • Previously reported intersections have included approximate true widths, but these may not be true widths, as ongoing interpretation of the geology and mineralisation may result in that drilling not always being exactly perpendicular to the strike/dip of mineralisation once interpreted.
Diagrams	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.</i></p>	<ul style="list-style-type: none"> • Plans, long projections and sections, where able to clearly represent the results of drilling, have previously been provided in prior lodged reports. • Various oriented isometric images have also previously been provided in prior lodged reports.
Balanced reporting	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<ul style="list-style-type: none"> • Drill collar locations of WMC Historical and current drilling completed by Lunnon Metals have been previously lodged on the ASX platform and all results of the drilling have also been previously reported.
Other substantive exploration data	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<ul style="list-style-type: none"> • The KNP and FBA has a long history of geological investigation, primarily for nickel, but also gold to a lesser degree. • Datasets pertinent to the KNP that represent other meaningful and material information include: <ul style="list-style-type: none"> ○ Geophysics - multiple ground and aerial based surveys of magnetic, gravity, Sub Audio Magnetics, electro magnetics, and down hole transient electromagnetic surveys. ○ Geochemistry - nickel and gold soil geochemistry datasets across the KNP and rock chip sampling in areas of outcrop. • Historical production data recording metallurgical performance of Foster mine nickel delivered to the Kambalda Concentrator. • Metallurgical test work on drill core from the project area is carried out by external consultants, currently Independent Metallurgical Operations Pty Ltd using methodologies consistent with the type of mineralisation encountered and the likely future processing route. • Geotechnical test work on this drill core is carried out by independent consultants MGT involving on-site geotechnical logging of the DD core and off-site rock property testing of selected DD core samples. • Downhole Transient Electro-magnetic (DHTEM) surveys, when conducted, use the DigiAtlantis system and DRTX transmitter. The readings are typically recorded at 2.5m to 10m intervals. The survey used loops ranging from 300m x 200m to 690m x 290m in orientations designed relative to the target and stratigraphic setting. • If required, the Company generally retains ABIM Solutions

Criteria	JORC Code explanation	Commentary
Other substantive exploration data (continued)		<p>Pty Ltd (ABIMS) to use the latest generation QL40 OBI Optical Televiewer and a customized logging vehicle, to conduct Optical Televiewer wireline surveys in the project area in select holes. Such surveys can assist reconcile 1m sample assays with imaged geology in the bore hole wall in RC holes.</p> <ul style="list-style-type: none"> • The QL40 OBI OTV generates an oriented 360-degree image of the borehole wall by way of a CCD camera recording the imaged reflected from a prism. • Similar to the ATV wireline surveys in the DD holes, the OTV wireline surveys in the RC holes are particularly useful in defining geological and structural orientation data, data that is otherwise unobtainable from RC drill chips. • If required, ABIMS are also used to collected down-hole imaging data using the latest generation ABI40 Acoustic Televiewer (ATV) and a customised logging vehicle. The ATV wireline survey in DD holes provides down-hole geological definition, geotechnical rock mass characterisation, determination of fracture frequency and orientation, and primary stress orientation. The ABI40 ATV generates an image of the drillhole wall by transmitting ultrasound pulses from a rotating sensor and recording the amplitude and travel time of the signals reflected from the drillhole wall. Data is transferred back to the surface via a wireline in real time. Such data collected is used by the Company's geologists in support of deposit geological and structural modelling and by MGT for geotechnical assessment purposes. • Where completed, these surveys supported the extents of the sulphide mineralisation, the down hole depths of key contacts and enabled the reconciliation of the Ni assay results received visually with the apparent massive and semi-massive sulphide mineralisation imaged downhole, and provided the orientation of important shear structures within the selected RC holes.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none"> • All Company work programmes are continuously assessed against and in comparison to ongoing high priority programmes elsewhere at the KNP; presently Foster and Warren for example and now also Silver Lake and Fisher. • Subject to ongoing success and positive results from drilling, the East Trough prospect may be the subject of a Mineral Resource Estimation exercise. • Since the Company's IPO, approximately 50,000m of either diamond or RC drilling has now been completed at FBA. • Subject to positive ongoing results and external market and price variables, updates to the Company's Mineral Resource Estimation may form the basis for development studies that may lead to the future declaration of a Probable Ore Reserve from those portions of the Mineral Resource at the Indicated (or higher) classification. • Any such Ore Reserves then in turn may then form the basis of technical and economic studies to investigate the potential to exploit those nickel deposits in the future.