

VISIBLE SULPHIDES INTERSECTED ACROSS MULTIPLE ZONES AT NARNDEE (AMENDED)

Aldoro Resources Ltd ("Aldoro", "The Company") (ASX: ARN) provides the following as an amendment to the ASX announcement released on Monday, 3 July 2023.

Highlights

- Completion of two (2) diamond holes on targeted IP anomalies with visible disseminated sulphides intersected at depth in both holes.
- Hole NDD0031 intersected four (4) zones of visible disseminated sulphides, most significantly a ~49 metre disseminated sulphide zone across a pyroxenite-basalt contact boundary.
- An additional drillhole east of NDD0031 will be strategically planned based on the significant length of visible sulphide zones encountered.
- Drilling of third diamond hole currently underway and progressing well.

Aldoro Resources Ltd ("Aldoro", "The Company") (ASX: ARN) is pleased to provide positive preliminary results from the planned four diamond hole program targeting Induced Polarisation (IP) geophysical anomalies. A total depth of 918.3m was drilled for the two completed holes, NDD0030 & NDD0031, as part of a 2000m diamond core program.

NDD0031 targeted the sinistral offset of the VC01 Ni-Cu mineralisation, and intersected four (4) zones of visible disseminated sulphides (see summary log below for sulphide type):

- 48.96 metres from 223.06m,
- 23.51 metres from 280.33m,
- 13.89 metres from 304.15m and
- 8.66 metres from 323.08m.

The nature of the sulphides is generally pyrite and pyrrhotite, with pXRF data¹ suggesting possible presence of pentlandite based on significant Ni content (Figure 1 below). Due to the significant length of the disseminated sulphide zones intersected at NDD0031, an additional drill hole is being strategically planned to east of this hole that is less than 150m away.





http://www.aldororesources.com



Figure 1: NDD0031 core ~257.7m of possible pentlandite, pXRF indicated 3.29%Ni and 0.28%Cu.

1(Note that the use of pXRF data is only used to assist logging interpretation and should not be considered representative in any way and Aldoro advises to wait until laboratory results are available).



Figure 2: NDD0031 from ~258-261.4m with <u>disseminated</u> sulphides and clots.

NDD0030 targeted the northern IP anomaly, with the drill core intersecting two (2) zones bearing visible sulphides across ultramafic/mafic rock contacts from 117.1 – 126.8m across an initial ultramafic-mafic contact and 384.8 – 394m across a second ultramafic-mafic contact boundary. The sulphides were disseminated in nature and identified as generally pyritic.

The tenor of the sulphide mineralisation will be tested through laboratory analysis with these zones to be analysed for Ni, Cu, Co, Pd, Pt and Au.

Please refer to the following pages for a location map, the drill hole collars table and summary drill logs for holes NDD0030 & NDD0031.

Forward Plan

Drilling of the third hole (NDD0032) is underway and progressing well. Aldoro shall update the market on the progress of activities as required.

Authorised for and on behalf of the Board,



Company Secretary





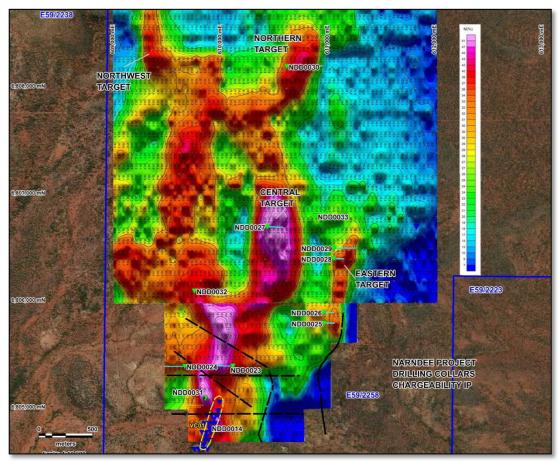


Figure 3: Location map of the two holes drilled NDD0030-31 and remaining holes NDD0032-33.

Table 1: Diamond Drill Collars

Target	Anomaly	Priority	Easting	Northing	Elevation	Azm	Dip	Depth	Upper contact	Lower contact	Drilled
NDD0030	Northern Target	P1	610600	6808200	497.5	90	70	500	220	>500	Yes
NDD0031	Trough	P2	609840	6805100	460.9	270	75	420	350	400	Yes
NDD0032	West Target	P3	609740	6806100	462	90	75	600	400	450	No
NDD0033	Eastern Target 2	P2	610870	6806800	472	0	90	250	150	225	No

The following tables are summary logs with the TYPE of sulphide (used as a generic term covering a range of metal sulphides) are identified under the column heading. These sulphides are listed as visual estimates and should not be considered a proxy or substitute for laboratory analysis which are required to determine the widths and grades of the mineralisation. The results of these analyses are dependent upon the backlog at the preferred laboratory (Intertek Genalysis) and cannot be estimated until the samples have been lodged. As the drilling is ongoing and the samples will be lodged once the drilling is completed, estimated lodgment date mid to late July 2023, the estimate for the results will be announced upon lodgment.





NDD0030 Summary Log

NDD0	NDD0030 Summary Log.						
HoleID	From (m)	To (m)	Lithology	Alteration	sulphides (%)	Туре	Comments
NDD0030	0	0.8	Transported clay				
NDD0030	0.8	2.5	Cavity				
NDD0030	2.5		Laterite				
NDD0030	5.3		Cavity				
NDD0030	5.5		Laterite				
NDD0030	5.8		Laterite				
NDD0030	9.1		Cavity				
NDD0030	9.2		Upper saprolite				
NDD0030	13.9		"Ultramafic, undifferentiated"				
NDD0030	20.6		Lower saprolite Cavity				
NDD0030	20.4		Cavity				
NDD0030	21.2		Lower saprolite				
NDD0030	25.2		Saprock				Ultramafic nontronite?
NDD0030	40.2		Pyroxenite	serpentinite			on an area on a control on a co
NDD0030	65.35		Pyroxenite	Jer periente			
NDD0030	66.25		Pyroxenite				
NDD0030	93.03		Talc dominated rock				
NDD0030	99.71	100.23	Talc dominated rock				brecciated fault zone cataclasite talc chlorite matrix as fault gouge
NDD0030	100.23	100.8	Talc dom rock				fault zone
NDD0030	100.8	101.8	Cavity				
NDD0030	101.8		Talc dom rock				
NDD0030	108.644	110.15	"Ultramafic, undifferentiated"				fault zone? Oxidation on joint planes weak breccia
NDD0030	110.15	115.45	High-Mg basalt				
NDD0030	115.45		"Ultramafic, undifferentiated"				brecciated um
NDD0030	117.1		High-Mg basalt		pyrite (0.1)	Diss/Blebby	minor 5-10cm vein breccia with associated Pyrite and siderite
NDD0030	122.48		High-Mg basalt		pyrite (0.5)?	Diss/Blebby	siderite
NDD0030	126.8		High-Mg basalt				moderate Magnetite
NDD0030	136.97		High-Mg basalt	silicic			chlorite rich veins
NDD0030	137.92		High-Mg basalt				moderate Magnetite
NDD0030	154.57		High-Mg basalt	silicic			and described
NDD0030	160.25 164.1		High-Mg basalt High-Mg basalt				moderate Magnetite
NDD0030	164.1		High-Mg basalt				weakly brecciated with quartz weak bands of Magnetite
NDD0030	184.5		High-Mg basalt				minor stringers of quartz
NDD0030	193.2		Shear zone and quartz veining				silica rich over printing
NDD0030	193.99		Gabbro				mottled
NDD0030	220.39			silicic			bleached possible chilled margin
NDD0030	221.75		Gabbro				massive
NDD0030	239.4						quartz carbonate veinlets up to 10mm long 0.5mm
NDD0030	255.88	259	Gabbro				massive
NDD0030	259	259.36	Gabbro				minor shear silica flooding banded with slickensides
NDD0030	259.36	266.64	Gabbro				
NDD0030	266.64	276.13	Gabbro				trace Magnetite stringers
NDD0030	276.13		Gabbro				gabbro minor Magnetite veinlets
NDD0030	283.68		Gabbro				minor stringers of magnetite
NDD0030	291.9						
NDD0030	316.43		Gabbro				minor magnetite rich veins
NDD0030	318.1		Gabbro				massive gabbro with bands of magnetite veining
NDD0030	347.64		Talc dom rock				flow banding in talcose UM chilled margin
NDD0030	350.9						coarser version of above Um
NDD0030	355.89			silicic		-	siliceous um? possible chilled margin
NDD0030	357.66	384.76	Dunite		pyrite (0.1)	discouri	blotchy cumulate textures
NDD0030			"Ultramafic, undifferentiated"	ciliaia			
NDD0030	386.1 394.04		High-Mg basalt	silicic	pyrite (0.1)	disseminated	chilled UM with strong siliceous overprint patchy foliation
NDD0030	410.49		High-Mg basalt	silicic			weak patchy silica
NDD0030	411.9		High-Mg basalt				minor broken zones
NDD0030	423.2		Cavity				THE STATE OF THE S
NDD0030	423.5		High-Mg basalt				minor bands of quartz- carbonate-magnetite
NDD0030	442.05		High-Mg basalt				breccia and fault gouge
NDD0030		452.07					
NDD0030	452.07		Gabbro	silicic			
NDD0030	453.86		Gabbro				patchy Magnetite
NDD0030	470.87		Talc dominated rock				base of flow cumulate?
NDD0030	472.3		Gabbro				coarse grained
NDD0030	475.61						cumulate textures
NDD0030	478.14	478.21	Dunite		pyrite (0.5)	disseminated	
NDD0030	478.21	498.3	Diorite		pyrite (0.5)	disseminated	highly siliceous intermediate to mafic







NDD0031 Summary Log

NDD0	031 Sı	ımm	ary Log					
HoleID	From (m)			Alteration	Sulphides	%	Туре	Comments
NDD0031	0		Colluvium		•			unconsolidated clay and gravel
NDD0031	0.15	16	Lower saprolite					lower sap UM?
NDD0031		27.6	Lower saprolite					
NDD0031	27.6	35.5	Saprock					basalt?
NDD0031	35.5	52.91	Basalt					porphyritic basalt
NDD0031	52.91		Basalt	silicic				porphyritic basalt
NDD0031	55.45	66.4	Basalt					porphyritic basalt
NDD0031	66.4		Basalt	silicic				bleached and veined basalt, shear contacts?
NDD0031	67.1		Basalt					
NDD0031	85.42		Basalt					shear zone
NDD0031	87.94		Basalt					
NDD0031	88.55		Basalt					veining associated with darker unit UM?
NDD0031	90.95		Basalt					
NDD0031	98.07		Basalt					chilled very fine grained
NDD0031	99.23							
NDD0031	117.77		Shear zone		pyrite	0.2	fracture Fill	qtz hanging wall qtz trace carb foot wall trace pyrite on fractures
NDD0031	117.96		Pyroxenite					
NDD0031	136.24		Pyroxenite		pyrite	0.1	veined	foliated with bands of quartz veining + pyrite
NDD0031	137.76		Pyroxenite					patchy coarse
NDD0031	143.9		Pyroxenite					
NDD0031	176		Pyroxenite		pyrite	0.1	blebby	fine grained UM pyrite in blebby patches
NDD0031	18		Pyroxenite					porphyritic pyroxenite
NDD0031	201.55		Pyroxenite					
NDD0031	201.74		Pyroxenite					6.11. 2
NDD0031	203.16		Pyroxenite					fault zone?
NDD0031	206.4		Pyroxenite			0.5	dia a a saisa a ka a d	minor pyrite near lower contact
NDD0031	220.9		Pyroxenite		pyrite	0.5	disseminated	minor pyrite increasing towards lower contact
NDD0031	222.94		"Ultramafic, undifferentiated"			0.5	la a dala d	Magnetite rich fine grained chilled margin ?
NDD0031	223.06		Pyroxenite		pyrite	_	bedded	minor clusters of Pyrite and pyrrhotite
NDD0031	226.9		"Ultramafic, undifferentiated"		pyrite			no remnant pyroxenite texture
NDD0031	228.1	228.85	"Ultramafic, undifferentiated"		pyrite	0.1		sheared UM texture
NDD0031	228.85		Pyroxenite		pyrite	0.2		blebs of pyrite
NDD0031	231.54		"Ultramafic, undifferentiated"		pyrite	0.1		small band if sheared foliated UM
NDD0031	231.75		Pyroxenite		pyrrhotite	0.5		fine clusters of pyrrhotite & pyrite
NDD0031	243.38		Pyroxenite		pyrrhotite	0.1		trace sulphides
NDD0031	246.21		Peridotite		pyrrhotite	0.1		trace disseminated pyrrhotite
NDD0031	247.7		Peridotite	silicic	pyrrhotite		blebby	contact with glassy (silica) altered basalt
NDD0031	247.88				pyrrhotite	2		moderate pyrrhotite
NDD0031	249.55				pyrrhotite	_	blebby	blebs and bands of Pyrrhotite and pyrite to 10mm
NDD0031	249.95		Basalt		pyrrhotite		blebby	minor 2-5mm bands of Pyrrhotite
NDD0031	253.22		Quartz vein		pyrite	_	disseminated	
NDD0031	253.44		Basalt		pyrrhotite		disseminated	-
NDD0031	254.4		"Ultramafic, undifferentiated"		pyrrhotite/Pentlandite?		blebby	grey soft UM? blebby pyrrhotite to 3cm
NDD0031	261.16		"Ultramafic, undifferentiated"		pyrrhotite/Pentlandite?		blebby	contact with strong disseminated pyrrhotite and trace pyrite
NDD0031	261.54				pyrrhotite	5	banded	moderate Pyrrhotite around contact
NDD0031	262.74							
NDD0031	279.91							
NDD0031	280.33				pyrrhotite	0.1	disseminated	trace sulphides throughout weak qtz/carb veining
NDD0031	300.15		Dolerite		pyrrhotite		blebby	coarser grey green Dolerite trace diss po sulphides
NDD0031	303.6	303.84	Basalt		pyrrhotite	5	blebby	chilled zone? moderate blebby pyrrhotite/pyrite
NDD0031	303.84	304.07	Dolerite					
NDD0031	304.07							
NDD0031	304.15		Dolerite		pyrite	0.1		massive dolerite trace Pyrite rite
NDD0031	318.04			carbonate				weak pervasive Carbonate alteration
NDD0031			Dolerite					
NDD0031		324.23		carbonate	1.7	_		chilled margin ?
NDD0031	324.23		Tonalite		pyrite		blebby	white feldspar rich leucocratic
NDD0031	324.46		Dolerite		pyrrhotite		blebby	leucocratic bands of feldspar rich with minor blebby pyrrhotite
NDD0031	326.18				pyrrhotite	_	blebby	blebs of Pyrrhotite on joints
NDD0031	328.94				pyrrhotite	1	banded	bands of sulphides
NDD0031	330.74							
NDD0031	331.94		Basalt		pyrrhotite		bedded	
NDD0031	332.6				pyrite	0.1	disseminated	
NDD0031	336.79			silicic	pyrrhotite		disseminated	
NDD0031	337.76				pyrrhotite		blebby	blebby pyrrhotite adjacent to contacts
NDD0031	338.43	338.96	Porphyry		pyrrhotite	0.1	disseminated	felsic porphyry?
NDD0031	338.96	339.28	Basalt		pyrrhotite	5	banded	minor bands of Pyrrhotite adjacent to porphyry contact
NDD0031	339.28	342.24	Basalt	carbonate				
NDD0031	342.24			carbonate	pyrrhotite	0.1	patchy	moderate quartz/carbonate veining
NDD0031	343.92	344.27	Basalt	carbonate				pillow basalt top?
NDD0031	344.27		Basalt	sericitic	pyrite	1	disseminated	
NDD0031	344.4		Basalt	silicic				
NDD0031	349.1			carbonate				
NDD0031	356.03			carbonate				
NDD0031	357.15		Basalt	1				
NDD0031	387.8							
NDD0031	388.49		Dolerite					
	300.43							





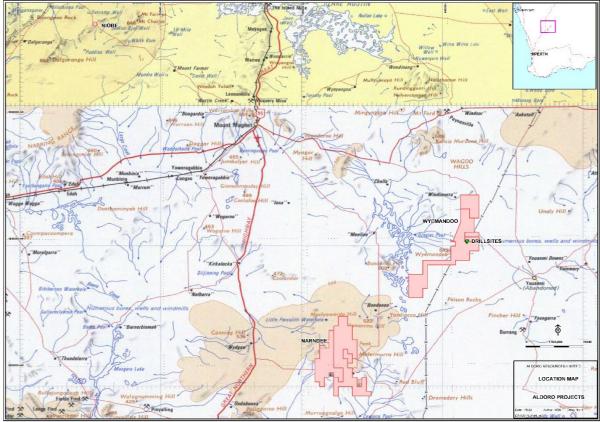


Figure 4. Location of the ARN landholding over the Murchison Terrane

About Aldoro Resources

Aldoro Resources Ltd is an ASX-listed (*ASX: ARN*) mineral exploration and development company. Aldoro has a portfolio of critical minerals including rare earth, lithium, rubidium and base metal projects, all located in Western Australia. The Company's flagship project the Narndee Igneous Complex, which is prospective for Ni-Cu-PGE mineralisation. The Company's other projects include. are the Kameelburg REE Project, the Wyemandoo lithium-rubidium-tungsten project and the Niobe lithium-rubidium-tantalum Project.

Disclaimer

Some of the statements appearing in this announcement may be in the nature of forward-looking statements. You should be aware that such statements are only predictions and are subject to inherent risks and uncertainties. Those risks and uncertainties include factors and risks specific to the industries in which Aldoro operates and proposes to operate as well as general economic conditions, prevailing exchange rates and interest rates and conditions in the financial markets, among other things. Actual events or results may differ materially from the events or results expressed or implied in any forward-looking statement. No forward-looking statement is a guarantee or representation as to future performance or any other future matters, which will be influenced by a number of factors and subject to various uncertainties and contingencies, many of which will be outside Aldoro's control.





Aldoro does not undertake any obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions or conclusions contained in this announcement. To the maximum extent permitted by law, none of Aldoro, its Directors, employees, advisors or agents, nor any other person, accepts any liability for any loss arising from the use of the information contained in this announcement. You are cautioned not to place undue reliance on any forward-looking statement. The forward-looking statements in this announcement reflect views held only as of the date of this announcement.

This announcement is not an offer, invitation or recommendation to subscribe for or purchase securities by Aldoro. Nor does this announcement constitute investment or financial product advice (nor tax, accounting or legal advice) and is not intended to be used for the basis of making an investment decision. Investors should obtain their own advice before making any investment decision.

Competent Person Statement

The information in this announcement that relates to Exploration Results and other technical information complies with the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code). It has been compiled and assessed under the supervision of Mark Mitchell, technical director for Aldoro Resources Ltd. Mr Mitchell is a Member of the Australasian Institute of Geoscientists and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC Code. Mr Mitchell consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.





JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg' reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 Core not cut and sampled yet. IP geophysical surveying has been carried out by Echo Vista Pty Ltd to target massive sulphides associated with magmatic Ni-Cu-PGE's in the Narndee Igneous Complex under Aldoro's Narndee project. The Inducted Polarisation sounding method was used with a 5kW transmitter, Model VIP5000 by IRIS instruments, with 10 true differential inputs (10 channel), operating on transmitter frequency range of 0.0625 to 4Hz (by factors of 2) and using industry standard compliant core receiver and current transmission wires. The stations were at 40m intervals along east-west lines (perpendicular to the local geological strike) at various lengths, 800m to 1520m with line spacings of 100m
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	 Diamond core drilling was conducted by DDH1 Drilling with collars positioned by handheld GPS with a +/-5m accuracy and using an average technique based on time. The top of the collar was reamed using a Chlore tool using to 6m depth. Holes are drilled by HQ3 to fresh rock, cased off and drilled NQ2 to end of the hole. The NQ2 part of the hole is oriented by a Reflex Act-IQ orientation tool. Bottom of the hole is marked on the core surface using an orientation cradle. All holes will be post drilling surveyed using a down hole gyro collecting continuous readings of dip and azimuth down hole





Criteria	JORC Code explanation	Commentary
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 Core recoveries are measured using industry-standard logging techniques. Core recoveries average close to 100% in fresh rock, and 90% in weathered material Sample bias is very unlikely given the very good sample recoveries especially below the base of oxidation. As the core loss is relatively low, no sample bias is considered
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Aldoro core is logged using industry-standard semi-quantitative logging templates on handheld digital devices recording lithologies, colour weathering, alteration, mineralisation, veining, gangue and well as α and β structural information. The logging is generally considered both qualitative and quantitative in nature with all core photographed, both wet and dry. Core lengths are tape measured with any loss recorded both digitally and core markers.
Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	The core is yet to be cut for sampling purposed. All core is onsite
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument 	 No samples for assaying have been collected yet. A Bruker S1 Titan with factory calibration was used for check pXRF readings. These are generally not reported due to a lack of confidence due to the small sampling window and the bias this produces. The units use is primarily to aid logging.

ALDORORESOURCES



Criteria	JORC Code explanation	Commentary
	 make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 Standard reference materials were analysed routinely by pXRF and found to be reporting withing acceptable limits. Quality control methods to be used include external standards and blanks to establish precision from the lab
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 Aldoro's visual intersections are logged, interpreted, and reported by the JORC Competent Person QAQC procedures and documentation of primary data are adopted for the core samples. Twinned holes are not being used or reported. No adjustments are made to assay data
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 Drillhole collars are measured by handheld GPS and checked several times before drilling. Coordinates presented are in GDA94, UTM Zone 50S. Aldoro holes are surveyed by a Reflex GYRO SPRINT-IQ The holes are yet to be accurately modelled vertically from DEM
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 Not relevant as only 2 holes have been completed to test various IP anomalies. The IP survey parameters were designed to give depth penetration to 800m and the orientation to give control in discriminating conductivity changes. A Mineral Resource is not being reported. No sample compositing has been applied, but assay results are reported on a length weighted average
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	 The orientation of drilling is as close to perpendicular to the interpreted key mineralised as possible. The orientation of drilling to key mineralised structures is an evolving interpretation. The geophysical survey has been designed to be orthogonal to the anticipated mineralisation. The interpretated anomalous chargeability/resistivity features identified are consisted with the petrophysical properties targeted, i.e., massive sulphides,





Criteria	JORC Code explanation	Commentary
		however these require validation through drilling to see if they relate to Ni-Cu-PGE mineralisation
Sample security	The measures taken to ensure sample security.	Core trays are currently at a remote site under supervision of the Project geologist
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews have been completed given the early stage of the project

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 Tenements E59/2223, E59/2238 and E59/2258 Held by Gunex Pty Ltd, a 100% owned subsidiary of Altilium Metals Pty Ltd, which in turn is a 100% owned subsidiary of Aldoro Resources Limited GSR to original tenement holder The tenements are in good standing, with no registered native title claimants and no known historical or environmentally sensitive areas with the tenement areas
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 Previous relevant exploration was undertaken by: Westralian Nickel-INCO (1960s-70s) BHP-Hunter Resources (1985-90) Wedgetail Resources (2001) Apex Minerals-Mark Creasy (2001-06) Falconbridge-Apex-Mark Creasy (2002-03) Maximus Resources (2005-14)
Geology	Deposit type, geological setting and style of mineralisation.	 The Narndee Project is located within the Youanmi Terrane of the Yilgarn Craton, close to a major structural boundary between the Murchison and Southern Cross Domains. The regional geology is dominated by Archaean granite-greenstone terranes (greenstone 2.8- 3.0 billion years, granites 2.6-2.95 billion years) and the Windimurra Group of layered mafic intrusions (2.847 billion +/- 71 million years).



Criteria	JORC Code explanation	Commentary
		These bodies represent the largest layered mafic-ultramafic intrusive complex in Australia. The Narndee Igneous Complex forms the primary component of the Boodanoo Suite and is divided into three broad units of stratigraphy: Ultramafic Zone, Lower Zone and Main Zone. Historical exploration has generally focused on stratiform PGE-reef mineralisation, whereas Aldoro's focus will be on massive magmatic nickel sulphide deposits
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	 Summary information of the diamond holes is provided in the text. The relevant details for Aldoro's drilling are contained in the body of this announcement. The use of any data is recommended for indicative purposes only in terms of potential Ni- Cu-PGE mineralisation and for developing exploration targets. XRF data was also not provided as it is considered not representative in nature and is only used for aiding in lithological and mineral context.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 Aldoro results will be presented on a length weighted average, in this case 1m intervals. No short interval lengths were reported. No metal equivalent values have been reported,
Relationship between mineralisation widths and	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	 All results referenced are based on down-hole lengths and may not reflect the true width of mineralisation or thickness of host lithologies, which is unknown





Criteria	JORC Code explanation	Commentary
intercept lengths	 If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	 Appropriate maps and tabulations are presented in the body of the announcement
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	 All significant and relevant intercepts have been highlighted and key elements have been reported in all tested intervals.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	IP sounding and Gradient array techniques have been utilised.
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Short term future work plans are detailed in the body of this announcement. Exploration is at an early stage, and longer-term future work will be results driven

