

07 July 2023

High-Value Germanium and Gallium Identified from Surface at the High-Grade Nosib Vanadium-Copper-Lead-Silver Deposit

- ***New drilling set to commence targeting shallow extensions of Nosib and a major geophysical target west of the high-grade Khusib Springs Cu-Ag mine***

-
- Re-examination of analytical results from diamond drillhole NSBDD008¹ at the Nosib project within Namibia's world-class Otavi Copper Belt has revealed significant intersections of key rare metals Gallium (Ga) and Germanium (Ge) from surface, including:
 - **8.70m @ 128 g/t Ga, 11.3 g/t Ge (1.84% Cu, 1.88% V₂O₅, 10.2% Pb, 3.6 g/t Ag) from surface**
 - Including **3.26m @ 189 g/t Ga, 14.7 g/t Ge**
 - The market price of germanium is currently ~US\$2,450/kg and gallium is ~US\$230/kg³, compared to vanadium (V₂O₅) at US\$16.60/kg, copper at US\$8.25/kg and zinc at US\$2.41/kg (see *kitco.com*). Demand and pricing for germanium and gallium are likely to be enhanced following China's decision to restrict exports of gallium and germanium used in computer and electronic products.
 - Metallurgical concentrate testwork on bulk samples from surface and from NSBDD008² core is close to completion. Expectations are that gallium and germanium will be recovered in the concentrate along-side vanadium, copper, lead, zinc and silver. The recovery of germanium and gallium has the potential to substantially enhance the value of the concentrate produced.
 - New drilling will test shallow extensions of the high-grade mineralisation at Nosib. This will form part of a drilling program set to commence at Khusib Springs⁴, testing a major geophysical target.

Golden Deeps Ltd CEO Jon Dugdale commented:

"China has announced that it will impose export restrictions on gallium and germanium products used in computer chips, semi-conductors and other components to protect its national security interests. This will likely result in a shortage of supply of germanium and gallium for countries outside China that produce such components such as Japan, Korea and the USA.

"Golden Deeps has polymetallic deposits in the Otavi Mountain Land of Namibia which include high-grade vanadium, copper and zinc as well as significant germanium and gallium from surface at Nosib.

"Metallurgical concentrate testwork is close to completion, which will allow the Company to finalise a maiden Mineral Resource estimate for Nosib. Concentrate samples should also contain significant germanium and gallium, potentially representing high-value credits.

"We look forward to further drilling which is set to commence, testing for shallow extensions of Nosib.

"The Company is also drilling a major low resistivity geophysical target to the west of the high-grade Khusib Springs copper-silver-zinc mine, that has similarities to the Tsumeb deposit. Tsumeb was a major copper, lead, zinc and silver mine, as well as a significant germanium producer."

Golden Deeps Ltd (Golden Deeps or “the Company”) (ASX: GED) is pleased to announce significant germanium and gallium rare earth element (REE) results from surface in diamond drillhole NSBDD008 at the Nosib deposit on its recently renewed EPL3543 located in Namibia’s highly-prospective Otavi Mountain Land base metals province (see tenements and prospects location, Figure 1, below).

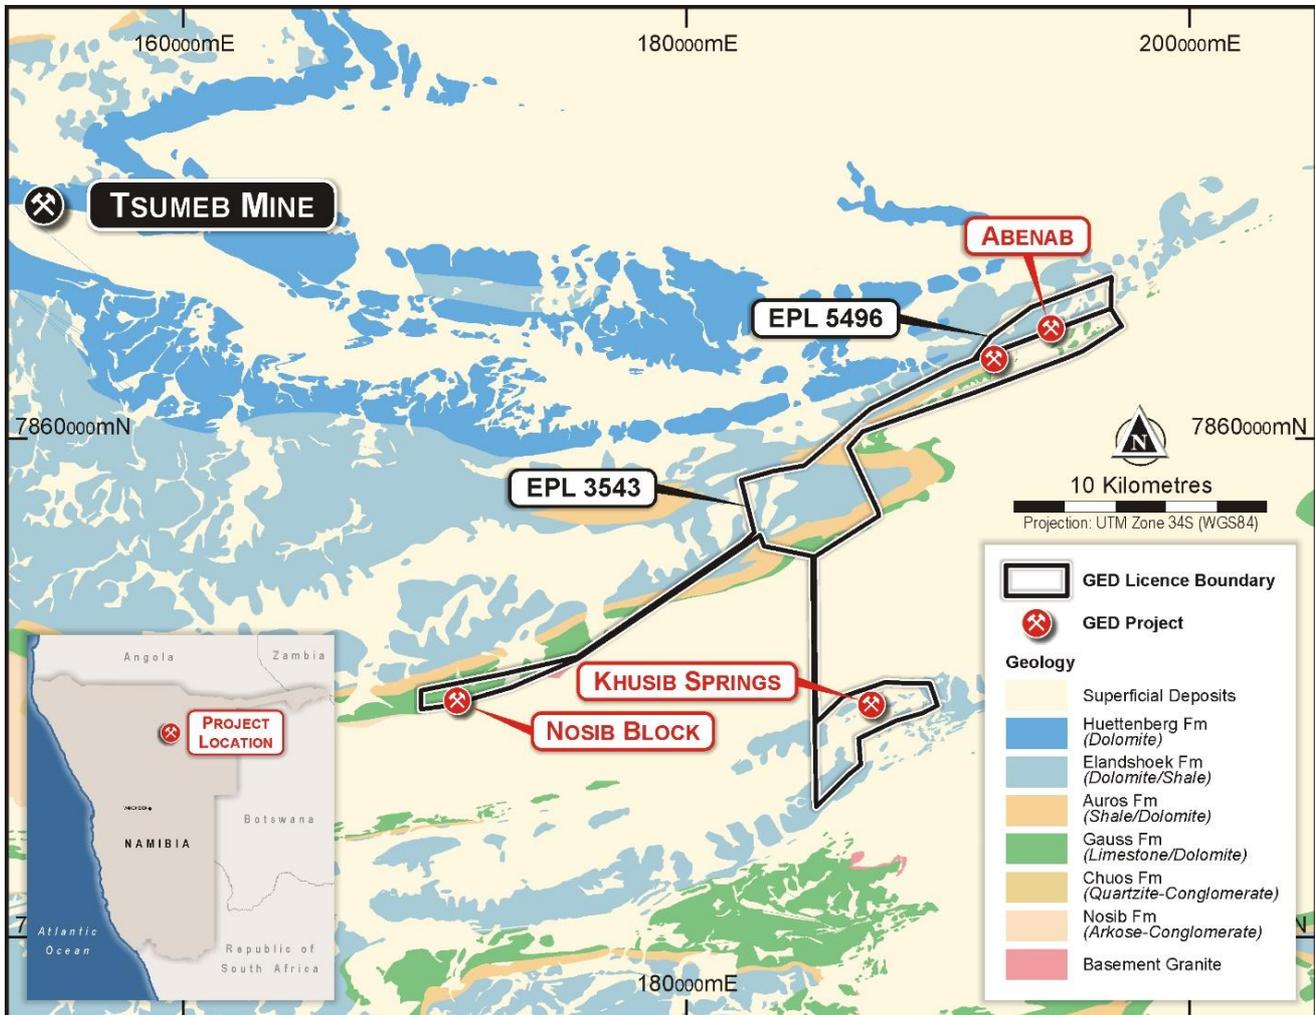


Figure 1: Golden Deeps Otavi Copper Belt licences with location of Nosib, Khusib Springs and Abenab projects.

Diamond drilling at the Nosib prospect during 2022 intersected mineralisation from surface in NSBDD008¹ (see appendix 2 for details), which produced an previously reported overall intersection of:

- **53.52m @ 1.15% Cu, 0.62% V₂O₅, 3.49% Pb, 4.57 g/t Ag (3.6% CuEq*)¹ from surface**
Including: 25.74m @ 1.71% Cu, 1.17% V₂O₅, 6.57% Pb, 4.92 g/t Ag (6.3% CuEq*) from 2.26m
Including: 11.74m @ 2.67% Cu, 1.42% V₂O₅, 9.21% Pb, 7.12 g/t Ag (8.5% CuEq*) from 2.26m
**See copper equivalent (CuEq) calculation Appendix 1*

Within that intersection, significant previously un-reported germanium and gallium results were recorded from surface, producing the following significant intersections (see cross section, Figure 2):

- **8.70m @ 128 g/t Ga, 11.3 g/t Ge (1.84% Cu, 1.88% V₂O₅, 10.2% Pb, 3.6 g/t Ag) from surface**
Including 3.26m @ 189 g/t Ga, 14.7 g/t Ge from surface.

Demand and pricing for germanium and gallium are likely to be enhanced following the decision by the Chinese government to impose export restrictions on gallium and germanium products used in computer chips, semi-conductors and other components to protect its national security interests⁵.

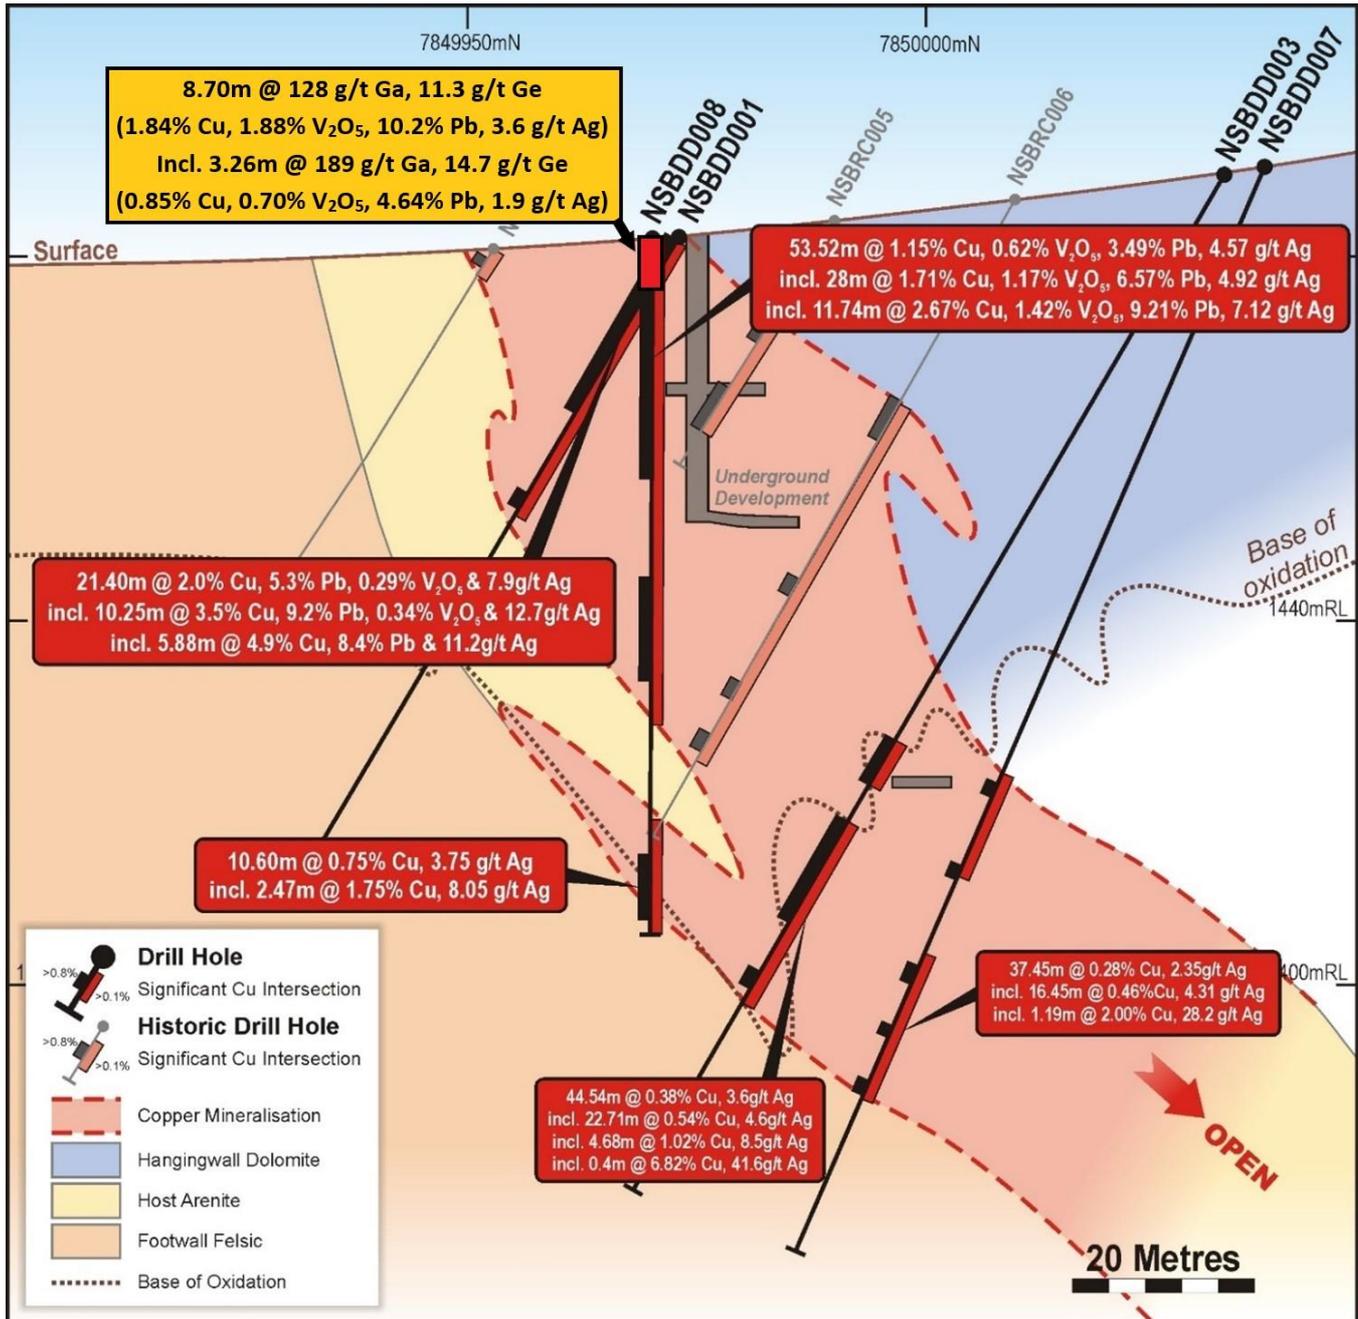


Figure 2: Nosib cross section through NSBDD008 showing at surface significant germanium and gallium intersection

Bulk samples from NSBDD008, as well as from a surface excavation at Nosib (see Image 1), are currently undergoing gravity concentrate metallurgical testwork at Nagrom Laboratories in Perth⁶. This work is close to completion and will generate a high-grade vanadium, copper, lead, silver concentrate with significant levels of germanium and gallium expected.

Downstream hydrometallurgical leach testing will be carried out on the concentrate, along the same lines as work previously completed on concentrate samples from the Abenab vanadium (zinc-lead-copper) project (Figure 1), which showed vanadium extraction rates of up to 95% and high extraction of lead, zinc and copper⁷. **Germanium and gallium can also be recovered through hydrometallurgical leaching and will be included in future downstream testwork on the Nosib concentrate samples.**

The completion of the metallurgical testwork at Nosib will allow the Company to generate indicative processing costs and finalise the Nosib resource model and pit optimisation. This will result in a maiden Mineral Resource for the project.

Mining studies on Nosib will be integrated with an updated resource model and mining studies on the Abenab deposit to produce an integrated mining and processing study for the production of vanadium as well as copper, lead, zinc and silver and potentially the addition of other valuable by-products such as germanium and gallium.

Initial resource modelling indicates that the Nosib deposit could extend to the west of the currently drilled deposit, under shallow cover. Further drilling is planned as part of the Khusib Springs geophysical target drilling program, scheduled to commence within two weeks.



Image 1: Nosib bulk sample excavation

About the Golden Deeps Otavi Copper Belt Projects and Programs:

The Company's key projects in the world-class Otavi Copper Belt of Namibia are located on two, recently renewed, Exclusive Prospecting Licences - EPL5496 and EPL3543 (see location, Figure 1).

The Otavi Copper Belt includes major historical mines such as the **Tsumeb** deposit which produced **30Mt of ore grading 4.3% Cu, 10% Pb and 3.5% Zn**⁸ from 1905 to 1996 (see Figure 1). Tsumeb was also a significant silver (100 g/t Ag) and germanium (50 g/t Ge) producer.

The Company's exploration and development programs are focused on the **Abenab** high-grade vanadium-zinc-lead resource; the **Nosib** high-grade vanadium-copper-lead-silver discovery and the **Khusib Springs** high-grade copper-silver deposit (Figure 1).

At **Abenab**, the Company has a Mineral Resource estimate of an Inferred **2.80Mt @ 0.66% V₂O₅, 2.35% Pb, 0.94% Zn at a 0.2% V₂O₅ cut-off**⁹. The results of gravity testwork on a bulk sample of the Abenab vanadium-zinc-lead resource produced an exceptionally high-grade vanadium-zinc-lead (descloizite - PbZn(VO₄)(OH)) concentrate grading **15.6% V₂O₅, 11.2% Zn, 38.2% Pb and 0.8% Cu**⁶.

The high-grade concentrate sample represents an 18-times upgrade of the representative drill-core composite sample and the new metallurgical results will be incorporated into the Abenab resource model to allow finalisation of the Mineral Resource update for the deposit.

Nosib is a new discovery that has produced a number of exceptional, thick and high-grade, vanadium-copper-lead-silver RC and diamond drilling intersections over the last 2 years^{10,11}. Mineral Resource modelling and estimation is currently being carried out by Shango Solutions⁵, focussed on the supergene vanadium-copper-lead-silver zone at Nosib that will then be the subject of initial open-pit optimisation.

Metallurgical testwork focussed on gravity concentration of the vanadium minerals, descloisite and mottramite, is close to completion, prior to hydrometallurgical testwork along the same lines as the Abenab testwork program⁵.

Key operating and capital cost information will be derived from the gravity testwork on both projects for input to the integrated mine development and processing study⁴ on the Company's near surface, high-grade, vanadium with copper, lead, zinc and silver deposits.

At **Khusib Springs**, new drilling will shortly test a large Natural Source Audio-Magneto-Telluric (NSAMT) **low-resistivity geophysical anomaly identified 2km southwest of the Khusib Springs mine, which produced 300,000t at a very high-grade of 10% copper and 584 g/t silver¹** before closing in the early 2000s (see Figure 1).

The large NSAMT low-resistivity anomaly corresponds with extensions of the T3 dolomite/T2 limestone contact (see cross section, Figure 3)¹². This major anomaly is interpreted to steepen across the carbonate stratigraphy from about 250m below surface to 600m below surface (Figure 3). This is a similar scenario to the setting of the Tsumeb deposit (production: **30Mt @ 4.3% Cu, 10% Pb, 3.5% Zn⁸**) which is in the equivalent stratigraphy to Khusib Springs and located 20km to the northwest (see location, Figure 1).

Diamond drilling is set to commence within two weeks to test this large target zone.

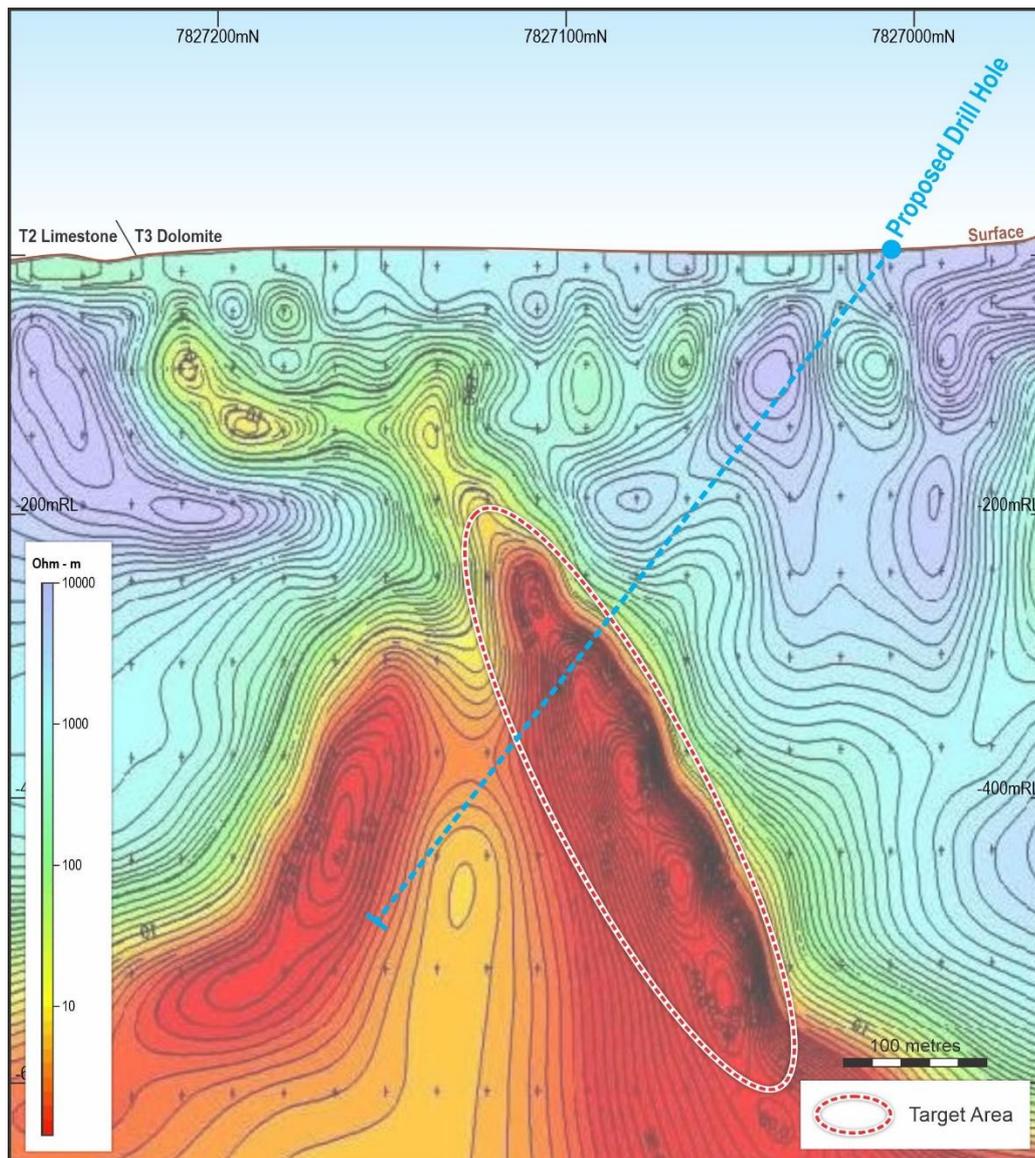


Figure 3: Major low-resistivity anomaly inversion model section 1600mE, with planned drilling.

References:

- ¹ Golden Deeps Ltd ASX announcement 4 April 2022 Exceptional Copper-Vanadium Intersection at Nosib.
- ² Golden Deeps Ltd ASX announcement, 21 June 2022. Major Study on High-Grade Vanadium Cu-Pb-Ag Development.
- ³ tradingeconomics.com/commodity/germanium or [gallium](https://tradingeconomics.com/commodity/gallium).
- ⁴ King C M H 1995. Motivation for diamond drilling to test mineral extensions and potential target zones at the Khusib Springs Cu-Pb-Zn-Ag deposit. Unpublished Goldfields Namibia report.
- ⁵ reuters.com/markets/commodities/chinas-rare-earths-dominance-focus-after-mineral-export-curbs-2023-07-05
- ⁶ Golden Deeps Ltd ASX announcement, 12 January 2023. Exceptionally high-Grade V-Zn-Pb Concentrate from Abenab.
- ⁷ Golden Deeps Ltd, ASX 21 March 2022. Outstanding Vanadium Extraction of up to 95% from Abenab.
- ⁸ Tsumeb, Namibia. PorterGeo Database: www.portergeo.com.au/database/mineinfo.asp?mineid=mn290
- ⁹ Golden Deeps Ltd ASX announcement, 31 January 2019. Major Resource Upgrade at Abenab Vanadium Project.
- ¹⁰ Golden Deeps Ltd ASX announcement, 2 Dec. 2021. Another Exceptional Copper-Vanadium Intersections at Nosib.
- ¹¹ Golden Deeps Ltd ASX announcement, 22 February 2022. Nosib Very High-Grade Copper & Vanadium Intersected.
- ¹² Golden Deeps Ltd ASX announcement, 17 May 2023. Renewal of Key Tenements Paves Way for New Khusib Drilling.

This announcement was authorised for release by the Board of Directors.

ENDS

Please refer to the Company's website or contact:

Jon Dugdale
Chief Executive Officer
Golden Deeps Limited
+61 (08) 9481 7833

Michael Muhling
Company Secretary
Golden Deeps Limited
+61 (08) 9481 7833

Cautionary Statement regarding Forward-Looking Information:

This document contains forward-looking statements concerning Golden Deeps Ltd. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory restrictions, including environmental regulation and liability and potential title disputes. Forward looking statements in this document are based on the company's beliefs, opinions and estimates of Golden Deeps Ltd as of the dates the forward-looking statements are made, and no obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

Competent Person Statement:

The information in this report that relates to exploration results, mineral resources and metallurgical information has been reviewed, compiled and fairly represented by Mr Jonathon Dugdale. Mr Dugdale is the Chief Executive Officer of Golden Deeps Ltd and a Fellow of the Australian Institute of Mining and Metallurgy ('FAusIMM'). Mr Dugdale has sufficient experience, including over 34 years' experience in exploration, resource evaluation, mine geology and finance, relevant to the style of mineralisation and type of deposits under consideration to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee ('JORC') Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves. Mr Dugdale consents to the inclusion in this report of the matters based on this information in the form and context in which it appears. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

Appendix 1: Copper Equivalent Calculation

Equivalent Copper (CuEq) Calculation

The conversion to equivalent copper (CuEq) grade must take into account the plant recovery/payability and sales price (net of sales costs) of each commodity.

Approximate recoveries/payabilities and sales price are based on preliminary and conservative leaching information from equivalent mineralogy samples from the Abenab vanadium, lead, zinc +/- copper, silver deposit located approximately 20km to the north of the Khusib Springs deposit.

The prices used in the calculation are based on market pricing (as at 06/12/22) for Cu, Pb, Zn, Ag and Sb sourced from the website kitcometals.com.

Table 2 below shows the grades, process recoveries and factors used in the conversion of the poly metallic assay information into an equivalent Copper Equivalent (CuEq) grade percent.

Metal	Average grade (%)	Metal Prices		Overall Recovery/payability (%)	Factor	Factored Grade (%)
Cu	0.53	\$3.80	\$8,375	0.60	1	0.53
Zn	0.10	\$1.40	\$3,086	0.54	0.37	0.04
Pb	0.00	\$1.00	\$2,204	0.62	0.26	0.00
Ag	0.010114	\$23.30	\$749,109	0.90	89.4	0.90
Sb	0.008077	\$0.41	\$13,182	0.90	1.57	0.01
					CuEq	1.5

Using the factors calculated above the equation for calculating the Copper Equivalent (CuEq)% grade of the intersection of 28m @ 0.5% Cu, 101 g/t Ag, 0.1% Zn, 80.8 g/t Sb is:

$$\text{CuEq\%} = (1 \times \text{Cu\%}) + (0.37 \times 0.1\% \text{ Zn}) + (0.26 \times 0\% \text{ Pb}) + (89.4 \times 101 \text{ g/t Ag}) + (1.57 \times 80.8 \text{ g/t Sb}) = 1.5\% \text{ CuEq}$$

APPENDIX 2: Nosib drillhole details:

Drillhole	Coordinates UTM		RL	Grid Orientation		Depth	
Hole_ID	East	North	Mts	Dip°	Azi.°	From	To
NSBD008	800,992	7,849,969	1.465	-90	180	0.00	76.31

APPENDIX 3
JORC 2012 Edition - Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> • Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. • Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. • Aspects of the determination of mineralisation that are Material to the Public Report. • In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> • Previous exploration drillholes at Khusib Springs and Nosib the reverse circulation drilling was used to obtain 1 m samples from which approximately 3 kg were pulverised from which a small charge will be obtained for multi-element analysis using the ICP-MS method. • Current diamond drilling sampled on approximately 1m intervals (varied subject to geological contacts) and analysed using the same procedure.
Drilling techniques	<ul style="list-style-type: none"> • Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> • Previous exploration drillholes at Khusib Springs and Nosib were Reverse Circulation percussion drilling method (RC drilling). • Current drilling is diamond drillcore, HQ sized core.
Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> • Diamond drilling recovery is reported in the detailed log. Where lost core is recorded assay grades are assumed to be zero. • RC drilling from the exploration drillholes at Khusib Springs and Nosib were bagged on 1m intervals and an estimate of sample recovery has been made on the size of each sample.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> The cyclone is shut off when collecting the sample and released to the sample bags at the completion of each metre to ensure no cross contamination. If necessary, the cyclone is flushed out if sticky clays are encountered. Samples were weighed at the laboratory to allow comparative analysis.
Logging	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> All holes were logged for lithology, structure and mineralisation. Diamond drilling logging intervals based on geological contacts. Logging of RC samples from exploration drillholes at Khusib Springs and Nosib based on 1m intervals.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> No information is provided on the sampling method for the historical drillholes. For exploration drillholes at Khusib Springs and Nosib <ul style="list-style-type: none"> Every 1m RC interval was sampled as a dry primary sample in a calico bag off the cyclone/splitter. Diamond drilling sampling half to quarter core sampled on approximately 1m intervals using core-saw or splitter. Drill sample preparation (Intertek, Namibia) and analysis (Intertek, Perth) carried out at registered laboratory. Field sample procedures involve the insertion of registered Standards every 20m, and duplicates or blanks generally every 25m and offset. Sampling is carried out using standard protocols as per industry practice. Sample sizes range typically from 2 to 3kg and are deemed appropriate to provide an accurate indication of mineralisation.

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> All samples are submitted to the Intertek Laboratories sample preparation facility at the Tschudi Mine near Tsumeb in Namibia where a pulp sample is prepared. The pulp samples are then transported to Intertek in Perth Australia for analysis. Pulp sample(s) have been digested with a mixture of four Acids including Hydrofluoric, Nitric, Hydrochloric and Perchloric Acids for a total digest. Cu, Pb, Zn, V, Ag, Sb have been determined by Inductively Coupled Plasma (ICP) Mass Spectrometry. Hand-held XRF spot readings on drill-core are used to provide a guide regarding mineralised intervals and cannot be used for the purposes of estimating intersections.
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> For current Khusib Springs and Nosib drilling all significant intercepts are reviewed and confirmed by two senior personnel before release to the market. No adjustments are made to the raw assay data. Data is imported directly to Datashed in raw original format. All data are validated using the QAQCR validation tool with Datashed. Visual validations are then carried out by senior staff members. Vanadium results are reported as V₂O₅ % by multiplication by atomic weight factor of 1.785.
Location of data points	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> The majority of the drill data was captured using the UTM33S grid. Location of the exploration drillholes at Khusib Springs and Nosib provided in Appendix 2.
Data spacing and distribution	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral</i> 	<ul style="list-style-type: none"> Exploration drill holes were drilled at close spacing, commonly 20m to 30m or less because of the relatively

Criteria	JORC Code explanation	Commentary
	<p><i>Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <ul style="list-style-type: none"> • <i>Whether sample compositing has been applied.</i> 	<p>short strike length of the initial target and the plunging orientation of the mineralisation.</p>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • Holes were angled to best intersect the plunging mineralisation. • The majority of the angled diamond drillholes at Khusib Springs holes were drilled on azimuth 315 degrees true at dips ranging from -60 degrees to vertical (UTM33S grid).
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • Recent drilling at Khusib Springs and Nosib - secure transport to registered laboratories.
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • All previous drill data relating to the Khusib Springs project generated by Goldfields Namibia or other companies was reviewed and validated in detail by Shango Solutions, a geological consultancy based in South Africa. • The data review included scanning level plans and cross sections to verify the position of drill holes in the 3D model. • No previous exploration drilling is recorded for the Nosib prospect, apart from the work conducted by Golden Deeps Ltd.

JORC 2012 Edition - Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Drilling results are from the Khusib Springs deposit located on Golden Deeps Limited (Huab Energy Ltd) EPL3543 located near the town of Grootfontein in northeast Namibia. EPL3543 and EPL5496 both reached expiry date on 6th July 2022. Renewal applications were submitted in April 2022 and the tenements are pending renewal. Mining lease applications are planned to ensure security of tenure. There are no material issues or environmental constraints known to Golden Deeps Ltd which may be deemed an impediment to the continuity of EPL3543 or EPL5496.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> No prior drilling identified for the Nosib Block Prospect. Previous work limited to underground sampling of historical workings. The Khusib Springs copper prospect was primarily drilled by Goldfields Namibia from 1993 onwards following the intersection of massive tennantite in drill holes KH06 and KH08.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Nosib Mine was worked historically to produce copper and vanadium. The deposit is arenite / sandstone-hosted with chalcopyrite, bornite, galena and pyrite as well as secondary descloizite (Lead-Vanadium hydroxide). The mineralization is associated with prominent argillic alteration and occurs within an upper pyritic zone of the Nabis Formation sandstone, which is locally gritty to conglomeratic. The main zone of mineralization at Nosib cross-cuts the stratigraphy and also includes stratiform mineralization with significant chalcopyrite, striking northeast-southwest and dipping moderately to NW.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> The Khusib Springs deposit is a small but high-grade pipe-like body that plunges steeply within brecciated carbonate rocks. The deposit resembles the Tsumeb deposit near the town of Tsumeb to the northeast.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> See Appendix 2 for drillhole details reported in this release. Refer to previous ASX announcements for previous drillhole details.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> All exploration results are reported by a length weighted average. This ensures that short lengths of high-grade material receive less weighting than longer lengths of low-grade material. Voids/lost core intervals are incorporated at zero grade. The assumptions used for reporting of metal equivalent values are detailed in Appendix 1 of this release.
Relationship between mineralisation widths and	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	<ul style="list-style-type: none"> Drill holes and drill traverses were designed to intersect the targeted mineralised zones at a high angle where possible. Intersections reported approximate true width.

Criteria	JORC Code explanation	Commentary
<i>intercept lengths</i>	<ul style="list-style-type: none"> If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., ‘down hole length, true width not known’). 	
<i>Diagrams</i>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Figure 1 is a regional scale plan-view showing geology and prospect locations. Figure 2 is a cross section through the Nosib deposit. Figure 3 is a cross section through the NSAMT inversion model 1600mE at Khusib Springs.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Intersections in all drillholes above designated cut-off grades are reported in Table 1 of the release.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> A series of Natural Source Audio-Magneto-Telluric (NSAMT) profiles were measured. NSAMT surveys utilise the same effects as CSAMT surveys but work with natural sources such as solar winds and electrical storms. The presence of very low frequency EM waves makes possible very large investigation depths, up to several kilometers. receivers allow the collection of scalar, vector or tensor data which can be processed and 2-d inversion models derived as shown on Figure 3.
<i>Further work</i>	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> The diamond drilling results from the current program will be interpreted and modelled prior to further drilling being planned. Conductors detected using MLEM and NSAMT geophysics will be modelled for further drill testing. The results of metallurgical work and mining studies on the Abenab and Nosib mineralisation will be integrated into the integrated Development Study in progress.