

ASX ANNOUNCEMENT | 2 November 2023

# SAMPLING AT SPRINGDALE PROJECT DELIVERS FURTHER HIGH-GRADE GOLD RESULTS



## HIGHLIGHTS

- Rock sampling campaign from several prospects at Springdale Project reveals granite-hosted and structurally controlled gold mineralisation
- Results include gold values up to 56.7 g/t Au and 49.8 g/t Au
- Further exploration activities have been planned for these encouraging prospects

Askari Metals Limited (**ASX: AS2**) ("**Askari Metals**" or "**Company**") is pleased to announce results from the Phase Two field exploration program at its 100%-owned Springdale Project in New South Wales.

### Commenting on the exploration results from the Springdale Project, VP-Exploration & Geology, Mr Johan Lambrechts, stated:

*"The Company is encouraged by the results of this second phase of work at its 100%-owned Springdale Project and is excited by the number of prospective targets identified so far.*

*We will closely review the granite-hosted gold mineralisation due to the association with base metals, as well as the sedimentary hosted targets, with both producing strong gold values from this campaign.*

*The presence of pathfinder minerals, such as arsenic, antimony, bismuth, and tellurium, is also positive news, as they can help identify target areas for further exploration.*

*Follow-on exploration activities will be designed at this highly prospective site in New South Wales, and we look forward to keeping our investors up to date with our progress."*

### Springdale Project Exploration Campaign

The Springdale Project is located in the highly prospective central east Lachlan Fold Mineral Belt, approximately 330km WSW of Sydney and 16km west of the town of Temora.

Several major structures are present and more than 20 historical gold workings are present within the tenement area, which is considered prospective for intrusive related gold mineralisation.



The Phase Two field exploration campaign involved collecting 201 rock samples from areas previously highlighted by the Phase One activities, with results delivering two different chemical signatures.

The first group showed elevated gold mineralisation, as well as the presence of arsenic, antimony, selenium, tellurium and bismuth. This group is likely associated with structurally controlled gold mineralisation and is hosted by the sedimentary rocks dominating the tenement.

Results from these samples include gold values up to 49.8 g/t Au, as summarised in Table 1.

Sample ID	Au_ppm	Ag_ppm	As_ppm	Bi_ppm	W_ppm	Sb_ppm
AS211993	49.80	2.3	22	18.4	1.7	5.4
AS211990	25.10	2.6	856	2.9	0.4	16.6
AS210970	21.50	0.4	494	0.5	0.7	2.3
AS210961	12.60	1.2	427	4.9	2.0	6.1
AS210983	7.99	0.5	49	0.3	3.8	8.0
AS210966	5.73	0.2	2370	1.2	2.1	16.7
AS211934	5.06	0.1	676	1.0	1.4	4.8
AS210956	4.85	0.1	1	1.9	0.8	1.4
AS211958	4.37	0.5	351	0.3	2.0	2.7
AS211957	3.53	0.2	22	0.5	0.4	1.1
AS211962	3.00	0.1	238	0.5	0.5	2.0
AS210988	2.88	0.2	274	0.4	1.4	7.6
AS211933	2.70	0.1	133	0.5	1.8	2.4
AS210935	2.52	1.1	89	2.4	2.1	2.8

*Table 1: Results from samples collected from the sediment-hosted prospects.*

The second group adds sulphide minerals, including elevated zinc (sphalerite) and lead (galena), and the early-stage interpretation of results is this may indicate the presence of a granite-hosted gold system, which the Company will investigate.

Results from these samples include gold values up to 56.7 g/t Au, as summarised in Table 2.

Sample ID	Au_ppm	Ag_ppm	As_ppm	Bi_ppm	W_ppm	Sb_ppm	Zn_ppm	Pb_ppm
AS211926	56.70	5.2	48	0.1	12.0	3.3	296	1130
AS210928	13.40	1.3	27	0.0	17.6	4.7	834	1320
AS211927	10.40	0.9	18	0.0	24.3	3.9	416	1220
AS211925	5.22	0.3	20	0.1	6.8	3.0	372	224
AS211008	4.87	2.1	3050	3.4	5.6	21.3	916	1770
AS210997	4.58	1.5	469	253.0	1.4	11.9	10	1530

*Table 2: Results from samples collected at the granite-hosted prospects.*

The Company is currently reviewing the data to determine future exploration activities, which could include RC drilling or high-definition geophysics over specific targets.

As shown in Figures 1, 2 and 3, two additional prospects (Colebrook and Trewins) are found on the edge of granite and diorite intrusions, and both present a distinct geochemical signature different from the prospects hosted in sediments. A third prospect (Kangaroo) shares a similar geochemical signature but is hosted in the sediments on the very edge of the granite.





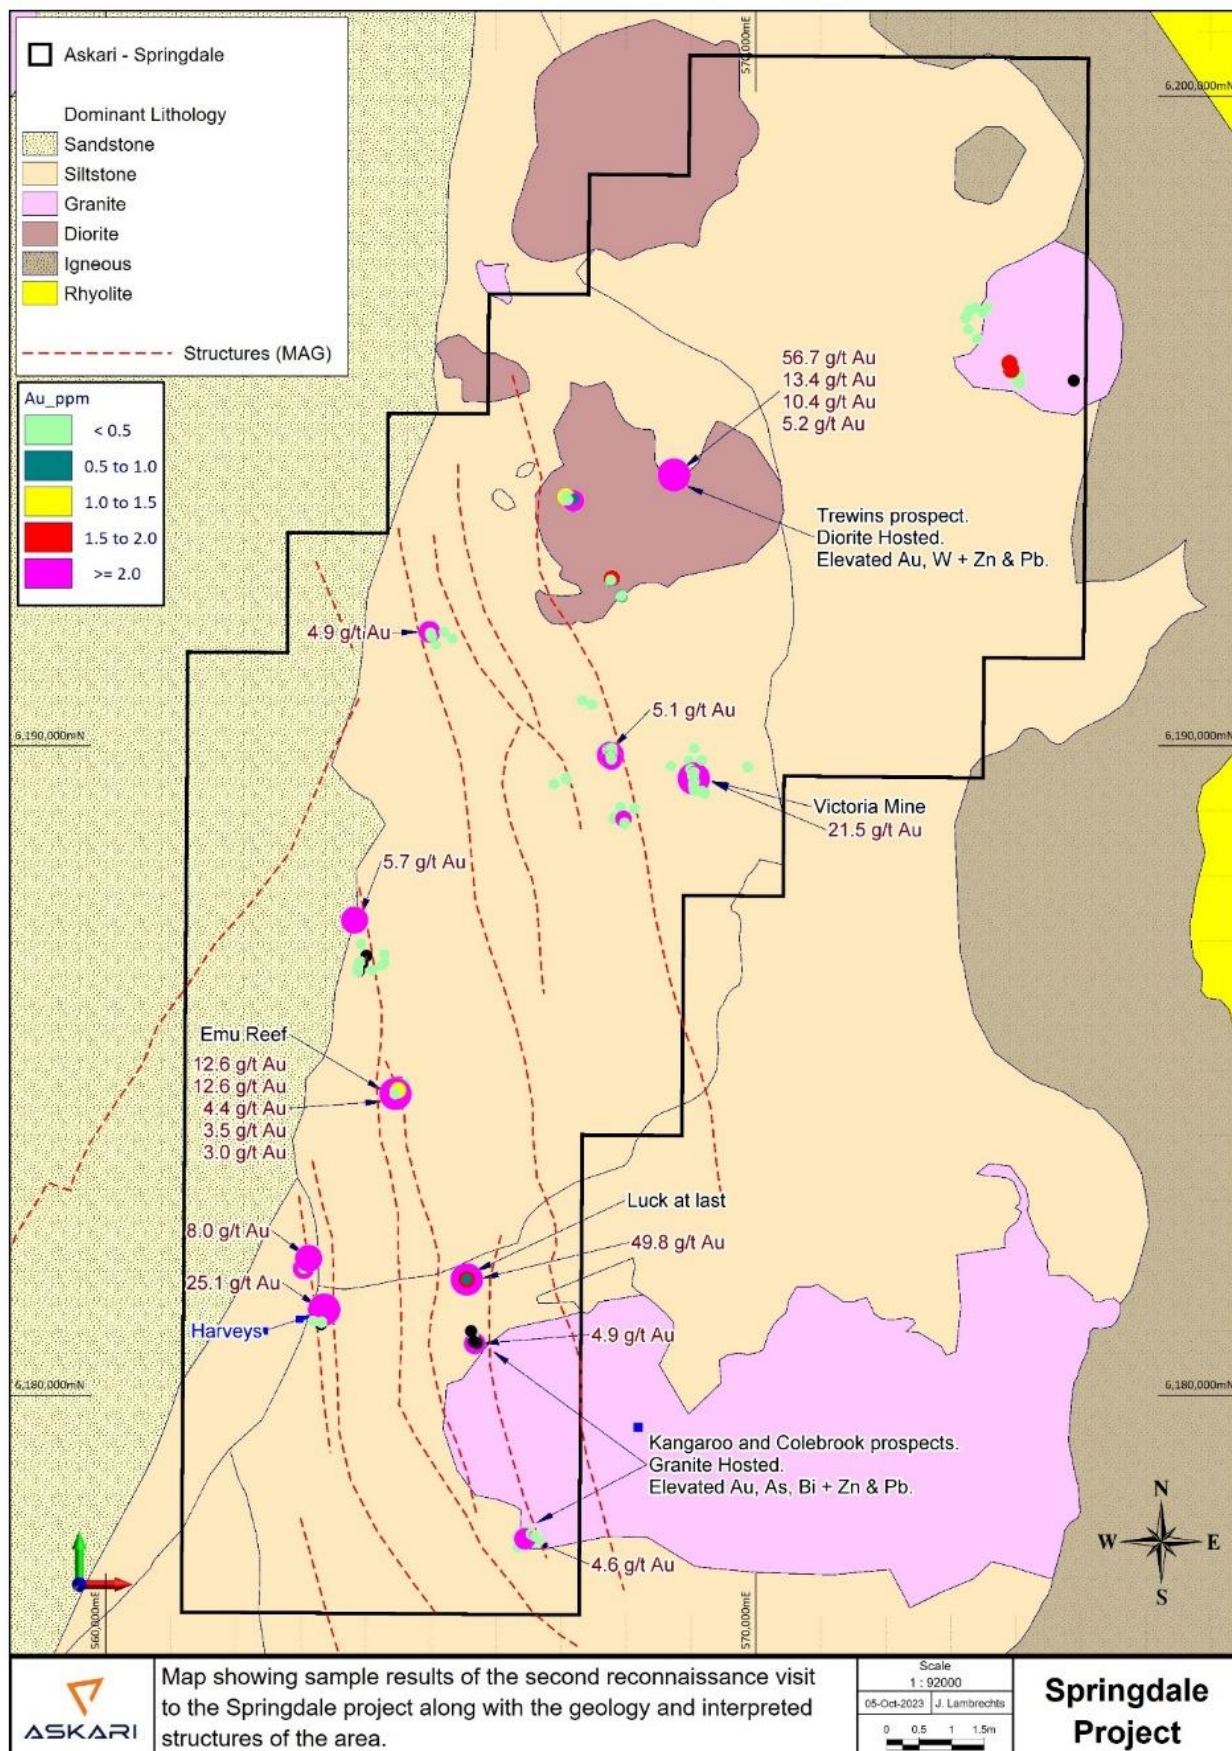


Figure 1: Map depicting sample results and their locations, along with the geology of the area



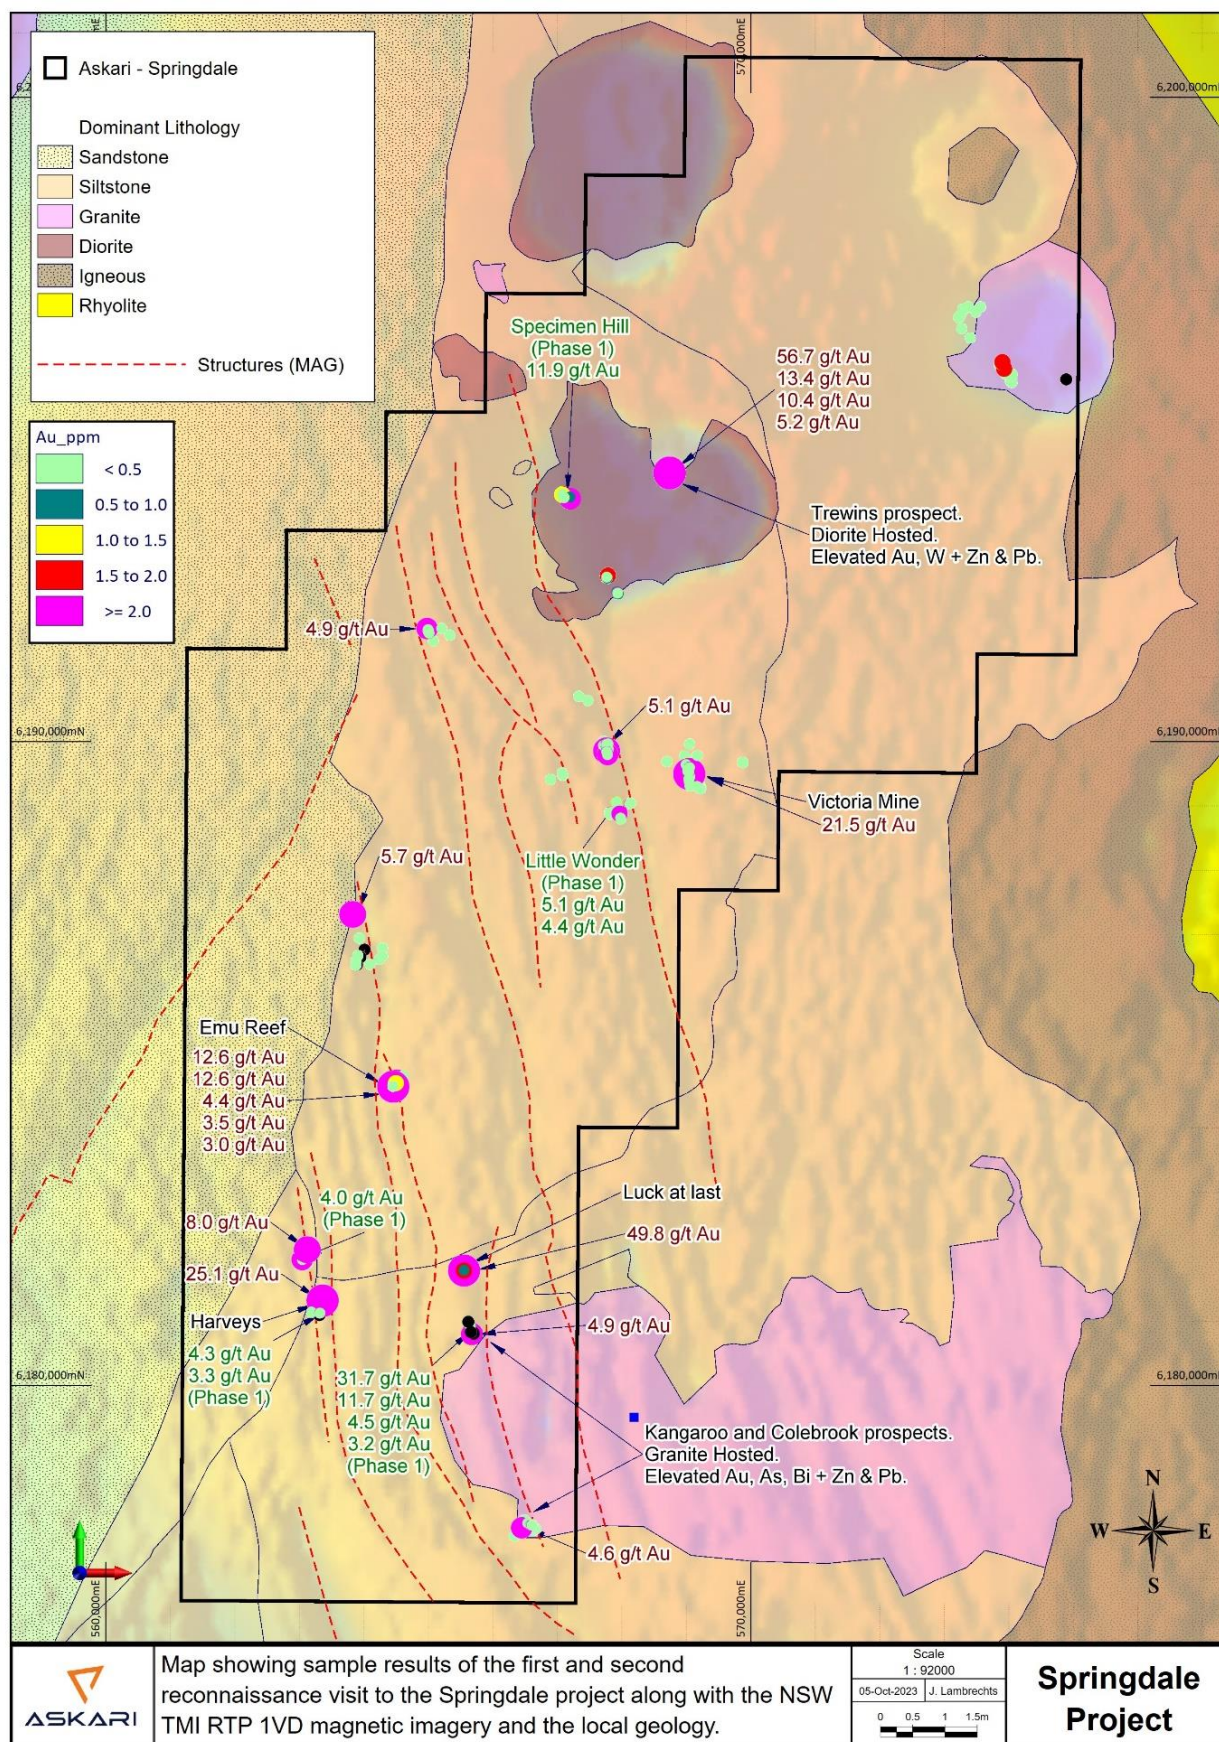


Figure 2: Map depicting sample locations for Phase One and Two, along with the geology and magnetic imagery of the area



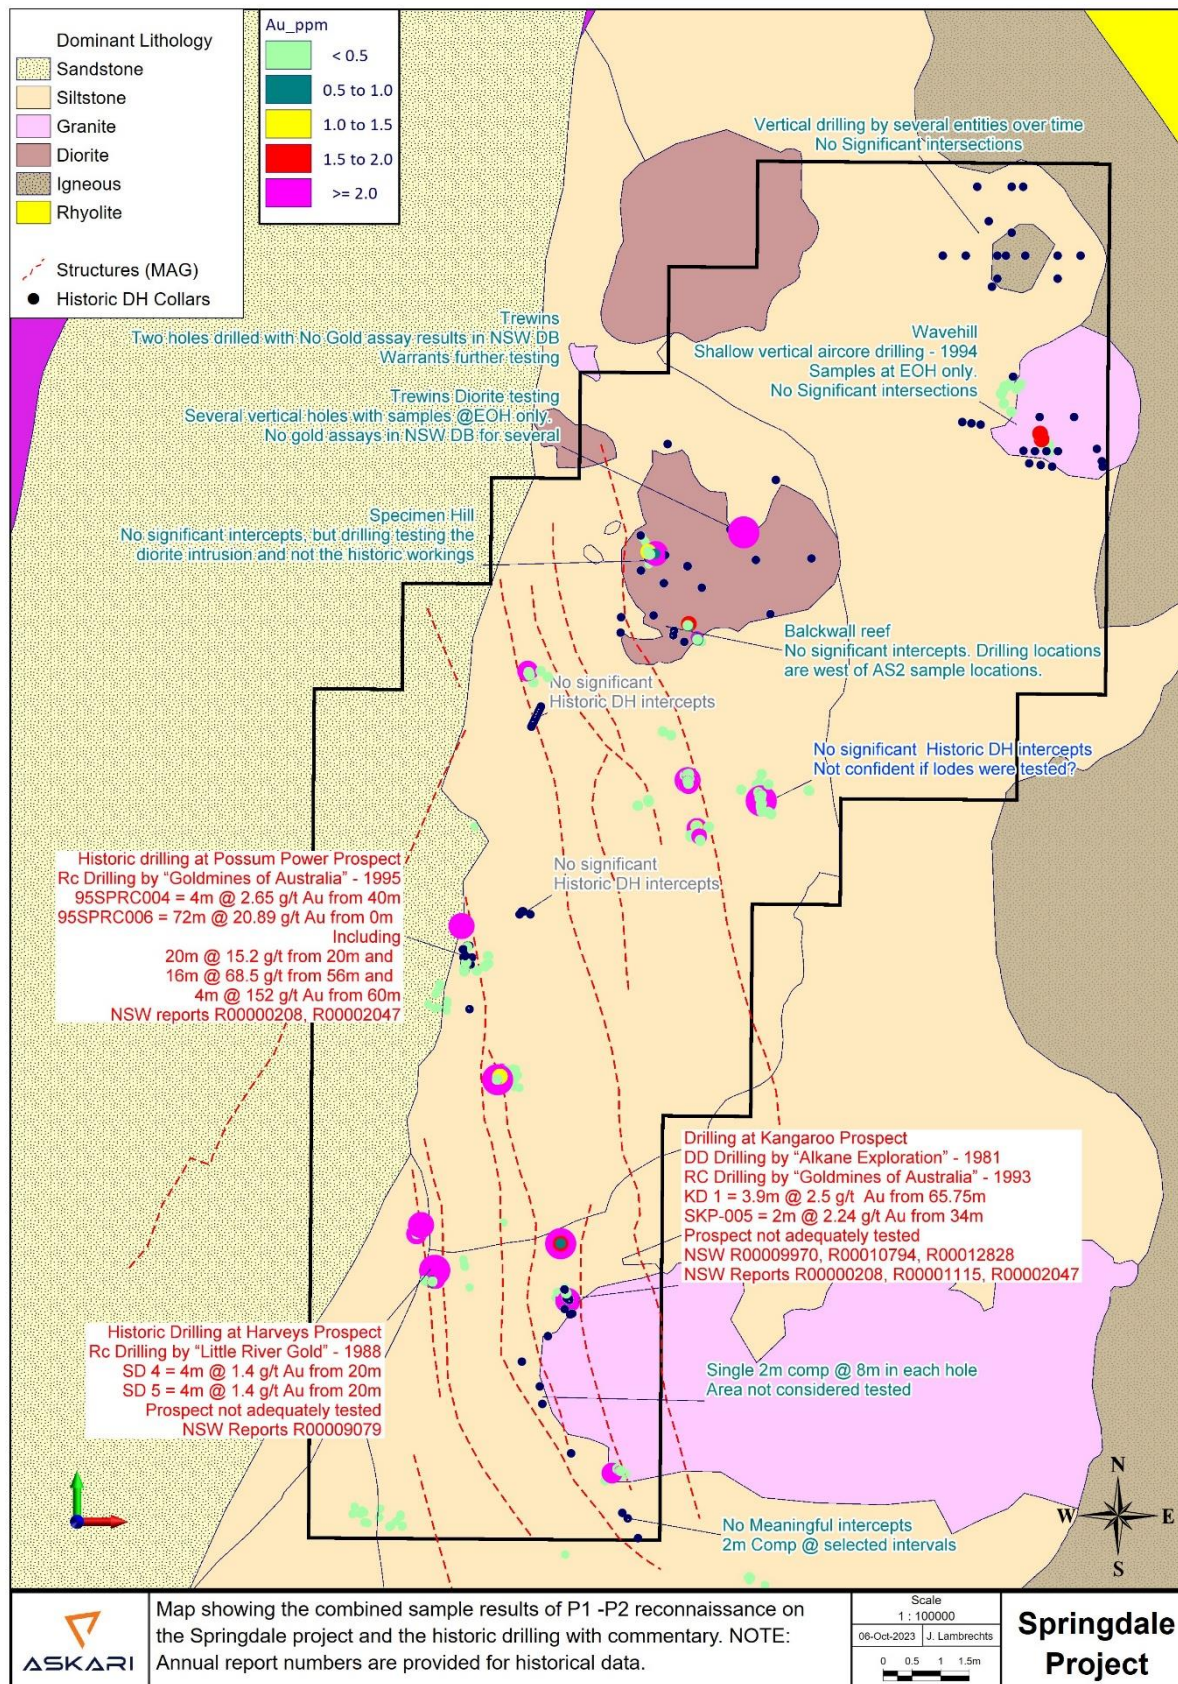


Figure 3: Map depicting the samples collected by the Company and historic drilling locations, underlain by the geology



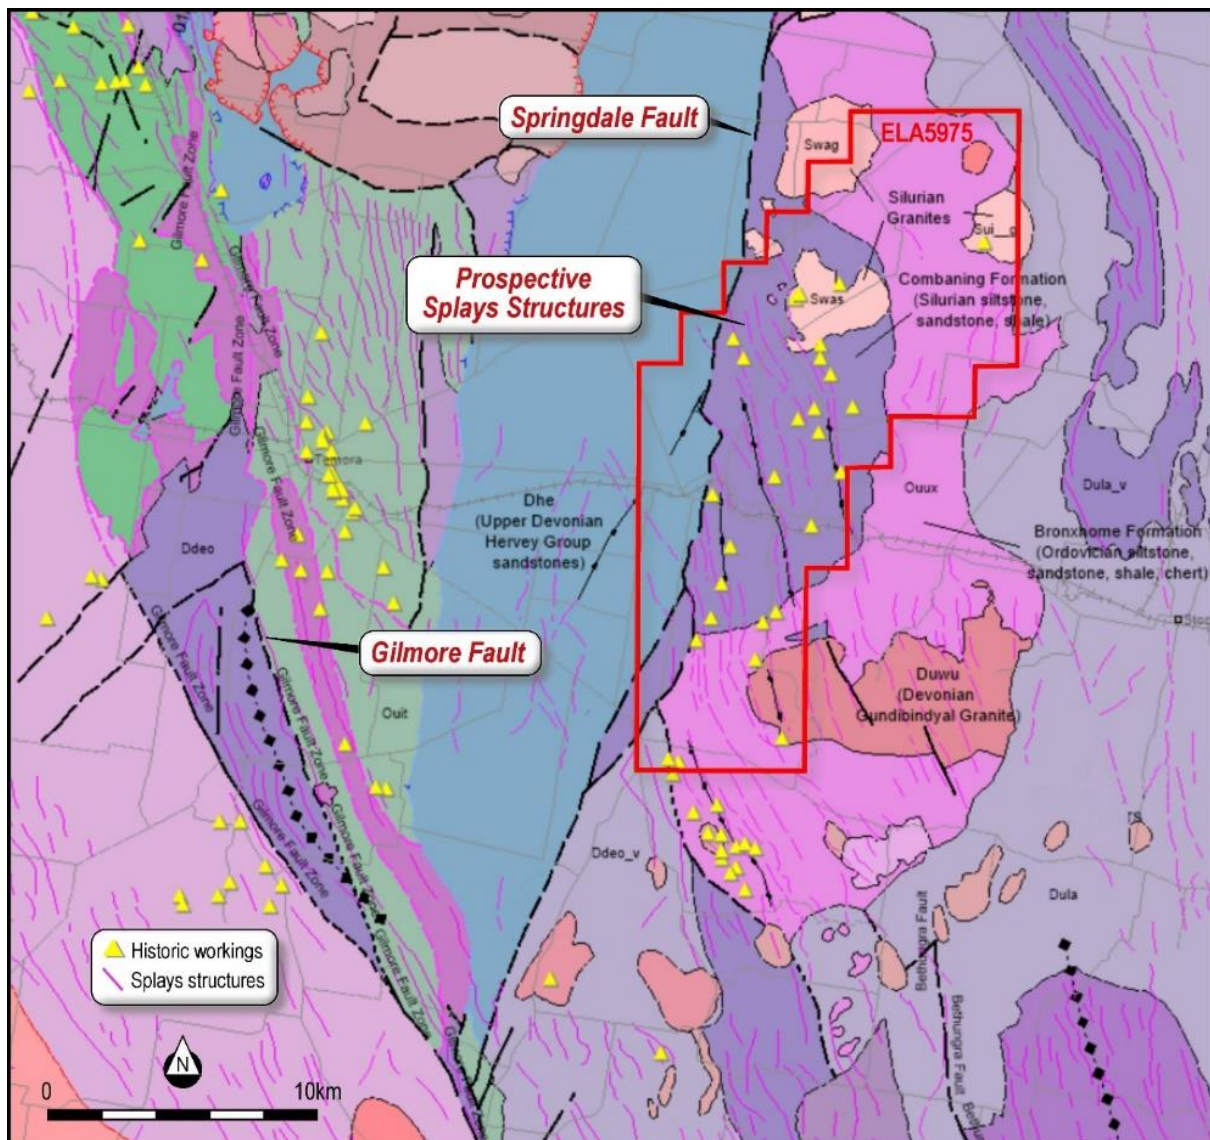


Figure 4: Geology plan for the Springdale Copper-Gold Project

This announcement is authorised for release by the executive board.

- ENDS -

**FOR FURTHER INFORMATION PLEASE CONTACT****INVESTORS**

**Gino D'Anna**  
EXECUTIVE DIRECTOR

**M.** +61 400 408 878  
**E.** gino@askarimetals.com

**Johan Lambrechts**  
VICE PRESIDENT – EXPLORATION & GEOLOGY

**M.** +61 431 477 145  
**E.** johan@askarimetals.com

**MEDIA**

**Emily Evans**  
SENIOR MEDIA ADVISOR

**M.** +61 401 337 959  
**E.** emily@hellospoke.com.au

**ABOUT ASKARI METALS**

Askari Metals was incorporated for the primary purpose of acquiring, exploring and developing a portfolio of high-grade battery (Li + Cu) and precious (Au + Ag) metal projects across Namibia, Western Australia, Northern Territory and New South Wales. The Company has assembled an attractive portfolio of lithium, copper, gold and copper-gold exploration/mineral resource development projects in Western Australia, Northern Territory, New South Wales and Namibia.

For more information please visit: [www.askarimetals.com](http://www.askarimetals.com)

**CAUTION REGARDING FORWARD-LOOKING INFORMATION**

This document contains forward-looking statements concerning Askari Metals Limited. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory restrictions, including environmental regulation and liability and potential title disputes.

Forward looking statements in this document are based on the Company's beliefs, opinions and estimates of Askari Metals Limited as of the dates the forward-looking statements are made, and no obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

**COMPETENT PERSONS STATEMENT**

The information in this report that relates to Exploration Targets, Exploration Results or Mineral Resources is based on information compiled by Johan Lambrechts, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr. Lambrechts is a full-time employee of Askari Metals Limited, who has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Lambrechts consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.



## Appendix 1 – JORC Code, 2012 Edition, Table 1 report

### Section 1 Sampling Techniques and Data (Criteria in this section applies to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> </ul>	<p>Rock chip samples</p> <ul style="list-style-type: none"> <li>Samples were collected from outcrop, float, or other exposure. Samples are clear of organic matter.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details.</li> </ul>	N.A
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> </ul>	N.A
Logging	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource Estimation, mining studies and metallurgical studies.</li> </ul>	Samples were logged, recording of colour, rock type and other comments in the field before being placed into Calico bags.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> </ul>	<p>All rock chip samples were crushed and then pulverised in a ring pulveriser (LM5) to a nominal 90% passing 75 microns. An approximately 100g pulp sub-sample is taken from the large sample, and the residual material is stored.</p> <ul style="list-style-type: none"> <li>A quartz flush (approximately 0.5 kilograms of white, medium-grained sand) is put through the LM5 pulveriser before each new batch of samples. Several quartz flushes are also put through the pulveriser after each massive sulphide sample to ensure the bowl is clean before the next sample is processed. A selection of this pulverised quartz flush material is then analysed and reported by the lab to gauge the potential level of contamination that may be carried through from one sample to the next.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>All AS2 samples were submitted to Bureau Veritas laboratories.</li> <li>The samples were sorted, wet-weighed, dried then weighed again. Primary preparation involved crushing and splitting the sample with a riffle splitter were necessary to obtain a sub-fraction which was pulverised in a vibrating pulveriser. All coarse residues have been retained.</li> <li>The samples have been analysed by a 40g lead collection fire assay as well as multi-acid digest with an Inductively Coupled Plasma (ICP) Optical Emission Spectrometry finish for multi-elements</li> <li>The lab randomly inserts analytical blanks, standards and duplicates into the client sample batches for laboratory QAQC performance monitoring.</li> <li>AS2 also inserted Certified Reference Material (CRM) samples and blanks were inserted at least every 10 samples to assess the accuracy and reproducibility of the drill core results.</li> </ul>



Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>All of the QAQC data has been statistically assessed to determine if the results were within the certified standard deviations of the reference material. If required a batch or a portion of the batch may be re-assayed. (no re-assays were required for the data in the release).</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>An internal review of results was undertaken by Company personnel. No independent verification was undertaken at this stage.</li> <li>Validation of both the field and laboratory data is undertaken prior to final acceptance and reporting of the data.</li> <li>Quality control samples from both the Company and the laboratory are assessed by the Company geologists for verification. All assay data must pass this data verification and quality control process before being reported.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> </ul>	Samples were collected and GPS located in the field using a hand-held GPS with roughly a 1-5m error.
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	The samples reported in this announcement were collected randomly from outcrop, float or mullock by the geologist in the field.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> </ul>	N.A
Sample security	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>All samples were collected and accounted for by AS2 employees. All samples were bagged into calico bags. Samples were transported to Perth from the site by AS2 employees and courier companies.</li> <li>The appropriate manifest of sample numbers and a sample submission form containing laboratory instructions were submitted to the laboratory. Any discrepancies between sample submissions and samples received were routinely followed up and accounted for.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	No audits have been conducted on the historical data to our knowledge.

**Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section.)**

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</li> </ul>	The Springdale Project comprises a single granted exploration licence EL9217 about 16km from the town of Temora in NSW.
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	A detailed historic exploration review is in progress.
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<p>The Springdale Project is situated to the east of the Gilmore Suture on the eastern margin of the Springdale Rift. The area is underlain by siltstones, sandstone and coarse quartzite cobble conglomerates, which appear to belong to the Combaning Formation (Silurian age). A dominant approximate 330 degree cleavage is observed throughout the licence, possibly a reflection of deformation associated with the Gilmore Suture. Several north-westerly regional structures are also present for distances up to 20km, such as structures dissecting the Gundibindyal Granite and Merri Hill areas.</p> <p>Porphyries and related acid volcanics intrude quartzite pebble conglomerate sediments in the south-east of the licence, interpreted to be part of the Combaning Formation.</p> <p>Several mafic intrusives occur within the Springdale Licence including north-trending dolerite dykes, a circular reversely magnetised olivine dolerite/basalt breccia pipe at the Yarra Glen prospect and ultramafics and serpentinites at the Merri Hill Prospect.</p> <p>As seen in the regional aeromagnetic imaging, several major structures are present within the licence with northerly and north-westerly trends. The Springdale Fault on the western side of the project is a N-S splay off the major crustal-scale Gilmore Suture to the south.</p> <p>More than 20 historical gold workings are known within the tenement area along the N-S structural trends at an angle to the Springdale fault zone, generally hosted by sediments associated with intrusives or structurally controlled by quartz veining in sediments.</p> <p>The area covered is considered prospective for intrusive-related gold mineralisation, however, other potential styles of mineralisation include structurally controlled gold mineralisation as well as intrusive-related nickel, copper, tin and tungsten. Numerous stocks and dykes associated with acid volcanics were potentially hydrothermally altered and may be copper and gold mineralised targets.</p>
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</li> </ul>	N.A
Data aggregation methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations</li> </ul>	No grade aggregation, weighting, or cut-off methods were used for this announcement.



Criteria	JORC Code explanation	Commentary
	<p>(eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <ul style="list-style-type: none"> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> </ul>	
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> </ul>	N.A
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	Diagrams are included in the body of the document.
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of results.</li> </ul>	All results of Askari Metals' samples have been reported in this release...See Appendix 1
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	A summary of historical drilling is given in Figure three. Annual reports are listed in the figure for reference.
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> </ul>	Currently under assessment. Follow-up work is required, as mentioned in body of the announcement.

## Appendix1: sample results

SampleID	Au_ppb	As_ppm	Sb_ppm	W_ppm	Zn_ppm	Pb_ppm	SampleID	Au_ppb	As_ppm	Sb_ppm	W_ppm	Zn_ppm	Pb_ppm
AS210926	1930	115.0	1.2	3.1	16.0	1.5	AS210967	94	130.0	2.2	0.8	14.0	11.5
AS210923	701	59.0	0.5	2.3	12.0	1.5	AS210964	92	351.0	7.8	1.3	28.0	4.0
AS210924	680	24.4	1.2	1.6	8.0	1.0	AS211968	28	147.0	4.7	0.5	60.0	4.0
AS210921	514	432.0	2.2	2.0	24.0	7.5	AS210969	27	180.0	3.4	1.3	8.0	22.0
AS210927	49	36.8	0.7	1.7	18.0	1.0	AS211970	12	21.6	1.3	0.8	30.0	10.0
AS210922	26	59.2	0.9	23.8	34.0	7.5	AS211973	7	134.0	2.1	0.9	34.0	19.0
AS210925	14	9.0	0.6	1.1	6.0	0.3	AS211969	5	15.8	0.8	0.2	10.0	3.0
AS211934	5060	676.0	4.8	1.4	44.0	20.5	AS211972	2	51.8	0.9	0.2	16.0	4.0
AS211933	2700	133.0	2.4	1.8	112.0	65.0	AS211971	1	7.8	0.4	0.2	16.0	3.0
AS211931	347	44.4	1.1	1.8	86.0	53.5	AS210935	2520	89.2	2.8	2.1	150.0	380.0
AS210941	341	359.0	2.4	4.0	74.0	9.5	AS210934	2340	188.0	8.3	3.1	62.0	119.0
AS211932	198	67.6	2.7	4.9	80.0	28.0	AS210931	1280	76.2	2.6	3.8	46.0	453.0
AS210936	188	455.0	2.7	1.4	96.0	36.0	AS211930	625	123.0	5.7	1.8	32.0	15.0
AS211938	143	58.0	2.7	4.9	66.0	50.5	AS211928	70	13.0	1.3	6.0	106.0	26.0
AS210938	125	73.4	0.7	2.0	16.0	6.0	AS210932	50	10.4	0.8	1.4	18.0	92.0
AS210939	122	530.0	2.9	1.2	376.0	402.0	AS211929	37	5.2	0.6	3.8	94.0	21.0
AS210937	103	80.0	1.1	0.9	10.0	8.0	AS210933	34	70.2	6.1	3.1	26.0	12.5
AS211939	59	170.0	1.6	2.0	74.0	32.5	AS211936	29	15.0	2.8	3.1	104.0	9.0
AS210918	39	32.8	1.0	1.4	18.0	36.5	AS211935	9	9.2	2.2	4.3	62.0	12.0
AS210943	20	9.8	0.7	1.3	12.0	2.5	AS211947	3	2.4	2.1	0.5	26.0	3.0
AS211941	8	18.0	2.2	3.1	80.0	23.5	AS210945	1	3.2	3.8	3.9	14.0	4.5
AS211944	4	38.8	2.7	2.0	66.0	28.5	AS210944	1	9.4	1.5	0.9	18.0	5.5
AS211945	4	23.2	2.0	2.0	58.0	23.0	AS211926	56700	47.8	3.3	12.0	296.0	1130.0
AS210942	3	32.6	0.7	1.8	10.0	2.5	AS210928	13400	27.4	4.7	17.6	834.0	1320.0
AS211942	3	18.6	2.2	2.9	84.0	24.0	AS211927	10400	18.4	3.9	24.3	416.0	1220.0
AS211943	3	31.0	2.4	3.2	124.0	25.0	AS211925	5220	19.8	3.0	6.8	372.0	224.0
AS211946	3	13.2	1.8	2.3	96.0	29.0	AS211924	191	25.6	2.8	7.0	452.0	277.0
AS211937	29	5.4	0.6	1.9	12.0	14.0	AS210929	187	17.0	1.7	18.4	834.0	236.0
AS210919	1	1.8	0.8	1.1	6.0	10.5	AS210930	187	13.0	1.4	14.8	224.0	214.0
AS210997	4580	469.0	11.9	1.4	10.0	1530.0	AS210970	21500	494.0	2.3	0.7	16.0	22.0
AS211005	491	13400.0	32.3	2.3	234.0	1610.0	AS210993	233	383.0	3.5	4.0	42.0	55.0
AS211999	463	14900.0	28.1	3.1	1480.0	4620.0	AS211975	152	1570.0	6.0	2.7	84.0	21.0
AS210998	334	10100.0	17.6	2.2	3220.0	8870.0	AS210973	149	49.8	1.2	1.4	14.0	6.0
AS211001	104	4860.0	11.9	2.7	364.0	866.0	AS211976	109	231.0	3.0	1.5	14.0	8.0
AS211006	85	2380.0	42.4	12.1	238.0	4150.0	AS210972	93	50.8	0.7	1.6	20.0	3.0
AS211004	74	5790.0	12.1	6.8	18.0	28.0	AS211981	84	140.0	1.2	0.2	20.0	8.0
AS211002	58	4820.0	14.5	2.7	16400.0	19100.0	AS211984	61	74.4	2.2	2.0	82.0	17.5
AS211998	19	33.0	7.3	1.7	16.0	27.5	AS210971	57	133.0	1.1	0.5	12.0	3.0
AS210999	17	1080.0	2.8	2.2	50.0	563.0	AS211974	45	109.0	1.4	0.9	12.0	10.5
AS211012	7	39.4	1.7	1.6	10.0	13.5	AS210975	30	19.8	1.3	0.4	10.0	7.0
AS211997	7	10.2	4.6	1.4	14.0	86.5	AS210976	30	11.0	0.7	0.4	8.0	6.0
AS211003	5	650.0	2.7	3.2	28.0	49.0	AS210974	24	77.6	2.0	0.9	156.0	526.0
AS211007	5	126.0	1.7	5.8	70.0	72.0	AS211982	14	58.8	2.1	3.5	32.0	3.5
AS211011	4	839.0	1.8	3.1	54.0	25.0	AS211983	7	20.2	0.8	2.0	8.0	1.0
AS210961	12600	427.0	6.1	2.0	176.0	458.0	AS210994	4	40.4	0.7	2.4	58.0	33.0
AS211958	4370	351.0	2.7	2.0	140.0	127.0	AS210981	3	16.8	1.1	11.6	48.0	36.5
AS211957	3530	21.8	1.1	0.4	32.0	25.5	AS210982	3	4.2	0.7	4.5	24.0	16.5
AS211962	3000	238.0	2.0	0.5	14.0	29.0	AS210977	2	5.2	0.7	0.4	6.0	5.0
AS210962	1290	237.0	1.5	1.2	16.0	82.0	AS210978	2	5.0	0.4	1.4	14.0	9.0
AS210963	807	108.0	2.3	1.7	118.0	28.5	AS210995	2	8.4	0.5	1.4	40.0	51.5
AS210959	78	206.0	2.1	0.8	124.0	53.0	AS211977	2	64.6	0.9	0.7	18.0	5.0
AS211964	42	161.0	1.5	0.7	10.0	7.5	AS211979	2	19.0	1.8	1.3	32.0	24.5
AS211963	18	69.2	1.2	1.4	40.0	20.0	AS210979	1	6.4	1.2	0.9	32.0	10.0
AS211959	12	31.6	2.2	2.6	114.0	24.5	AS211986	1	3.6	0.8	0.7	14.0	3.5
AS211961	2	6.0	0.6	0.3	18.0	5.5	AS210996	1	5.0	0.5	0.9	8.0	9.0
AS210958	1	5.4	0.5	0.6	14.0	2.0	AS211978	1	13.8	0.4	0.3	6.0	38.0
AS210983	7990	48.6	8.0	3.8	338.0	24.5	AS211985	1	3.0	0.9	0.9	10.0	3.5
AS210988	2880	274.0	7.6	1.4	160.0	9.5	AS211987	1	1.6	0.4	0.5	14.0	18.0
AS210989	480	74.8	4.9	1.1	46.0	12.0	AS211988	1	13.0	1.6	0.9	86.0	94.0
AS211992	226	4.4	0.7	0.2	10.0	10.5	AS211989	1	9.4	1.1	0.9	32.0	10.0
AS211996	8	32.8	3.6	1.1	78.0	29.0	AS210910	1800	700.0	57.8	5.0	38.0	464.0
AS211991	4	38.0	1.9	0.8	274.0	36.5	AS210913	1790	195.0	22.2	5.3	60.0	36.5
AS211990	25100	856.0	16.6	0.4	34.0	76.0	AS210908	569	1220.0	51.7	5.6	134.0	249.0
AS210986	3	25.6	0.6	1.2	34.0	18.5	AS210914	305	127.0	16.5	7.0	72.0	39.0
AS210987	3	11.4	0.5	0.8	14.0	6.0	AS210917	173	36.0	10.4	4.3	28.0	21.0
AS211008	4870	3050.0	21.3	5.6	916.0	1770.0	AS210906	138	235.0	8.9	7.4	66.0	116.0
AS210984	822	2690.0	17.3	2.5	3260.0	3530.0	AS210912	97	636.0	31.5	7.2	184.0	466.0
AS210985	452	2990.0	14.4	2.2	4280.0	2960.0	AS210909	59	229.0	11.8	8.3	46.0	41.0
AS211950	2210	262.0	3.7	2.2	20.0	46.5	AS210911	32	18.8	24.1	11.2	30.0	13.5
AS210946	627	222.0	3.4	3.7	20.0	48.0	AS211908	22	84.8	8.6	3.4	40.0	17.5





SampleID	Au_ppb	As_ppm	Sb_ppm	W_ppm	Zn_ppm	Pb_ppm	SampleID	Au_ppb	As_ppm	Sb_ppm	W_ppm	Zn_ppm	Pb_ppm
AS210991	581	569.0	6.0	1.7	36.0	5.5	AS211907	21	196.0	15.5	4.4	70.0	23.5
AS211949	343	656.0	4.7	3.1	42.0	86.0	AS210915	8	68.0	12.4	9.2	72.0	16.5
AS210990	342	420.0	5.6	2.0	162.0	7.5	AS211911	8	81.2	23.2	3.3	34.0	23.0
AS210947	163	282.0	4.6	5.2	26.0	30.0	AS210916	4	38.6	7.2	5.6	56.0	151.0
AS210952	26	16.8	3.5	1.3	178.0	23.0	AS211909	4	56.4	7.5	4.1	34.0	26.0
AS211948	15	169.0	1.8	4.9	42.0	15.5	AS211910	3	46.8	7.0	3.2	50.0	33.0
AS210992	8	64.8	3.5	4.3	44.0	18.5	AS211916	34	81.0	11.4	7.0	32.0	55.5
AS211951	7	65.6	1.5	0.8	30.0	12.0	AS211918	15	748.0	11.7	17.4	268.0	370.0
AS210951	5	4.0	1.0	1.3	22.0	178.0	AS211919	4	1490.0	25.7	34.8	72.0	131.0
AS211952	5	14.2	3.0	0.9	164.0	27.0	AS211921	3	475.0	7.8	5.0	38.0	30.5
AS210948	4	19.6	0.9	2.0	26.0	7.0	AS211912	2	63.6	4.9	5.2	50.0	23.0
AS210949	3	4.4	0.7	1.7	12.0	4.0	AS211917	2	309.0	2.5	2.3	18.0	19.0
AS210950	2	4.2	0.8	1.3	24.0	61.5	AS211923	2	47.8	3.1	3.4	60.0	15.0
AS211993	49800	22.2	5.4	1.7	14.0	251.0	AS211913	1	35.0	2.8	4.9	22.0	6.5
AS211994	1720	38.8	2.0	1.3	116.0	163.0	AS211914	1	219.0	7.3	6.5	118.0	16.5
AS211995	566	50.4	3.1	1.8	84.0	34.5	AS211915	1	209.0	5.0	3.1	44.0	20.5
AS210956	4850	1.0	1.4	0.8	36.0	23.0	AS211922	1	1410.0	4.3	2.6	120.0	30.5
AS211955	62	12.2	0.9	1.5	36.0	18.5	AS210901	218	496.0	25.7	15.4	40.0	232.0
AS211953	38	174.0	1.1	0.4	20.0	5.5	AS210904	97	142.0	29.9	8.8	38.0	208.0
AS211954	2	9.8	1.0	0.4	72.0	51.5	AS211902	36	248.0	18.1	8.5	46.0	275.0
AS211956	2	18.2	2.8	2.1	62.0	25.0	AS211901	13	89.0	18.0	9.2	40.0	64.5
AS210953	1	3.6	1.1	2.2	24.0	40.0	AS210905	10	74.0	10.9	8.7	30.0	53.0
AS210957	1	1.6	0.7	3.1	20.0	4.5	AS210899	9	501.0	104.0	10.1	56.0	1160.0
AS210954	1	1.0	1.2	1.0	20.0	10.5	AS210902	9	113.0	22.9	7.7	52.0	15.5
AS210955	1	2.0	1.9	0.9	52.0	47.5	AS211906	9	97.2	15.9	3.4	38.0	63.5
AS210966	5730	2370.0	16.7	2.1	92.0	89.0	AS211905	8	88.4	7.2	3.4	44.0	67.0
AS211966	441	683.0	3.9	1.6	42.0	15.5	AS211904	5	361.0	12.7	4.1	34.0	32.5
AS210965	316	94.4	1.8	1.1	8.0	11.5	AS210903	4	139.0	10.9	8.9	40.0	27.0
AS210968	293	43.6	1.3	1.0	14.0	7.5	AS211903	3	46.6	15.9	9.5	32.0	38.5
AS211967	292	676.0	3.6	0.8	124.0	45.0	AS210907	1	121.0	22.1	5.8	52.0	90.5
AS211965	143	586.0	4.7	2.0	48.0	19.0							

