

# POSITIVE LITHIUM AUGER RESULTS AT PIONEER DOME

## HIGHLIGHTS

- First pass reconnaissance surface sampling program in August 2023 identified large lithium anomaly in soils at Pioneer Dome, highly prospective for Lithium-Caesium-Tantalum pegmatites<sup>1</sup>
- Follow up auger sampling results include significantly elevated results of lithium (182 ppm), and key pathfinder elements rubidium (328 ppm) and caesium (70 ppm) returned at PDWS01 target
- Dynamic team evaluating results in context of lithium exploration under cover and plan additional infill auger and drill targets for early 2024
- Lake Percy follow up RC drilling targeting nickel to commence shortly

Dynamic Metals Limited (**ASX: DYM**) (“**Dynamic**” or “**the Company**”) is pleased to announce the results from follow up auger sampling completed at Pioneer Dome West (**PDW**), part of the larger Widgiemooltha Project (“**Widgiemooltha**” or the “**Project**”) in the Goldfields Region of Western Australia. The auger program was designed to follow up on the results from a first pass soil sampling program<sup>1</sup> which identified a large lithium soil anomaly and several smaller targets of pathfinder elements for Lithium-Caesium-Tantalum (LCT) pegmatites with results in Figure 1.

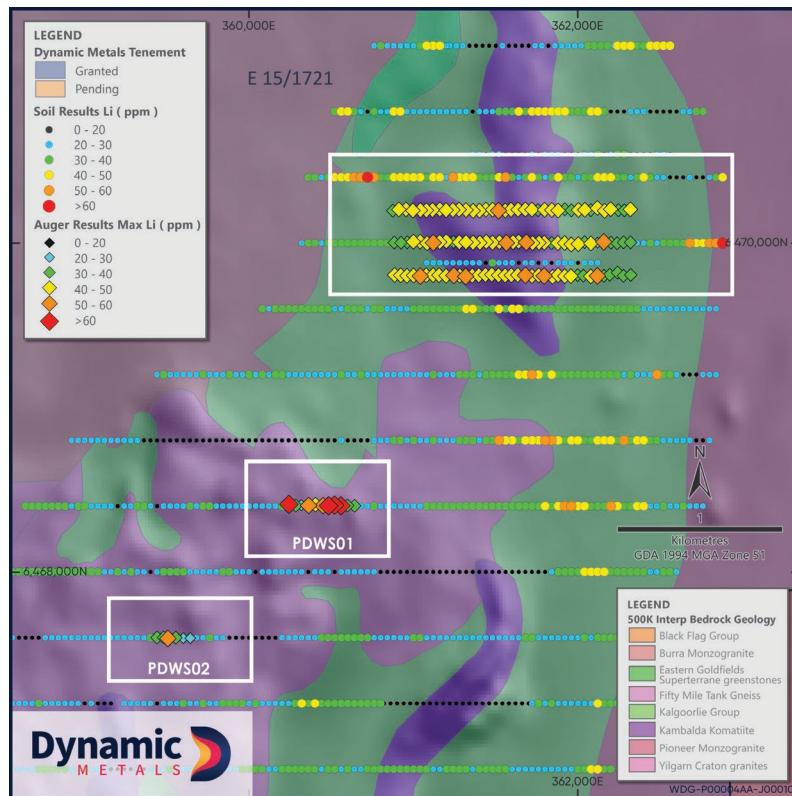


Figure 1. Plan map of auger and soil samples (diamond and circle shape respectively) taken by Dynamic Metals at Pioneer Dome West prospect. Background values for lithium in granite can be up to 30ppm (AUSIMM Field Geologists Guide). All results are Li ppm.

The most significant results from the auger program are at the PDWS01 target, where assay results demonstrate coincident lithium (Li), rubidium (Rb) and caesium (Cs) anomalies peaking at 182ppm Li, 328 ppm Rb, and 70ppm Cs (Figure 2).

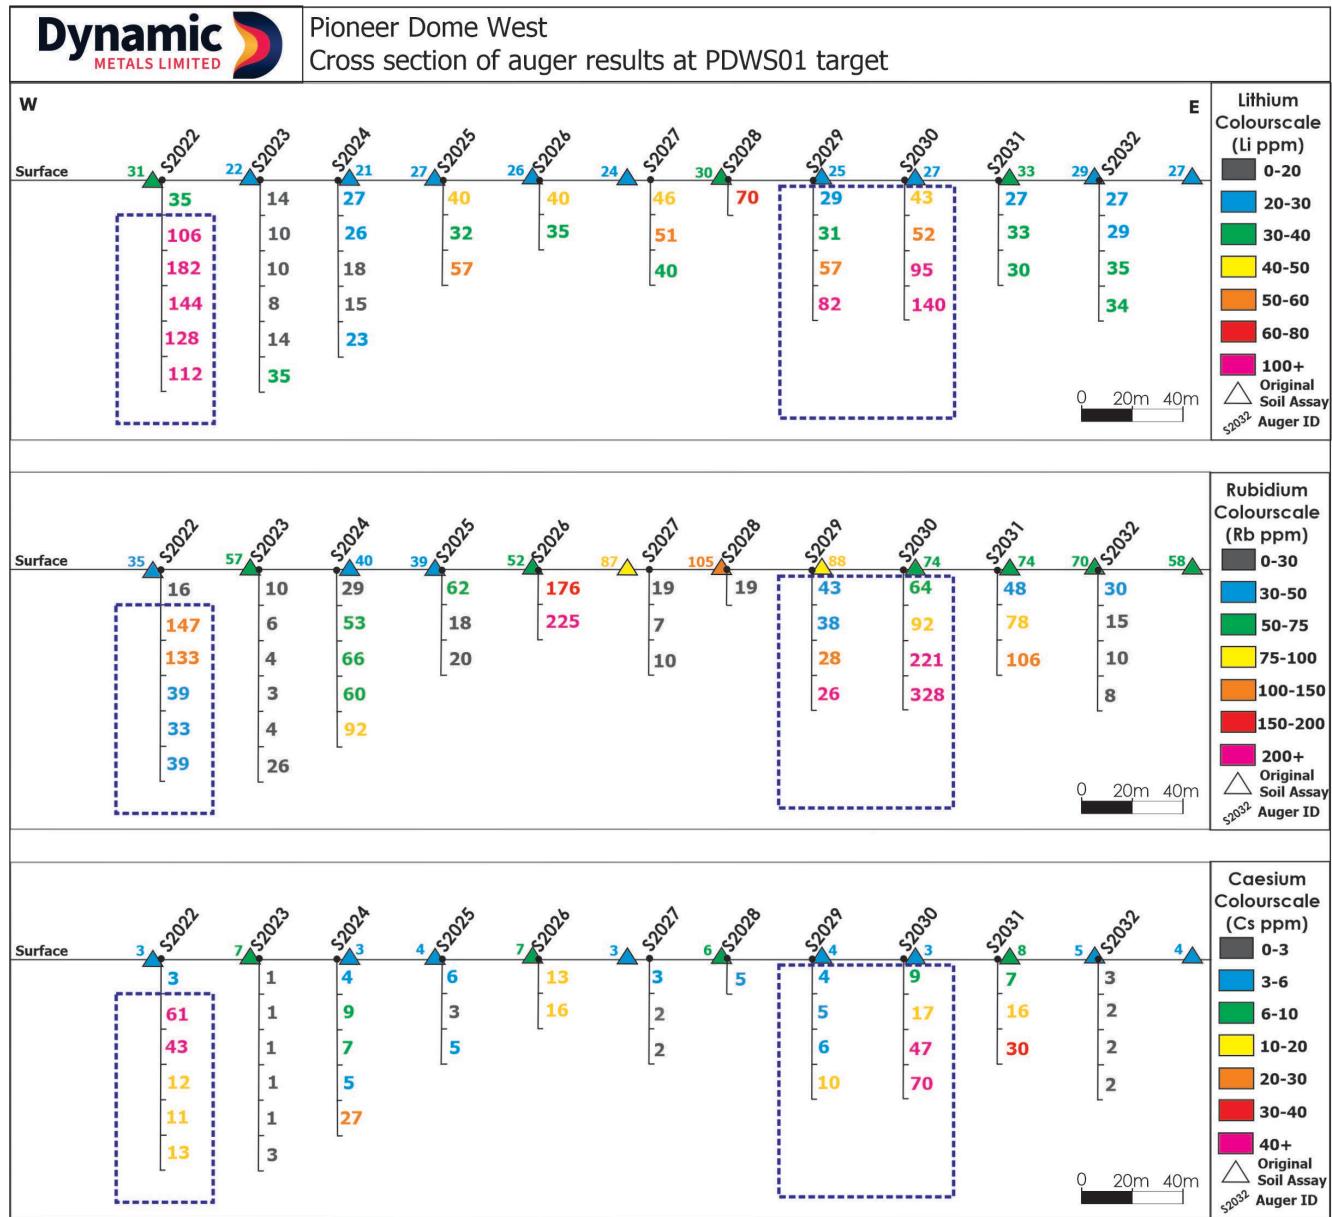


Figure 2. Section view of auger results through PDWS01 target for lithium, rubidium and caesium (all reported as ppm). Two consistent anomalies detected approximately 280m apart.

Importantly, the team are reviewing all results received to date to evaluate the effectiveness of soil sampling for lithium exploration under cover, and apply learnings to future programs of work.

## Background

The Widgiemooltha area has emerged as a significant lithium belt hosting numerous spodumene deposits, with the Mt Marion, Bald Hill, and Buldania projects all within 25km of Dynamic tenure (Figure 1). The Pioneer Dome West tenement is adjacent to Essential Metals' (ASX: ESS) Dome North lithium project which hosts a Mineral Resource of 11.2Mt @ 1.2% Li<sub>2</sub>O<sup>2</sup> and recently acquired by Develop Global (ASX: DVP)<sup>3</sup>.

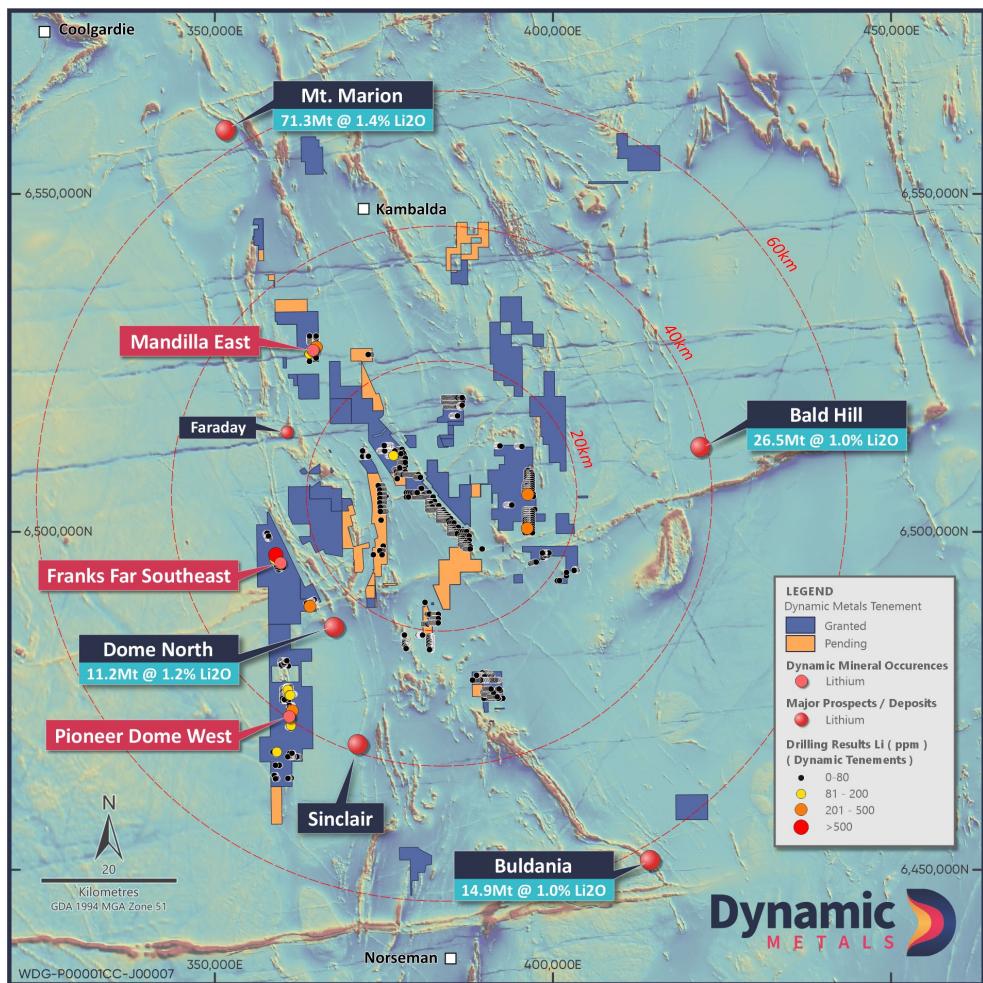


Figure 3. Dynamic's Widgiemooltha Project tenements with key lithium projects and prospects

The PDW target is located on E15/1721 and covers 20km of strike along the highly prospective western side of the Pioneer Dome. Dynamic's soil sampling program is the first systematic lithium exploration sampling program along this prospective area due to the historic gold and nickel exploration focus.

In July 2023 soil samples were taken by Dynamic every 40m on 400m spaced lines to obtain geochemical data coverage across the interpreted greenstone sequence flanked on the east by the Pioneer Dome granite and to the west by regional granites. A 2.8km trend of elevated lithium (40ppm and greater) was identified in the centre of the soil sampling area.

Follow up auger sampling was complete in the centre of the elevated lithium trend, and additionally in several other locations with highly anomalous Cs or Rb results (Figure 2). A total 580 auger samples were taken on lines at 40m spacings to test the soil anomalies in the regolith profile with details included in Table 1.

## **Next Steps**

Plans for infill auger drilling to refine lithium drill targets for 2024 are advancing, in addition to a project wide review of the effectiveness of the previous soil sampling programs in this area.

In the meantime, the exploration team has mobilised to Lake Percy to complete planned follow up Reverse Circulation drilling at the LP1 and LP2 nickel targets.

*Released with the authority of Dynamic Metals' Board of Directors.*

For further information on the Company and our projects, please visit: [www.dynamicmetals.com.au](http://www.dynamicmetals.com.au)

## **CONTACT**

---

### **Karen Wellman**

Managing Director

[enquiry@dynamicmetals.com.au](mailto:enquiry@dynamicmetals.com.au)

+61 8 6558 0637

## ABOUT DYNAMIC METALS

**Dynamic Metals (ASX: DYM)** is a dedicated exploration company focused on advancing a highly prospective portfolio of future facing critical minerals projects in Australia. The Company completed a successful IPO in January 2023 raising \$7 million to fully fund an aggressive exploration program across the portfolio.

Dynamic's flagship project, Widgiemooltha, covers an extensive area of c.880km<sup>2</sup> extending between Norseman and Kambalda. The region is well known for its numerous nickel and gold mines, but more recently has emerged in significance for its lithium mineralisation and prospectivity.

## DYNAMIC METALS CAPITAL STRUCTURE

**Share Price:** \$0.18/share


**Cash 30 Jun 2023:** \$3.7M

**Shares on Issue:** 49M

**Market Cap:** \$8.8M



Portfolio of future-facing critical minerals projects in Australia



Exposure to global decarbonisation and battery metals thematic



Substantial exploration targets generated across Li, Ni, Cu, PGE and Au



Team has extensive experience and successful track record



On-ground activities complete and drilling commenced



Attractive valuation and leverage to exploration success



## REFERENCES

Additional details including JORC 2012 reporting tables, where applicable, can be found in the following releases lodged with ASX and referred to in this announcement:

1. Dynamic Metals ASX Announcement 05/10/2023: "2.8km lithium anomaly defined at Pioneer Dome"
2. Essential Metals ASX Announcement 20/12/2022: "Dome North lithium upgrade boosts Indicated Resource tonnes by 50%"

Deposit	Classification	Tonnes (Mt)	Li <sub>2</sub> O %	Ta <sub>2</sub> O <sub>5</sub> ppm	Contained Li <sub>2</sub> O (T)	Fe <sub>2</sub> O <sub>3</sub> %
Cade	Indicated	6.9	1.26	49	88,000	0.44
	Inferred	1.3	0.88	49	11,000	0.44
Davy	Indicated	1.6	1.08	81	18,000	0.54
	Inferred	0.6	0.89	73	4,000	0.58
Heller	Inferred	0.7	1.02	76	8,000	0.72
<b>Total</b>	<b>Total</b>	<b>11.2</b>	<b>1.16</b>	<b>57</b>	<b>129,000</b>	<b>0.48</b>

*Note: Appropriate rounding applied.*

3. Develop Global Limited ASX Announcement 03/07/2023: "Develop and Essential Metals enter into binding Scheme Implementation Deed"

## COMPETENT PERSONS STATEMENT

The information in this report that relates to Exploration Results is based on information compiled by Mrs Karen Wellman. Mrs Wellman is an employee of the Company and a Member of the Australasian Institute of Mining and Metallurgy. Mrs Wellman has sufficient experience relevant to the styles of mineralisation and types of deposits under consideration, and to the activity being undertaken, to qualify as Competent Persons as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves.' Mrs Wellman consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

## FORWARD LOOKING STATEMENT

This document may contain certain forward-looking statements. Forward-looking statements include but are not limited to statements concerning Dynamic Metals Limited's (Dynamic's) current expectations, estimates and projections about the industry in which Dynamic operates, and beliefs and assumptions regarding Dynamic's future performance. When used in this document, the words such as "anticipate", "could", "plan", "estimate", "expects", "seeks", "intends", "may", "potential", "should", and similar expressions are forward-looking statements. Although Dynamic believes that its expectations reflected in these forward-looking statements are reasonable, such statements are subject to known and unknown risks, uncertainties and other factors, some of which are beyond the control of Dynamic and no assurance can be given that actual results will be consistent with these forward-looking statements.

## 1 ANNEXURE A

Auger sampling details from Pioneer Dome West prospect

AugerID	Collar Coordinates (MGA)				Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL											
SP1911	6470205	362319	326.2	6	0/0		0	1	23.8	36.4	1.66	0.3	3.9	0.9
							1	2	20.1	27.6	1.38	0.24	3.1	0.7
							2	3	39.9	36.8	1.92	0.36	4.7	1
							3	4	44.5	39.9	2.15	0.47	5.6	1.1
							4	5	30.9	39.3	2.14	0.53	6.8	1.3
							5	6	21.9	41.1	2.54	0.76	9.8	1.9
SP1912	6470199	362282	324.9	6	0/0		0	1	17.4	25.6	1.12	0.22	2.8	0.6
							1	2	22.6	24.4	1.23	0.23	3	0.6
							2	3	36.4	36.8	1.88	0.4	5.1	1.1
							3	4	38.8	38.9	2.14	0.51	6.6	1.3
							4	5	29	24	1.64	0.57	7.4	1.6
							5	6	20.7	32.3	1.8	0.83	8.6	1.7
SP1913	6470200	362246	323.2	5	0/0		0	1	20.4	32.9	1.42	0.38	3.3	0.7
							1	2	27.9	30.6	1.56	0.36	3.7	0.8
							2	3	34.6	39.9	2.01	0.43	5.2	1.1
							3	4	31.3	26.8	2.03	0.51	6.6	1.4
							4	5	21	43.7	2.35	0.69	8.9	1.8
							5	6	33.6	43.3	2.34	0.57	7.4	1.5
SP1914	6470206	362199	322.8	4	0/0		0	1	27.2	39.4	1.74	0.31	4	0.8
							1	2	31.9	35.6	1.6	0.3	3.9	0.8
							2	3	42	42.9	2.11	0.41	5.6	1.1
							3	4	33.6	43.3	2.34	0.57	7.4	1.5
							4	5	37.8	23.4	1.84	0.59	7.4	1.4
							5	6	29.2	45	2.27	0.92	9.5	1.7

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
SP1916	6470213	362118	323.1	6	0/0	0	1	25	39.3	1.6	0.32	3.8	0.8
						1	2	22.2	31.8	1.34	0.23	3.2	0.7
						2	3	33.1	38.8	1.75	0.34	4.3	0.9
						3	4	47.1	47	2.24	0.46	5.9	1.2
						4	5	26.2	38.2	1.94	0.48	5.5	1.8
						5	6	16.5	42.7	1.9	0.5	5.4	1.7
SP1917	6470200	362078	321.9	6	0/0	0	1	35.8	55.8	2.42	0.36	4.9	1.1
						1	2	27	40.7	1.86	0.3	4	0.8
						2	3	29.2	40.5	1.92	0.3	4	0.9
						3	4	35.1	53.9	2.49	0.4	5.6	1.1
						4	5	27.2	51.8	2.44	0.42	5.5	1.1
						5	6	16.7	59	2.9	0.39	5.6	1.1
SP1918	6470202	362042	320.7	6	0/0	0	1	21.8	39.4	1.61	0.26	3.5	0.7
						1	2	20.4	34.6	1.48	0.24	3.2	0.7
						2	3	22.5	31	1.7	0.23	3.1	0.7
						3	4	44	46.9	2.56	0.35	4.8	1
						4	5	34.2	45.2	2.46	0.46	5.4	1
						5	6	22.4	48.5	2.88	0.43	6.4	1.2
SP1919	6470201	362003	320.6	6	0/0	0	1	27.5	41.3	1.78	0.51	4.1	0.8
						1	2	45.1	45.5	2.1	0.36	5	1.1
						2	3	33.7	47.6	2.32	0.4	5.6	1.1
						3	4	23.3	47.4	2.45	0.42	5.6	1.2
						4	5	17	45.4	2.48	0.42	5.6	1.1
						5	6	11.4	34.2	2.28	0.3	4.3	0.9
SP1920	6470199	361960	320.4	6	0/0	0	1	31.2	50.2	2.1	0.93	4.9	1
						1	2	34.8	47.1	2.12	0.41	4.7	1.1
						2	3	39.5	54.2	2.76	0.55	6.2	1.4
						3	4	26.4	47.9	2.39	0.51	5.9	1.4
						4	5	21.4	49.6	2.76	0.6	5.7	1.4
						5	6	14.9	42	2.47	0.42	4.6	1.1

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
SP1921	6470205	361920	319.2	5	0/0	0	1	34.6	48.7	2.22	0.41	4.5	1.2
						1	2	37.7	49.5	2.4	0.47	5.5	1.3
						2	3	26.5	47.9	2.24	0.59	6.2	1.5
						3	4	23.1	41.3	1.83	0.43	5	1.2
						4	5	17.4	35	1.57	0.42	4.8	1.3
SP1922	6470198	361879	321	6	0/0	0	1	28.8	43.3	1.91	0.4	4.3	1
						1	2	45.5	46.4	2.35	0.49	5.3	1.2
						2	3	25.4	45.2	2.24	0.48	5.5	1.4
						3	4	14.4	34.7	1.56	0.42	4.6	1.2
						4	5	12.8	38	1.92	0.58	5.6	1.6
						5	6	26.2	46	2.18	0.52	5.7	1.4
SP1923	6470201	361841	321.2	5	0/0	0	1	28.7	39.4	1.67	0.37	4.1	0.9
						1	2	42	49	2.44	0.53	5.8	1.4
						2	3	25.9	55.9	2.7	0.62	7	1.5
						3	4	19.1	48.9	2.23	0.71	7	1.4
						4	5	11	25.9	1.37	0.39	3.9	1.1
SP1924	6470202	361797	321.2	6	0/0	0	1	34.1	46	2.15	0.44	5	1.2
						1	2	33.9	42.8	2.03	0.43	4.8	1.1
						2	3	32.1	37.8	1.98	0.41	4.5	1
						3	4	47	45.6	2.4	0.52	5.9	1.3
						4	5	35.8	44.1	2.51	0.55	6.4	1.4
						5	6	24.3	36.1	1.94	0.41	4.6	1
SP1925	6470200	361757	323.1	5	0/0	0	1	31.1	58.7	2.77	0.55	6	1.4
						1	2	22	24.9	1.2	0.24	2.6	0.6
						2	3	31.4	34.5	1.76	0.36	4	0.9
						3	4	38.7	46.7	2.51	0.53	5.9	1.3
						4	5	32.4	30	1.7	0.37	4.2	1.1
SP1926	6470203	361720	325.1	5	0/0	0	1	44.2	49.6	2.79	0.59	6.6	1.6
						1	2	28.1	37.4	1.85	0.41	4.2	0.9
						2	3	38.3	46.8	2.37	0.53	6.1	1.3

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						3	4	43	51.1	2.67	0.68	7.1	1.6
						4	5	36.4	54.6	2.41	0.58	7.5	1.5
SP1927	6470204	361680	326.2	4	0/0	0	1	36.6	56.2	2.24	0.49	6.4	1.3
						1	2	35.7	49.9	2.18	0.48	6.2	1.3
						2	3	42.4	55.3	2.48	0.62	7.7	1.4
						3	4	44.7	56.5	2.63	0.57	7.5	1.6
SP1928	6470203	361636	323.2	4	0/0	0	1	30.7	41.6	1.78	0.38	4.8	1
						1	2	26.1	31.2	1.46	0.3	3.8	0.8
						2	3	42.2	45.7	2.16	0.46	5.8	1.2
						3	4	38.8	50.2	2.24	0.5	6.3	1.3
SP1929	6470202	361593	320.2	4	0/0	0	1	30.9	41.4	1.64	0.36	4.5	1.1
						1	2	37.8	41.6	1.88	0.38	5	1.1
						2	3	42.8	43.6	2.04	0.42	5.3	1.1
						3	4	28.7	51.8	2.3	0.48	6.3	1.4
SP1930	6470198	361558	320.2	5	0/0	0	1	35.1	47.5	1.91	0.44	5.1	1.1
						1	2	41.8	50.8	2.17	0.45	5.7	1.3
						2	3	28	51.6	2.4	0.52	6.5	1.4
						3	4	22.3	49.9	2.28	0.52	6.5	1.4
						4	5	19.2	52.4	2.34	0.54	7.1	1.6
SP1931	6470197	361517	322.2	5	0/0	0	1	39.8	56.6	2.14	0.6	5.9	1.2
						1	2	52.6	60.3	2.61	0.56	7.1	1.5
						2	3	33.9	54	2.45	0.49	6.5	1.5
						3	4	27.1	56.1	2.74	0.57	7.2	1.5
						4	5	19.2	51.7	2.44	0.51	6.8	1.5
SP1932	6470203	361481	323.2	4	0/0	0	1	35.7	53.2	2	0.45	5.4	1.1
						1	2	42.2	53.6	2.26	0.46	6.3	1.3
						2	3	42.4	56	2.65	0.53	7	1.5
						3	4	24.8	52.7	2.38	0.52	6.6	1.5
SP1933	6470203	361440	324.2	5	0/0	0	1	42.6	60.6	2.42	0.55	6.5	1.4
						1	2	42.1	54.6	2.35	0.49	6.1	1.3

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						2	3	45.2	54	2.67	0.51	6.7	1.6
						3	4	24.8	48.6	2.13	0.43	5.7	1.3
						4	5	15.3	48.2	2.28	0.54	7.1	1.5
SP1934	6470197	361401	322.7	4	0/0	0	1	45.5	61	2.52	0.55	6.5	1.5
						1	2	41.9	52.7	2.36	0.5	6.3	1.3
						2	3	38.4	55.5	2.66	0.54	6.8	1.5
						3	4	28.5	51.5	2.5	0.53	6.5	1.3
SP1935	6470196	361362	322.5	5	0/0	0	1	36.8	51.1	2.28	0.58	6.1	1.2
						1	2	45.9	55.1	2.83	0.54	6.5	1.4
						2	3	46.8	62.6	3.23	0.58	7.2	1.6
						3	4	22.1	54	2.71	0.56	6.5	1.5
						4	5	14.2	44.6	2.05	0.49	5.5	1.2
SP1936	6470201	361319	324.3	4	0/0	0	1	43.3	61.5	2.87	0.56	7.1	1.5
						1	2	39.5	55.4	2.48	0.56	6.6	1.4
						2	3	39.7	52.5	2.49	0.53	6.2	1.3
						3	4	27.6	49.9	2.26	0.46	5.4	1.2
SP1937	6470203	361277	321.4	4	0/0	0	1	44	56.3	2.5	0.52	6.3	1.4
						1	2	39.7	50.6	2.22	0.45	5.7	1.3
						2	3	40.8	51.8	2.37	0.53	5.7	1.3
						3	4	23.1	41	1.64	0.43	5.3	1.4
SP1938	6470201	361239	320.4	5	0/0	0	1	47.2	45.8	2.48	0.53	6.8	1.5
						1	2	41	48.1	2.29	0.46	5.6	1.2
						2	3	41.4	55	2.51	0.49	6.1	1.4
						3	4	25	45.9	1.98	0.42	5.5	1.3
						4	5	14.4	39.6	1.69	0.49	5.8	1.4
SP1939	6470200	361198	320.4	4	0/0	0	1	45.5	56	2.48	0.49	6.4	1.5
						1	2	38	48.5	2.13	0.42	5.5	1.2
						2	3	40.9	35.8	2.06	0.43	5.3	1.2
						3	4	17.7	39.5	1.76	0.41	5.2	1.3
SP1940	6470204	361160	321.5	5	0/0	0	1	40.8	55.3	2.23	0.47	5.8	1.2

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						1	2	31.1	41	1.7	0.38	4.8	1.1
						2	3	41.5	47.3	2.12	0.39	4.9	1.1
						3	4	22	39.6	1.72	0.32	3.8	1
						4	5	16.7	38.9	1.67	0.31	4.2	0.9
SP1941	6470201	361115	323.5	6	0/0	0	1	43	30.2	2.02	0.73	6.7	1.5
						1	2	34.4	50.4	2.2	0.49	5.9	1.3
						2	3	39.8	53.2	2.51	0.46	5.5	1.3
						3	4	21.9	41.4	1.94	0.44	4.6	1
						4	5	18.3	49.4	2.48	0.47	5.7	1.2
						5	6	15.2	44.2	2.42	0.43	5.5	1.1
SP1942	6470199	361078	322.5	5	0/0	0	1	40.1	67.3	2.86	0.59	7.4	1.6
						1	2	28.2	42.7	1.6	0.35	4.5	1.1
						2	3	39	35	1.83	0.43	4.9	1.1
						3	4	18.2	29.9	1.12	0.36	4.2	1.3
						4	5	18.7	43.5	2.19	0.47	5.2	1.2
SP1943	6470200	361042	323.5	6	0/0	0	1	47.4	65.8	2.85	0.63	7.3	1.7
						1	2	37.5	52.8	2.28	0.57	6.1	1.4
						2	3	39.7	50	2.28	0.47	5.4	1.3
						3	4	30.8	41.1	1.79	0.38	4.3	1
						4	5	16.8	36	1.56	0.37	4.3	1
						5	6	15.6	47.8	2.3	0.52	6.1	1.3
SP1944	6470198	360996	322.5	6	0/0	0	1	48.9	41.2	2.54	0.66	7.6	1.7
						1	2	40.7	53.1	2.26	0.51	6	1.3
						2	3	39.2	48	2.12	0.5	5.6	1.4
						3	4	29.1	54.8	2.55	0.56	6.5	1.6
						4	5	21.9	46	2.26	0.53	6	1.4
						5	6	15.9	44.8	2.07	0.7	7.6	1.8
SP1945	6470204	360954	321.5	5	0/0	0	1	50	77.2	3.27	0.78	9.2	2.1
						1	2	33.2	40.6	1.7	0.43	4.5	1.1
						2	3	40.6	56.3	2.45	0.58	6.4	1.4

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						3	4	27.1	48.9	2.24	0.5	5.5	1.2
						4	5	20.4	51.1	2.37	0.62	6.9	1.4
SP1946	6470204	360911	320.5	6	0/0	0	1	49.5	56.3	2.75	0.61	6.7	1.7
						1	2	36.9	51.9	2.22	0.49	5.4	1.3
						2	3	25.4	37.7	1.62	0.64	4.3	1
						3	4	33.5	49	2.25	0.45	5.3	1.2
						4	5	32.8	56	2.62	0.62	6.7	1.6
						5	6	23.8	57.6	2.85	0.69	7.8	1.8
SP1947	6470197	360874	317.5	5	0/0	0	1	32.8	54.2	2.15	0.45	5.2	1.2
						1	2	27.7	45.8	1.92	0.39	4.5	1.1
						2	3	24.5	40.4	1.82	0.46	4.1	1
						3	4	33.1	45.3	2.06	0.43	4.8	1.1
						4	5	24.1	50.1	2.48	0.84	6.4	1.4
SP1948	6470003	360883	322.9	5	0/0	0	1	23	34	1.26	0.3	3.4	0.8
						1	2	25.7	39.9	1.64	0.38	4.2	0.9
						2	3	38.8	51.8	2.2	0.49	5.7	1.2
						3	4	30.8	61.2	2.82	0.67	7.2	1.6
						4	5	19.4	66.2	3.18	0.8	8.7	1.9
SP1949	6470002	360924	322.5	4	0/0	0	1	28.3	39.1	1.63	0.35	4.1	0.9
						1	2	39.1	54.4	2.34	0.49	5.8	1.3
						2	3	37	60.8	2.8	0.59	7.1	1.6
						3	4	25.1	61.2	2.95	0.61	7.4	1.7
SP1950	6470004	360962	322.5	6	0/0	0	1	27.4	43.7	1.7	0.4	4.5	1
						1	2	27.6	40.9	1.8	0.39	4.5	1.1
						2	3	30.5	46.3	2.07	0.43	5	1.2
						3	4	34.5	51.5	2.17	0.47	5.6	1.3
						4	5	38.2	56.4	2.66	0.58	6.6	1.5
						5	6	27.9	56.6	2.9	0.65	7.8	1.9
SP1951	6470008	360999	322.5	5	0/0	0	1	31.3	53.4	1.91	0.42	4.8	1.1
						1	2	35.7	54.5	2.22	0.43	5.2	1.2

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						2	3	45.8	55.9	2.48	0.57	6.3	1.4
						3	4	37	60.5	2.83	0.64	7.2	1.6
						4	5	24.8	61.6	2.93	0.69	8.2	1.8
SP1952	6470008	361040	322.5	5	0/0	0	1	38.8	58.9	2.33	0.52	6.1	1.4
						1	2	32.9	43.6	1.95	0.42	4.8	1.1
						2	3	44	53.7	2.57	0.5	6	1.4
						3	4	42.8	47.6	2.8	0.61	7.3	1.7
						4	5	28	62	3.24	0.72	8.4	1.9
SP1953	6469999	361082	321.5	4	0/0	0	1	38.5	57.2	2.29	0.52	6.1	1.4
						1	2	44.6	64.3	2.78	0.61	7.1	1.7
						2	3	46.4	66.8	2.99	0.71	7.6	1.8
						3	4	28.9	65	3.31	0.68	8.2	1.9
SP1954	6470002	361120	320.5	4	0/0	0	1	51.2	55.2	2.95	0.62	7.6	1.8
						1	2	41.1	53.3	2.49	0.51	5.9	1.4
						2	3	47	33	2.43	0.74	7.2	1.6
						3	4	27.5	56.6	2.85	0.67	7.1	1.6
SP1955	6470006	361159	321.5	4	0/0	0	1	46.8	38.2	2.49	0.64	7.7	1.8
						1	2	38.5	45.1	2.53	0.57	6.8	1.6
						2	3	31.3	59.8	2.83	0.59	7.1	1.7
						3	4	19.2	55.6	2.94	0.66	7.5	1.5
SP1956	6470010	361199	320.5	4	0/0	0	1	45.5	33.6	2.3	0.66	7.9	1.8
						1	2	33.3	45.8	2.24	0.46	5.5	1.3
						2	3	44.5	49.9	2.37	0.44	5.4	1.3
						3	4	18.7	44.3	2.24	0.45	5.6	1.3
SP1957	6470006	361243	320.5	4	0/0	0	1	34.4	54.3	2.48	0.56	6.7	1.4
						1	2	26.3	43.5	1.8	0.46	5.5	1.3
						2	3	27.5	44.7	2.11	0.42	5.4	1.2
						3	4	21.4	41.8	1.94	0.45	5.8	1.1
SP1958	6470005	361278	320.5	5	0/0	0	1	45.9	35.9	2.64	0.61	7.6	1.7
						1	2	31.5	46.5	2.14	0.46	5.9	1.3

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						2	3	37.4	51.1	2.43	0.45	5.8	1.4
						3	4	23.9	42.5	2.01	0.41	5.2	1.2
						4	5	15.9	42.5	2.28	0.47	5.9	1.3
SP1959	6470005	361319	320.5	4	0/0	0	1	49.3	64.4	3.38	0.7	8.6	1.8
						1	2	26.9	40.5	1.86	0.39	4.7	1.1
						2	3	26	46.5	2.3	0.53	6.5	1.3
						3	4	15.3	46.2	2.29	0.47	6.1	1.3
SP1960	6470002	361362	319.4	4	0/0	0	1	47	43.5	2.82	0.67	8.1	1.7
						1	2	42.3	54.3	2.69	0.56	7.3	1.5
						2	3	25.6	56.8	2.96	0.61	7.7	1.5
						3	4	14.4	38.6	1.96	0.43	5.7	1.3
SP1961	6470002	361403	321.4	4	0/0	0	1	46.5	48.2	2.91	0.63	8	1.7
						1	2	43.6	57.1	2.82	0.6	7.6	1.5
						2	3	33.6	48.8	2.45	0.51	6.4	1.4
						3	4	14.3	46.8	2.25	0.51	6.5	1.5
SP1962	6470007	361442	320.4	5	0/0	0	1	42.5	60.8	2.79	0.58	7.3	1.5
						1	2	42.1	51.1	2.49	0.5	6.1	1.3
						2	3	42.8	56.3	2.86	0.56	7.1	1.5
						3	4	15.9	44.8	1.96	0.43	5.3	1.1
						4	5	12.2	44	2	0.39	5	1.1
SP1963	6470002	361480	321.4	5	0/0	0	1	45.6	38.1	2.58	0.6	7.5	1.6
						1	2	44.8	59.6	2.99	0.58	7.5	1.5
						2	3	48.6	56.9	2.83	0.53	6.7	1.4
						3	4	26.2	48.7	2.42	0.49	6.6	1.4
						4	5	21.9	54.1	3.01	0.61	7.2	1.6
SP1964	6470005	361522	321.4	6	0/0	0	1	42.8	59.1	2.71	0.53	6.6	1.4
						1	2	39.6	53	2.57	0.49	6.2	1.3
						2	3	35.1	43.5	2.21	0.39	5	1.1
						3	4	47.9	53.6	2.63	0.46	6	1.3
						4	5	35.2	52.5	2.65	0.51	6.3	1.4

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						5	6	30.7	53	2.78	0.54	6.8	1.4
SP1965	6470001	361565	322.4	4	0/0	0	1	42	56.9	2.43	0.47	6.4	1.3
						1	2	43.2	47.2	2.21	0.46	5.6	1.2
						2	3	57.5	39	2.71	0.55	7.2	1.6
						3	4	39.5	55.7	2.99	0.55	7.3	1.6
SP1966	6470005	361605	322.4	5	0/0	0	1	36.5	49.2	2.03	0.42	5.5	1.2
						1	2	32.3	42.8	2	0.35	4.8	1
						2	3	40.1	44.9	2.31	0.38	5	1.2
						3	4	42.7	54.1	2.97	0.47	6.3	1.4
						4	5	31.3	54.9	2.88	0.5	6.2	1.4
SP1967	6470008	361639	323.4	4	0/0	0	1	42.3	55	2.18	0.5	5.9	1.3
						1	2	41.4	48.3	2.17	0.46	5.4	1.2
						2	3	43.9	46.2	2.14	0.41	4.8	1.2
						3	4	45.9	46.2	2.61	0.54	6.3	1.4
SP1968	6470004	361686	325.4	4	0/0	0	1	38.3	48.2	2.17	0.43	5.3	1.1
						1	2	53.9	54.1	2.57	0.49	6.1	1.3
						2	3	36.9	56.3	2.79	0.54	6.7	1.5
						3	4	20.7	52.7	2.63	0.54	6.6	1.4
SP1969	6470000	361724	324.3	4	0/0	0	1	40.4	54.4	2.38	0.49	6	1.3
						1	2	40.9	50.4	2.36	0.46	6	1.3
						2	3	20.5	40.6	2.01	0.45	5.6	1.3
						3	4	14.1	41.5	2.09	0.49	6.1	1.3
SP1970	6470002	361763	324.3	5	0/0	0	1	38.8	53.9	2.53	0.51	6.4	1.4
						1	2	18.4	47.3	2.15	0.56	6.6	1.3
						2	3	41.1	53.9	2.62	0.58	7.1	1.5
						3	4	12.1	45.5	2.17	0.52	6.6	1.5
						4	5	12.8	48.5	2.53	0.61	7.9	1.6
SP1971	6470002	361795	322.3	3	0/0	0	1	39.8	55.3	2.63	0.61	6.9	1.5
						1	2	40.4	56.4	2.67	0.56	7	1.8
						2	3	26.2	49	2.26	0.48	6.2	1.3

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
SP1972	6470000	361840	320.3	4	0/0	0	1	37	56.9	2.67	0.5	6.3	1.4
						1	2	38.8	54.3	2.85	0.57	7.1	1.6
						2	3	25.1	53.2	2.79	0.59	7.5	1.7
						3	4	14.8	41.7	1.97	0.48	6.1	1.5
SP1973	6470000	361878	321.3	5	0/0	0	1	41	61.6	2.9	0.55	6.8	1.5
						1	2	45.9	50.9	2.85	0.59	7.5	1.7
						2	3	35.5	51.7	2.39	0.5	6.4	1.5
						3	4	20.6	48.6	2.24	0.52	6.8	1.5
							5	16	51.3	2.42	0.6	7.7	1.6
SP1974	6470000	361919	323.3	4	0/0	0	1	31.3	48.9	2.05	0.39	5	1.1
						1	2	40.6	53.2	2.51	0.49	6.5	1.5
						2	3	37	48.7	2.36	0.51	6.2	1.4
						3	4	19.6	39.4	1.77	0.4	5.2	1.1
SP1975	6469992	361959	324.1	4	0/0	0	1	29.4	45.3	1.81	0.37	4.8	1
						1	2	42.4	48.6	2.29	0.48	6.1	1.4
						2	3	31.5	52.3	2.39	0.54	6.8	1.5
						3	4	19.8	49.8	2.29	0.65	7.3	1.5
SP1976	6469994	362002	322.6	3	0/0	0	1	26.8	41.8	1.72	0.36	4.4	1
						1	2	42.1	52.9	2.33	0.48	6	1.3
						2	3	30.6	51.3	2.28	0.51	6.5	1.5
SP1977	6470005	362040	323.4	4	0/0	0	1	36.8	43.8	1.84	0.38	4.7	1.1
						1	2	29	43.4	2.02	0.4	5.4	1.2
						2	3	21	43.1	2.03	0.43	5.9	1.4
						3	4	11.6	31.9	1.73	0.47	7	1.5
SP1978	6469998	362079	321.5	4	0/0	0	1	35.1	56.8	2.33	0.44	5.5	1.3
						1	2	45.9	57	2.52	0.48	6	1.5
						2	3	33.6	57.9	3.02	0.6	7.4	1.8
						3	4	21.1	75.7	3.45	0.71	8.9	2.2
SP1979	6470002	362119	321.5	5	0/0	0	1	23.7	32.4	1.52	0.29	3.4	0.7
						1	2	30	52.9	2.42	0.4	5.3	1.2

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						2	3	19.4	53.5	3.33	0.6	7.6	1.5
						3	4	16	102.5	6.82	0.47	6.2	2.1
						4	5	10.6	101.5	7.18	0.41	5.2	1.9
SP1980	6470007	362157	321.5	6	0/0	0	1	26.1	31.4	1.36	0.28	3.3	0.7
						1	2	51.6	36.7	1.78	0.44	5.1	1.1
						2	3	41.1	19.8	1.46	0.42	5.1	1.1
						3	4	33.5	30	1.46	0.43	5.3	1.3
						4	5	24.5	23.1	1.31	0.41	5	1.3
						5	6	18.8	18.4	1.1	0.33	4.2	1.3
SP1981	6470002	362201	322.5	3	0/0	0	1	33.6	48.2	1.94	0.41	4.8	1.2
						1	2	39.3	46.9	2.04	0.46	5.5	1.4
						2	3	33.8	46.4	2.14	0.63	7.7	1.9
SP1982	6469999	362238	322.5	4	0/0	0	1	37.6	40.4	1.85	0.53	5.3	1.6
						1	2	39.6	27	1.35	0.49	6.1	2.2
						2	3	28.5	4	0.44	0.57	7.6	3.6
						3	4	23.7	7.3	0.66	0.47	5.9	2.3
SP1983	6470004	362277	322.5	4	0/0	0	1	30.5	39.7	1.79	0.39	4.3	1.1
						1	2	27.9	35.4	1.64	0.39	4.6	1
						2	3	37.4	3.9	0.5	0.53	6.5	1.7
						3	4	29.1	20.5	1.23	0.66	8	1.9
SP1984	6470004	362320	321.4	5	0/0	0	1	19.8	24.9	1	0.26	3.1	0.7
						1	2	30.1	34.8	1.53	0.42	5.3	1.2
						2	3	35.2	39.5	1.84	0.55	6.7	1.5
						3	4	31.9	35.1	1.79	0.77	8.4	1.8
						4	5	23.5	32.2	1.78	0.99	8.7	1.9
SP1985	6469806	362321	326.4	5	0/0	0	1	15.1	20.2	0.7	0.18	2.2	0.5
						1	2	17.1	22.2	0.78	0.21	2.5	0.6
						2	3	28.1	29.6	1.11	0.38	4.5	1
						3	4	35.9	23.5	1.22	0.48	5.6	1.4
						4	5	18.6	20.2	0.73	0.96	7.4	1.6

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
SP1986	6469801	362277	325.4	4	0/0	0	1	17.2	20.3	0.76	0.19	2.5	0.6
						1	2	34.9	28	1.19	0.39	4.2	0.9
						2	3	28.3	23.7	1.32	0.5	6	1.4
						3	4	21	28.1	1.58	0.65	8.1	1.9
SP1987	6469820	362241	322.4	4	0/0	0	1	23.7	36.3	1.38	0.31	3.8	0.9
						1	2	22.9	24.4	0.98	0.28	3.6	0.9
						2	3	35.5	32.1	1.47	0.45	5.5	1.4
						3	4	31.4	32.8	1.84	0.62	7.6	1.8
SP1988	6469807	362193	321	6	0/0	0	1	34.5	56.6	2.18	0.39	4.9	1.3
						1	2	25.9	36.2	1.56	0.33	4.2	1.1
						2	3	35.7	7.8	0.7	0.35	4.4	1.6
						3	4	30.3	3.1	0.39	0.34	4.6	1.9
						4	5	20.5	7.7	0.64	0.37	4.9	1.9
						5	6	21.3	13.4	1.18	0.44	5.5	1.7
SP1989	6469801	362158	321.4	4	0/0	0	1	38.9	55.4	2.25	0.55	5.7	1.4
						1	2	31.4	23.3	1.1	0.32	4.5	1.3
						2	3	28.2	3.7	0.48	0.41	5.5	1.7
						3	4	16.6	13.1	0.7	0.45	5.5	1
SP1990	6469800	362118	323.4	5	0/0	0	1	42.3	50.6	2.48	0.53	6.7	1.6
						1	2	37.7	47.1	2.18	0.45	5.5	1.3
						2	3	54.9	19.5	1.79	0.54	6.8	1.7
						3	4	42.7	24.8	1.83	0.5	6.1	1.6
						4	5	24.9	20.9	1.43	0.46	5.7	1.7
SP1991	6469798	362078	323.4	4	0/0	0	1	37.9	58.2	2.3	0.47	6	1.4
						1	2	42.4	54.5	2.43	0.53	6.4	1.4
						2	3	38.5	52.1	2.41	0.56	6.8	1.5
						3	4	21.6	44.5	2.03	0.52	6.4	1.5
SP1992	6469802	362033	321.4	5	0/0	0	1	35.1	51.8	2.09	0.46	5.8	1.3
						1	2	38.3	52.8	2.2	0.5	6.2	1.3
						2	3	38.1	44	2.1	0.48	6.1	1.4

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						3	4	19.3	46.3	2.07	0.53	6.5	1.5
						4	5	16.4	50.6	2.39	0.64	8.3	1.8
SP1993	6469805	361998	322.4	4	0/0	0	1	28.8	41.8	1.76	0.38	4.7	1.1
						1	2	31.5	44.5	1.93	0.46	5.2	1.1
						2	3	29.3	43.8	1.98	0.51	6.2	1.4
						3	4	14.8	41.1	1.78	0.47	6	1.3
SP1994	6469799	361957	321.4	4	0/0	0	1	24.9	32.3	1.4	0.35	3.7	0.8
						1	2	43.6	43.9	2.06	0.46	5.2	1.2
						2	3	29	44.8	2.07	0.49	5.8	1.3
						3	4	13.8	30.7	1.28	0.64	5.2	1.3
SP1995	6469799	361920	321.4	4	0/0	0	1	34.1	47.8	1.98	0.43	5	1.1
						1	2	46.7	53.8	2.52	0.55	6.6	1.5
						2	3	25.5	50.8	2.44	0.59	6.7	1.5
						3	4	17.3	48.1	2.34	0.61	7.2	1.6
SP1996	6469805	361879	322.4	4	0/0	0	1	30.1	43.2	1.78	0.45	5.1	1
						1	2	40.7	47.3	2.14	0.49	5.8	1.3
						2	3	19.8	43.5	2.04	0.52	6.2	1.4
						3	4	18.2	40.8	1.78	0.59	6.4	1.4
SP1997	6469795	361846	323.4	4	0/0	0	1	33.5	44.5	1.81	0.42	5.1	1.1
						1	2	45	45.3	2.24	0.52	6.1	1.3
						2	3	30.1	52.1	2.57	0.72	7.3	1.5
						3	4	26.1	51.3	2.49	0.61	7.1	1.6
SP1998	6469800	361794	321.4	4	0/0	0	1	39.5	50.1	2.26	0.5	5.7	1.3
						1	2	50.2	55.4	2.66	0.6	6.8	1.5
						2	3	25.2	49.6	2.55	0.6	6.9	1.6
						3	4	17.6	43.5	2.22	0.55	6.4	1.4
SP1999	6469804	361761	321.4	3	0/0	0	1	44	54.7	2.49	0.53	6.4	1.4
						1	2	44.4	52	2.7	0.6	7.2	1.6
						2	3	31	57.8	2.78	1	7.7	1.7
SP2000	6469800	361720	322.4	4	0/0	0	1	43.4	52.6	2.27	0.52	6.1	1.3

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						1	2	44.3	51.8	2.46	0.51	6	1.4
						2	3	43.4	48.7	2.25	0.58	5.9	1.3
						3	4	20.8	44.2	2.1	0.47	5.8	1.3
SP2001	6469804	361680	321.5	4	0/0	0	1	43.2	53.4	2.47	0.54	6.2	1.4
						1	2	50.4	55.4	2.85	0.56	6.8	1.5
						2	3	29.9	49.3	2.54	0.52	6.3	1.4
						3	4	18	36.7	1.7	0.44	5.1	1.3
SP2002	6469806	361634	321.5	4	0/0	0	1	42.8	55.9	2.47	0.55	6.7	1.5
						1	2	46.1	51.4	2.47	0.83	6.8	1.5
						2	3	30.6	50.7	2.81	0.62	7	1.6
						3	4	15	49.3	2.5	0.54	6.4	1.4
SP2003	6469804	361595	321.5	4	0/0	0	1	45.9	54.5	2.66	0.61	7.3	1.7
						1	2	43.7	42.3	2.61	0.62	7.5	1.7
						2	3	24.1	51.8	2.61	0.54	6.9	1.5
						3	4	14.6	40.2	2	0.47	5.6	1.3
SP2004	6469803	361557	322.5	5	0/0	0	1	44.9	54	2.85	0.65	7.9	1.7
						1	2	35.8	51.8	2.52	0.61	6.9	1.6
						2	3	16.9	36.9	1.82	0.51	6.2	1.8
						3	4	8.8	29	1.3	0.37	4.6	1.2
						4	5	10.9	36.7	1.85	0.43	5.3	1.2
SP2005	6469804	361517	322.5	4	0/0	0	1	43.2	53.3	2.67	0.6	7.4	1.5
						1	2	31.9	45.6	2.05	0.5	5.8	1.3
						2	3	24.7	37.3	1.75	0.41	5.1	1.2
						3	4	14.4	43.2	2.04	0.44	5.5	1.3
SP2006	6469808	361476	323.5	4	0/0	0	1	40.7	62.5	2.59	0.61	7.4	1.6
						1	2	28.7	43.4	2	0.52	6	1.4
						2	3	26.5	40.1	1.99	0.48	5.7	1.3
						3	4	11.8	44.9	2.07	0.51	6	1.3
SP2007	6469806	361437	323.5	3	0/0	0	1	44.2	58.1	2.65	0.58	7.1	1.6
						1	2	23.6	35.5	1.55	0.39	4.7	1.1

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
				2	3	28.8	37.1	1.67	0.45	5.4	1.3		
SP2008	6469804	361397	323.5	4	0/0	0	1	49.7	68.4	3.24	0.66	8	1.8
				1	2	41.2	57.8	2.67	0.51	6.5	1.7		
				2	3	44.5	59	2.97	0.51	6.3	1.5		
				3	4	24.4	46.6	2.19	0.47	5.9	1.4		
SP2009	6469802	361357	322.7	6	0/0	0	1	47.8	53.1	2.93	0.64	7.9	1.8
				1	2	36.1	52.8	2.55	0.48	5.8	1.4		
				2	3	41.4	55.1	3.03	0.5	6.1	1.6		
				3	4	34.5	39.2	2.89	0.57	6.5	1.6		
				4	5	21.1	52.8	2.81	0.53	6.5	1.6		
				5	6	17.9	54.7	3.12	0.63	7.7	1.7		
SP2010	6469797	361317	320.5	5	0/0	0	1	40.9	60.9	2.55	0.47	6	1.4
				1	2	43.5	58.6	2.71	0.49	6	1.4		
				2	3	50.1	63.2	3.17	0.6	6.9	1.7		
				3	4	42.2	59.7	3.26	0.63	7.2	1.8		
				4	5	32.8	62.7	3.71	0.63	7.5	2		
SP2011	6469802	361281	322.5	6	0/0	0	1	40.3	58.5	2.38	0.46	5.5	1.4
				1	2	39.7	55.4	2.5	0.48	5.6	1.4		
				2	3	31.4	43.5	2.36	0.42	4.8	1.2		
				3	4	33.8	51.9	2.9	0.41	5.2	1.4		
				4	5	48.2	63.4	3.74	0.61	6.8	1.6		
				5	6	36.1	54.2	4.08	0.7	8.3	2		
SP2012	6469803	361245	323.5	5	0/0	0	1	41.7	58.1	2.49	0.62	7.3	1.3
				1	2	34.6	43.4	2.19	0.4	4.6	1.1		
				2	3	52.2	60.4	3.3	0.56	6.4	1.5		
				3	4	41.7	67.3	3.99	0.63	7.4	1.7		
				4	5	30.6	69.8	4.44	0.72	8.5	1.9		
SP2013	6469801	361198	323.5	5	0/0	0	1	41.4	60.1	2.47	0.53	5.9	1.5
				1	2	43.2	55.3	2.56	0.44	5.3	1.4		
				2	3	47.1	56.3	2.77	0.56	5.8	1.4		

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
						3	4	35.9	64.9	3.55	0.64	7.4	1.9
						4	5	28.7	66.8	4.23	0.74	8.6	2.1
SP2014	6469805	361155	324.5	4	0/0	0	1	37.8	54.6	2.28	0.45	5.4	1.4
						1	2	44.1	58	2.76	0.52	6.2	1.6
						2	3	46.4	66.4	3.38	0.57	7.2	1.8
						3	4	31.8	67.5	3.53	0.88	8.3	1.9
SP2015	6469805	361119	322.5	4	0/0	0	1	36.2	55.3	2.28	0.52	5.5	1.4
						1	2	36.2	51.9	2.32	0.47	5.6	1.4
						2	3	45.9	61.3	2.78	0.69	7	1.6
						3	4	32.6	68.7	3.29	0.66	7.8	1.9
SP2016	6469804	361077	321.6	5	0/0	0	1	35.5	58.9	2.21	0.51	5.9	1.5
						1	2	34.6	46.8	2.03	0.45	5.1	1.3
						2	3	46.9	55.5	2.45	0.53	6.2	1.6
						3	4	32.5	60.2	3.1	0.85	8.5	1.9
						4	5	25.7	64.7	3.12	0.72	8.5	2
SP2017	6469799	361041	322.6	6	0/0	0	1	33.8	53.5	2.06	0.43	5.3	1.3
						1	2	53.9	59.4	2.68	0.62	7.1	1.7
						2	3	32.3	64.3	2.98	0.69	8	1.8
						3	4	24.7	65.1	3.13	0.71	8.6	2
						4	5	21.4	67.7	3.45	1.05	10	2.1
						5	6	18.9	62.7	3.4	0.92	9.4	2.1
SP2018	6469803	361000	323.6	5	0/0	0	1	25.4	39.6	1.78	0.38	4.6	1.1
						1	2	28	40.7	1.88	0.41	4.9	1.2
						2	3	42.8	57.1	2.68	0.65	7.6	1.7
						3	4	27.5	60.5	3.05	0.68	8.2	1.9
						4	5	21.1	55.6	3.2	0.77	8.8	1.9
SP2019	6469801	360960	323.6	6	0/0	0	1	25.2	37.5	1.63	0.37	4.4	1.1
						1	2	31.8	43.7	2.07	0.48	5.6	1.3
						2	3	42.9	54.8	2.47	0.58	7.1	1.5
						3	4	30.2	59	2.85	0.63	7.6	1.7
						4	5	25.1	54.1	2.95	0.66	7.9	1.8

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
				5	6	20.7	59.5	3.32	0.8	8.9	2.1		
SP2020	6469804	360922	322.6	6	0/0	0	1	26.7	40.9	1.73	0.36	4.6	1.2
				1	2	28.8	38.2	1.84	0.39	4.8	1.1		
				2	3	44.3	54.1	2.56	0.56	6.7	1.6		
				3	4	27.7	59.5	3.01	0.76	8.9	1.7		
				4	5	21.1	64.3	3.41	0.76	10.1	2.1		
				5	6	20.2	61.5	3.39	0.75	9.1	2.1		
SP2021	6469806	360885	324.6	6	0/0	0	1	29	42.1	1.78	0.45	5.3	1.2
				1	2	31.2	45.3	2.05	0.45	5.4	1.3		
				2	3	47.1	52.5	2.52	0.61	7.2	1.6		
				3	4	30.4	64.2	2.93	0.65	8.1	1.8		
				4	5	23.1	62.1	3.12	0.69	8.4	1.9		
				5	6	19.3	64.2	3.23	0.71	8.8	2		
SP2022	6468411	360242	347.9	6	0/0	0	1	34.9	16.3	3.22	0.26	3.2	3.9
				1	2	105.5	147	60.5	1.7	20.1	7.2		
				2	3	181.5	133	43.2	1.61	24	9		
				3	4	143.5	38.9	12.45	2.27	29.1	7.9		
				4	5	128.5	32.6	11.25	1.31	13.6	5.4		
				5	6	111.5	38.7	13.35	0.46	6.7	3.9		
SP2023	6468403	360284	347.9	6	0/0	0	1	13.7	10	1.24	0.13	1.8	0.5
				1	2	9.6	5.6	1	0.09	1.2	0.4		
				2	3	9.8	3.8	0.76	0.06	0.8	0.4		
				3	4	7.9	3.1	0.64	0.05	0.8	0.4		
				4	5	13.5	4.1	0.61	0.06	1	1		
				5	6	35.2	25.5	2.79	0.26	4	2.6		
SP2024	6468406	360317	348.9	5	0/0	0	1	27.3	28.6	4.3	0.75	6.7	1.8
				1	2	26.5	53.4	8.46	1.1	10.7	2.8		
				2	3	18.2	65.5	6.86	1.21	8.5	2		
				3	4	15.4	60.1	5.39	0.95	5.2	1.4		
				4	5	22.6	92.4	27.2	3.73	33.9	5.9		

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
SP2025	6468404	360362	347.9	3	0/0	0	1	39.7	62	5.69	0.78	8.5	1.8
						1	2	32.3	17.8	2.75	0.51	3.3	3.7
						2	3	56.6	19.9	5.01	1.15	3.6	2.3
SP2026	6468409	360403	346.9	2	0/0	0	1	40.3	175.5	12.6	0.88	14.2	2.2
						1	2	34.6	225	16.2	1.12	18.7	2.9
SP2027	6468403	360450	343.9	3	0/0	0	1	45.7	19.2	3.44	0.24	3	0.9
						1	2	50.6	7	1.71	0.07	0.9	0.7
						2	3	39.6	10.3	2.12	0.1	1.2	0.4
SP2028	6468402	360483	344.8	1	0/0	0	1	70.5	19	5.2	0.15	1.7	1.7
SP2029	6468406	360519	344.8	4	0/0	0	1	29.3	42.6	3.91	0.49	5.1	1.5
						1	2	30.6	37.5	5.11	0.44	5.1	1.6
						2	3	57	28.4	5.85	0.5	3.9	1.6
						3	4	82.1	26.3	10.45	0.52	2.7	1.6
SP2030	6468402	360558	343.8	4	0/0	0	1	43.1	64.4	8.7	1.01	7.2	1.8
						1	2	52	91.6	17.25	1.09	6.9	2.6
						2	3	95.4	221	47.1	1.89	9.1	5.3
						3	4	139.5	328	69.7	0.35	1.9	4.4
SP2031	6468404	360598	342.8	3	0/0	0	1	27.3	48.2	7.3	0.57	5	1.4
						1	2	33.2	78.2	16.1	0.93	7.8	2.2
						2	3	29.9	106	30.2	0.61	7.4	2.2
SP2032	6468402	360641	341.8	4	0/0	0	1	26.8	30.4	2.88	0.38	3.7	1.1
						1	2	29.4	15.2	1.87	0.21	2	0.9
						2	3	34.6	9.6	2.23	0.08	0.9	0.8
						3	4	33.8	7.9	2.1	0.06	0.7	0.8
SP2033	6467597	359642	370.2	2	0/0	0	1	23.4	19	1.6	0.2	2.2	1
						1	2	26.3	15.2	1.74	0.11	1.2	1.5
SP2034	6467597	359600	367.2	3	0/0	0	1	23.9	175	16.25	0.51	8.2	1.4
						1	2	13.8	202	16.5	0.46	9.1	1.7
						2	3	15.2	209	8.1	0.59	9.5	1.7
SP2035	6467600	359554	367.2	1	0/0	0	1	34.6	144	12.3	0.52	6.9	1.5

AugerID	Collar Coordinates (MGA)			Depth	Dip / Azi	From	To	Li (ppm)	Rb (ppm)	Cs (ppm)	Ta (ppm)	Nb (ppm)	Sn (ppm)
	Northing	Easting	RL										
SP2036	6467595	359506	366.2	2	0/0	0	1	52.5	88	12.15	0.65	6.9	2.5
						1	2	51.1	107	19.4	0.61	6.6	3.6
SP2037	6467601	359480	367.2	3	0/0	0	1	25.2	182	4.19	0.67	13.6	2.2
						1	2	32.9	197	10.55	0.74	14.6	2.7
						2	3	21.9	215	6.46	0.65	13.4	2.4
SP2038	6467601	359440	366.2	3	0/0	0	1	34.8	137	4.12	0.83	11.7	1.7
						1	2	37.3	207	4.17	1.32	18.9	2.4
						2	3	40	259	11.85	1.41	20.3	2.8
SP2039	6465699	360009	363.9	1	0/0	0	1	17.6	141	3.67	0.74	10.4	2.3
SP2040	6464802	360042	364.9	1	0/0	0	1	19	210	3.5	0.41	7	1.5
SP2041	6464799	360485	352.4	2	0/0	0	1	26.4	146.5	2.99	0.56	7	1.2
						1	2	10	144	2.97	0.57	7.2	1.2

## 2 ANNEXURE B

### JORC Code 2012 Edition – Table 1

#### Section 1 Soil Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling Techniques</b>	<ul style="list-style-type: none"> <li><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></li> <li><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></li> <li><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></li> <li><i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></li> </ul>	<ul style="list-style-type: none"> <li>Auger holes are vertical.</li> <li>Auger samples were collected at 1 metre intervals to maximum of 6m depth. Approximate sample size ~2kg.</li> <li>Samples were sent to the laboratory for sample preparation including crushing 70% to &lt;2mm, then pulverising subsample 1000g to 85% &lt;75um.</li> <li>Sampling considering appropriate for the stage of exploration.</li> </ul>
<b>Drilling Techniques</b>	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Samples were taken by auger with depth constrained by blade refusal.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Representative chips were taken for each metre and logged by Dynamic geologist.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically</li> </ul>	<ul style="list-style-type: none"> <li>Chips were geologically logged for every sample point, every 1m.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <ul style="list-style-type: none"> <li>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>• The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>• Geological logging is qualitative by nature.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>• Samples were dry when taken.</li> <li>• 1000g sample pulverized to &lt;75um at the laboratory.</li> <li>• Multi-element analysis undertaken for 34 elements by four acid digest ICP-AES.</li> <li>• Sample size considered appropriate for first pass exploration.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>• Samples were submitted to ALS Laboratories in Kalgoorlie</li> <li>• No standards were submitted by Dynamic.</li> <li>• Field duplicates were taken at a rate of 1/50.</li> <li>• Standards were used by ALS at 1/25.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• The verification of significant intersections by either independent or alternative company personnel.</li> <li>• The use of twinned holes.</li> <li>• Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>• Discuss any adjustment to assay data</li> </ul>	<ul style="list-style-type: none"> <li>• Sampling personnel movements are logged via GPS.</li> <li>• No twinning as not appropriate for this level of exploration.</li> <li>• Data is stored in a database.</li> <li>• No adjustments to assay data were made.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>• Specification of the grid system used.</li> </ul>	<ul style="list-style-type: none"> <li>• Sample locations were surveyed using a handheld GPS positions.</li> <li>• Locations are reported in metres GDA94 MGA Zone 51.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li><i>Quality and adequacy of topographic control.</i></li> </ul>	
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li><i>Data spacing for reporting of Exploration Results.</i></li> <li><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li><i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>Infill sampling occurred on lines spaced 200m apart, with samples taken every 40m on the line and at every metre of depth. This considered appropriate for this stage of exploration.</li> <li>No compositing has been applied.</li> <li>No Mineral Resources have been estimated.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assess and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>There is not enough information to make assumptions regarding orientation of potential mineralised structures.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li><i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>Samples were placed in bulka bags and freighted directly to ALS in Kalgoorlie by DYM field personnel.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li><i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>No audits have been completed at this stage.</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>Sampling located on E 15/1721 which is 100% owned by Dynamic Metals. No joint ventures or royalty interests are applicable.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration has been undertaken by several companies over time including but not limited to Resolute Gold, WMC and Avoca Mining.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration is for pegmatite hosted lithium-caesium-tantalum type deposits.</li> </ul>
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:             <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>Sample data included in Appendix A.</li> <li>Plan view of subsection of sampling results included in Figure 1.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should</li> </ul>	<ul style="list-style-type: none"> <li>All lithium assays values have been reported in Figures in main body of text based on Li ppm as reported by the laboratory. No data manipulation has occurred. No weighted averages or assumptions on metal equivalents have been made .</li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>be clearly stated.</i>	
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>Not applicable due to the nature of the sampling.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>See main body of announcement.</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>All results have been reported as lithium ppm.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>No additional observations at this time.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>Evaluation of soil and auger results is ongoing to determine the most efficient and effective method</li> </ul>