

18 December 2023

Leliyn Graphite Project, Northern Territory  
**Further Thick & High-grade Graphite  
Intercepts Ahead of Maiden Resource**

**Consistently strong results throughout maiden drilling program demonstrate massive scale and high-grade potential ahead of the Maiden Mineral Resource Estimate**

### HIGHLIGHTS

- **Final drilling assay results received from the maiden drill program ahead of a Maiden Mineral Resource Estimate (MRE) scheduled for Q1-CY24, highlights include:**
  - 160m @ 5.6 % TGC from 36m (TALD001)
  - 43m @ 9.9 % TGC from 206m (TALD001)
  - 94m @ 7.4 % TGC from 30m incl. 14m @ 11.53% TGC from 32m (LEDD\_10)
- **Final assay results build on exceptional previous drill results that demonstrate the massive scale and high-grade potential of the Leliyn Graphite Project, previous highlights include:**
  - 206m @ 10.0% TGC from 0m, inc. 46m @ 12.2% TGC from 67m (LEDD\_05)
  - 285m @ 6.1% TGC from 0m, inc. 79m @ 10.5% TGC from 206m (LEDD\_08)
  - 158m @ 10.1% TGC from 16m (LERC\_17)
- **MRE to be based on only 5km of the 20km outcropping graphitic schist**
- **Metallurgical test-work to confirm commercial grade concentrate is ongoing**
- **Leilyn is shaping up to become a world class graphite project in a tier-1 jurisdiction**

**Kingsland Minerals (ASX:KNG)** is pleased to announce more outstanding intersections of Total Graphitic Carbon (TGC) at its 100 per cent owned Leliyn Graphite Project in the Northern Territory. The initial drilling program has been completed with 53 RC holes (5,400m) and 11 diamond core holes (2,400m). All assay results have been received and passed on to independent geologists to complete the maiden Mineral Resource Estimate (MRE).

**Kingsland Minerals Managing Director, Richard Maddocks said:**

*“Kingsland has completed an exceptional maiden drill program at Leliyn in CY2023. We have returned world class graphite drilling intersections which really underpin the considerable upside for Leliyn to develop into a globally significant graphite deposit.*

*Estimation of the maiden Mineral Resource Estimate and metallurgical test-work are both well underway with results expected during the March 2024 quarter. These two key milestones have immense potential to develop Leliyn into an important critical minerals project in the Northern Territory.”*

## **Drilling Details**

The initial drilling program at the Leliyn Graphite Project in the Northern Territory has been completed. A total of 53 RC holes totalling 5,400m and 11 diamond core holes for about 2,400m have been completed. All assays have now been received. Figure 1 shows the plan of completed drilling with significant graphite intersections received to date. Figures 2,3 and 4 show cross-sections with the latest returned assay results, the location of these sections is illustrated on Figure 1.

Diamond hole TALD001 on cross-section 3 was drilled by previous explorers in 2016. This hole was not assayed but did have small rock slabs taken every few meters down the hole for thin section analysis and assay, these results have been reported previously.<sup>1</sup> This hole was recently found stored in a shed in Pine Creek. The core was in excellent condition, enabling the full hole to be cut, sampled and assayed. All of the assay results from the drilling program are contained in tables 1 and 2.

Rehabilitation of the Leliyn project site has commenced with all plastic bags removed from site, PVC drill collars cut below ground level and capped with a cement plug and then buried. Drilling sumps have been backfilled.

Planning is now commencing for the 2024 drilling program. This program will infill the current drilling to allow the upgrading of the resource classification to Indicated. An Indicated Mineral Resource is required for more detailed analysis of the economic viability of the project. In addition, diamond drill core will be collected to provide material for more metallurgical test-work.

Kingsland would like to thank all parties involved in this extremely successful maiden drilling program at Leliyn. AMWD drilling contractors, North Australian Laboratories, Intertek Genalysis, Pine Creek Plumbing, Pine Creek Hotel, Harbrow Mining Equipment and Mary River East Station are all valued contributors to this success and Kingsland Minerals is looking forward to working with them in the future.

---

<sup>1</sup> Refer to ‘Graphite Exploration Target’ released on the ASX 21 March 2023

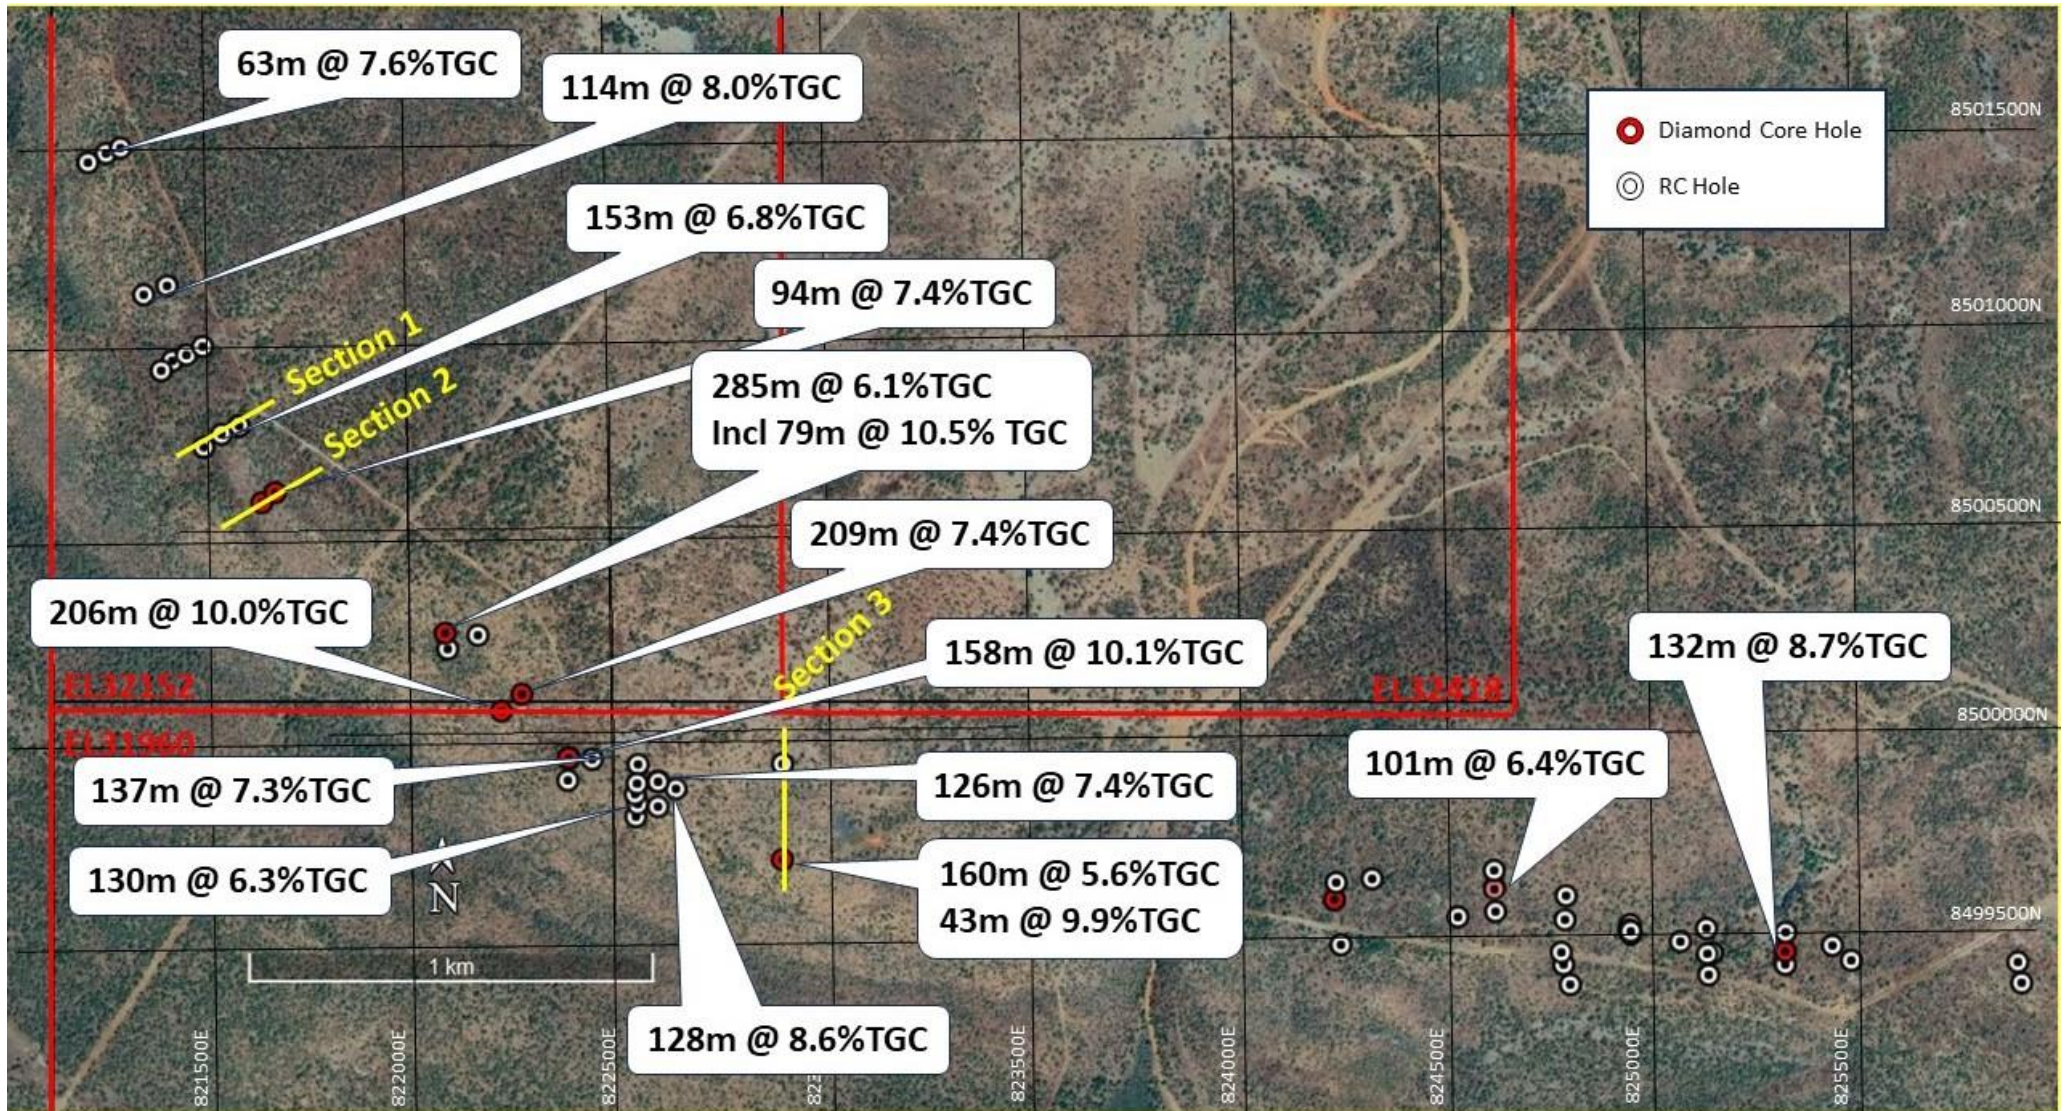


Figure 1: Plan showing location of significant drillhole results and cross sections (MGA Z52)

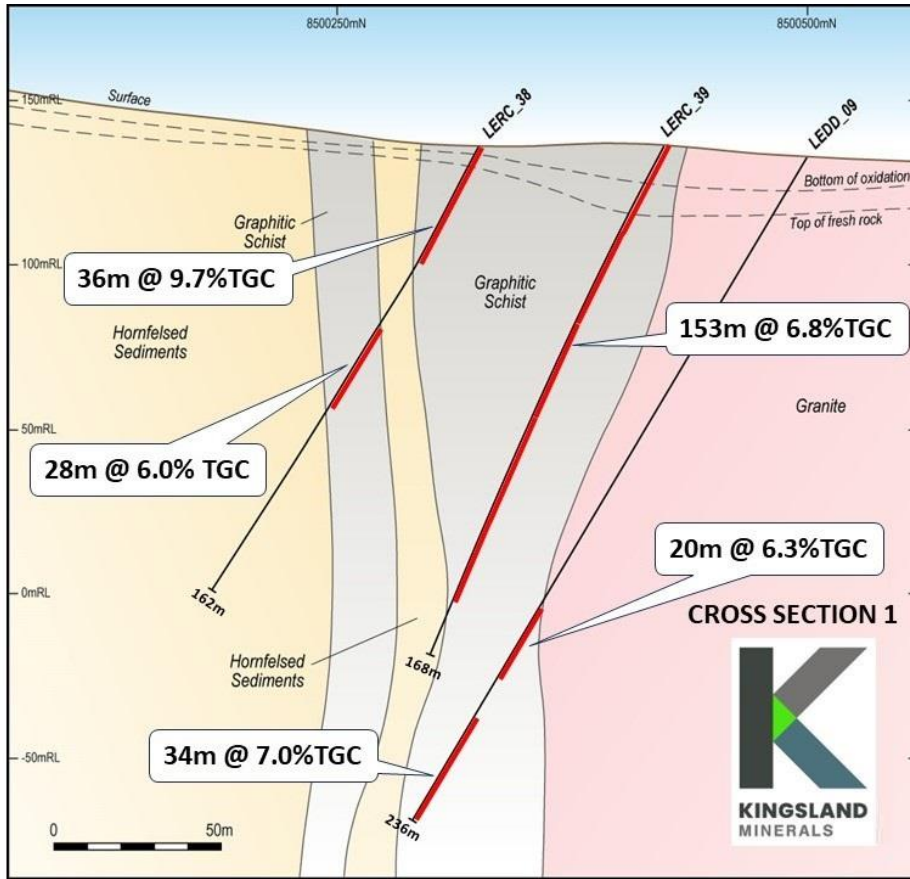


Figure 2: Cross-Section 1 looking north-west

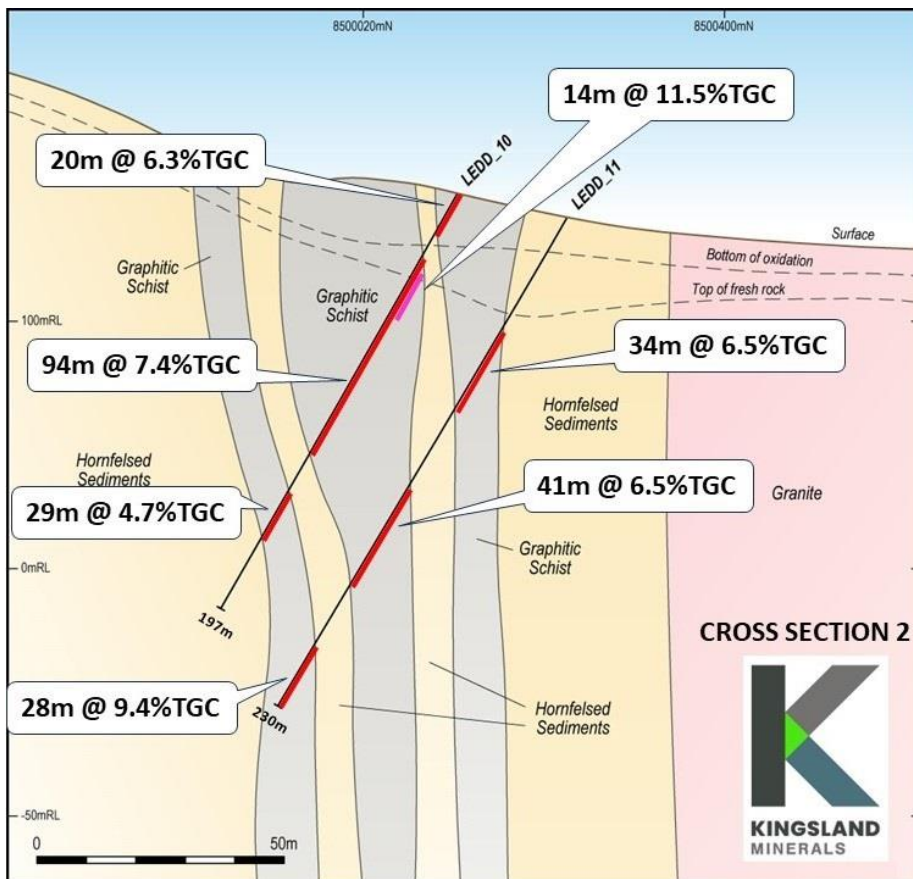


Figure 3: Cross-section 2 looking north-west

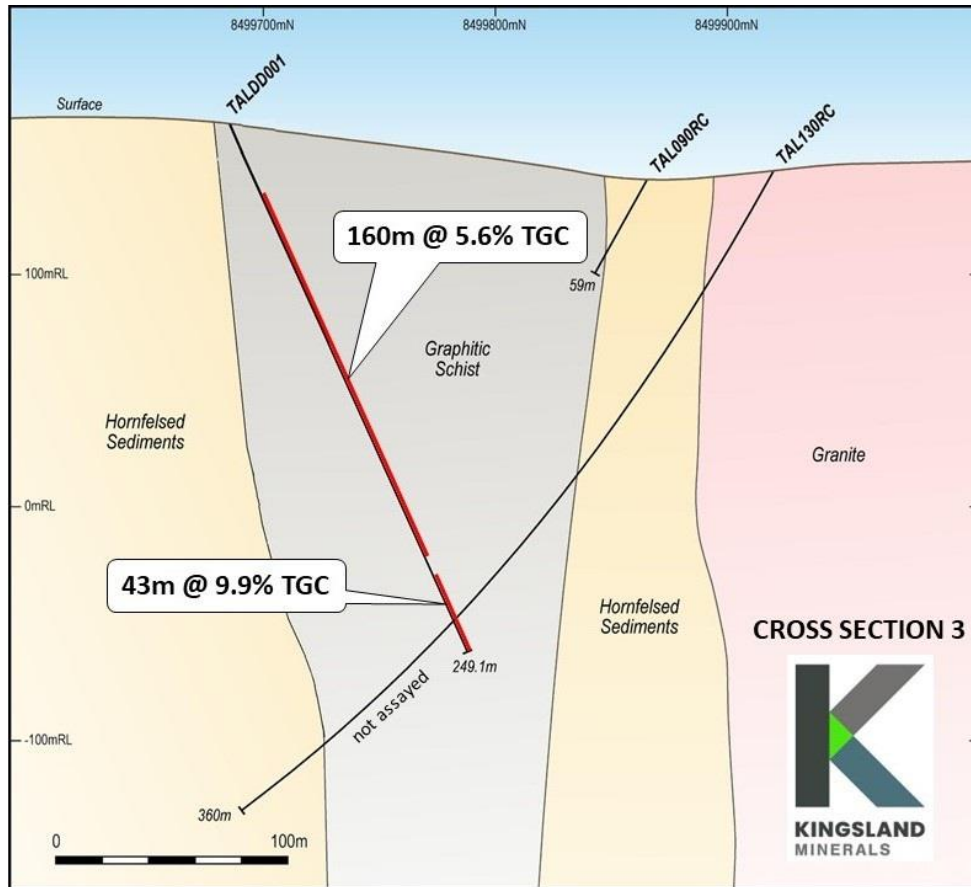


Figure 4: Cross-section 3 looking north-west

Table 1: Leliyn Diamond Drilling Assay Results

Hole	From (m)	To (m)	Intercept (m)	TGC (%)
LEDD_01	0	132	132	8.73
Inc.	31	54	23	11.69
Inc.	84	125	41	12.31
LEDD_02	52	178	126	7.44
Inc.	117	170	53	11.09
LEDD_03	11	75	64	8.72
Inc.	42	74	32	10.87
Inc.	94	124	30	8.36
LEDD_04	154	363	209	7.39
Inc.	237	268	31	10.90
Inc.	314	352	38	11.19
LEDD_05	0	206	206	10.02
Inc.	3	49	46	12.17
Inc.	67	140	73	11.18
Inc.	161	180	19	11.45
And	219	250	31	4.39
LEDD_06	11	112	101	6.39

LEDD_07	0	18	18	6.08
LEDD_08	0	285	285	6.05
Inc.	206	285	79	10.48
LEDD_09	172	192	20	6.30
	208	242	34	7.00
LEDD_10	0	20	20	6.30
	30	124	94	7.35
Inc.	32	46	14	11.53
	140	169	29	4.74
LEDD_11	57	91	34	6.47
	128	169	41	6.53
	202	230	28	9.36
TALD001	5	10	5	5.19
	36	196	160	5.57
	206	249	43	9.91

**Table 2: Leliyn RC Drilling Assay Results**

Hole	From (m)	To (m)	Intercept (m)	TGC (%)
LEDDRC_01	25	54	29	9.30
Inc.	40	54	14	12.99
LERC_02	41	60	19	8.15
Inc.	42	52	10	11.69
LERC_03		Not sampled		
LERC_04		Not sampled		
LERC_06	0	25	25	10.10
Inc.	11	23	12	11.48
LERC_07		Not sampled		
LERC_08	0	46	46	8.33
Inc.	0	18	18	11.79
	55	84	29	10.83
LERC_09	67	84	17	2.44
	101	113	12	2.33
LERC_10	0	124	124	4.32
Inc.	5	37	32	7.40
and	59	124	65	3.15
LERC_11	0	130	130	6.28
Inc.	1	30	29	8.92
and	93	114	21	11.27
LERC_12		NSI		
LERC_13	13	150	137	7.29
Inc.	69	116	47	10.85
And	138	150	12	11.23
LERC_14	48	187	139	6.97
Inc.	107	170	63	10.04
	200	204	4	8.93

Hole	From (m)	To (m)	Intercept (m)	TGC (%)
LERC_15	9	78	69	7.97
LERC_16	2	5	3	2.71
LERC_17	16	174	158	10.13
LERC_18	45	173	128	8.58
Inc.	87	173	86	10.90
LERC_19	8	91	83	5.92
LERC_20	11	22	11	5.27
LERC_21	0	78	78	5.19
Inc.	57	71	14	8.71
LERC_22	42	114	72	4.71
LERC_23	Pre-collar for LEDD_07			
LERC_24	NSI			
LERC_25	4	21	17	3.79
LERC_26	2	7	5	4.14
	33	34	1	2.18
LERC_27	Not sampled			
LERC_28	0	41	41	10.50
	52	66	14	10.81
	79	87	8	7.26
	99	109	10	3.46
LERC_29	153	174	21	4.90
LERC_30	0	19	19	9.02
	35	118	83	5.02
LERC_31	1	115	114	8.03
Inc.	42	53	11	10.64
LERC_32	Not sampled			
LERC_33	NSI			
LERC_34	14	24	10	7.52
	39	46	7	10.76
	76	84	8	3.27
LERC_35	NSI			
LERC_36	NSI			
LERC_37	NSI			
LERC_38	5	41	36	9.67
	62	90	28	5.96
LERC_39	0	153	153	6.79
Inc.	9	18	9	10.50
Inc.	50	60	10	10.80
Inc.	68	82	14	10.47
LERC_40	Not sampled			
LERC_41	5	39	34	7.47
LERC_42	4	141	137	6.85
	48	85	37	9.34
LERC_43	124	174	50	4.96

Hole	From (m)	To (m)	Intercept (m)	TGC (%)
LERC_44			NSI	
LERC_45	42	105	63	7.60
LERC_46	96	123	27	4.83
LERC_47	0	27	27	4.60
	55	120	65	7.03
LERC_48	4	66	62	5.13
LERC_49	28	60	32	5.49
LERC_50	2	13	11	3.15
LERC_51			NSI	

**Table 3: Details of Leliyn Drilling**

Hole	Type	East MGA52	North MGA52	RL	Dip	Azi	Depth
LEDD_01	DDH	825395	8499428	124	-70	195	149.6
LEDD_02	DDH	822614	8499882	139	-60	190	182.39
LEDD_03	DDH	822393	8499941	139	-60	220	124
LEDD_04	DDH	822280	8500099	147	-60	335	362.56
LEDD_05	DDH	822229	8500058	161	-60	335	262
LEDD_06	DDH	824678	8499593	128	-60	180	155
LEDD_07	DDH	824282	8499570	131	-60	185	181.8
LEDD_08	DDH	822098	8500250	152	-60	220	284.2
LEDD_09	DDH	821596	8500753	133	-60	230	243.12
LEDD_10	DDH	821643	8500577	153	-60	230	197.01
LEDD_11	DDH	821676	8500601	136	-60	230	230.04
LEDDRC_01	RC	825215	8499428	123	-60	180	54
LEDDRC_02	RC	825339	8499459	118	-60	180	78
LERC_01	RC	824851	8499519	119	-60	180	90
LERC_02	RC	825202	8499426	124	-60	180	72
LERC_03	RC	825014	8499484	124	-60	180	54
LERC_04	RC	825208	8499375	129	-60	180	84
LERC_05	RC	Not drilled					
LERC_06	RC	825395	8499398	126	-60	180	96
LERC_07	RC	824587	8499524	138	-60	180	36
LERC_08	RC	825395	8499426	124	-60	180	102
LERC_09	RC	822455	8499945	136	-60	225	120
LERC_10	RC	822396	8499893	147	-60	225	150
LERC_11	RC	822557	8499850	140	-60	180	150
LERC_12	RC	822565	8499923	135	-60	180	138
LERC_13	RC	822562	8499876	138	-60	185	150
LERC_14	RC	822614	8499880	139	-60	180	204
LERC_15	RC	822563	8499826	141	-60	180	90
LERC_16	RC	822562	8499795	145	-60	185	54
LERC_17	RC	822391	8499943	139	-60	235	174



Hole	Type	East MGA52	North MGA52	RL	Dip	Azi	Depth
LERC_18	RC	822656	8499866	139	-60	184	174
LERC_19	RC	824678	8499590	128	-60	187	114
LERC_20	RC	825009	8499488	124	-60	180	42
LERC_21	RC	824680	8499536	129	-60	180	102
LERC_22	RC	824678	8499637	124	-60	185	114
LERC_23	RC	824282	8499570	131	-60	185	60
LERC_24	RC	824287	8499612	129	-60	185	60
LERC_25	RC	825014	8499477	125	-60	180	60
LERC_26	RC	824376	8499620	131	-60	180	78
LERC_27	RC	825136	8499457	126	-60	180	60
LERC_28	RC	822613	8499819	146	-60	180	174
LERC_29	RC	822173	8500242	149	-60	215	174
LERC_30	RC	822100	8500210	161	-90	0	132
LERC_31	RC	821357	8501091	144	-60	260	138
LERC_32	RC	825979	8499345	122	-60	170	108
LERC_33	RC	825970	8499396	121	-60	175	72
LERC_34	RC	824847	8499404	126	-60	180	84
LERC_35	RC	824863	8499354	129	-60	180	36
LERC_36	RC	824297	8499459	128	-60	180	72
LERC_37	RC	824842	8499434	124	-60	180	60
LERC_38	RC	821485	8500672	138	-60	230	162
LERC_39	RC	821545	8500746	134	-60	225	168
LERC_40	RC	821596	8500757	133	-60	225	96
LERC_41	RC	821398	8500904	133	-60	225	120
LERC_42	RC	821469	8500942	130	-60	230	162
LERC_43	RC	821506	8500959	129	-60	230	174
LERC_44	RC	821223	8501417	133	-60	230	36
LERC_45	RC	821268	8501439	130	-60	230	162
LERC_46	RC	821304	8501452	130	-60	225	150
LERC_47	RC	821415	8501112	130	-60	225	120
LERC_48	RC	821432	8500934	130	-60	225	66
LERC_49	RC	824855	8499573	130	-60	180	60
LERC_50	RC	824852	8499514	130	-60	180	102
LERC_51	RC	825201	8499488	130	-60	180	56

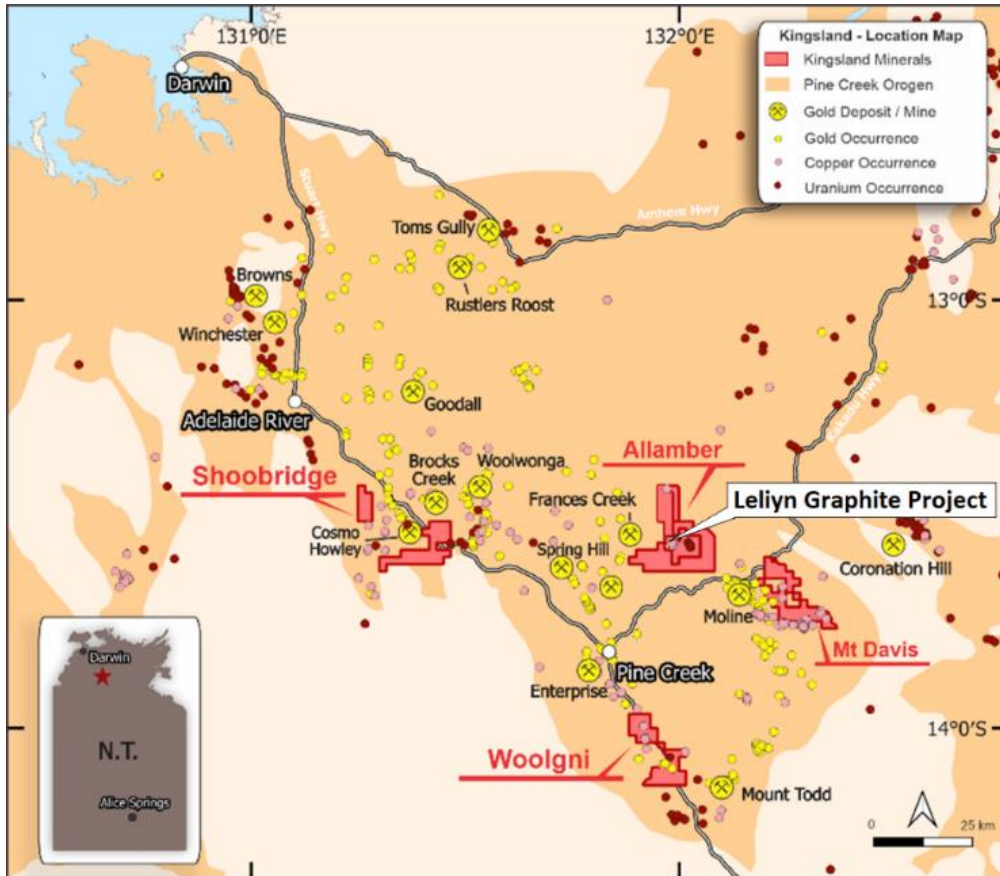


Figure 5: Kingsland Minerals Northern Territory Exploration Projects

THIS ANNOUNCEMENT HAS BEEN AUTHORISED FOR RELEASE ON THE ASX BY THE COMPANY'S BOARD OF DIRECTORS

### About Kingsland Minerals Ltd

Kingsland Minerals Ltd is an exploration company with assets in the Northern Territory and Western Australia. Kingsland's focus is exploring the Leliyn Graphite Project in the Northern Territory. The Company is confident that Leliyn has significant potential, as shown by the substantial Exploration Target of 200-250 million tonnes grading 8-11 per cent Total Graphitic Carbon (TGC) for contained graphite of 16-27Mt. **The potential quantity and grade of an exploration target is conceptual in nature, there has been insufficient exploration to determine a mineral resource and there is no certainty that further exploration work will result in the determination of mineral resources or that the production target itself will be realised.** The Exploration Target is based on a graphitic schist measuring 5km long, 200m deep and 100m wide. The 5km strike length of the schist sits within a longer 20km-long graphitic schist. The initial exploration program has focused on the 5km stretch which hosts the Exploration Target. This will underpin a maiden JORC Resource. Kingsland believes there is also significant exploration potential within the remaining 15km of graphitic schist.

## **FOLLOW US ON TWITTER:**

<https://twitter.com/KingslandLtd>

## **CAPITAL STRUCTURE**

Shares on issue: 58,449,800

Options on issue: 18,669,920

## **INVESTOR RELATIONS**

Read Corporate

Paul Armstrong

Email: [info@readcorporate.com.au](mailto:info@readcorporate.com.au)

Tel: +61 8 9388 1474

## **BOARD OF DIRECTORS**

**Richard Maddocks:** Managing Director

**Bruno Seneque:** Director/Company Secretary

**Nicholas Revell:** Executive Technical Director

## **SHAREHOLDER CONTACT**

Bruno Seneque

Email: [info@kingslandminerals.com.au](mailto:info@kingslandminerals.com.au)

Tel: +61 8 9381 3820

## **Competent Persons Statement**

*The information in this report that relates to Exploration Results is based on information compiled by Richard Maddocks, a Competent Person who is a Fellow of The Australasian Institute of Mining and Metallurgy. Richard Maddocks has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Richard Maddocks consents to the inclusion in the report of the matters based on his information in the form and context in which it appears. Richard Maddocks is a full time employee of Kingsland Minerals Ltd and holds securities in the company.*

*The information in this announcement referring to the Leliyn Exploration Target is extracted from the report entitled 'Graphite Exploration Target' created on March 21 2023 and available to view on [www.kingslandminerals.com.au](http://www.kingslandminerals.com.au), or on the ASX website [www.asx.com.au](http://www.asx.com.au) under ticker code KNG. The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and in the case of estimates of Mineral Resources or Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.*

*The Leliyn Graphite Exploration Target is based on historical drill results, petrographical analysis and field reconnaissance conducted by Kingsland. A drilling program, including both Reverse Circulation (RC) and Diamond Core drilling, is currently being conducted to progress the Exploration Target to a Mineral Resource Estimate, depending on successful drilling results. To date, a total of 53 RC holes (5,400m) and 11 Diamond core holes (2,400m) have been drilled. Drilling is scheduled to be complete in mid-November 2023.*

*The information in this announcement referring to previous graphite and gallium exploration results is extracted from the reports entitled 'First Holes Intersect 150m of Graphitic Schist' released 25 May 2023, 'First assays reveal extensive high grade graphite at Leliyn' released 15 June 2023, 'Extremely wide intersections with high grades at Leliyn' released 24 July 2023, '158m high grade intersection at Leliyn' released 16 August 2023, 'Diamond core assays confirm high grades over big widths' released 22 August 2023, 'Bonanza intersection 10% Graphite over 206m at Leliyn' released 5 September 2023, and 'Assays reveal significant Gallium by-product potential' released 27 September 2023, 'More Wide, High Grade Graphite Intersections at Leliyn', released on 25 October 2023 and 'Thickest Intersection to Date 285m @ 6.1% TGC at Leliyn' released on 13 November 2023. These reports are all available to view on [www.kingslandminerals.com.au](http://www.kingslandminerals.com.au), or on the ASX website [www.asx.com.au](http://www.asx.com.au) under ticker code KNG. The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and in the case of estimates of Mineral Resources or Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The company confirms that the form*

and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

## JORC Tables

### Section 1: Sampling Techniques and Data Leliyn Graphite Project

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>RC drilling samples were collected as 1m intervals via a riffle splitter off the drill rig.</li> <li>Diamond core is cut in half. Holes LEDD_04 and LEDD_05 were sampled with quarter core as these holes are part of the government co-funding 'Resourcing the Territory' initiative and may eventually be retained by the NT Geological core storage facility</li> <li>Samples for thin section analysis were collected from half core about every 7-8m down the core hole. A small section of core about 10cm long was collected</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>RC drilling techniques were used.</li> <li>Diamond drilling is HQ size</li> <li>A total of 53 RC holes for 5,400m and 11 core holes for 2,400m have been drilled</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>RC drilling sample recoveries are considered to be high</li> <li>Core recoveries are generally at 100% except for fault zones and highly oxidised zones</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> </ul>	<ul style="list-style-type: none"> <li>All drilling was qualitatively geologically logged recording lithology, mineralisation colour, weathering and grain size.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• The total length and percentage of the relevant intersections logged.</li> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>• Sample preparation was conducted at North Australian Laboratories in Pine Creek</li> <li>• Samples were delivered to North Australian Laboratories at Pine Creek for analysis</li> <li>• Samples are dried at 120 C for a minimum of four hours [or over-night if samples are excessively wet]. Sample prep is jaw crushing whole sample through a Boyd double toggle jaw crusher to a nominal 2mm particle size, splitting 400 gram through a jones riffle splitter and fine pulverising to 75 micron through an LM2 pulveriser. A barren washed creek sand as a barren flush is pulverised after every sample</li> <li>• Total Graphitic Carbon is analysed with a weak acid digestion (HCl diluted to a 50% solution with demineralised water) followed by a 420°C roast and then final analysis in a CS analyser</li> <li>• A suite of multi-elements was also assayed using a 4-acid digest followed by ICP-MS and ICP-OES</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>• Internal QAQC by the laboratory indicate no sampling or bias issues.</li> <li>• The assay technique is considered appropriate for the style of mineralisation and results in a total analysis of graphitic carbon.</li> <li>• Standards, blanks and field duplicates are submitted as part of the drilling program</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>• The verification of significant intersections by either independent or alternative company personnel.</li> <li>• The use of twinned holes.</li> <li>• Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>• Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>• Assays have been verified by company geologists.</li> <li>• Some diamond core holes have been drilled as twins to RC holes</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>• Specification of the grid system used.</li> <li>• Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>• Drill holes were initially surveyed with a hand held GPS with +/- 5m accuracy. After drilling Cross Solutions of Darwin surveyed the collar location with DGPS to close accuracy</li> <li>• The project areas lies at the boundary between MGA zones 52 and 53 so GPS co-ordinates are sometimes reported in these different grids depending where drill</li> </ul>

Criteria	JORC Code explanation	Commentary
		holes lie. The default grid to use in computer software to enable all holes to be plotted on the same grid co-ordinates will be MGAZ52
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drill spacing is designed on 200m to 300m spacing with about 30m-50m spacing along drill lines. Some lines to the west of the project have been drilled at 50m spacing to assess shorter range variability in geology and grade</li> <li>• The density of drilling is considered appropriate for the estimation of Inferred Mineral Resources</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drilling is generally perpendicular to the strike direction of then graphitic schists.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• <i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples are taken to the assay lab in Pine Creek by Kingsland personnel.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• <i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No audits or reviews of sampling techniques have been undertaken.</li> </ul>

## Section 2: Reporting of Leliyn Graphite Project Exploration Results

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li>• <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The Leliyn Graphite Project is located on tenements EL 31960 and EL 32152. These tenements are 100% owned by Kingsland Minerals Ltd. There are no known encumbrances to conducting exploration on these tenements.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>• <i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>• There has been an extensive history of exploration for uranium and copper over the past 40 years. There has however been only limited work done focussed on graphite. Thundelarra Exploration (now Ora Gold Ltd) sampled some holes in 2012 for graphite at their Hatrick copper prospect and Cleo uranium prospect. These samples indicated the presence of significant grade and thickness of graphite mineralisation measured as total graphitic carbon (TGC). In 2017 one diamond drill hole TALD001 was drilled into the graphitic schist and sampled for TGC. Significant grades</li> </ul>

Criteria	JORC Code explanation	Commentary
		and widths of graphite mineralisation were encountered. Samples from TALD001 were submitted to Pathfinder Exploration Pty Ltd for thin section petrographical analysis.
<b>Geology</b>	<ul style="list-style-type: none"> <li>• <i>Deposit type, geological setting and style of mineralisation.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Carbonaceous sediments of the Masson Formation have been contact metamorphosed by the Cullen Granites. This has metamorphosed carbon to graphite and converted shales to schists .</li> <li>• This contact extends for about 20 km within Kingsland's tenement package.</li> </ul>
<b>Drill hole information</b>	<ul style="list-style-type: none"> <li>• <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <li>• <i>easting and northing of the drill hole collar</i></li> <li>• <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i></li> <li>• <i>dip and azimuth of the hole</i></li> <li>• <i>down hole length and interception depth</i></li> <li>• <i>hole length</i></li> </ul> </li> <li>• <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drilling information is included in this announcement</li> <li>• RC and core holes are surveyed downhole with a single shot camera. It is apparent that magnetic minerals, likely pyrrhotite, do interfere with azimuth readings. Obviously erroneous readings are disregarded</li> <li>• Deeper diamond core holes are surveyed with a gyro tool to eliminate in impact of magnetic readings</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>• <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i></li> <li>• <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></li> <li>• <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Assays are reported as weighted average intersections.</li> <li>• Intervals have been reported at a cut-off grade of 2% TGC with a maximum of 4m of internal dilution.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>• <i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li>• <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li>• <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drilling has been perpendicular to the strike direction. The true width of mineralisation will vary but is generally expected to be from 70% to 80% of the reported down-hole widths.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>• <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Relevant diagrams have been included within the main body of text.</li> </ul>
<b>Balanced Reporting</b>	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and</i></li> </ul>	<ul style="list-style-type: none"> <li>• The competent person deems the reporting of these drill results to be balanced.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>other locations used in Mineral Resource estimation.</i></p> <ul style="list-style-type: none"> <li>• <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.</i></li> </ul>	
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>• <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>• RC and diamond drilling will progress at Leliyn, ultimately aimed at the estimation of a Mineral Resource.</li> <li>• Diamond drill samples will be used for metallurgical test work to determine flotation characteristics and the suitability of Leliyn graphite for battery end uses.</li> <li>• There is no other substantive data to report. Exploration at Leliyn is at an early stage with only limited historical exploration data relevant to graphite mineralisation.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large- scale step-out drilling).</i></li> <li>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Diamond drill samples will be used for metallurgical test work to determine flotation characteristics and the suitability of Leliyn graphite for battery end uses.</li> </ul>