

EXPLORATION UPDATE

HIGHLIGHTS:

- Spodumene confirmed in two pegmatite rock chip samples
- Soil sampling highlights 3 lithium anomalous zones
- Lithium anomalous soil samples also report elevated pathfinder elements Sn, Cs, Nb, Ta
- Submission lodged with Ngarluma Aboriginal Corporation for Heritage Survey Clearances
- Ground activities comprising reconnaissance, soil sampling, rock chip sampling are underway with a focus on newly generated target zones

Errawarra Resources Ltd (ASX:ERW) (**Errawarra** or the **Company**) is pleased to provide this exploration update to stakeholders regarding the collection of additional soil samples and rock chips within the Andover West project tenement.

Executive Chairman Thomas Reddcliffe commented: *“We are very encouraged by the results of our reconnaissance soil sampling which has highlighted compelling lithium soil anomalies associated with the southern margin of the Andover Mafic Intrusion. A second intermittent linear soil anomaly is also looking promising. We are working to better define these anomalies with a view to drill testing. It has been demonstrated recently by TG Metals, elevated to high levels of lithium in soils can potentially reflect below ground and poorly exposed Lithium bearing pegmatites¹.*

The confirmation of spodumene in the pegmatites that occur in the western portion of the tenement is a major step forward and gives us confidence that this broad pegmatite package is prospective and warrants ongoing investigation and potentially drill testing.

¹ Refer to TG Metals Ltd ASX announcement dated 10 July 2023.

ANDOVER WEST EXPLORATION RESULTS

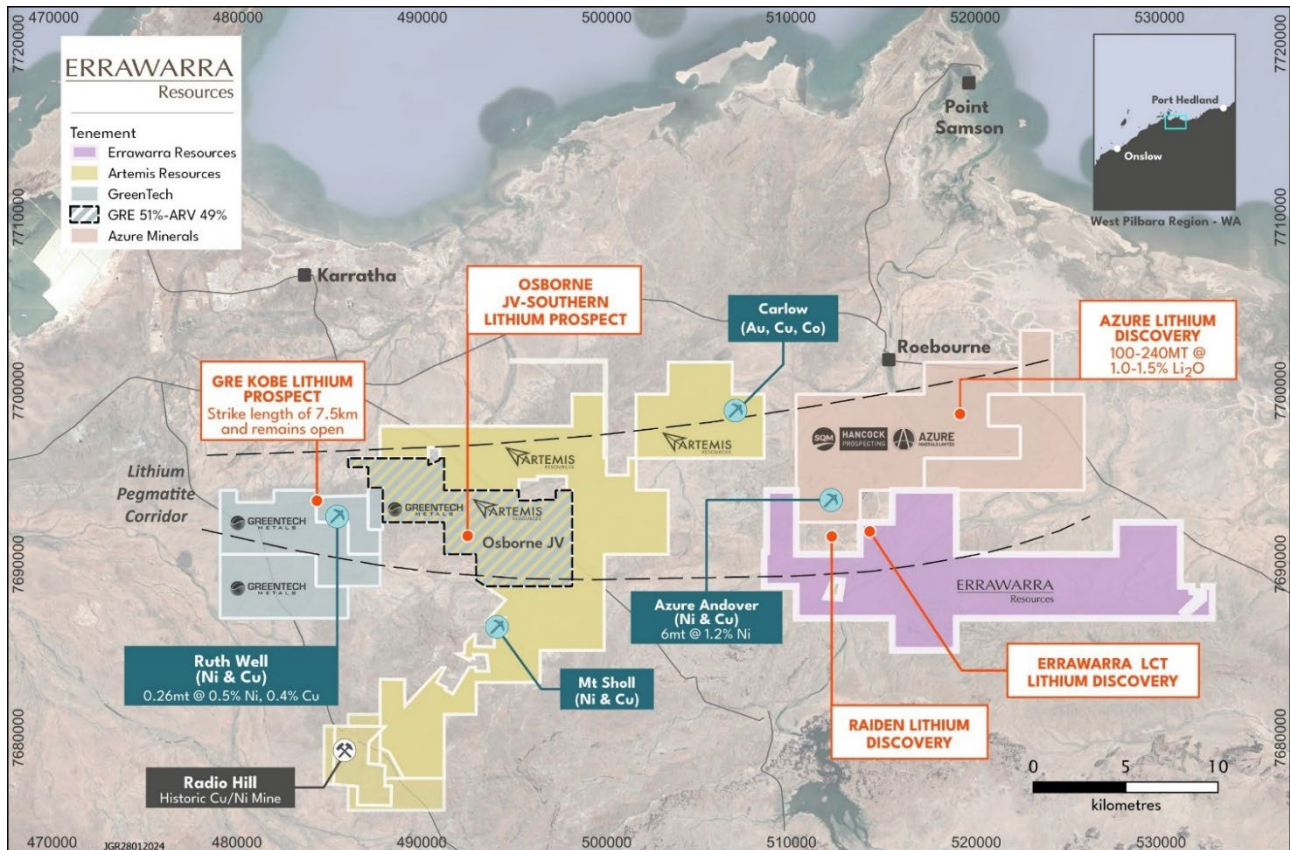


Figure 1. Regional map with Errawarra's Andover West project

The Andover West project is strategically located within the highly prospective and competitive Karratha-Roebourne lithium pegmatite corridor and borders the Andover project of Azure Minerals Ltd (ASX:AZS) where Azure have reported an exploration target of **100-240mt @ 1-1.5% Li₂O²**. In the West Pilbara region of Western Australia and ~30km from **Karratha**, a major regional and industrial hub with **multiple shipping ports** and only ~2 hours from Perth by commercial airlines, the project is strategically placed.

Soil Sampling

The results have been received for the second soil sampling program which was completed in January 2024, and which comprised 289 samples. This most recent program of soil sampling was undertaken to build on the results of the first soil sampling program which comprised 242 samples the results for which were reported in late 2023³. The results for these two programs have been merged for ease of interpretation and reporting. The previously reported lithium soil anomalies have now been effectively closed off to the east and to the south by the addition of the new 2024 sampling results. However these new results have highlighted several new lithium soil anomalies and including extensions to the previously reported lithium anomalous zones. Overall, the anomalous lithium soil samples reported to date peak at **197ppm Li (424ppm Li₂O³)**. The significant anomalous lithium soil anomalies are as follows:

- (1) **Zone A** – This soil anomaly is centred on pegmatite outcrop for which the initial rock chip samples have reported up to **0.9% Li₂O³**. A recent rock chip sample from this same pegmatite has reported **0.43% Li₂O** which is further confirmation of the lithium bearing nature of the

² Refer to Azure Minerals Ltd ASX announcement dated 7 August 2023.

³ Refer to Errawarra Minerals Ltd ASX announcement dated 6 December 2023.

pegmatite. This pegmatite is located some 600m along strike and to the east of the significant lithium pegmatite discovery reported by Raiden Resources in 2023⁴. The Raiden pegmatite discovery reported up to **3.8% Li₂O** and with spodumene being the lithium bearing mineral. Because of the close spatial relationship of the Errawarra pegmatite discovery to the Raiden discovery it is anticipated that spodumene will also be the lithium bearing mineral in the Errawarra pegmatite, however this is yet to be confirmed. A strong soil anomaly which has associated pathfinder element anomalism extends to the east of the Errawarra pegmatite outcrop under soil cover for some 800m and represents a priority exploration target.

- (2) **Zone B** – This is an east west trending lithium soil anomaly zone which has a strike of **5km and a width up to 1400m** at its western extremity and is entirely within soil covered terrain. The zone is located approximately 1500m south of the Raiden pegmatite discovery and encompasses 5 hotspot anomalies with each reporting over **100 ppm Li₂O**. The hotspots occur within a broader background of over 60 ppm Li₂O and have a peak value of **152 ppm Li₂O**. In most instances the anomalous samples are accompanied by variously elevated responses in the associated pathfinder elements (Sn, Nb, Cs). This is a compelling zone of lithium soil anomalies which could potentially be indicative of a zone of lithium pegmatite occurrence.
- (3) **Zone C** – This is an intermittently defined linear lithium soil anomaly with a **strike of 3km** and with a west-southwest trend. This trend is approximately 2.5km south of the Raiden pegmatite discovery and has 2 hotspot anomalies reporting over **100 ppm Li₂O**. The peak sample value for this linear zone is **250 ppm Li₂O** however the association with elevated pathfinder elements is less pronounced than is seen at zones 1 and 2. Further on ground investigation of this potential pegmatite zone is being undertaken.

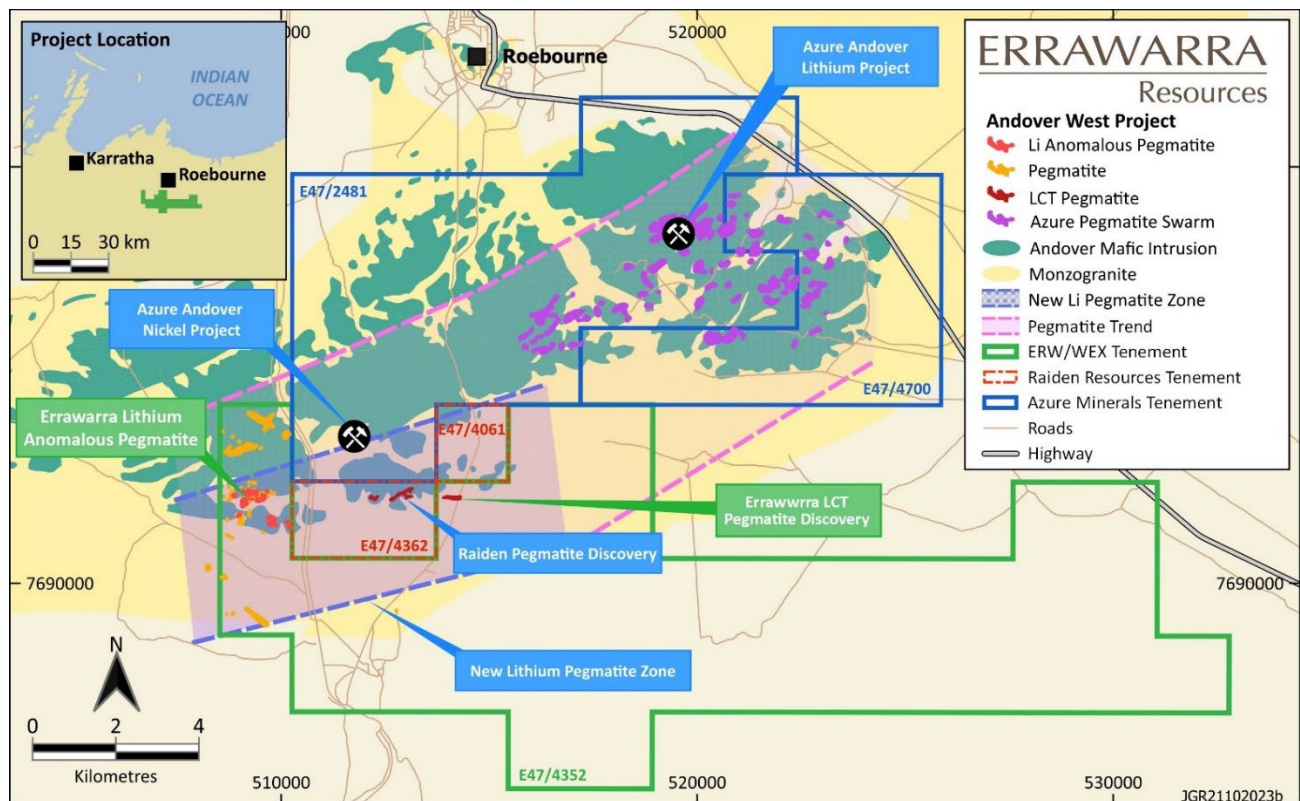


Figure 2. Andover West project location

⁴ Refer to Raiden Resources Ltd ASX announcement dated 9 November 2023.

Rock Chip Sampling

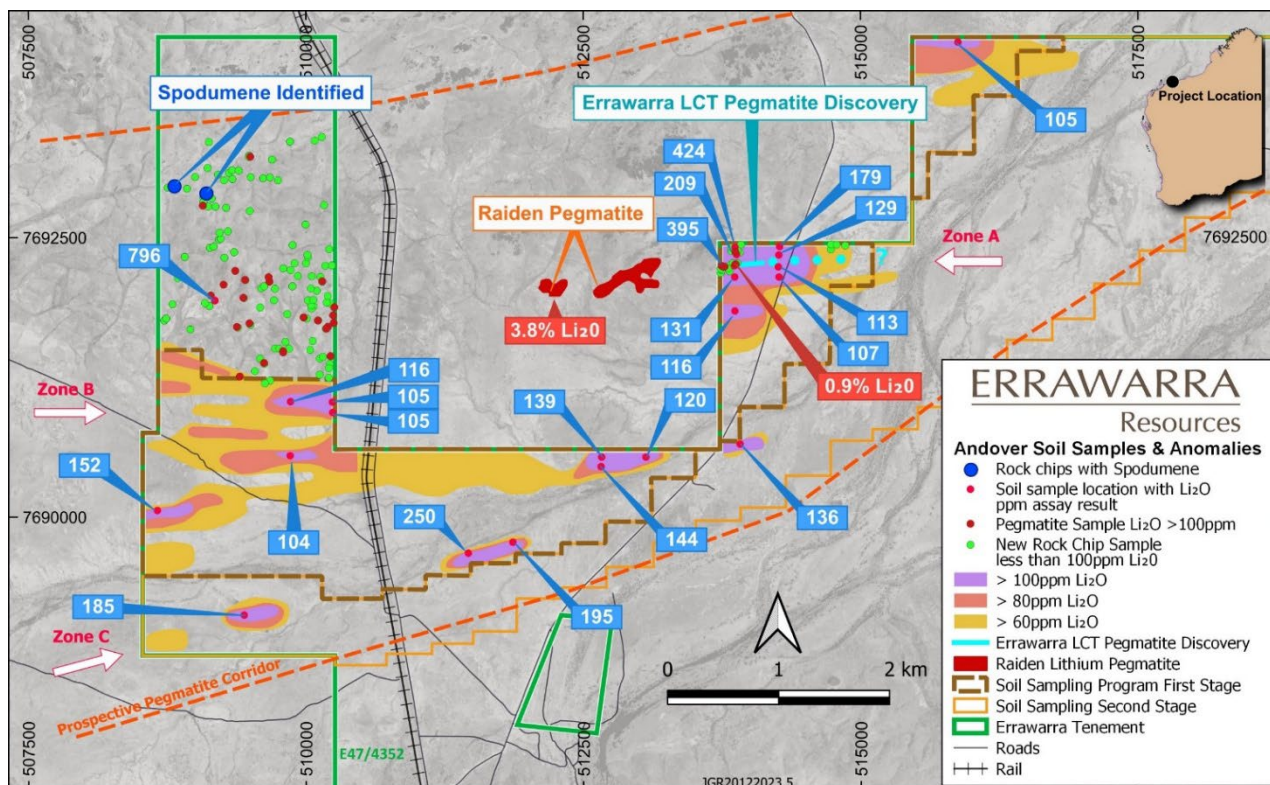


Figure 3. Location of Soil Sampling Grids and Lithium Soil Anomalies

The Company has further extended the rock chip sampling of pegmatite occurrences in the northwestern portion of the tenement and also including the area adjacent to the recent discovery of lithium pegmatites reported by Raiden Resources, where rock chip assays up to of 3.8% Li₂O₃ were recorded. A total of 62 rock chip samples were submitted to ALS Global Laboratories in Perth for analysis. The results from these samples have been merged with 115 previously reported rock chip samples taken in these areas for ease of interpretation and reporting.

TIMA Analysis

Four rock chip samples were selected for TIMA and XRD analysis based on field analyses using a Vanta XRF Analyser. The analyses were conducted at Curtin University by Dr Martin Wells a recognised lithium specialist. The whole rock chemical analysis on the samples was done at ALS Global Laboratories. Although only reporting low lithium content in the laboratory assays, 2 of the dominantly quartz-albite pegmatite samples have reported low levels of spodumene. Results as follows;

Sample 23EW11-23: dominant mineralogy quartz-muscovite-albite (90% vol), Spodumene (0.5% vol). Assay 138ppm Li₂O.

Sample 23EW11-30: dominant mineralogy quartz-albite (88% vol), Spodumene (0.4%vol). Assay 56ppm Li₂O.

Heritage Clearances

A heritage clearance survey request has been submitted Ngarluma Aboriginal Corporation (**NAC**) which covers the areas where potential ground disturbing activities including activities including drilling may be planned. The timing of this survey is not yet scheduled.

Discussion of Results

The confirmation of spodumene and related pathfinder elements in these dominantly quartz-albite pegmatites which occur in the northwest portion of the tenement provides confidence that we have the right type of pegmatite host for lithium mineralisation. Our rock chip sampling to date has highlighted numerous pegmatites in this area that are lithium anomalous and with associated lithium pathfinder elements. We will be assessing all of the data we have for these pegmatites with a view to potentially drill testing selected pegmatites at depth. To aid in this assessment soil sampling which has not previously been done in this area is currently being undertaken.

We are also very encouraged by the results of our first pass reconnaissance soil sampling which strongly suggests that the regional lithium pegmatite bearing zone potentially extends much further to the south than initially expected. Zone A in which we have already confirmed lithium pegmatite in outcrop is a priority target due to the soil sampling indicating that it may extend further to the east under soil cover.

Zone B is our second priority target zone which is expressed in the soil sampling as potentially a **new pegmatite bearing zone some 5km in strike**. Ground investigation of the hotspot anomalies in this broad lithium anomalous zone is currently underway. Ground reconnaissance is also underway in Zone C with a focus on the hotspot lithium soil anomalies.

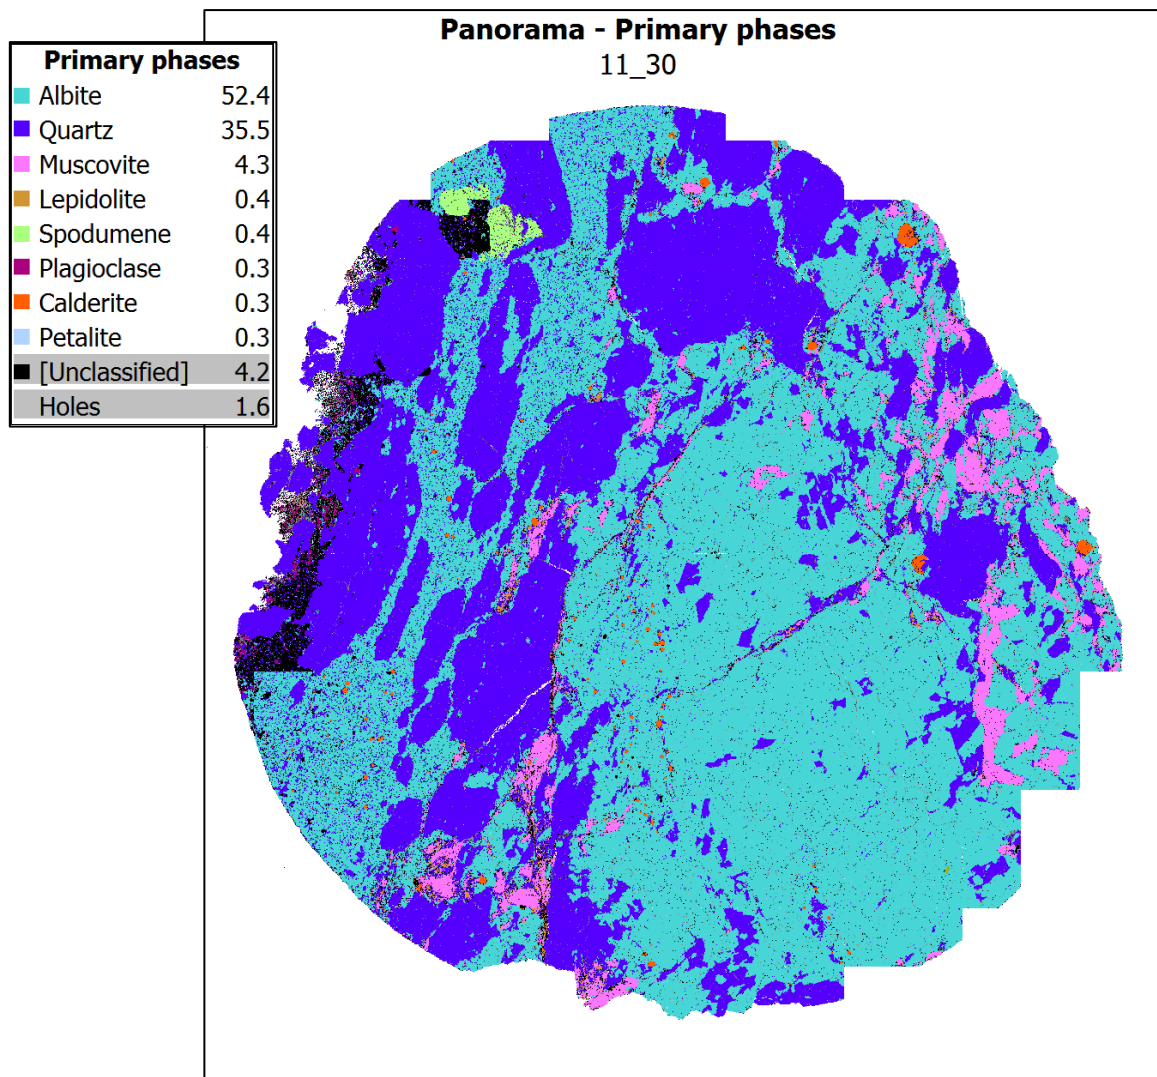


Figure 4. TIMA Scan of Sample 23EW11_30, Showing Spodumene

Forward Plans

Over the coming quarter, the company will focus on further defining the lithium soil anomalies with an emphasis on identifying potential lithium pegmatites that could be associated with the hotspot targets as well as within the broader anomalous zones. This will be done by way of reconnaissance and infill soil sampling as warranted with a view to identifying selected areas for potential drill testing. Areas selected for drill testing will be included in the areas for Heritage Clearance when the survey is finalised.

This ASX announcement has been authorised for release by Thomas Reddicliffe, Executive Chairman on behalf of the Board of Directors.

For further information, please contact:

Tom Reddicliffe
Executive Chairman
Errawarra Resources Ltd
E: info@errawarra.com

Competent Person Statement

Thomas Reddicliffe, BSc (Hons), MSc, a Director and Shareholder of the Company, is a Fellow of the AUSIMM, and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Thomas Reddicliffe consents to the inclusion in the report of the information in the form and context in which it appears.

Dr Martin Wells (PhD). The sample testing was carried out in the John de Laeter Centre at Curtin University. Spodumene was identified using a proprietary automated mineralogy technique and confirmed using x-ray diffraction (XRD) analysis by Dr Martin Wells (PhD). Dr Wells is a Research Fellow (Mineralogy/Petrology) and an authority in lithium ore deposits as evidenced by his authorship of the 2023 Geological Survey of Western Australia Report 228 (The geology, mineralogy and Geometallurgy of EV materials deposits in Western Australia; <https://dmpbookshop.eruditetechnologies.com.au/product/mriwa-report-m532-geology-mineralogy-and-metallurgy-ofematerial-resources-in-wa-do>). Dr Martin Wells consents to the inclusion in the report of the information pertaining to sample analyses undertaken at the John De Laeter Centre in the form and context in which it appears.

Appendices

Table 1: Significant Soil Sample Assay Results >60ppm Li₂O (Datum GDA94Z50)

| Sample Id | Easting | Northing | Lippm | Li2Oppm | Csppm | Nbppm | Rbppm | Snppm | Tappm |
|------------|---------|----------|-------|---------|-------|-------|-------|-------|-------|
| 23EW10-001 | 508798 | 7689699 | 38.5 | 82.9 | 4.33 | 13.45 | 168 | 2.07 | 2.12 |
| 23EW10-002 | 508801 | 7689797 | 35.6 | 76.6 | 4.95 | 13.45 | 198 | 2.29 | 2 |
| 23EW10-003 | 508800 | 7689900 | 29 | 62.4 | 5.25 | 9.95 | 265 | 1.87 | 1 |
| 23EW10-005 | 508797 | 7690107 | 38.3 | 82.5 | 4.11 | 14.95 | 169 | 2.3 | 3.25 |
| 23EW10-006 | 508801 | 7690199 | 71 | 152.9 | 4.99 | 12.9 | 137.5 | 1.91 | 1.41 |
| 23EW10-012 | 508800 | 7690806 | 34 | 73.2 | 5.2 | 17.15 | 221 | 2.35 | 2.78 |
| 23EW10-017 | 508819 | 7691298 | 46.3 | 99.7 | 6.08 | 16.55 | 216 | 3.53 | 2.98 |
| 23EW10-018 | 508812 | 7691405 | 36.3 | 78.1 | 5.53 | 15 | 211 | 2.72 | 3.25 |
| 23EW10-019 | 508813 | 7691502 | 30.2 | 65.0 | 5.16 | 17.35 | 186.5 | 2.6 | 7.1 |
| 23EW10-020 | 508810 | 7691606 | 38.1 | 82.0 | 5.75 | 18.55 | 165.5 | 2.61 | 7.38 |
| 23EW10-021 | 508813 | 7691702 | 29.3 | 63.1 | 8.86 | 14.95 | 142 | 2.49 | 4.91 |
| 23EW10-026 | 509202 | 7690099 | 31.5 | 67.8 | 4.43 | 11.3 | 161.5 | 2.18 | 1.37 |
| 23EW10-027 | 509204 | 7690200 | 35.4 | 76.2 | 5.06 | 11.95 | 173 | 2.7 | 1.34 |
| 23EW10-028 | 509203 | 7690299 | 41.3 | 88.9 | 5.65 | 13.5 | 189 | 2.91 | 1.9 |
| 23EW10-029 | 509204 | 7690399 | 36.8 | 79.2 | 4.95 | 13.05 | 180 | 2.54 | 3.12 |
| 23EW10-031 | 509199 | 7690602 | 28 | 60.3 | 5.13 | 12.95 | 227 | 5.02 | 2.14 |
| 23EW10-032 | 509192 | 7690703 | 33 | 71.0 | 4.75 | 12.1 | 216 | 2.2 | 3.16 |
| 23EW10-034 | 509200 | 7690907 | 40.2 | 86.5 | 5.78 | 14.25 | 169.5 | 2.61 | 2.76 |
| 23EW10-036 | 509199 | 7691099 | 31.9 | 68.7 | 5.31 | 16.65 | 226 | 2.78 | 3.04 |
| 23EW10-038 | 509200 | 7691301 | 32.2 | 69.3 | 5.9 | 24.3 | 253 | 2.94 | 5.35 |
| 23EW10-039 | 509199 | 7691405 | 30.4 | 65.4 | 6.21 | 17.55 | 267 | 2.88 | 3.1 |
| 23EW10-040 | 509202 | 7691500 | 40 | 86.1 | 6.1 | 27.9 | 242 | 4.81 | 5.06 |
| 23EW10-047 | 509601 | 7690200 | 28.1 | 60.5 | 4.18 | 10.3 | 117 | 2.26 | 1.19 |
| 23EW10-049 | 509602 | 7690399 | 29.2 | 62.9 | 4.35 | 12.05 | 151.5 | 2.41 | 1.85 |
| 23EW10-051 | 509599 | 7690600 | 37.2 | 80.1 | 5.11 | 14.3 | 176 | 2.77 | 4.61 |
| 23EW10-052 | 509599 | 7690701 | 40 | 86.1 | 5.3 | 12.3 | 175 | 3.16 | 2.23 |
| 23EW10-053 | 509602 | 7690800 | 31.3 | 67.4 | 5.6 | 17.25 | 243 | 2.79 | 3.45 |
| 23EW10-054 | 509599 | 7690905 | 39.3 | 84.6 | 7.24 | 22 | 238 | 3.74 | 4.47 |
| 23EW10-055 | 509595 | 7691007 | 30.7 | 66.1 | 5.45 | 22.7 | 225 | 3.26 | 3.99 |
| 23EW10-056 | 509601 | 7691104 | 30 | 64.6 | 5.34 | 24.1 | 210 | 2.9 | 4.52 |
| 23EW10-058 | 509596 | 7691304 | 34.5 | 74.3 | 5.96 | 22.9 | 203 | 3.74 | 4.55 |
| 23EW10-065 | 510000 | 7690299 | 28.8 | 62.0 | 3.96 | 9.8 | 107.5 | 2.21 | 1.1 |
| 23EW10-066 | 510001 | 7690402 | 37.3 | 80.3 | 4.66 | 12.9 | 141 | 2.79 | 1.88 |
| 23EW10-068 | 509998 | 7690601 | 33.7 | 72.6 | 4.7 | 22.1 | 170 | 2.75 | 7.45 |
| 23EW10-069 | 509997 | 7690700 | 48.4 | 104.2 | 6.09 | 19.4 | 204 | 3.42 | 4.72 |
| 23EW10-070 | 510003 | 7690800 | 32.5 | 70.0 | 4.92 | 12.3 | 147 | 2.42 | 2.46 |
| 23EW10-072 | 509999 | 7691004 | 34.2 | 73.6 | 4.71 | 19 | 189.5 | 2.73 | 6.84 |
| 23EW10-073 | 509999 | 7691103 | 43.9 | 94.5 | 5.65 | 22 | 188 | 3.52 | 4.89 |
| 23EW10-074 | 510001 | 7691203 | 54 | 116.3 | 6.08 | 18.65 | 202 | 3.43 | 5.75 |
| 23EW10-075 | 510003 | 7691301 | 42.5 | 91.5 | 5.41 | 23.4 | 246 | 3.42 | 5.2 |
| 23EW10-085 | 510405 | 7690401 | 30.7 | 66.1 | 4.37 | 8.65 | 177.5 | 2.33 | 1.21 |
| 23EW10-086 | 510398 | 7690501 | 33.4 | 71.9 | 3.95 | 14.9 | 125 | 2.11 | 3.14 |
| 23EW10-087 | 510400 | 7690601 | 37.7 | 81.2 | 3.92 | 11.25 | 118 | 2.23 | 2.01 |
| 23EW10-088 | 510406 | 7690701 | 39.4 | 84.8 | 4.38 | 10.4 | 129 | 2.36 | 1.53 |
| 23EW10-089 | 510399 | 7690798 | 36.9 | 79.4 | 4.08 | 10.8 | 127 | 2.34 | 5.35 |
| 23EW10-090 | 510396 | 7690904 | 39.1 | 84.2 | 4.35 | 12.3 | 132 | 2.51 | 1.99 |
| 23EW10-091 | 510399 | 7691001 | 35.8 | 77.1 | 4.37 | 14.1 | 132.5 | 2.39 | 3.06 |
| 23EW10-092 | 510401 | 7691101 | 48.8 | 105.1 | 5.13 | 13.45 | 142.5 | 2.81 | 5.23 |
| 23EW10-093 | 510402 | 7691198 | 48.9 | 105.3 | 5.34 | 13.75 | 157.5 | 2.88 | 2.59 |
| 23EW10-094 | 510401 | 7691301 | 45 | 96.9 | 5.07 | 17.65 | 169 | 3.23 | 3.18 |
| 23EW10-105 | 510798 | 7690500 | 32.3 | 69.5 | 3.94 | 9.38 | 119.5 | 1.98 | 1.09 |

| Sample Id | Easting | Northing | Lippm | Li2Oppm | Csppm | Nbppm | Rbppm | Snppm | Tappm |
|------------|---------|----------|-------|---------|-------|-------|-------|-------|-------|
| 23EW10-106 | 510797 | 7690601 | 28.1 | 60.5 | 3.98 | 9.51 | 134 | 1.95 | 2.23 |
| 23EW10-107 | 510799 | 7690703 | 32.7 | 70.4 | 4.25 | 11.3 | 129.5 | 2.22 | 2.29 |
| 23EW10-108 | 511198 | 7689599 | 17.5 | 37.7 | 2.97 | 8.08 | 79.8 | 1.61 | 1.41 |
| 23EW10-116 | 511200 | 7690398 | 33.4 | 71.9 | 4.26 | 9.01 | 117 | 1.83 | 1.22 |
| 23EW10-117 | 511200 | 7690497 | 31.1 | 67.0 | 4.07 | 7.97 | 105.5 | 2.06 | 1.01 |
| 23EW10-118 | 511200 | 7690598 | 32.7 | 70.4 | 4.3 | 9 | 117 | 2.01 | 2.67 |
| 23EW10-119 | 511201 | 7690700 | 31.7 | 68.2 | 4.42 | 8.25 | 125 | 1.81 | 0.97 |
| 23EW10-121 | 511600 | 7689801 | 116 | 249.7 | 3.32 | 4.98 | 61.2 | 1.08 | 0.47 |
| 23EW10-128 | 511596 | 7690499 | 31.9 | 68.7 | 3.83 | 10 | 102 | 2.76 | 2.79 |
| 23EW10-129 | 511603 | 7690600 | 37.1 | 79.9 | 4.24 | 8.32 | 103.5 | 2.04 | 0.97 |
| 23EW10-130 | 511602 | 7690703 | 29.2 | 62.9 | 3.74 | 8.36 | 107.5 | 2.07 | 1.17 |
| 23EW10-131 | 511998 | 7689802 | 29.4 | 63.3 | 2.78 | 5.39 | 82.3 | 1.23 | 0.93 |
| 23EW10-132 | 511999 | 7689902 | 90.4 | 194.6 | 2.36 | 5.08 | 57.8 | 1.17 | 0.45 |
| 23EW10-137 | 512000 | 7690399 | 30.8 | 66.3 | 3.5 | 8.55 | 89.6 | 2.03 | 0.91 |
| 23EW10-138 | 512001 | 7690499 | 32.8 | 70.6 | 3.98 | 9.13 | 99.1 | 1.97 | 1.02 |
| 23EW10-139 | 512000 | 7690601 | 35.3 | 76.0 | 4.25 | 9.21 | 95.3 | 2.02 | 1 |
| 23EW10-140 | 512002 | 7690700 | 33.1 | 71.3 | 4.1 | 9.02 | 88.5 | 1.94 | 1.02 |
| 23EW10-147 | 512400 | 7690504 | 35.7 | 76.9 | 4.63 | 9.27 | 111 | 1.98 | 0.99 |
| 23EW10-156 | 512798 | 7690601 | 67.3 | 144.9 | 4.02 | 11.8 | 144.5 | 4.67 | 1.93 |
| 23EW10-157 | 512801 | 7690702 | 64.7 | 139.3 | 3.97 | 13.35 | 136 | 3.38 | 2.6 |
| 23EW10-162 | 513202 | 7690612 | 33.4 | 71.9 | 3.96 | 8.19 | 94.4 | 1.99 | 0.85 |
| 23EW10-163 | 513199 | 7690700 | 56 | 120.6 | 3.21 | 13.9 | 106.5 | 4.81 | 2.97 |
| 23EW10-167 | 514003 | 7691002 | 29.2 | 62.9 | 3.36 | 7.75 | 78.1 | 1.76 | 0.82 |
| 23EW10-174 | 514000 | 7691701 | 31.8 | 68.5 | 3.74 | 7.85 | 93.2 | 1.81 | 1.1 |
| 23EW10-175 | 513998 | 7691799 | 39.5 | 85.0 | 4.11 | 8.06 | 100.5 | 2.19 | 1.26 |
| 23EW10-176 | 513999 | 7691898 | 43.5 | 93.6 | 4.24 | 8.12 | 111 | 2.37 | 1.54 |
| 23EW10-177 | 514000 | 7691999 | 54.1 | 116.5 | 4.53 | 8.66 | 112.5 | 2.47 | 1.7 |
| 23EW10-178 | 513999 | 7692095 | 44 | 94.7 | 4.22 | 7.53 | 126 | 2.24 | 1.58 |
| 23EW10-179 | 513996 | 7692200 | 39.4 | 84.8 | 5.07 | 7.42 | 187.5 | 2.83 | 1.84 |
| 23EW10-180 | 513999 | 7692300 | 60.9 | 131.1 | 7.38 | 12.9 | 255 | 4.55 | 6.05 |
| 23EW10-181 | 513997 | 7692404 | 183.5 | 395.0 | 7.47 | 21.7 | 250 | 6.83 | 11.25 |
| 23EW10-182 | 514017 | 7692502 | 97.4 | 209.7 | 6.18 | 12.45 | 188.5 | 2.79 | 2.3 |
| 23EW10-183 | 514003 | 7692595 | 197 | 424.1 | 6.48 | 9.68 | 211 | 2.02 | 1.51 |
| 23EW10-184 | 514406 | 7691202 | 30.4 | 65.4 | 3.45 | 9.95 | 83.9 | 1.76 | 3.02 |
| 23EW10-192 | 514401 | 7691998 | 30.6 | 65.9 | 3.76 | 7.69 | 104 | 1.86 | 1.08 |
| 23EW10-193 | 514400 | 7692101 | 19.1 | 41.1 | 2.69 | 5.26 | 88.8 | 1.3 | 0.72 |
| 23EW10-194 | 514396 | 7692201 | 32 | 68.9 | 3.4 | 6.29 | 102 | 1.72 | 0.92 |
| 23EW10-195 | 514400 | 7692300 | 49.8 | 107.2 | 4.01 | 7.96 | 104 | 2.05 | 1.29 |
| 23EW10-196 | 514391 | 7692391 | 52.7 | 113.5 | 4.45 | 8.33 | 118.5 | 2.33 | 1.21 |
| 23EW10-197 | 514397 | 7692496 | 60 | 129.2 | 5.04 | 8.92 | 143.5 | 2.79 | 1.27 |
| 23EW10-198 | 514400 | 7692596 | 83.2 | 179.1 | 6.56 | 10.95 | 193 | 4.84 | 3.79 |
| 23EW10-205 | 514802 | 7692203 | 33.5 | 72.1 | 3.33 | 6.75 | 88.4 | 1.64 | 0.63 |
| 23EW10-207 | 514798 | 7692401 | 33.1 | 71.3 | 3.43 | 7.25 | 90 | 1.77 | 0.7 |
| 23EW10-208 | 514803 | 7692501 | 32.4 | 69.8 | 3.52 | 6.84 | 104.5 | 1.78 | 0.72 |
| 23EW10-209 | 514799 | 7692601 | 35.1 | 75.6 | 4.03 | 9.82 | 124 | 2.2 | 1.17 |
| 23EW10-210 | 515202 | 7692295 | 34.8 | 74.9 | 3.8 | 7.72 | 95.5 | 1.9 | 0.77 |
| 23EW10-219 | 516002 | 7693602 | 28.2 | 60.7 | 3.4 | 5.38 | 78.5 | 1.26 | 0.54 |
| 23EW10-222 | 516005 | 7693902 | 33.4 | 71.9 | 4.06 | 6.45 | 72.1 | 1.49 | 0.64 |
| 23EW10-223 | 516006 | 7694002 | 32.6 | 70.2 | 3.08 | 5.51 | 66 | 1.43 | 0.82 |
| 23EW10-224 | 516004 | 7694105 | 25.4 | 54.7 | 3.02 | 5.25 | 75.5 | 1.36 | 1.29 |
| 23EW10-225 | 515997 | 7694201 | 40.2 | 86.5 | 3.84 | 6.26 | 76.4 | 1.87 | 1.46 |
| 23EW10-226 | 515996 | 7694306 | 38.3 | 82.5 | 3.42 | 5.1 | 85.4 | 1.81 | 0.98 |
| 23EW10-227 | 515998 | 7694406 | 51.4 | 110.7 | 4.27 | 6.59 | 92.3 | 2.21 | 2.74 |
| 23EW10-234 | 516393 | 7694096 | 31.4 | 67.6 | 3.21 | 5.31 | 73.7 | 1.4 | 0.52 |
| 23EW10-235 | 516393 | 7694213 | 29 | 62.4 | 3.52 | 5.37 | 85.1 | 1.38 | 0.61 |

| Sample Id | Easting | Northing | Lippm | Li2Oppm | Csppm | Nbppm | Rbppm | Snppm | Tappm |
|------------|---------|----------|-------|---------|-------|-------|-------|-------|-------|
| 23EW10-236 | 516400 | 7694302 | 36.2 | 77.9 | 4.07 | 6.54 | 84.2 | 1.61 | 0.84 |
| 23EW10-237 | 516398 | 7694398 | 36 | 77.5 | 3.39 | 5.08 | 80.8 | 1.53 | 0.86 |
| 23EW10-240 | 516801 | 7694199 | 32.5 | 70.0 | 3.61 | 6.74 | 76.4 | 1.62 | 0.63 |
| 23EW10-241 | 516796 | 7694299 | 27.9 | 60.1 | 3.1 | 6.19 | 73.8 | 1.33 | 0.6 |
| 23EW12-002 | 508800 | 7689001 | 28.5 | 61.4 | 3.68 | 8.39 | 77.1 | 1.6 | 0.7 |
| 23EW12-003 | 508803 | 7689106 | 31.9 | 68.7 | 3.73 | 7.9 | 79.1 | 1.56 | 0.69 |
| 23EW12-020 | 509594 | 7689205 | 42.2 | 90.9 | 4.94 | 28.4 | 148 | 2.59 | 3.37 |
| 23EW12-021 | 509599 | 7689306 | 85.8 | 184.7 | 5.42 | 5.94 | 110.5 | 1.36 | 0.64 |
| 23EW12-022 | 509598 | 7689392 | 36.6 | 78.8 | 3.56 | 8.36 | 92.6 | 1.66 | 0.81 |

Table 2: Significant Rock Chip Sample Assay Results >100ppm Li₂O (Datum GDA94Z50)

| Sample Id | Easting | Northing | Lippm | Li ₂ Oppm | Csppm | Nbppm | Rbppm | Snppm | Tappm |
|------------|---------|----------|-------|----------------------|-------|-------|-------|-------|-------|
| 23EW9-005 | 510357 | 7691585 | 64.7 | 139 | 8.4 | 5 | 499 | 5 | 5 |
| 23EW9-009 | 509761 | 7691524 | 48.1 | 104 | 14.9 | 5 | 414 | 5 | 5 |
| 23EW9-020 | 509576 | 7692111 | 148 | 318 | 16.5 | 111 | 1032 | 26 | 18 |
| 23EW9-021 | 509591 | 7692271 | 56.9 | 122 | 14.4 | 83 | 981 | 23 | 16 |
| 23EW9-025 | 509809 | 7692256 | 117 | 252 | 24.2 | 121 | 2049 | 143 | 17 |
| 23EW9-037 | 510118 | 7691934 | 65.9 | 142 | 15.6 | 14 | 95.9 | 5 | 12 |
| 23EW9-038 | 510247 | 7691907 | 51 | 110 | 5.9 | 96 | 801 | 17 | 21 |
| 23EW9-039 | 510322 | 7691834 | 64.2 | 138 | 18.8 | 86 | 1528 | 35 | 20 |
| 23EW9-040 | 510336 | 7691851 | 431 | 928 | 21.1 | 98 | 2261 | 120 | 11 |
| 23EW9-048 | 516398 | 7694304 | 120 | 259 | 2.8 | 5 | 41 | 5 | 5 |
| 23EW9-052 | 510387 | 7691884 | 150 | 323 | 17.2 | 80 | 176 | 67 | 16 |
| 23EW9-053 | 510382 | 7691951 | 80 | 173 | 12.9 | 92 | 105 | 62 | 12 |
| 23EW9-054 | 510400 | 7692026 | 158 | 340 | 22.2 | 106 | 179 | 121 | 16 |
| 23EW9-073 | 514016 | 7692414 | 1824 | 3927 | 32.4 | 70 | 226 | 49 | 43 |
| 23EW9-081 | 510284 | 7692259 | 82 | 176 | 14.8 | 94 | 90.6 | 25 | 16 |
| 23EW9-094 | 514009 | 7692524 | 104 | 225 | 62.5 | 67 | 316 | 212 | 36 |
| 23EW9-099 | 513885 | 7692404 | 84 | 181 | 3.1 | 35 | 151 | 21 | 45 |
| 23EW9-105 | 513916 | 7692389 | 4197 | 9035 | 36.7 | 75 | 188 | 82 | 34 |
| 23EW11-001 | 513888 | 7692410 | 1770 | 3811 | 38.5 | 105 | 1805 | 224 | 56.9 |
| 23EW11-023 | 508943 | 7693130 | 64 | 138 | 133.5 | 109 | 3980 | 266 | 78.7 |
| 23EW11-028 | 509208 | 7692977 | 60 | 129 | 24.2 | 39.9 | 1845 | 101 | 33.6 |
| 23EW11-030 | 509236 | 7693057 | 26 | 56 | 12.7 | 76.4 | 1140 | 101 | 34.5 |
| 23EW11-036 | 509625 | 7693392 | 72 | 155 | 65.8 | 64.9 | 4750 | 198 | 32.2 |
| 23EW11-052 | 509515 | 7691856 | 70 | 151 | 7.3 | 127.5 | 1125 | 74 | 11.95 |
| 23EW11-053 | 509630 | 7691882 | 85 | 183 | 11.5 | 107.5 | 1890 | 67 | 14.4 |
| 23EW11-054 | 509539 | 7691398 | 58 | 125 | 25.2 | 84.9 | 652 | 1.5 | 11.4 |
| 23EW11-060 | 509305 | 7692097 | 370 | 797 | 21.7 | 140 | 2550 | 146 | 15.35 |
| 23EW11-061 | 509259 | 7692050 | 148 | 319 | 18.8 | 112.5 | 1870 | 71 | 8.83 |

JORC CODE, 2012 EDITION – TABLE 1 REPORT

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| Sampling techniques | <ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. | <ul style="list-style-type: none"> Reconnaissance style rock chip sampling taken opportunistically from pegmatite outcrop. This announcement discusses the findings of reconnaissance and follow-up sampling and mapping with a view to determining the lithium potential of the Company's tenements and which included the collection of rock chip samples. Pegmatite was identified in outcrop. The rock chip samples were restricted to outcrop of pegmatite rocks. Samples were dispatched to ALS Global Laboratories in Perth for analysis. Soil samples were collected on a 100m x 400m NS orientated grid. Samples were taken from a depth of 20cm and sieved to collect the -1mm size fraction The samples were sent to ALS Global laboratories in Perth to undergo a 4 acid digest using their ME-MS61L 60 element technique |
| Drilling techniques | <ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). | <ul style="list-style-type: none"> This announcement does not relate to drilling carried out by Errawarra Resources Ltd. No mention is made in this announcement of exploration drill results including drilling conducted by other companies on nearby tenements. |
| Drill sample recovery | <ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. | <ul style="list-style-type: none"> Not applicable as no details on any drilling carried out by Errawarra Resources are included in this announcement. |
| Logging | <ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. | <ul style="list-style-type: none"> Not applicable due to the reconnaissance nature of the sampling. |
| Sub-sampling techniques and sample | <ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. | <ul style="list-style-type: none"> Rock chip samples were dispatched to ALS Global Laboratories in Perth for analysis using their GE_IMS92A50 46 element technique. |

| Criteria | JORC Code explanation | Commentary |
|--|--|---|
| preparation | <ul style="list-style-type: none"> For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the insitu material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. | <ul style="list-style-type: none"> The laboratory reported the use of standards and blanks as part of the analyses for QA/QC. The samples were opportunistic in nature and taken from insitu outcrop. Samples were approximately 0.5kg to 1kg in weight. The samples were considered generally representative of the outcrop being sampled. |
| Quality of assay data and laboratory tests | <ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. | <ul style="list-style-type: none"> Rock chip samples were dispatched to ALS Global Laboratories in Perth for analysis using their GE_IMS92A50 46 element technique. The laboratory reported the use of standards and blanks as part of the analyses for QA/QC. No standards or blanks were submitted by the company. Soil samples were dispatched to ALS Global Laboratories in Perth for analysis using their ME-MS61L 60 element technique. The laboratory reported the use of standards and blanks as part of the analyses for QA/QC. No standards or blanks were submitted by the company |
| Verification of sampling and assaying | <ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. | <ul style="list-style-type: none"> No verification of sample results for rock chips or soil samples has been undertaken. |
| Location of data points | <ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. | <ul style="list-style-type: none"> Sample points were determined by handheld GPS which is considered appropriate for the reconnaissance nature of the sampling. |
| Data spacing and distribution | <ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. | <ul style="list-style-type: none"> Not applicable due to the reconnaissance nature of the sampling. No attempt has been made to demonstrate geological or grade continuity between sample points. Soil samples were collected on a 100m x 400m NS orientated grid |
| Orientation of data in relation to geological structure | <ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. | <ul style="list-style-type: none"> Not applicable |
| Sample security | <ul style="list-style-type: none"> The measures taken to ensure sample security. | <ul style="list-style-type: none"> Sample security is by way of chain of custody. |

| Criteria | JORC Code explanation | Commentary |
|--------------------------|---|---|
| Audits or reviews | <ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. | <ul style="list-style-type: none"> No review of the sampling techniques has been undertaken. |

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

| Criteria | JORC Code explanation | Commentary |
|--|--|--|
| Mineral tenement and land tenure status | <ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. | <ul style="list-style-type: none"> The Andover West project tenement covers an area of 100km² and comprises granted tenements: 47/4352. The tenement is owned 100% by Western Exploration subsidiary company owned 80% by Errawarra Resources Ltd The tenements are in good standing with DMIRS and there are no known impediments for exploration on these tenements. |
| Exploration done by other parties | <ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. | <ul style="list-style-type: none"> Numerous exploration parties have held the area covered by the current Errawarra tenure previously. There is no reported previous exploration for lithium bearing pegmatites on the tenement. No other exploration companies generated data was used in this release. Regional RTP aeromagnetics and geology from Geological Survey of WA. |
| Geology | <ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. | <ul style="list-style-type: none"> The pegmatite zone trends WNW-ESE and is mostly hosted by the Andover Mafic Intrusion. The pegmatites mostly occur as intermittent deformed lenses in the Andover Mafic Intrusion. The pegmatites are moderately dipping and up to 5m wide. The project area is underlain by the Archean Pilbara Craton, specifically the West Pilbara Superterrane (WPST) of Hickman (2016). The 3280-3070 Ma WPST comprises numerous tectonostratigraphic packages (Sholl, Regal and Karratha Terranes and the Whundo and Nickol River Basins) and igneous complexes that have been variously affected by several tectonic events. The easterly to east-north easterly trending Sholl Shear Zone (SSZ) is a boundary for the regional rock packages. Metamorphic grade is higher to the north of the SSZ, suggesting the present-day surface shows a slightly deeper crustal level on the north side. |
| Drill hole Information | <ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole | <ul style="list-style-type: none"> Not applicable as drilling is not being reported. |

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | <ul style="list-style-type: none"> ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. | |
| Data aggregation methods | <ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. | <ul style="list-style-type: none"> • Not applicable |
| Relationship between mineralisation widths and intercept lengths | <ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). | <ul style="list-style-type: none"> • Not applicable as surface sampling is reconnaissance in nature. |
| Diagrams | <ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. | <ul style="list-style-type: none"> • All the appropriate maps are provided in the body of this announcement. |
| Balanced reporting | <ul style="list-style-type: none"> • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. | <ul style="list-style-type: none"> • This announcement discusses the findings of recent reconnaissance sampling and associated assays. |
| Other substantive exploration data | <ul style="list-style-type: none"> • Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. | <ul style="list-style-type: none"> • All the meaningful exploration data has been included in the body of this announcement. |
| Further work | <ul style="list-style-type: none"> • The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. | <ul style="list-style-type: none"> • Errawarra plans to conduct further ground reconnaissance and sampling in the short term to determine the surface extent both laterally and along strike. Drilling will also be undertaken if warranted. |