

13 MAY 2024

FOSTER SOUTH MINERAL RESOURCE UPDATE

KEY POINTS

- Updated Mineral Resource estimate records **17,600 tonnes of nickel metal¹ at 4.7% nickel**
- Represents an increase of **10% in tonnes and nickel metal**
- Confirms Foster South as **key high-grade component in any future Foster mine re-start**
- Company's Mineral Resource now stands at **4.1 million tonnes at 2.7% nickel for 110,700 tonnes of contained nickel metal¹**
- **Baker Mining Proposal now approved**

Lunnon Metals Limited (ASX: LM8) (the **Company** or **Lunnon Metals**) is pleased to report an update to the Foster South nickel JORC (2012) Mineral Resource estimate (**MRE**) at the Foster mine, located on the 100% owned Foster-Baker Project (**FBA**), within the Company's broader Kambalda Nickel Project (**KNP**). Foster South is a high-grade and unmined nickel deposit approximately 300m south of the end of the historical decline at Foster. Foster South will be a key target for development and mining upon any potential mine re-start in the future.

The updated MRE for Foster South stands at 375,000 tonnes at 4.7% nickel (**Ni**) for 17,600 contained nickel tonnes, comprising:

- 264,000 tonnes @ 4.7% Ni for 12,400 nickel tonnes in Indicated Resource; and
- 111,000 tonnes @ 4.7% Ni for 5,200 nickel tonnes in Inferred Resource.

This latest increase to the Company's MRE means Lunnon Metals has now discovered 2.86 million tonnes at 2.5% Ni containing 71,700 tonnes of nickel metal since its June 2021 listing on the ASX. The global MRE across the KNP now stands at 4.1 million tonnes @ 2.7% nickel for 110,700 contained nickel tonnes¹, with the FBA component on the south side of Lake Lefroy now totalling:

3.0 million tonnes @ 3.0% nickel for 92,200 contained nickel tonnes

The update follows the metallurgical diamond drill (**DD**) program completed in late 2023, the assay results reported in ASX announcements dated 9 and 17 October 2023 and the metallurgical test work results on 8 December 2023.

The Company is also pleased to report that as part of the ongoing de-risking of the path to production at **Baker**, the Company submitted a Mining Proposal in the December 2023 quarter to the Western Australian Department of Energy, Mines, Industry Regulation and Safety. The Mining Proposal has now been approved, enabling the Company to mine the Baker deposit from underground (with decline access from the West Idough Open Pit) and transport the ore offsite to a third-party concentrator at a time of its choosing.

Managing Director, Edmund Ainscough, commenting said:

"The Foster South deposit is our second highest ranking nickel deposit after Baker. It is high-grade at 4.7% nickel, giving us great confidence to expect a high rate of conversion from the Indicated category of Mineral Resource to our future mine plan. Just a few hundred metres off the south end of the Foster decline, these 17,600 tonnes of nickel metal² were left unmined by WMC at the end of Foster's operational life and represent a high-priority target, not just for our current PFS work, but also once a future re-start at Foster is underway. It's also excellent to report the approval of the Baker Mining Proposal. This means we can start Baker at a time of our choosing when the nickel market environment is more conducive. Continuing to de-risk our nickel portfolio now, by completing the Baker-Foster PFS and permitting Foster, are low-cost initiatives that save time and add huge value. In parallel, the team can seek to complement our high-quality nickel portfolio, by adding more value to our gold portfolio, after excellent early success, particularly at Plentiful and Lady Herial."

¹ A classification breakdown of the updated KNP MRE is tabulated on page 18 to this report.

² The breakdown of the Foster South Mineral Resource is presented above.

FOSTER SOUTH MRE UPDATE

The drilling program was designed to intersect the previous MRE to provide fresh rock for metallurgical test work as well as provide additional information regarding the boundaries of the MRE. Historical WMC Resources Ltd (**WMC**) DD data previously formed the basis of the MRE, the majority of which had been re-assayed by the Company for JORC (2012) Code compliance.

The DD program was a combination of new DD holes from surface and DD holes wedged off existing historical WMC drill holes. Significant results previously reported³ included:

FOS23DD_006: 2.89m @ 4.73% Ni, 0.29% Cu, 0.11% Co, 0.65g/t Pd, 0.28g/t Pt, <10ppm As (from 858.32m);
 FOS23DD_006W2: 4.62m @ 3.87% Ni, 0.30% Cu, 0.10% Co, 0.73g/t Pd, 0.35g/t Pt, <10ppm As (from 856.16m); and
 CD2906W3: 14.05m @ 4.13% Ni, 0.25% Cu, 0.08% Co, 0.52g/t Pd, 0.32g/t Pt, 49ppm As (from 876.00m).

Historical WMC DD holes included intervals³ such as (>1.0% Ni cut-off, depth is metres downhole):

CD323: 9.37m @ 3.60% Ni, 0.51% Cu (from 767.00 metres, previously not re-assayed⁴);
 CD323W1: 7.00m @ 4.22% Ni, 0.42% Cu, 0.11% Co, <10ppm As (from 814.00m);
 CD323W2: 4.24m @ 4.49% Ni, 0.47% Cu, 0.10% Co, <10ppm As (from 754.58m);
 CD2906: 2.47m @ 4.63% Ni, 0.27% Cu, 0.10% Co, <10ppm As (from 840.92m);
 CD2906W1: 0.94m @ 10.18% Ni, 0.72% Cu, 0.24% Co, <10ppm As (from 841.34 metres); and
 CD2906W2: 12.05m @ 4.54% Ni, 0.55% Cu, 0.08% Co, 40ppm As (from 881.00 metres).

A pinch-out of the nickel sulphides recorded in new DD hole FOS23DD_006W2 resulted in local re-interpretation of the position and plunge orientation of the deposit shoots (see later **Figure 3**) although overall this revised interpretation, coupled with the new information from other DD holes in the Lunnon Metals' program, led to a slight increase to the modelled tonnage and nickel metal.

Consequently, the mine design elements of the current Foster-Baker Pre-Feasibility Study program will be reviewed for opportunities to both incorporate this new metal and seek to take advantage of the potential to reduce the capital development required to access the slightly shallower plunging modelled deposit.

The metallurgical test work results reported on 8 December 2023 delivered the following summary results:

Table 1: Summary metallurgical test work results for Foster South.

Foster South – test work results ⁵	CD2906W3	FOS23DD_006W2	Average
Head grade (% Ni)	4.74	3.47	4.11
Recovery (% Ni)	91.4	91.3	91.4
Concentrate grade (% Ni)	17.3	12.9	15.1
Concentrate grade (% Cu)	1.09	1.15	1.12
Concentrate grade (% Co)	0.35	0.32	0.34
Concentrate grade (g/t Pd)	2.40	2.15	2.28
Concentrate grade (g/t Pt)	0.84	0.39	0.62
Fe:MgO ratio (n:1 in concentrate)	19.1	17.4	18.3
As (ppm) (in concentrate)	198	16	107

Note: The results above are indicative metallurgical performance and concentrate quality based on metallurgical flotation test work. Actual results may vary depending on the specifications and performance of the concentrator.

³ Intervals used in the final MRE exercise may differ slightly and are reported in Annexure 2.

⁴ CD323 has now been re-assayed by the Company; results are in Annexure 2.

⁵ Palladium and platinum results were pending at the time of the 8 December 2023 ASX announcement and are now included.



MATERIAL INFORMATION SUMMARY – MINERAL RESOURCE ESTIMATION

Pursuant to ASX Listing Rule 5.8.1 and complementing JORC Code Table 1, Sections 1, 2 and 3 contained in the Annexures to this announcement, Lunnon Metals is pleased to provide the following information. The Foster South MRE was completed internally by Lunnon Metals based upon geological interpretations and 3D models compiled by its employees. Detailed commentary on the relevant input parameters for the MRE process is contained at the end of this announcement.

Summary Result

The results reflect a combination of massive nickel sulphide, adjacent matrix and disseminated nickel sulphide mineralisation within each Mineral Resource classification. The breakdown of the MRE as at 13 May 2024 at a 1.0% Ni cut-off grade is as follows.

Table 2: MRE for the Foster South Nickel Deposit as at 13 May 2024.

Foster South	tonnes	Ni %	Cu%	Co%	As ppm	Ni metal
Indicated	264,000	4.7	0.41	0.10	17	12,400
Inferred	111,000	4.7	0.50	0.10	22	5,200
Total	375,000	4.7	0.44	0.10	18	17,600

Note: tonnes have been rounded to 3 significant figures, grade to 2 significant figures and nickel metal has been rounded to the nearest 100t. Insufficient historical data exists to estimate arsenic, where assayed, it was below detection limits.

Comparison with Previous MRE Results

The comparison with the previous Foster South MRE is shown below in **Table 3**. The updated Foster South geological model incorporates new data from eight DD holes (totalling over 4,260 metres) drilled since June 2021, of which three directly inform the MRE grade estimation along with six historical holes. The new DD holes were primarily drilled to collect fresh diamond core material for metallurgical test work purposes from the central portion of the MRE along with holes testing the margins of the mineralised surface. As reported to the ASX at the time, the results of these DD holes closely aligned with the existing MRE, and other than refinement to the modelled margins and associated plunge orientation modifications, at the deposit scale there was a 10% increase on volume (tonnes) and thus metal, with no change to the average grade estimated.

Table 3: Comparison between the previous MRE and May 2024 MRE for Foster South.

Foster South	Previous MRE			May 2024 MRE			Compare %		
	tonnes	Ni %	metal	tonnes	Ni %	metal	tonnes	Ni %	metal
Indicated	223,000	4.7	10,500	264,000	4.7	12,400	118%	100%	118%
Inferred	117,000	4.8	5,500	111,000	4.7	5,200	95%	98%	94.5%
Total	340,000	4.7	16,000	375,000	4.7	17,600	110%	100%	110%

LOCATION

The KNP area is located approximately 570km east of Perth and 50-70km south-southeast of Kalgoorlie, in the Eastern Goldfields of Western Australia (GDA94/MGA zone 51 – refer **Figure 1**). The KNP is approximately 47km² in size comprising two parcels of 19 (being the **FBA**) and 20 (Silver Lake and Fisher or **SLF**) contiguous granted mining leases all situated within the famous Kambalda Nickel District which extends for more than 70km south from the township of Kambalda. Each Mining Lease has dimensions of approximately 1,500 metres by 800 metres. The KNP is broadly surrounded by tenements held by St Ives Gold Mining Co. Pty Ltd (**SIGM**), the Company's major shareholder. The KNP is located in the semi-arid climatic region of the Goldfields and experiences cool winters and hot, generally dry summers. The average daily maximum temperature is approximately 34.8°C in summer and 19.7°C in winter.

The two components of the KNP are located to the immediate north (SLF) and south (FBA) of Lake Lefroy. The KNP is accessed via public roads, well-established mine road infrastructure and the main SIGM lake causeway which extends from the northern shoreline near the Kambalda township to the south side of the lake adjacent to the SIGM main administration office, which itself is 3.5km north of the KNP site office at the historical Foster nickel mine offices. Foster South is located to the immediate south and approximately 300m beyond the end of the Foster decline at a depth of between 700m and 800m below surface. The Kambalda nickel concentrator owned and operated by BHP Group Limited subsidiary, Nickel West (**Nickel West**), is located to the immediate east of the SLF component of the KNP and 20km to the north of the current MRE at Foster South within the FBA.

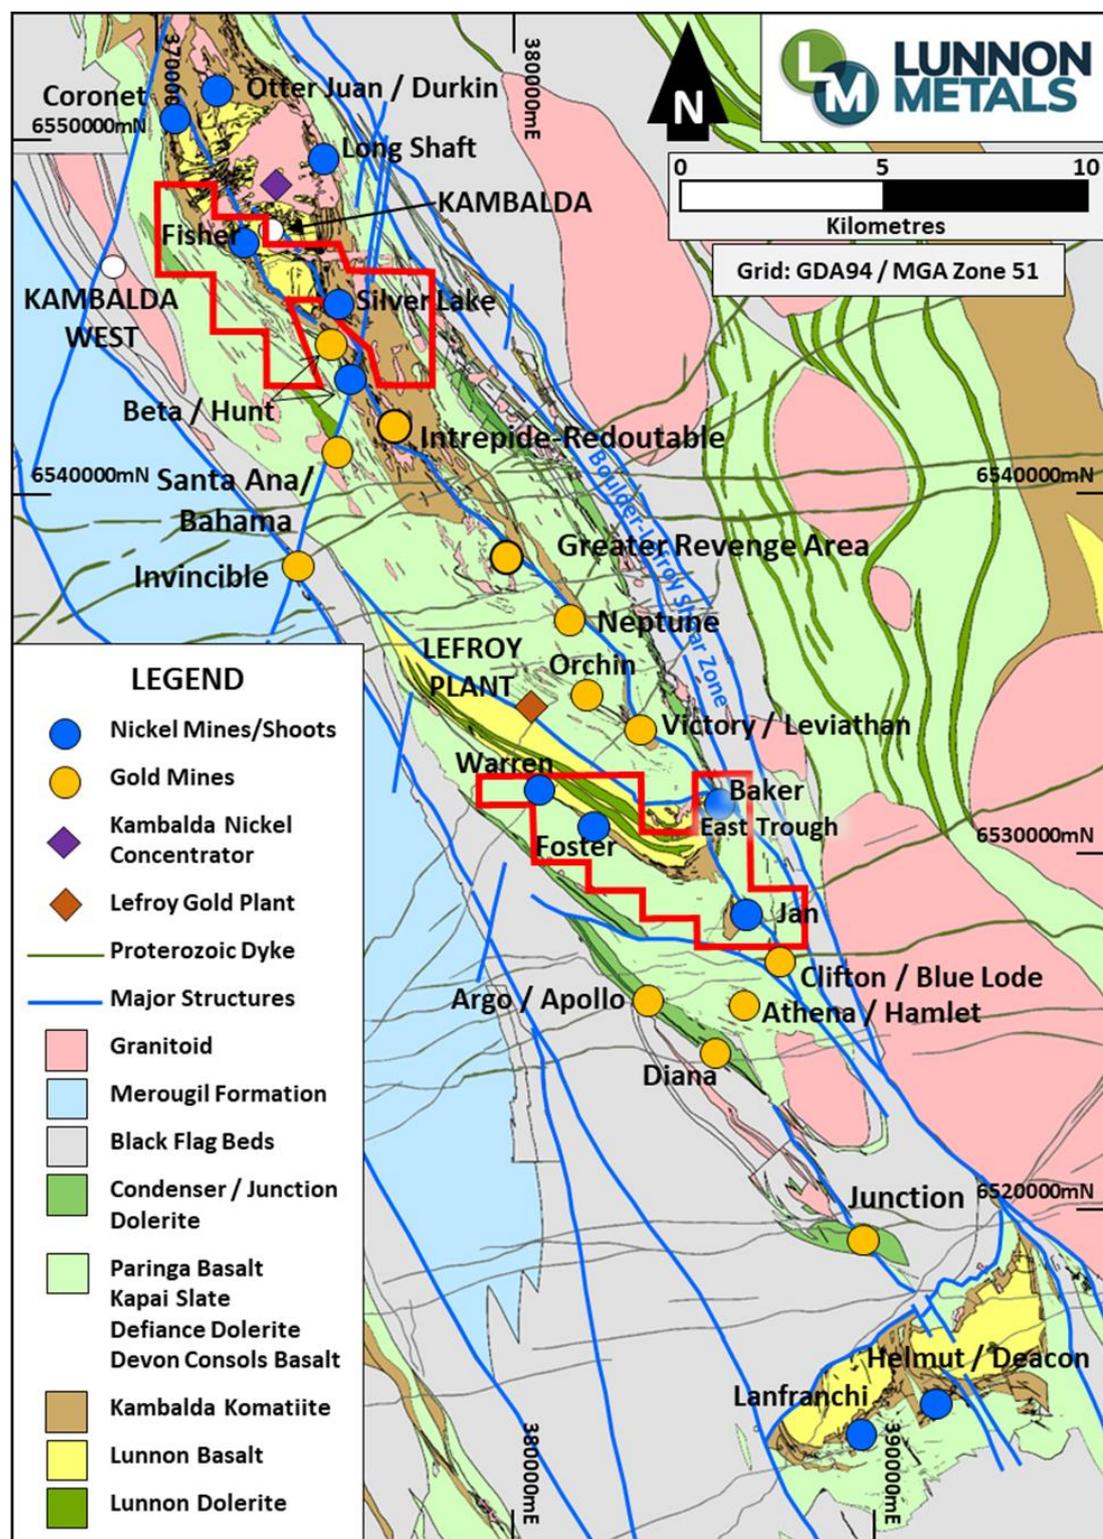


Figure 1: The KNP (red outline) with Kambalda regional geology and location of key mines/infrastructure.

HISTORY AND PRIOR PRODUCTION

Two historical mines are located on the FBA.

Foster nickel mine operated between 1981 and 1994, delivering **2.37 million tonnes of ore grading 2.57% Ni for 61,129 tonnes of nickel metal**⁶. The Jan nickel mine, accessed via the Jan Shaft, produced **1.1 million tonnes @ 2.82% Ni for 30,000 tonnes of nickel metal**² before closing in 1987.

Foster South itself was not developed or mined during the operational life of the Foster mine (see **Figure 2**).

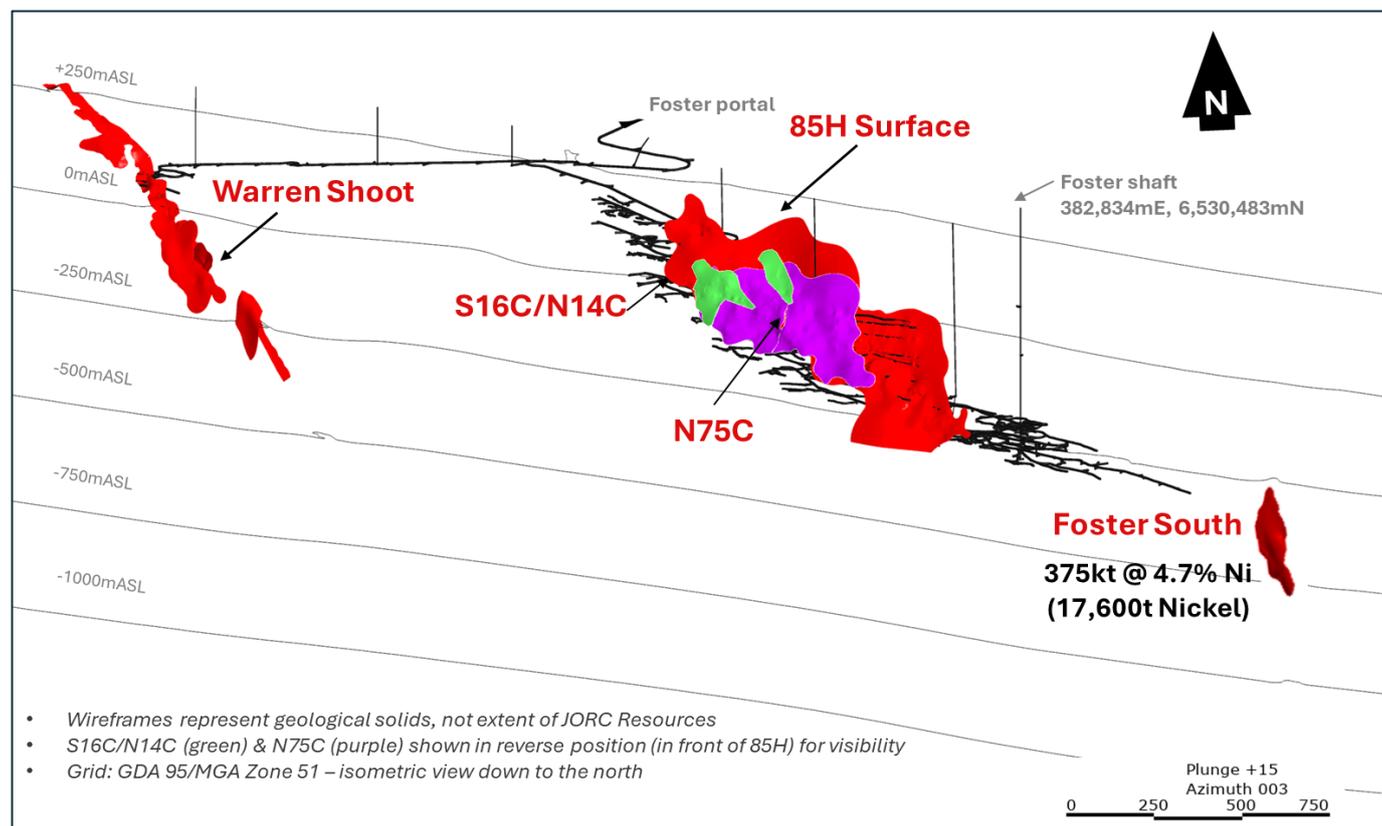


Figure 2: Isometric View of Foster Mine decline illustrating relative location of the unmined Foster South MRE⁷, to both the workings and the surface.

GEOLOGY

The KNP sits within the Kambalda-St Ives region, itself part of the Norseman-Wiluna greenstone belt, which comprises regionally extensive volcano-sedimentary packages. These rocks were extruded and deposited in an extensional environment between 2,700Ma and 2,660Ma. The mining district is underlain by a north-northwest trending corridor of basalt and komatiite rocks with several prominent dolerite intrusions (see prior **Figure 1**).

Nickel mineralisation is normally accumulated towards the base of the thick Silver Lake Member of the Kambalda Komatiite Formation immediately above or on the contact with the Lunnon Basalt. The Lunnon Basalt and favourable komatiite stratigraphy is exposed around the Kambalda Dome, then again in the Company's FBA area and once more in the Lanfranchi-Tramways area further south due to structural folding and later thrust faulting.

The Foster South deposit is hosted at the base of the Kambalda Komatiite Formation immediately above or on the contact with the Lunnon Basalt. The channel mineralisation is located within a significant embayment within the footwall Lunnon Basalt and the mineralisation limits are characterised as "pinch outs" into the encompassing basalt (see **Figures 3 and 4**). There are also components of flanking (non-channel) nickel mineralisation and minor hanging wall mineralisation at the base of the second komatiite flow, both intersected by Company and historical DD holes. Although neither of these were

⁶ Based on historical WMC Resources Ltd ore production and delivery records.

⁷ The breakdown of the Foster South Mineral Resource is presented on page 1 of this report.

modelled for this MRE exercise, and thus are not reported herein, future targeting from better positioned underground drilling positions is warranted to fully assess their economic potential.

Figure 3 presents an isometric view of the Foster South mineralisation. Note assay intervals shown predominantly represent the hanging wall mineralisation, as the high grades associated with the channel mineralisation at the contact with the Lunnon Basalt are within (i.e. hidden) the geological wireframes depicted.

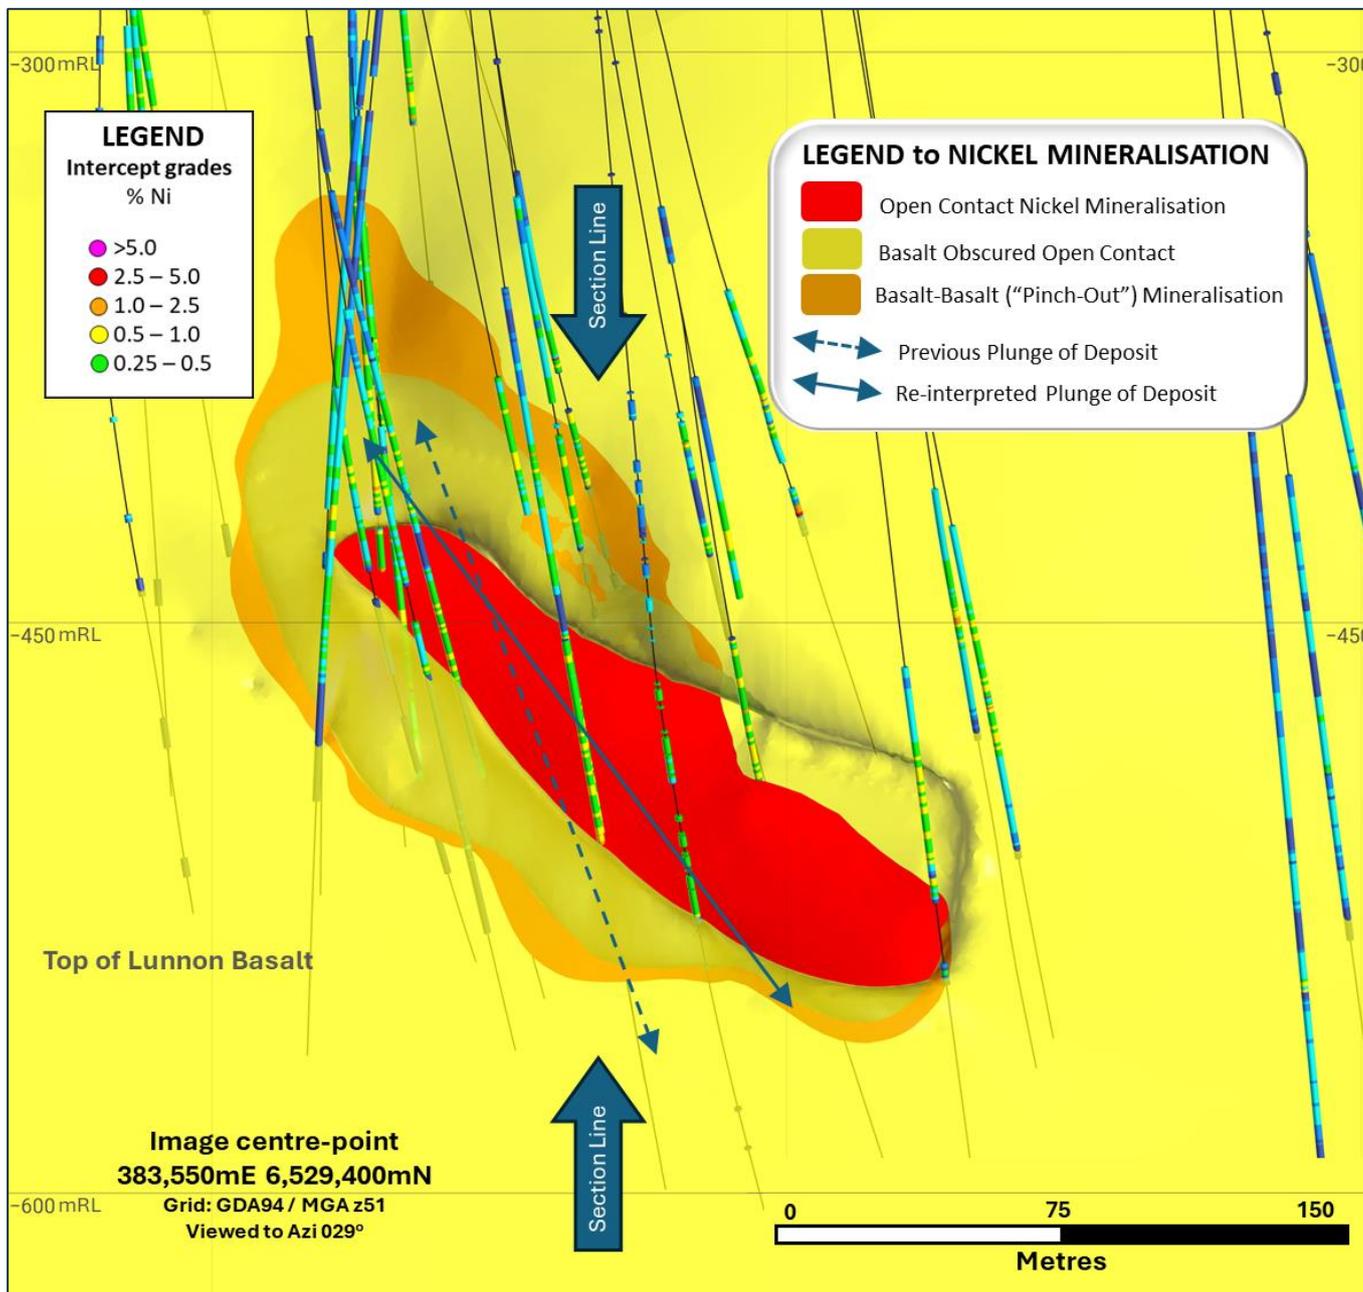


Figure 3: Isometric View (looking NNE) illustrating current and revised plunge orientation and geological interpretation of nickel sulphide mineralisation host position at Foster South (see **Figure 4** for cross section indicated).

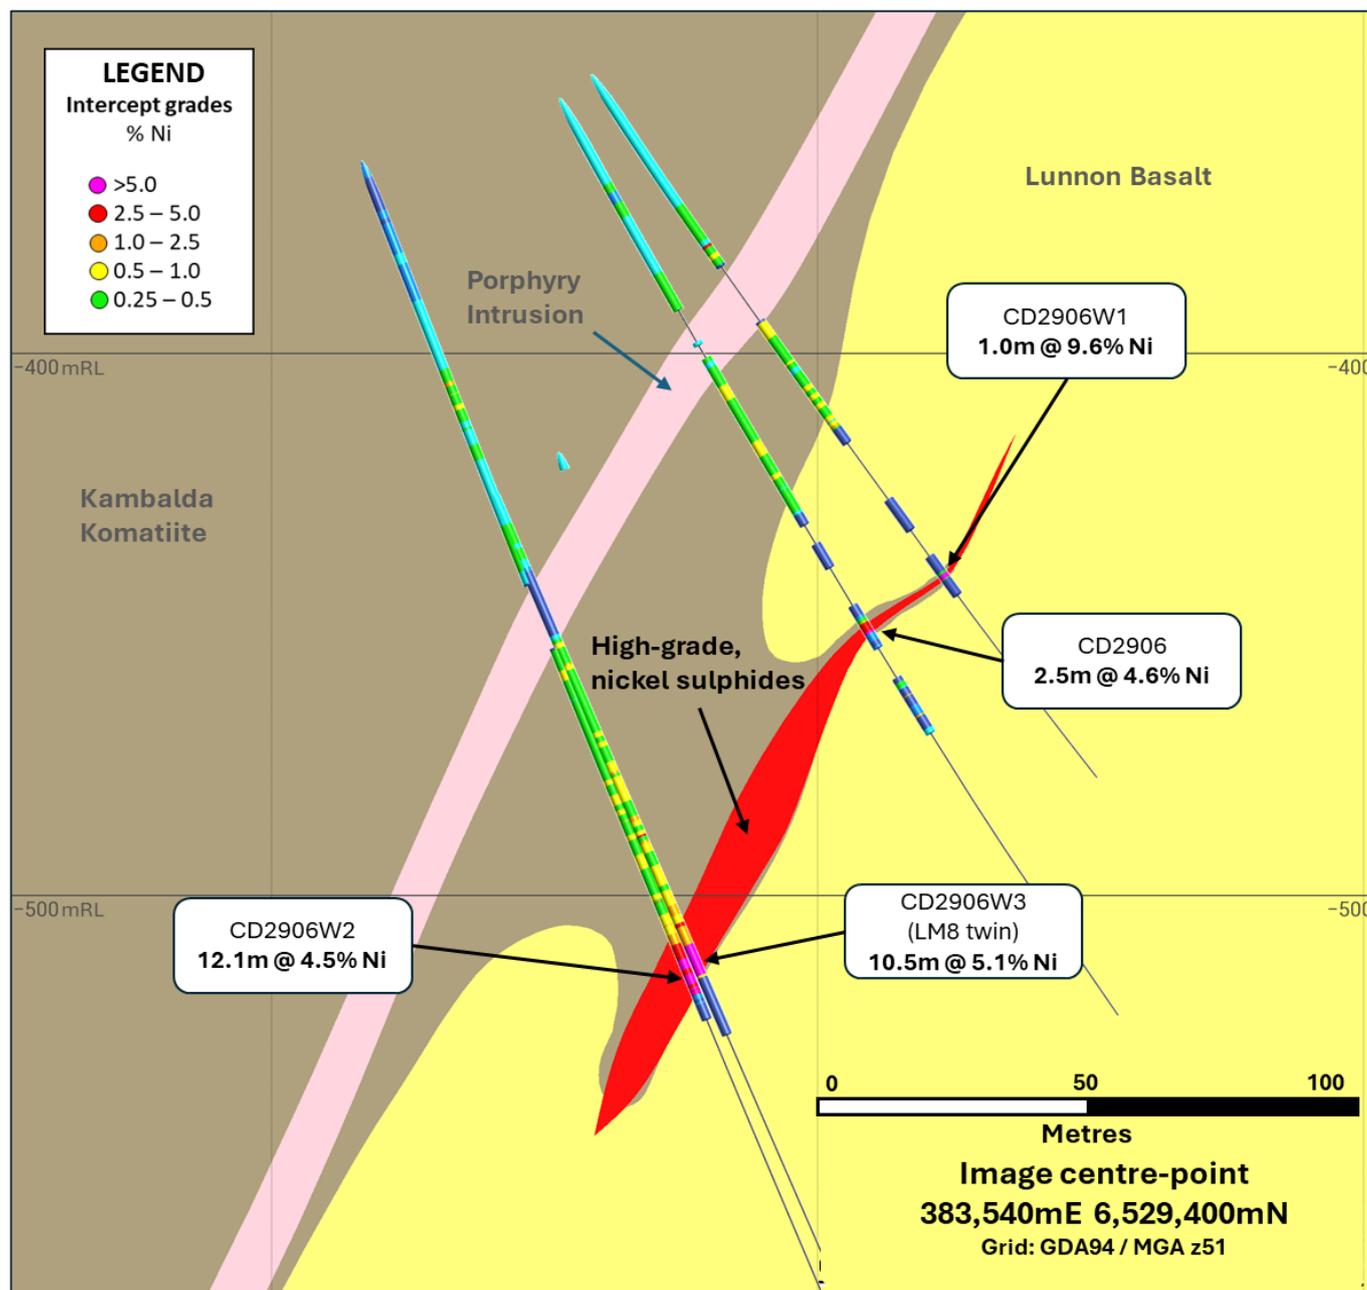


Figure 4: Geological cross section view through Foster South MRE looking north-west.

DRILLING TECHNIQUES

Lunnon Metals completed eight new DD holes, including wedge holes, (for 4,262m drilled) that informed the geological model at Foster South with three of these holes used directly in the MRE grade estimation. In addition to the three new holes, six historical WMC DD holes were re-sampled and re-assayed (all except one 0.58m sample) for direct use in the MRE grade estimation.

All new and historical DD holes used in the MRE exercise are detailed in the appendices to this announcement.

SAMPLING AND SUBSAMPLING TECHNIQUES

Lunnon Metals oriented DD core samples were collected with a DD rig drilling HQ and NQ2 size core. After geological logging, the core was marked up for sampling at a typical minimum interval of 0.3m to ensure adequate sample weight and to a typical maximum interval of 1.0m, constrained by geological boundaries. The selected sample intervals of drill core were cut in half along the length of the drill core. Typically, one half of the drill core is sent to the laboratory for assay and

the other half retained in its original core tray. Specific Gravity, or density measurements were taken for each mineralised DD sample for the Lunnon Metals drill holes. Sample weights vary depending on sample length and density of the rock. Industry standard quality assurance and quality control (**QAQC**) measures are employed at the sampling stage. Upon receipt, the independent laboratory dried, crushed and pulverised the core samples prior to analysis. In zones of potential economic nickel mineralisation, the half core sample was vacuum sealed and stored refrigerated for later potential use in metallurgical test work.

In regard to historical core used in the Foster South estimation, WMC typically drilled NQ and BQ size drill holes with core collected in steel or hybrid wooden/steel core trays as observed and validated by Lunnon Metals. Subsampling techniques typically involved half and quarter sawn drill core with the quarter core dispatched for assaying. Sample lengths were similar to those described and used by Lunnon Metals. Where historical core was re-sampled by Lunnon Metals for validation purposes the remaining quarter (or half) core was used. As per the Lunnon Metals DD samples Industry standard QAQC measures are employed for all resampling of historical core involving certified reference material (**CRM**) standards, blanks and field duplicate samples. Sample preparation procedures employed by the laboratory for re-sampled DD core are the same as for new Lunnon Metals DD core samples.

For both Lunnon Metals DD core, and historical DD core, sample sizes are considered appropriate for the style of mineralisation (potentially nickeliferous massive, matrix and disseminated sulphides, hosted in komatiite).

SAMPLE ANALYSIS METHOD

WMC vintage DD holes re-sampled by Lunnon Metals and all new Lunnon Metals drilled DD samples were submitted to Intertek Genalysis in Kalgoorlie for sample preparation. Pulverised samples were then transported to Intertek Genalysis in Perth for analysis. Samples were analysed for a multi-element suite including Ni, Cu, Co, Cr, As, Fe, Mg, Pb, S, Ti and Zn as a minimum. Analytical techniques used a four-acid digest (with ICP-OES or ICP-MS finish). Within the expected nickel mineralised zones, the platinum group elements (Pd, Pt, Au) were also analysed using a 50g charge lead collection fire assay method with ICP-MS finish. The resultant Lunnon Metals and laboratory QAQC data is reviewed upon receipt and the accuracy and precision of the data is assessed and identified as acceptable prior to MRE work.

There is no data available pertaining to WMC's assaying and laboratory procedures; however, it is expected that industry standards as a minimum were likely to have been adopted. WMC's samples were typically assayed for nickel and to a lesser extent copper, cobalt and zinc. There were no issues noted regarding the representivity of the existing assays previously recorded by WMC for Ni and where relevant Cu and Co.

Of the drill samples (54.8m in total) that were directly used in the MRE grade estimation calculation approximately 65% were Company re-assays from historical WMC DD holes, 34% were from new Company DD holes, and 1% (1 sample) was from the original WMC assayed drill core.

GEOLOGICAL MODELLING & INTERPRETATION

The modelled Foster South deposit comprises channel style mineralisation hosted at the base of the Kambalda Komatiite at its contact with the footwall Lunnon Basalt. This style of mineralisation is the more traditional style in the Kambalda region. The channel mineralisation is located within a significant embayment within the footwall Lunnon Basalt and the mineralisation limits are characterised as "pinch outs" into the encompassing basalt. There are also components of lower grade flanking (non-channel) nickel mineralisation and minor hanging wall mineralisation at the base of the second komatiite flow, both intersected by Company and historical DD holes, however neither of which were modelled for this MRE exercise.

The modelled deposit displays an overall average strike and dip of approximately 125°/60° south-west. The outline of the deposit has a long axis plunge of approximately 48° towards 150° currently extending for approximately 260 metres. The across plunge dimension approaches 100 metres. The vertical extent of the deposit is approximately 300 metres ranging from 340 metres below sea level (680 metres below ground level) to 560 metres below sea level (900 metres below ground level).



The deposit domain wireframes were modelled via a process of drillhole interval selection and 3D implicit 'vein' modelling within the Leapfrog Geo® software. Interval selection is a manual process performed by the geologist (who was the Competent Person) in the Leapfrog Geo® software environment whereby drillhole sample/logging intervals are tagged and coded with the relevant nickel sub-domain ID. The 3D implicit 'vein' modelling, or wireframe generation, is further constrained by control strings or points manually drawn in the Leapfrog Geo® software environment by the geologist (who was the Competent Person) to honour the overall geological, mineralisation and structural interpretation.

ESTIMATION METHODOLOGY

Lunnon Metals produced a MRE for the Foster South deposit. Validated drillhole data and geological interpretation wireframes were generated and the MRE produced using 3D ordinary kriging (**OK**) in Leapfrog Geo® software. Estimates were made and are reported for nickel, copper and cobalt. There was sufficient new specific gravity, or density, data to derive an updated regression calculation for density. There has been no prior mining at Foster South, so no areas of the MRE were excised.

CUT-OFF GRADE

The cut-off grade for reporting the MRE is above 1.0% nickel, which is the same as the existing MRE cut-offs previously reported by Lunnon Metals. It is assumed that the MRE could be mined via underground methods. The cut-off grade chosen aligns with an estimated approximate breakeven grade that will cover benchmarked mining unit rates, assumed processing recovery and concentrator payability levels together with ore off-take processing costs derived from both data reported publicly by third parties in the Kambalda district and the Company's May 2023 Preliminary Feasibility Study⁸ at the Baker deposit, coupled with averaged analysts' forecasts of future nickel prices and exchange rates.

RESOURCE CLASSIFICATION CRITERIA

In general, classification of the Mineral Resources at Foster South uses the following criteria:

- Confidence in the volume, location and orientation of the geological solids which is primarily influenced by drill spacing;
- Confidence in the nickel estimate; and
- Reasonable prospects for eventual economic extraction.

Mineralised blocks typically within 50m of drilling and where the confidence in the interpretation is good have been classified as Indicated. The resource outside the Indicated area is classified as Inferred, where contiguous blocks meet the minimum 1.0% nickel cut-off grade. Drilling beyond the down plunge edge of the deposit has defined the likely limits of the mineralisation. The Mineral Resource estimate appropriately reflects the Competent Person's view of the deposit.

Further commentary on the relevant input parameters for the Mineral Resource are contained in Table 1, Sections 1, 2 and 3, in the Annexure to this announcement.

REASONABLE PROSPECTS FOR EVENTUAL ECONOMIC EXTRACTION (RPEEE) INCLUDING CONSIDERATION OF MATERIAL MODIFYING FACTORS

The Foster South MRE is located on granted Mining Leases and native title has been determined. There is no native title negotiation step required prior to any mining commencing. However, the Company is seeking to enter into a Mining Rights Agreement with the relevant native title claimant before any potential development commences.

Prior to any development or mining, a Mining Proposal/Mine Closure Plan is required to be submitted to the Western Australian Department of Mines, Industry Regulation and Safety along with a Whole of Mine Risk Assessment. The updated MRE is a key input into any technical assessment required to commence those submissions.

⁸ See ASX announcement dated 22 May 2023 for full details of the PFS, including input assumptions and parameters and physical and financial results.



The Company completed and reported a Preliminary Feasibility Study⁹ (**PFS**) into potential underground mining of the Baker nickel deposit, located on the FBA at KNP. A Company employee who is a mining engineer and has over 30 years' experience in mining in Western Australia, including 7 years' experience in the relevant commodity at Kambalda, co-ordinated and managed the PFS process and compilation of findings and results.

The Baker PFS estimated LOM operating cost for mining, surface haulage, processing, and general and administration to an accuracy level of -15% to +25%. The operating costs were compiled and developed from a variety of sources, including:

- First-principle estimates based on a ground up build approach based on key physical drivers, volumes and consumption rates;
- Benchmarking by an external consultant against current unit costs for mines operating at a similar scale and utilising similar mine methods;
- Contractor request for quotation or request for pricing (RFQ or RFP), in particular for mining, paste-fill, surface haulage, power station, diesel and cement, accommodation, and flights;
- Indicative terms for the OTCPA;
- Key consultant and vendor recommendations/inputs;
- Metallurgical testwork; and
- General, administrative costs, personnel numbers and salary costs determined by Lunnon Metals, based on prior experience and input from consultants.

The PFS derived the following unit operating costs:

- C1 cash operating cost estimate: \$279/t ore
- Total Operating cost estimate: \$309/t ore
- All-in-Sustaining cost estimate: \$340/t ore

A fully costed cut-off grade was calculated which included all costs for mining and processing ore material at Baker. This value was used to generate focused mining zones that determine the extents of the ore development. The incremental cut-off grade was applied to low-grade development necessary to provide access to high-grade areas that would not normally be targeted for mining.

Based on the detailed analysis completed at Baker and summarised above, a reporting cut-off of 1.0% Ni has therefore been adopted by the Company when assessing RPEEE and applied for this MRE. The grades and geometry of the nickel mineralisation are amenable to small to modest-scale underground mining, as was contemplated in the Baker PFS.

Many nickel surfaces mined historically on both the FBA and SLF areas also exploited similar style mineralisation. In direct relevance to any RPEEE for Foster South, technical documentation available to the Company, dating from the 1980s and 1990s, indicates that nickel mineralisation, such as the Foster South, was successfully mined throughout Foster's operational life.

Presently, it is forecast that no processing capital will be required as future nickel ore may be sent to the nearby Nickel West concentrator with Nickel West retaining a right of pre-emption in relation to any proposal by Lunnon Metals to enter into any sales contract or other sales arrangement to realise any revenue or other benefit from the treatment or sale of nickel ore, beneficiated nickel ore, nickel concentrate, nickel matte or any other form of refined or smelted nickel won from the KNP.

Whilst there is some present uncertainty over the future of Nickel West's Kambalda Concentrator, other options to process nickel ore from any future Baker, Foster and Foster South production activity include Nickel West's Leinster Concentrator, other local concentrators such as Black Swan (owned by Poseidon Nickel) and Forrestania (owned by IGO) whilst a new

⁹ See ASX announcement dated 22 May 2023 for full details of the PFS, including input assumptions and parameters and physical and financial results.

stand-alone concentrator remains a viable option for the Company, either on its own or in collaboration with other local nickel focused companies, both private and publicly listed.

If the Company agreed commercial off-take arrangements with a different concentrator owner, or Nickel West chose not to agree commercial terms for future ore off-take, Nickel West may charge a royalty on any nickel produced from the KNP.

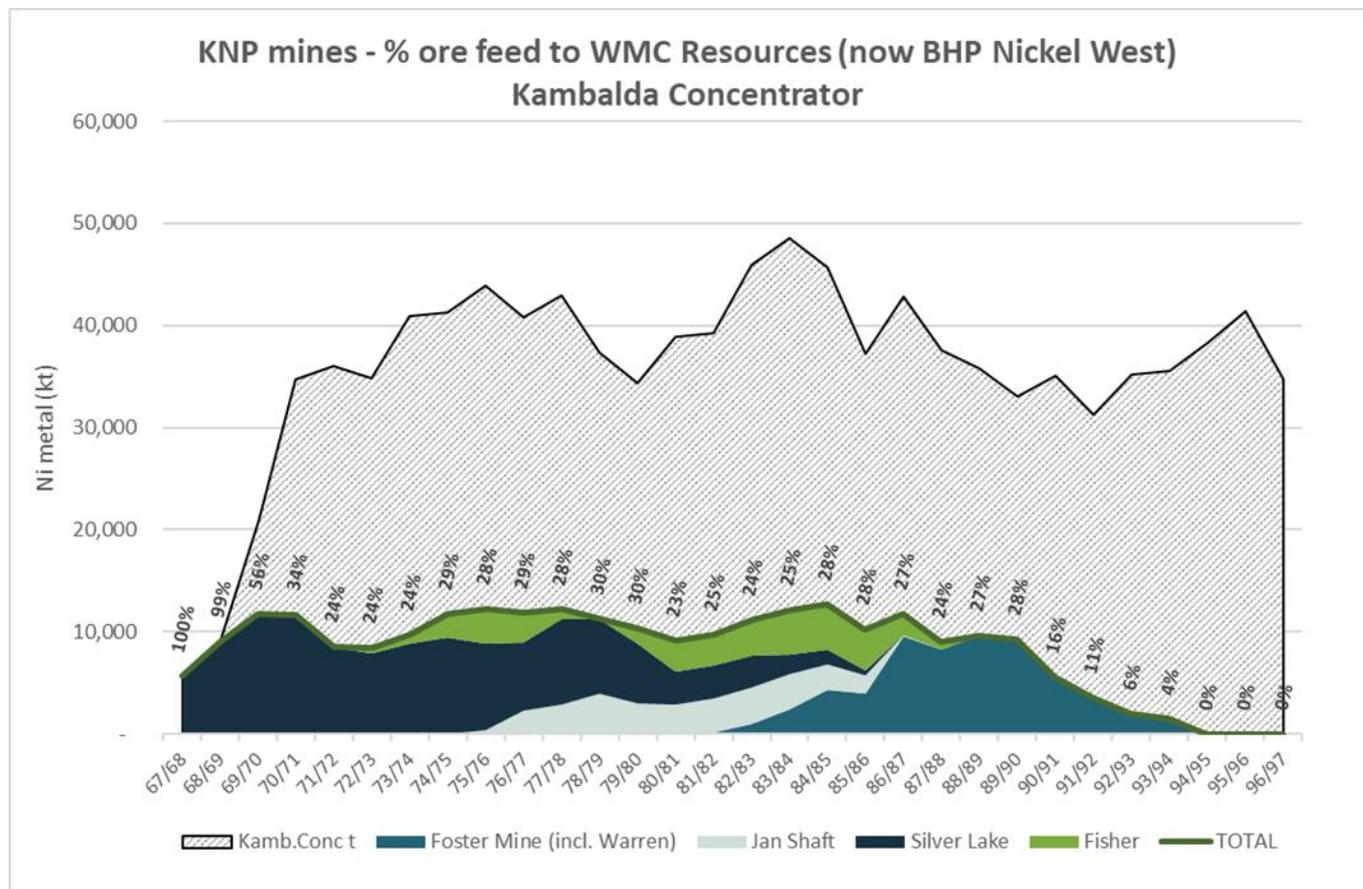


Figure 5: Historical nickel metal in ore fed to the Kambalda Concentrator (1967-1997), highlighting the contribution from nickel mines now in Lunnon Metals’ portfolio¹⁰.

The metallurgical test work at Foster South demonstrated that in line with the historical metallurgical performance of other Foster mine deposits, Foster South produces a high-grade, premium nickel sulphide concentrate grading between 12.9% and 17.3% nickel with excellent copper and cobalt by-product grade and outstanding Fe:MgO ratios of 17.4:1 to 19.1:1.

There was little to no deleterious arsenic recorded. Further, as shown in **Figure 5** above, the nickel mines that now sit inside the Lunnon Metals’ portfolio contributed a significant proportion of the ore feed to the Kambalda Nickel Concentrator, ranging from 100% (when Silver Lake Shaft was the first and only operational mine), to regularly contributing 25-30% when Foster, Jan and Fisher were also operational. There are no current reasons to consider that future Foster South nickel mineralisation would behave differently when subjected to the same process flow operated by Nickel West.

Accordingly, the Competent Persons considers there are reasonable prospects for the eventual future economic extraction of the Foster South nickel deposit.

BAKER MINING PROPOSAL AND PERMITTING

As part of the ongoing de-risking of the path to production at Baker, the Company submitted a Mining Proposal in the December 2023 quarter to the Department of Energy, Mines, Industry Regulation and Safety. The Mining Proposal has now been approved, enabling the Company to mine the Baker deposit from underground (with decline access from the West Idough Open Pit) and transport the ore offsite to a third-party concentrator.

¹⁰ Based on historical WMC Resources Ltd ore production and delivery records.



There are no further compulsory permitting requirements for the development of Baker, noting that the Company continues to seek a Mining Rights Agreement with the Ngadju Native Title Aboriginal Corporation¹¹.

In light of current nickel market conditions, the Company reported after March 2024 quarter's end that it does not intend to proceed with Baker's development until these conditions improve. The Company recognises that there is significant option value in timing its financial investment decision to maximise the value of Baker and Foster under a more favourable nickel price and equity price scenario. In the meantime, the Company continues to finalise the PFS study and complete the permitting of the Foster deposits, which requires minimal expenditure with the majority of technical data collection and analysis already complete.

As communicated, this strategy also enables the Company to preserve cash whilst still progressing its emerging and exciting gold opportunities, particularly at Plentiful, Lady Herial, Hustler and Paringa West (all to the west of, and adjacent to, the Foster mine), where it holds 100% of the gold rights (see ASX announcement dated 13 March 2024).

BAKER AND FOSTER PFS

As reported in the recent March 2024 Quarterly Report, work continues on the combined Baker and Foster PFS which involves economic and technical studies to investigate the potential to mine the available Foster MRE (includes Foster South) and assess the benefits and potential improvements to the Baker PFS¹² of operating both Baker and Foster together.

As reported at Baker, further excellent high-grade assay results from the last RC drilling program there indicated the potential to add to the tonnage and metal content from both extensions to the mineralised domain up-dip to the top of fresh rock and into the transitional zone, and positional changes to the existing interpretation on the margins of the previous drill data coverage. Pending completion of the update to the Baker MRE, such changes will warrant an iteration of the mine design for the upper levels at Baker.

Similarly, the increase in potentially mineable nickel metal at Foster South reported today, along with local positional changes resulting from the re-interpretation, also warrant an iteration of the mine design, with a particular focus on reducing the capital development required due to the shallower plunge of the deposit.

The combined Baker and Foster Pre-Feasibility Study will use a nickel price closer to the current three-year lows, and also model the impact of higher nickel prices for comparative purposes. The results of this combined PFS, if positive, are likely to lead to an increase to the Company's Probable Ore Reserve. The updated PFS will enable the Company to have a better view of the KNP's nickel production potential and thereby better position the Company to continue evaluating its processing alternatives which include potential ore tolling partners.

The Company continues to progress the Mining Proposal for Foster, with the aim to have an initial Mining Proposal approved for the dewatering of the Foster decline and the rehabilitation of the decline, being the key preliminary activities to recommence mining at Foster.

This release has been approved and authorised for release by the Board.

Edmund Ainscough
Managing Director
Phone: +61 8 6424 8848
Email: info@lunnonmetals.com.au

¹¹ The Baker Mining Leases were granted before Ngadju's native title rights were claimed or determined, meaning the right to negotiate process for the grant of a Mining Lease does not apply. However, any new tenure would require the Company to negotiate with the Ngadju. At present, the Company does not have any plans for any additional tenure, with all proposed infrastructure located on granted Mining Leases or the Company having access agreements to construct infrastructure on granted Mining Lease or Miscellaneous Licences owned by third parties.

¹² Refer to ASX Announcement dated 23 May 2023.

Annexure 1: Diamond Drill Hole Collar Table for holes informing the MRE

Hole ID	Easting	Northing	Elevation (m ASL)	Dip	Azimuth	EOH Drill Depth (m)	Hole Type	Grid	Drilled by
CD244	383,490.2	6,529,440.5	320.8	-90.0	359.4	726.0	DD	MGA94_51	WMC
CD244W2	383,490.2	6,529,440.5	320.8	-90.0	359.4	700.0	DD	MGA94_51	WMC
CD249	383,490.7	6,529,339.9	319.3	-89.9	348.8	856.5	DD	MGA94_51	WMC
CD249W1	383,490.7	6,529,339.9	319.3	-89.9	348.8	891.0	DD	MGA94_51	WMC
CD2721A	383,407.2	6,529,432.5	318.3	-89.9	251.0	850.1	DD	MGA94_51	WMC
CD2721AW1	383,407.2	6,529,432.5	318.3	-89.9	251.0	823.0	DD	MGA94_51	WMC
CD2721AW3	383,407.2	6,529,432.5	318.3	-89.9	251.0	716.0	DD	MGA94_51	WMC
CD2906	383,299.0	6,529,197.8	315.0	-70.5	44.1	927.8	DD	MGA94_51	WMC
CD2906W1	383,299.0	6,529,197.8	315.0	-70.5	44.1	888.8	DD	MGA94_51	WMC
CD2906W2	383,299.0	6,529,197.8	315.0	-70.5	44.1	981.1	DD	MGA94_51	WMC
CD2906W3	383,299.0	6,529,197.8	315.0	-70.5	44.1	951.3	DD	MGA94_51	Lunnon Metals
CD293A	383,536.0	6,529,500.5	322.8	-90.0	0.0	600.0	DD	MGA94_51	WMC
CD323	383,444.7	6,529,394.7	318.5	-89.6	29.8	846.7	DD	MGA94_51	WMC
CD323W1	383,444.7	6,529,394.7	318.5	-89.6	29.8	830.7	DD	MGA94_51	WMC
CD323W2	383,444.7	6,529,394.7	318.5	-89.6	29.8	790.2	DD	MGA94_51	WMC
CD4066	383,300.8	6,529,114.5	313.9	-69.0	45.0	1001.0	DD	MGA94_51	WMC
CD4066W1	383,300.8	6,529,114.5	313.9	-69.0	45.0	837.6	DD	MGA94_51	WMC
CD4066W2	383,300.8	6,529,114.5	313.9	-69.0	45.0	959.5	DD	MGA94_51	WMC
CD4066W3	383,300.8	6,529,114.5	313.9	-69.0	45.0	922.8	DD	MGA94_51	WMC
CD6119	383,344.9	6,529,100.5	313.8	-69.5	45.0	982.0	DD	MGA94_51	WMC
CD6119W1	383,344.9	6,529,100.5	313.8	-69.5	45.0	953.4	DD	MGA94_51	WMC
CD6119W5	383,344.9	6,529,100.5	313.8	-69.5	45.0	1001.0	DD	MGA94_51	WMC
FOS23DD_006	383,297.4	6,529,250.2	315.0	-75.3	43.7	924.6	DD	MGA94_51	Lunnon Metals
FOS23DD_006W1	383,297.4	6,529,250.2	315.0	-75.3	43.7	927.5	DD	MGA94_51	Lunnon Metals
FOS23DD_006W2	383,297.4	6,529,250.2	315.0	-75.3	43.7	915.4	DD	MGA94_51	Lunnon Metals
FOS23DD_006W3	383,297.4	6,529,250.2	315.0	-75.3	43.7	781.7	DD	MGA94_51	Lunnon Metals
FOS23DD_007	383,379.8	6,529,455.7	318.9	-81.2	41.3	771.7	DD	MGA94_51	Lunnon Metals
FOS23DD_007W1	383,379.8	6,529,455.7	318.9	-81.2	41.3	699.4	DD	MGA94_51	Lunnon Metals
FOS23DD_009	383,299.7	6,529,196.8	314.9	-69.3	48.0	954.5	DD	MGA94_51	Lunnon Metals
FSD001	383,489.0	6,529,096.8	315.1	-77.8	44.4	911.2	DD	MGA94_51	ConsMin
FSD001W1	383,489.0	6,529,096.8	315.1	-77.8	44.4	972.6	DD	MGA94_51	ConsMin
FSD001W2	383,489.0	6,529,096.8	315.1	-77.8	44.4	1005.0	DD	MGA94_51	ConsMin



Annexure 2: Drill Intercepts for holes informing the MRE¹³

Hole ID	From (drill depth) (m)	Width (m)	Ni %	Cu %	Co %	Fe %	Mg %	As ppm	Pd g/t	Pt g/t	Cut-off % Ni
CD244	639.45	8.00	0.62	0.05	0.02	8.11	16.37	26	n/a	n/a	0.5
including	645.85	1.05	1.09	0.08	0.04	11.92	14.32	34	n/a	n/a	1.0
CD244W2	615.00	1.20	0.53	0.03	0.01	n/a	n/a	n/a	n/a	n/a	0.5
CD249	NSA										
CD249W1	744.00	9.00	0.54	n/a	n/a	n/a	n/a	n/a	n/a	n/a	0.5
CD2721A	NSA										
CD2721AW1	668.00	3.15	0.79	0.04	0.02	n/a	n/a	n/a	n/a	n/a	0.5
including	669.09	0.75	1.41	0.09	0.03	n/a	n/a	n/a	n/a	n/a	1.0
and	684.84	1.16	0.84	0.05	0.02	n/a	n/a	n/a	n/a	n/a	0.5
CD2721AW3	669.00	2.00	0.51	0.03	0.02	n/a	n/a	n/a	n/a	n/a	0.5
CD2906	790.00	3.00	0.50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	0.5
and	802.00	3.00	0.50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	0.5
and	840.92	2.47	4.63	0.27	0.10	27.05	8.87	<10	0.49	0.21	1.0
CD2906W1	766.00	3.00	1.12	0.03	0.02	n/a	n/a	n/a	n/a	n/a	0.5
including	766.00	0.53	3.81	0.10	0.03	5.96	19.31	23	n/a	n/a	1.0
and	783.65	3.35	0.56	0.01	0.01	n/a	n/a	n/a	n/a	n/a	0.5
and	798.00	5.00	0.54	0.04	0.01	n/a	n/a	n/a	n/a	n/a	0.5
and	805.00	2.43	0.82	0.07	0.03	10.02	15.59	<10	n/a	n/a	0.5
and	841.34	0.94	10.18	0.72	0.24	44.97	0.48	<10	1.31	0.27	1.0
CD2906W2	770.50	0.80	1.36	0.05	0.03	n/a	n/a	n/a	n/a	n/a	1.0
and	853.00	4.00	0.56	0.03	0.02	n/a	n/a	n/a	n/a	n/a	0.5
and	865.00	2.84	0.76	0.04	0.02	n/a	n/a	n/a	n/a	n/a	0.5
and	873.00	1.54	0.93	0.05	0.02	7.41	20.00	10	n/a	n/a	0.5
and	877.00	4.00	0.81	0.06	0.02	7.78	19.56	14	n/a	n/a	0.5
and	881.00	12.05	4.54	0.55	0.08	21.54	12.18	40	n/a	n/a	1.0
CD2906W3	827.15	1.30	0.73	0.02	0.02	5.59	19.18	<10	0.07	0.02	0.5
and	841.00	3.00	0.53	0.02	0.02	5.58	19.75	<10	0.05	0.03	0.5
and	847.00	8.00	0.66	0.04	0.02	5.89	19.68	<10	0.08	0.03	0.5
and	858.00	7.30	0.90	0.05	0.02	7.07	19.62	11	0.11	0.05	0.5
and	868.00	11.60	0.76	0.05	0.02	7.10	19.20	12	0.09	0.04	0.5
and	879.60	10.45	5.15	0.31	0.10	23.79	11.37	58	0.69	0.43	1.0
CD293A	NSA										
CD323	707.00	3.00	0.61	0.04	0.02	6.71	17.54	<10	n/a	n/a	0.5
and	717.00	6.00	0.68	0.05	0.02	8.85	14.09	<10	n/a	n/a	0.5
and	726.00	6.00	0.59	0.04	0.02	8.89	14.24	<10	n/a	n/a	0.5
and	735.00	11.00	0.72	0.05	0.02	9.29	14.60	21	n/a	n/a	0.5
including	744.00	1.00	1.09	0.08	0.04	11.17	13.86	52	0.15	0.08	1.0
and	767.00	9.37	3.48¹⁴	0.50	0.08	n/a	n/a	n/a	n/a	n/a	1.0

¹³ Intervals used in the MRE grade estimation process and may differ slightly from previously reported intervals as an outcome of local geological interpretation.

¹⁴ New Lunnon Metals' re-assay result. Previously reported assay interval was the historical WMC assay and at that time had not been re-assayed by the Company.

Hole ID	From (drill depth) (m)	Width (m)	Ni %	Cu %	Co %	Fe %	Mg %	As ppm	Pd g/t	Pt g/t	Cut-off % Ni
CD323W1	752.00	2.00	0.53	0.02	0.01	n/a	n/a	n/a	n/a	n/a	0.5
and	771.00	4.00	0.59	0.03	0.02	n/a	n/a	n/a	n/a	n/a	0.5
and	790.25	1.75	1.02	0.11	0.03	n/a	n/a	n/a	n/a	n/a	0.5
including	791.00	1.00	1.37	0.16	0.05	n/a	n/a	n/a	n/a	n/a	1.0
and	814.00	7.00	4.22	0.42	0.11	26.26	10.22	<10	n/a	n/a	1.0
CD323W2	706.00	12.00	0.68	0.02	0.01	n/a	n/a	n/a	n/a	n/a	0.5
and	721.00	7.00	0.62	0.04	0.01	n/a	n/a	n/a	n/a	n/a	0.5
and	754.58	4.24	4.49	0.47	0.10	26.02	10.25	<10	n/a	n/a	1.0
CD4066	910.00	0.80	0.77	0.06	0.03	n/a	n/a	n/a	n/a	n/a	0.5
CD4066W1	NSA										
CD4066W2	862.00	3.00	0.57	0.03	0.02	n/a	n/a	n/a	n/a	n/a	0.5
and	872.00	1.00	1.46	0.05	0.04	8.58	19.17	26	n/a	n/a	1.0
and	883.00	10.80	0.63	0.04	0.02	n/a	n/a	n/a	n/a	n/a	0.5
CD4066W3	803.00	3.80	0.78	0.06	0.02	11.28	10.93	52	n/a	n/a	0.5
and	839.75	3.55	2.19	0.15	0.04	24.17	5.61	<10	n/a	n/a	1.0
CD6119	835.00	6.00	0.85	0.09	0.02	n/a	n/a	n/a	n/a	n/a	0.5
including	838.00	2.20	1.30	0.17	0.03	22.88	6.02	<10	n/a	n/a	1.0
CD6119W1	852.50	0.35	6.63	0.27	0.10	32.10	5.42	407	n/a	n/a	1.0
and	855.00	2.00	1.89	0.12	0.05	n/a	n/a	n/a	n/a	n/a	0.5
including	855.60	0.30	9.01	0.42	0.24	40.60	0.61	52	n/a	n/a	1.0
and	861.00	7.00	0.50	0.03	0.02	n/a	n/a	100	n/a	n/a	0.5
CD6119W5	857.00	14.00	0.58	0.04	0.02	n/a	n/a	n/a	n/a	n/a	0.5
and	875.00	9.00	0.60	0.06	0.01	n/a	n/a	n/a	n/a	n/a	0.5
and	888.00	2.00	0.71	0.04	0.02	n/a	n/a	n/a	n/a	n/a	0.5
FOS23DD_006	776.00	3.00	0.50	0.04	0.01	5.37	19.82	19	n/a	n/a	0.5
and	812.00	2.50	0.62	0.02	0.02	6.80	21.31	38	n/a	n/a	0.5
and	820.80	7.67	0.56	0.03	0.02	7.08	18.47	11	n/a	n/a	0.5
and	857.55	3.66	3.84	0.24	0.09	23.16	11.45	<10	0.53	0.23	0.5
including	858.32	2.89	4.73	0.29	0.11	27.31	10.01	<10	0.65	0.28	1.0
FOS23DD_006W1	766.00	4.00	0.57	0.03	0.02	5.81	20.51	15	n/a	n/a	0.5
and	818.50	1.00	0.82	0.06	0.02	9.47	14.58	11	0.11	0.05	0.5
FOS23DD_006W2	761.00	5.00	0.50	0.02	0.02	5.87	20.12	<10	0.05	0.02	0.5
and	856.16	4.62	3.87	0.30	0.10	26.03	10.67	<10	0.73	0.35	1.0
FOS23DD_006W3	764.00	5.00	0.55	0.04	0.02	6.12	19.42	15	0.06	0.03	0.5
FOS23DD_007	630.00	1.55	0.69	0.02	0.02	5.25	20.24	12	0.13	0.05	0.5
and	653.40	1.35	1.50	0.15	0.04	12.77	12.58	<10	0.18	0.09	1.0
FOS23DD_007W1	620.65	0.35	0.86	0.06	0.02	7.62	17.98	<11	0.11	0.06	0.5
FOS23DD_009	782.90	1.45	0.99	0.02	0.02	5.65	19.37	<10	0.17	0.06	0.5
and	810.50	3.20	0.57	0.03	0.02	7.42	18.00	<10	0.08	0.04	0.5
and	835.95	0.35	2.77	0.06	0.08	21.36	1.59	<10	0.20	0.30	1.0
FSD001	NSA										
FSD001W1	NSA										
FSD001W2	890.00	2.85	0.51	0.04	0.02	9.98	10.35	20	n/a	n/a	0.5



'n/a' means that insufficient number of samples within the composited interval were assayed for these elements and thus an average grade is unable to be derived.

NSA means no significant assays

** Cut-off grade is modelling cut-off as described in the JORC Table 1; although close to 1% Ni cut-off it is not always exactly 1%.*



COMPETENT PERSON'S STATEMENT & COMPLIANCE

Any information in this announcement that relates to nickel and gold geology, nickel Mineral Resources, Exploration Targets, Exploration Results and the Company's Historical Core Program, which includes the accessing, re-processing, re-logging, cutting and assaying of historical WMC Resources Ltd diamond core and the appropriateness of the use of this data and other historical geoscience hard copy data such as cross sections, underground level mapping plans, longitudinal projections and long sections, including commentary relying on personal experience whilst employed at Kambalda by WMC Resources Ltd and Gold Fields Ltd, is based on, and fairly represents, information and supporting documentation prepared by Mr. Aaron Wehrle, who is a Member of the Australasian Institute of Mining and Metallurgy (**AusIMM**). Mr. Wehrle is a full-time employee of Lunnon Metals Ltd, a shareholder and holder of employee options/performance rights; he has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that he is undertaking to qualify as Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Wehrle is the Company's principal Competent Person and consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

The information in this announcement that relates to the MRE geostatistics, methodology and estimation is based on, and fairly represents, information and supporting documentation prepared by Mr. Stephen Law, who holds current Chartered Professional (Geology) status with the AusIMM. Mr. Law is a full-time employee of Lunnon Metals Ltd; he has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that he is undertaking to qualify as Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Law consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

Any information in this announcement that relates to reporting of prior nickel metallurgical testwork results, was based on, and fairly represents, information and supporting documentation prepared by Mr. Barry Cloutt, who is a Member of the AusIMM. Mr. Cloutt is an external and independent consultant to Lunnon Metals Ltd and has sufficient experience that is relevant to the activity that he is undertaking to qualify as Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Cloutt consented to the inclusion in those announcements of the matters based on his information in the form and context in which it appears.

Any information in this announcement that relates to the mining, metallurgical and environmental modifying factors or assumptions as they may apply to the Company's MREs was based on, and fairly represents, information and supporting documentation prepared by Mr. Max Sheppard, Mr. Wehrle and Mr. Edmund Ainscough, who are Competent Persons and Members of the AusIMM and full time employees of Lunnon Metals Ltd. Mr. Wehrle and Mr. Ainscough are shareholders and all three are holders of employee options/performance rights. All three employees have sufficient experience that is relevant to the style of mineralisation, the types of deposit under consideration, the activity that they are undertaking and the relevant factors in the particular location of the prospect area, the historical Foster mine and the KNP generally, to qualify as Competent Persons as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Sheppard, Mr. Wehrle and Mr. Ainscough consent to the inclusion in this announcement of the matters based on their information in the form and context in which it appears.



MINERAL RESOURCES

The detailed breakdown of the Company's Mineral Resources as updated 13 May 2024, is as follows:

	Cut-off (Ni %)	Indicated Ni			Inferred Ni			Total Ni		
		Tonnes	%	Ni Tonnes	Tonnes	%	Ni Tonnes	Tonnes	%	Ni Tonnes
FOSTER MINE										
Warren	1.0	345,000	2.6	8,800	100,000	2.4	2,400	445,000	2.5	11,200
Foster Central										
85H	1.0	395,000	3.2	12,800	294,000	1.2	3,600	689,000	2.4	16,400
N75C	1.0	271,000	2.6	6,900	142,000	1.9	2,600	413,000	2.3	9,500
S16C/N14C	1.0	-	-	-	64,000	5.7	3,700	64,000	5.7	3,700
South	1.0	264,000	4.7	12,400	111,000	4.7	5,200	375,000	4.7	17,600
Sub total		1,275,000	3.2	40,900	711,000	2.5	17,500	1,986,000	2.9	58,400
BAKER AREA										
Baker	1.0	638,000	3.8	24,000	291,000	2.3	6,800	929,000	3.3	30,800
East Trough	1.0	-	-	-	108,000	2.7	3,000	108,000	2.7	3,000
Sub total		638,000	3.8	24,000	399,000	2.5	9,800	1,037,000	3.3	33,800
SILVER LAKE										
25H	1.0	336,000	1.6	5,300	488,000	1.7	8,500	824,000	1.7	13,800
Sub total		336,000	1.6	5,300	488,000	1.7	8,500	824,000	1.7	13,800
FISHER										
F Zone	1.0	56,000	2.7	1,500	196,000	1.6	3,200	252,000	1.9	4,700
Sub total		56,000	2.7	1,500	196,000	1.6	3,200	252,000	1.9	4,700
TOTAL		2,305,000	3.1	71,700	1,794,000	2.2	39,000	4,099,000	2.7	110,700

Note: Figures have been rounded and hence may not add up exactly to the given totals. The Mineral Resource is inclusive of any reported Ore Reserves.

ORE RESERVES

The detailed breakdown of the Company's Baker Ore Reserve as at 30 June 2023, is as follows:

Baker	tonnes	Ni %	Cu%	Co%	Pd g/t	Pt g/t	As ppm	Ni metal
Proved	-	-	-	-	-	-	-	-
Probable	612,000	2.86	0.24	0.052	0.49	0.20	110	17,500
Total	612,000	2.86	0.24	0.052	0.49	0.20	110	17,500

DISCLAIMER

References in this announcement may have been made to certain previous ASX announcements, which in turn may have included Exploration Results, Exploration Targets, Mineral Resources, Ore Reserves and the results of Pre-Feasibility Studies. For full details, please refer to the said announcement on the said date. The Company is not aware of any new information or data that materially affects this information. Other than as specified in this announcement and mentioned announcements, the Company confirms it is not aware of any new information or data that materially affects the information included in the original market announcement(s), and in the case of estimates of Mineral Resources that all material assumptions and technical parameters underpinning the estimates in the relevant announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcement.

ABOUT THE KAMBALDA NICKEL PROJECT (KNP)

The Kambalda Nickel Project (**KNP**) (shown in **Figure 6**) features approximately 47km² of tenements in the Kambalda Nickel District. KNP is located approximately 570km east of Perth and 50-70km south-southeast of Kalgoorlie, in the Eastern Goldfields of Western Australia. KNP comprises two project areas, Foster and Baker* (19 contiguous mining leases) and Silver Lake and Fisher+ (20 contiguous mining leases).

The world-renowned Kambalda Nickel District has produced in excess of 1.6 million tonnes of nickel metal since its discovery in 1966 by WMC Resources Ltd (**WMC**). In addition, over 15Moz of gold in total has been mined, making the Kambalda/St Ives district a globally significant gold camp in its own right.

The KNP is accessed via public roads, well-established mine road infrastructure and the main St Ives causeway over Lake Lefroy. The KNP is broadly surrounded by tenements held by St Ives Gold Mining Co. Pty Ltd (**SIGM**), a wholly owned subsidiary of Gold Fields Limited (JSE:GFI) and the Company's major shareholder.

**SIGM retains rights to explore for and mine gold in the "Excluded Areas", as defined in the subsisting agreements between Lunnon Metals and SIGM, and on the remaining area of the tenements, has select rights to gold in limited circumstances.*

+The Company has the exclusive rights to nickel on 19 mining leases and related access rights on one additional tenure. Gold Fields retains the rights to the other minerals (except to the extent minerals occur in conjunction with nickel mineralisation or nickel bearing ore but excluding gold).

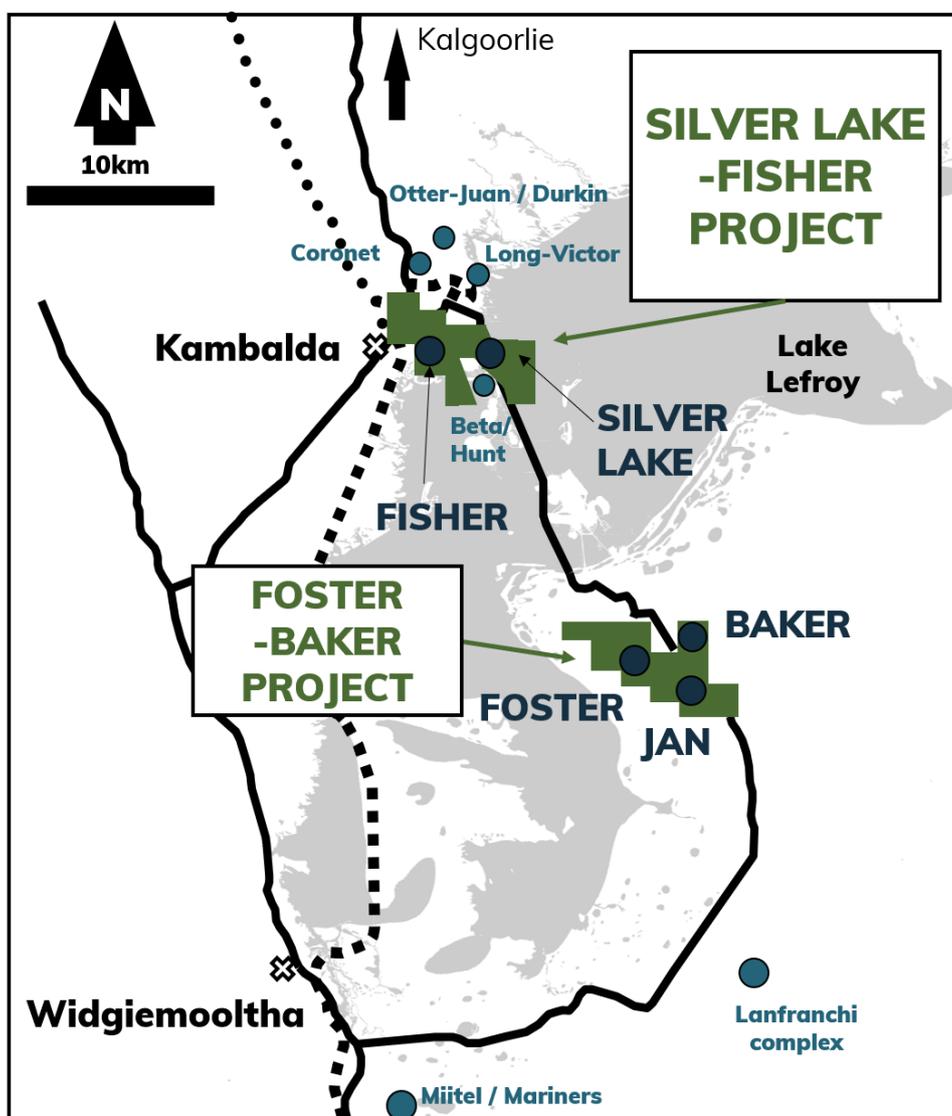


Figure 6: Regional Location of the Kambalda Nickel Project and other nearby nickel deposits.

JORC TABLE 1

Note: where the acronym MRE is used in the following sections, it continues to mean Mineral Resource estimate and also represents the named deposit or project the subject of this report/announcement.

SECTION 1 SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> All drilling and sampling are undertaken in an industry standard manner both by Lunnon Metals Ltd (Lunnon Metals or the Company) in 2021, 2022 and 2023, historically by WMC Resources Ltd (WMC) and one limited surface program completed by Consmin in the early 2000s, distal and to the south of the Foster South MRE. For the purposes of this Table 1, references to WMC Historical drilling or data include this one minor additional program by Consmin. Lunnon Metals' diamond drill (DD) and reverse circulation (RC) holes are completed by Blue Spec Drilling Pty Ltd (Blue Spec) following protocols and QAQC procedures aligned with industry best practice. Any DD holes on the surface of the salt lake, Lake Lefroy, have been drilled to date by Ausdrill Pty Ltd (Ausdrill), using a track-mounted lake rig. <p>WMC Historical data</p> <ul style="list-style-type: none"> Sampling procedures followed by WMC in the drilling, retrieval, and storage of diamond drill core are in line with industry standards at the time (1966 to 2001). Surface diamond drill obtaining NQ and/or BQ diameter drill core, were the standard exploration sample techniques employed by WMC. Where relevant underground DD was also used extensively in the operating environment, with drilling of both up and down holes, retrieving typically BQ diameter drill core and to a lesser extent AQ diameter drill core. The drill core was typically collected in steel core trays of 1.0m lengths comprising five to seven compartments depending on drill core diameter. The core trays were labelled with the drill hole number and numbered with the downhole meterage for the start of the first 1 m run and the end of the last 1 m run on the lip of the core tray and typically included core blocks within the core trays demarcating the depth meterage of rod pull breaks. The earlier drilling was collected in wooden, and hybrid wooden/steel core trays and occasionally depths recorded in feet. <p>Handheld XRF</p> <ul style="list-style-type: none"> Where a handheld XRF tool was used to collect previous exploration data, it was done so to verify the levels of key elements such as nickel, chromium, copper and zinc. The individual XRF results themselves are not reported and any element ratios are used as a guide only for logging/ sampling and to assist vectoring to potential mineralisation. No XRF results are used in the MRE.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so,</i>	<p>The MRE completed by Lunnon Metals utilised a combination of its own new DD and WMC historical vintage surface DD of NQ and BQ size drill core. No underground drilling was completed historically at Foster South and any such commentary in this Table 1 is provided for background and context purposes only.</p> <p>WMC Historical Drilling</p> <ul style="list-style-type: none"> Historical surface DD completed by WMC typically comprised NQ

Criteria	JORC Code explanation	Commentary
Drilling techniques (continued)	<i>by what method, etc.).</i>	<p>and BQ size drill core. Pre-collars to the surface diamond drillholes are typically PQ and HQ size and occasionally comprised RC drilling techniques. The pre-collars are not typically mineralised.</p> <ul style="list-style-type: none"> • Underground DD was used extensively in the operating environment. Drilling included both up hole and downhole, retrieving typically BQ diameter drill core and to a lesser extent AQ diameter drill core. • Although no documentation is available to describe the drilling techniques used by WMC at the time it is understood that the various drilling types used conventional drilling methods consistent with industry standards of the time. • None of the historical WMC diamond drill core was oriented.
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> • DD core recovery is measured for each drilling run by the driller and then checked by the Lunnon Metals geological team during the mark up and logging process. • No sample bias is observed. • There is no relationship between recovery and nickel grade nor bias related to fine or coarse sample material. • There are no available records for sample recovery for DD or RC drilling completed by WMC; however, re-logging exercises completed by Lunnon Metals of surface and underground DD holes from across the KNP between 2017 and present found that on average drill recovery was good and acceptable by industry standards.
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>For Lunnon Metals re-logging of Historical DD</p> <ul style="list-style-type: none"> • Geology logging is undertaken for the entire hole recording lithology, oxidation state, mineralisation, alteration, structural fabrics, and veining. • DD orientated structural logging, core recovery, and Rock Quality Designation (RQDs) are all recorded from drill core over intervals of interest and relevance. • Detailed geotechnical logging and rock property test work is completed over intervals of relevance by independent MineGeoTech Pty Ltd (MGT) contractor geotechnical engineers. • Geological logging (and where required, geotechnical logging) is completed in sufficient detail to support future Mineral Resource estimation, mining and metallurgical studies. • Metallurgical test work in the broader project area is ongoing in addition to the geological logging and element assaying detailed below. • General logging data captured are qualitative (descriptions of the various geological features and units) and quantitative (numbers representing structural attitudes, and vein and sulphide percentages, magnetic susceptibility and conductivity). • DD core is photographed in both dry and wet form. <p>WMC Historical data</p> <ul style="list-style-type: none"> • There is no available documentation describing the logging procedures employed by WMC geologists in the KNP area. • However, the historical graphical hardcopy logs and other geoscientific records available for the project are of high quality and contain significant detail with logging intervals down to as narrow as 0.01 m. • The geological logs document lithology, textures, structures, alteration, and mineralisation observed in drill core captured both graphically and in a five-character logging code (Lunnon Metals

Criteria	JORC Code explanation	Commentary
Logging (continued)		<p>notes that a previous logging legend employed at WMC's Kambalda nickel operations utilised a 3-letter code which is often represented on hard copy plans and cross sections of an older vintage and which was converted by WMC to the latter 5-character code at some later time).</p> <ul style="list-style-type: none"> • Stratigraphy is also captured in a three-character logging code. Sample intervals are recorded on the graphical log. These logging legends are well documented in lieu of a recorded procedure and are utilised by Lunnon Metals in current logging practices. • In regard geotechnical logging or procedures, there is no record of any formal relevant procedures or logging and based on personal experience of the Competent Person, such logging was not routinely completed prior to the introduction of Regulation 10:28 in the WA Mine Safety and Inspection Act, requiring the same in approximately 1996. • Based on the personal experience of the relevant Competent Person to this announcement, having worked for WMC in Kambalda between 1996 and 2001, it is known that WMC had a rigorous and regimented system for storing and archiving the graphical logs physically, microfilmed, and drafted on to master cross sections, plans, and long sections as well as capturing the interval data (logging and assays) digitally in database format. • Lunnon Metals sourced historical diamond core from the St Ives Gold Mining Co Pty Ltd (SIGM) Kambalda core yard on Durkin Road where relevant to its investigations.
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <hr/> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i></p> <hr/> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <hr/> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <hr/> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <hr/> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>Lunnon Metals DD</p> <ul style="list-style-type: none"> • DD core samples are collected with a diamond drill rig drilling HQ and/or NQ2 size core. After logging, sample interval mark-up, photographing, and geotechnical rock property test work, selected sample intervals of drill core are cut in half along the length of the drill core with a diamond saw in a Discoverer® Automatic Core Cutting Facility using a Corewise Auto Core Saw. • Typically, one half of the drill core is sent to the laboratory for assay and the other half retained in its original core tray. • In zones of potential metallurgical interest, the half core sample is vacuum sealed and stored refrigerated for later use, the remaining half core is further cut into quarters with one quarter sent to the laboratory for assay and the remaining quarter retained in its original core tray. • In the case of metallurgical 'twin' holes, the quarter core is sent to the laboratory for assay, while the remaining three quarters of core is vacuum sealed and stored refrigerated. No core is retained in its original core tray. • Holes are marked-up and sampled for assaying over mineralised and surrounding intervals at a typical minimum sample interval of 0.3m to ensure adequate sample weight and a typical maximum sample interval of 1.0m, constrained by geological boundaries. • Specific Gravity – density measurements are taken for each mineralised DD sample for the Lunnon Metals drill holes. • Sample weights vary depending on core diameter, sample length and density of the rock. • Industry prepared certified reference material (CRM), or standard samples, of various grades appropriate to the mineralisation expected are inserted into the sample batches, approximately every 50 samples and more frequently in the identified mineralised zones. • Lunnon Metals prepared blank samples are inserted, approximately every 50 samples and more frequently in the identified mineralised zones. Blank samples are prepared from barren non-ultramafic RC

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation (continued)		<p>chips as verified by laboratory analysis or barren non-ultramafic Proterozoic Dyke DD core acquired locally and verified by geological logging.</p> <ul style="list-style-type: none"> • Field duplicate samples are collected at a rate of 1 in 25 samples, and more frequently in the identified mineralised zones, by cutting the core into quarters and submitting both quarters to the laboratory for analysis as two separate samples. • In the case of the metallurgical holes no field duplicates are collected to preserve a consistent amount of core for metallurgical testwork. • After receipt of the DD core samples by the independent laboratory the samples are dried, crushed to ~2mm, and pulverised with >85% pulverised to 75micron or better. For sample weights >3kg the sample is dried, crushed to ~2mm, split, and pulverised up to 3kg. • Sample sizes are considered appropriate for the style of mineralisation (potentially nickeliferous massive, matrix and disseminated sulphides, hosted in komatiite and basalt). • Samples are submitted to Intertek Genalysis in Kalgoorlie for sample preparation i.e. drying, crushing where necessary, and pulverising. Pulverised samples are then transported to Intertek Genalysis in Perth for analysis. <p>WMC Historical Drilling</p> <ul style="list-style-type: none"> • All historical core that was relevant to the mineralisation drilled and sampled by WMC as sighted by Lunnon Metals was sawn with half or quarter core sampling practices. It is assumed that all samples otherwise contributing to any estimation of nickel mineralisation by Lunnon Metals were processed with this standard methodology. • In regard historical core used in the MRE, subsampling techniques for WMC drilled NQ, BQ and where relevant AQ size holes typically involved half and quarter sawn drill core with the quarter core dispatched for assaying in the case of NQ and BQ, and half core in the case of AQ. • Portions of drill core distal to the main high-grade mineralisation were sometimes 'chip sampled' by WMC. Lunnon Metals has chosen not to utilise such samples in any estimation of grade or mineralisation. • WMC typically sampled in interval lengths relevant to the underlying lithology and mineralisation such that sample interval lengths may vary from between minima of 0.05m and maxima up to 2.00m approximately within any mineralised zone. • Intervals of no mineralisation or interest were not sampled. • Review of historical drill core by Lunnon Metals indicated that there were no areas of interest relevant to nickel mineralisation that were not half or quarter core sawn and sampled by WMC and that the sample sizes were appropriate for the type, style and thickness of mineralisation being tested with sample breaks corresponding to lithological or mineralisation breaks being the norm. Although faded through time, sample depth intervals are evident as marked on the remaining half core as observed by Lunnon Metals and these correlate to sample interval depths in the original paper graphical drill logs and the database. • While the WMC procedures for logging, sampling, assaying and QAQC of drillhole programs, was not available at the time of this announcement it is interpreted that it was of high quality and in line with industry standards at that time. • It is the opinion of the relevant Competent Person that the sample preparation, security, and analytical procedures pertaining to the above-mentioned historical WMC drilling are adequate and fit for purpose based on:

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation (continued)		<ul style="list-style-type: none"> - WMC's reputation in geoscience stemming from their discovery of nickel sulphides in Kambalda in the late 1960s; - identification of procedures entitled "WMC QAQC Practices for Sampling and Analysis, Version 2 – adapted for St Ives Gold" dated February 2001 and which includes practices for nickel; and - the first-hand knowledge and experience of the Competent Person of this announcement whilst working for WMC at Kambalda between 1996 and 2001.
Quality of assay data and laboratory tests	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<p>Lunnon Metals work on Historical DD</p> <ul style="list-style-type: none"> • Samples are submitted to Intertek Genalysis in Kalgoorlie for sample preparation i.e. drying, crushing where necessary, and pulverising. • Pulverised samples are then transported to Intertek Genalysis in Perth for analysis. • Samples are analysed for a multi-element suite including, as a minimum, Ni, Cu, Co, Cr, As, Fe, Mg, Pb, S, Ti, Zn. Analytical techniques used a four-acid digest (with ICP-OES or ICP-MS finish) of hydrofluoric, nitric, perchloric and hydrochloric acids, suitable for near total dissolution of almost all mineral species including silica-based samples. • Within the nickel mineralised zones, the platinum group elements (Pd, Pt, Au) are also analysed using a 50g charge lead collection fire assay method with ICP-MS finish. • These techniques are considered quantitative in nature. • As discussed previously, CRM standard, and blank samples are inserted by Lunnon Metals into sample batches, and the laboratory also carries out internal standards in individual batches. • The resultant Lunnon Metals and laboratory QAQC data is reviewed upon receipt to determine that the accuracy and precision of the data has been identified as acceptable prior to being cleared for upload to the database. • This project-wide Lunnon Metals KNP Geobank® database (Database) is now hosted and maintained in-house by a Lunnon Metals Database Administrator. <p>WMC Historical data</p> <ul style="list-style-type: none"> • There is no data available at the time of this announcement pertaining to the assaying and laboratory procedures nor the historical field or laboratory quality assurance and quality control (QAQC), if any, undertaken by WMC drilling programs in the KNP area; however, it is expected that industry standards as a minimum were likely to have been adopted in the KNP area and the analytical laboratory. <p>Extensive re-sampling and re-assaying by Lunnon Metals of historical WMC DD core has returned consistency in nickel values when compared to the original WMC nickel assay values, further supporting the expected appropriateness of the WMC assay data.</p>
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<p>Lunnon Metals work on Historical DD</p> <ul style="list-style-type: none"> • Numerous DD twin holes of original RC holes, and DD wedge twin holes from original DD parent holes now completed at KNP demonstrate acceptable correlation and verification of the associated significant intersections reported. The distance between the original and twin holes typically ranges between 0.5m and 5.0m. • Prior to drilling, all planned collar data is captured in a digital drillhole collar register stored on a secure site-based server which is backed up to Perth based server continuously. The collar register is updated as drilling progresses and is completed. • Logging and sample intervals are captured in digital QAQC'd spreadsheets via rugged tablet, field-based laptops (known as

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying (continued)		<p>“Toughbooks”). After internal sign-off, these digital sampling and logging registers are saved by geologists in the designated folder on the server.</p> <ul style="list-style-type: none"> • After further data validation by the Database administrator, the items in the upload folder are uploaded to a secure digital database on a separate sequel sever. • Since September 2023 the data collected on the Toughbooks synchronises directly to the Database stored on a separate secure sequel server. A set of buffer tables store the data before the database administrator does a second validation of the data (driven by in-built validation rules in the Database) before loading to the production data tables. • Assays from the laboratory are sent directly to the Database administrator via a dedicated Lunnon Metals assays email address where they are all checked and verified by the Lunnon Metals Database administrator before accepting the batches into the Database. • No adjustments are made to the original assay data. <p>WMC Historical data</p> <ul style="list-style-type: none"> • Diamond core data – across the KNP, Lunnon Metals has undertaken exhaustive assessment of historical WMC underground and surface diamond drill core to inspect and visually validate significant drill assays and intercepts, and re-sample and re-assay to validate historical assay data in the KNP Database. • No significant or systematic anomalies have been identified and the Competent Person is satisfied that the original data in the project area is representative of the geology and mineralisation modelled; thus no adjustments to assay data have been deemed necessary or made. • Twin holes of select historical WMC intercepts have now been completed and also demonstrate acceptable correlation and verification of the associated historical significant intersections. Lunnon Metals notes that the Kambalda style of nickel mineralisation is highly visible permitting the nickel grade to be relatively accurately estimated by experienced geologists to validate the laboratory assay grade; this is a practise that is not uncommon in the nickel mining industry.
Location of data points	<p><i>Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<p>General</p> <ul style="list-style-type: none"> • The grid projection is GDA94/ MGA Zone 51. • Diagrams and location data tables have been provided in the previous reporting of exploration results where relevant. <p>WMC Historical data</p> <ul style="list-style-type: none"> • Historical methods of drill collar survey pick-up are not known however WMC did employ surface surveyors dedicated to the collection of exploration collar data. The easting, northing and elevation values were originally recorded in local KNO (‘Kambalda Nickel Operations’) grid and later converted to the currently used GDA94/MGA Zone 51 grid. Both the original KNO grid coordinates and the converted coordinates are recorded in the Database. A representative number of historical drill collars were located in the field and their locations cross checked via differential GPS and/or handheld GPS to validate the Database collar coordinates. • Historical hardcopy downhole survey data is generally available for the majority of surface drillholes and the records show that single shot magnetic instruments were used. A representative number of these hardcopy downhole survey records have been cross checked

Criteria	JORC Code explanation	Commentary
		<p>against the digital records in the Database.</p> <ul style="list-style-type: none"> Downhole surveys of select historical surface DD have been conducted using modern gyro systems as described above and no significant errors or inconsistencies were deemed present. Lunnon Metals has corrected where necessary incorrect data in the Database where down hole measurements from the hardcopy data were incorrectly processed. No other significant errors or inconsistencies were deemed present or capable of being detrimental to any interpretation of nickel mineralisation including any MRE work.
<p>Data spacing and distribution</p>	<p><i>Data spacing for reporting of Exploration Results.</i></p> <hr/> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied</i></p> <hr/> <p><i>Whether sample compositing has been applied.</i></p>	<p>Lunnon Metals work on Historical DD</p> <ul style="list-style-type: none"> All holes have been geologically logged and provide a strong basis for geological control and continuity of mineralisation. No sample compositing has been applied except at the reporting stage of drill intercepts within a single hole. <p>WMC Historical data</p> <ul style="list-style-type: none"> The typical spacing for the early WMC DD surface drill traverses varies but is typically approximately 200m to 400m apart with drillhole spacing along the traverses at 100m to 50m. In areas of shallower RC drilling this drill spacing is sometimes improved to 100m by 50m or even 50m by 50m. The drill spacing for areas the subject of underground DD holes was variable but was on average spaced at approximately 20m along the strike of a mineralised zone with fans or rings of DD holes that deliver pierce points in the dip orientation at variable spacing, but typically 10m to 20m apart. The drill spacing for the MRE deposit, with Company and WMC surface DD, is variable but ranges from approximately 25m to 80m for surface holes.
<p>Orientation of data in relation to geological structure</p>	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <hr/> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<ul style="list-style-type: none"> The preferred orientation of drilling at KNP is designed to intercept the target approximately perpendicular to the strike and dip of the mineralisation where/if known. Subsequent sampling is therefore considered representative of the mineralised zones if/when intersected. In the broader project area, the majority of historical drill holes were collared vertically and lifted/drifted in towards close to perpendicular to the mineralisation with depth as the nickel contact was approached. The chance of bias introduced by sample orientation relative to structures, mineralised zones or shears at a low angle to the drillhole is possible, however quantified orientation of the intercepted interval allows this possible bias to be assessed. Where drilling intercepts the interpreted mineralisation as planned, bias is considered non-existent to minimal. Lunnon Metals does not consider that any bias was introduced by the orientation of sampling resulting from any particular drilling technique. Where drilling intercepts the interpreted mineralisation as planned, bias is considered non-existent to minimal.
<p>Sample security</p>	<p><i>The measures taken to ensure sample security.</i></p>	<p>Lunnon Metals work on Historical DD</p> <ul style="list-style-type: none"> After the drill core is cut and returned to its original position in the core tray, Lunnon Metals' geologists mark up the drill core for sampling and records the sample intervals against unique sample numbers in a digital sample register. A Lunnon Metals core farm technician then collects the cut core samples into calico bags guided by the sample register and sampling information contained therein.

Criteria	JORC Code explanation	Commentary
Sample security (continued)		<ul style="list-style-type: none"> The calico samples are collected sequentially in groups of five and placed into polyweave bags which are labelled and secured with cable ties. The polyweave bags are in turn placed in bulka bags which are secured on wooden pallets and transported directly via road freight to the laboratory with a corresponding submission form and consignment note. The laboratory checks the samples received against the submission form and notifies Lunnon Metals of any inconsistencies. Once the laboratory has completed the assaying, the pulp packets, pulp residues and coarse rejects are held in the laboratory's secure warehouse until collected by Lunnon Metals or approval is provided for them to be discarded. <p>WMC Historical data</p> <ul style="list-style-type: none"> There is no documentation which describes the historical sample handling and submission protocols during the WMC drilling programmes; however, it is assumed that due care was taken with security of samples during field collection, transport and laboratory analysis. The historical drill core remaining after sampling was stored and catalogued at the KNO core farm (now Gold Fields, SIGM core farm) and it remains at this location to the present day.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> No external audits or reviews have been undertaken at this stage of the program. <p>WMC Historical data</p> <ul style="list-style-type: none"> Cube Consulting Pty Ltd (Cube) are independent of Lunnon Metals and have been previously retained by Lunnon Metals to complete the grade estimation for nickel mineralisation models and MRE exercises but also to review and comment on the protocols developed by Lunnon Metals to deal with, and thereafter utilise, the historical WMC Resources' data, in particular the re-sampling and QAQC exercise completed by Lunnon Metals such that the data is capable of being used in accordance with current ASX Listing Rules where applicable and JORC 2012 guidelines and standards for the generation and reporting of MREs. Cube has documented no fatal flaws in the work completed by Lunnon Metals in this regard.

SECTION 2 REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
<p>Mineral tenement and land tenure status</p>	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<ul style="list-style-type: none"> • The property is located on granted Mining Leases. Although all the tenements wholly or partially overlap with areas the subject of determined native title rights and interests, the Company notes that the original grant of the right to mine pre-dates 23 December 1996 and as such section 26D of the Native Title Act will be applied to exempt any future renewals or term extensions from the right to negotiate in Subdivision P of the Act. • The complete area of contiguous tenements on which the Silver Lake-Fisher project and rights is located is, together with the wholly owned Foster-Baker project area on the south side of Lake Lefroy, collectively referred to as the Kambalda Nickel Project ("KNP") area. • Gold Fields Ltd's wholly owned subsidiary, SIGM, remains the registered holder and the beneficial owner of the Silver Lake-Fisher area. • Lunnon Metals holds: <ul style="list-style-type: none"> - 100% of the rights and title to the Foster-Baker (FBA) area of KNP, its assets and leases, subject to certain select reservations and excluded rights retained by SIGM, principally relating to the right to gold in defined areas and the rights to process any future gold ore mined at their nearby Lefroy Gold Plant; - The FBA project area of KNP comprises 19 tenements, each approximately 1,500 m by 800 m in area, and three tenements on which infrastructure may be placed in the future. The tenement numbers are as follows: <ul style="list-style-type: none"> - M15/1546; M15/1548; M15/1549; M15/1550; M15/1551; M15/1553; M15/1556; M15/1557; M15/1559; M15/1568; M15/1570; M15/1571; M15/1572; M15/1573; M15/1575; M15/1576; M15/1577; M15/1590; M15/1592; and additional infrastructure tenements, M15/1668; M15/1669; M15/1670; and - 100% of the mineral rights to nickel and associated metals in the Silver Lake-Fisher (SLF) project area of KNP, subject to the rights retained by SIGM as tenement holder and as detailed in the Mineral Rights Agreement (MRA). The tenement numbers are as follows (note select tenements are not wholly within the MRA area): <ul style="list-style-type: none"> - ML15/0142(access rights only); M15/1497; M15/1498; M15/1499; M15/1505; M15/1506; M15/1507; M15/1511; M15/1512; M15/1513; M15/1515; M15/1516; M15/1523; M15/1524; M15/1525; M15/1526; M15/1528; M15/1529; M15/1530; M15/1531 • There are no known impediments to potential future development or operations, subject to relevant regulatory approvals, over the leases where significant results have been reported. • The tenements are in good standing with the Western Australian Department of Mines, Industry Regulation and Safety.

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<ul style="list-style-type: none"> In relation to nickel mineralisation, WMC, now BHP Nickel West Pty Ltd and a wholly owned subsidiary of BHP Group Ltd, conducted all relevant exploration, resource estimation, development and mining of the mineralisation at Foster, Jan, Silver Lake and Fisher mines from establishment of the mineral licences through to sale of the properties to SIGM in December 2001. Approximately over 550,000m of DD was undertaken on the properties the subject of the FBA and SLF area by WMC prior to 2001. SIGM has conducted later gold exploration activities on the KNP area since 2001, however until nickel focused work recommenced under Lunnon Metals management, no meaningful nickel exploration has been conducted since the time of WMC ownership and only one nickel focussed surface diamond core hole (with two wedge holes), was completed in total since WMC ownership and prior to Lunnon Metals' IPO. On the KNP, past total production from underground mining in contained nickel metal terms by WMC was: <ul style="list-style-type: none"> Foster 61,129 nickel tonnes; Jan 30,270 nickel tonnes; Fisher 38,070 nickel tonnes; and Silver Lake 123,318 nickel tonnes.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<ul style="list-style-type: none"> The KNP area is host to both typical 'Kambalda' style, komatiitic hosted, nickel sulphide deposits and Archaean greenstone gold deposits such as routinely discovered and mined in Kambalda/St Ives district. The project area is host to nickel mineralisation and elements associated with this nickel mineralisation, such as Cu, Co, Pd and Pt.
Drillhole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i></p> <ul style="list-style-type: none"> <i>easting and northing of the drillhole collar</i> <i>elevation or RL (elevation above sea level in metres) of the drillhole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth hole length.</i> 	<ul style="list-style-type: none"> Drill hole collar location and directional information has been provided within the body of related previous ASX reports and also within the relevant Additional Details Table in the Annexures of those reports. A representative proportion of historical drilling completed by WMC as recorded in the drilling Database and relevant to the report, has been verified. DD drilling previously reported has included plan and cross-sectional orientation maps to aid interpretation where possible and appropriate. Due to the long plunge extents and ribbon like nature of many of the known and potential nickel shoots at the KNP, long projections are often considered the most appropriate format to present most results, especially if there are insufficient drill hole intercepts to present meaningful, true cross sections. Isometric views are also utilised to place drill results in context if possible.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	<ul style="list-style-type: none"> Grades have been reported as intervals recording down-hole length and interpreted true width where this estimation is able to be made. Any grades composited and reported to represent an interpreted mineralised intercept of significance are reported as sample-length weighted averages over that drill intercept. The Company currently considers that grades above 0.5% Ni and/or 1.0% Ni are worthy of consideration for individual reporting in any announcement of Exploration Results in

Criteria	JORC Code explanation	Commentary
Data aggregation methods (continued)		<p>additional details tables provided.</p> <ul style="list-style-type: none"> • Composite nickel grades may be calculated typically to a 0.5% Ni cut-off with intervals greater than 1.0% reported as “including” in any zones of broader lower grade mineralisation. • Other composite grades may be reported above differing cut-offs however in such cases the cut off will be specifically stated. • Reported intervals may contain minor internal waste (samples with values below stated cut-off grade) however the resultant composite must be greater than either the 0.5% Ni or 1.0% Ni as relevant (or the alternatively stated cut-off grade). • As per other Kambalda style nickel sulphide deposits the Lunnon Metals composites reported may include samples of very high nickel grades down to lower grades approaching the 0.5% Ni or 1.0% Ni cut-off as relevant. • No top-cuts have been applied to reporting of drill assay results and no metal equivalent values have been reported. • Other elements of relevance to the reported nickel mineralisation, such as Cu, Co, Fe, Mg, Pd and Pt and the like, are reported where the nickel grade is considered significant, if they have been assayed. • Historical WMC drilling in the project area was typically only assayed for Ni and less frequently for Cu, Zn and Co.
Relationship between mineralisation widths and intercept lengths	<p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’).</i></p>	<ul style="list-style-type: none"> • In regard to nickel exploration, the general strike and dip of the Lunnon Basalt footwall contact and by extension any hanging wall related nickel mineralised surfaces, if present, are considered to be well defined by past drilling which generally allows for true width calculations to be made regardless of the density or angle of drilling. • For nickel exploration in the broader project area, if possible due to the shallow depth, drillhole design has generally allowed drill holes to intersect target surfaces at approximately perpendicular to the strike of mineralisation. • Previously reported intersections have included approximate true widths, but these may not be true widths, as ongoing interpretation of the geology and mineralisation may result in that drilling not always being exactly perpendicular to the strike/dip of mineralisation once interpreted.
Diagrams	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.</i></p>	<ul style="list-style-type: none"> • Plans, long projections and sections, and isometric imagery where able to clearly represent the results of drilling, have been included in this report or previously been provided in prior lodged reports.
Balanced reporting	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<ul style="list-style-type: none"> • Drill collar locations of WMC Historical and current drilling completed by Lunnon Metals have been previously lodged on the ASX platform and all results of the drilling have also been previously reported. • WMC Historical DD holes may have informed the margins, periphery or extents of the current MRE, but themselves were not significantly mineralised and thus not reported.
Other substantive exploration data	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to):</i></p>	<ul style="list-style-type: none"> • The KNP has a long history of geological investigation, primarily for nickel, but also gold to a lesser degree. • Datasets pertinent to the KNP that represent other

Criteria	JORC Code explanation	Commentary
<p>Other substantive exploration data (continued)</p>	<p><i>geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p>meaningful and material information include:</p> <ul style="list-style-type: none"> ○ Geophysics - multiple ground and aerial based surveys of magnetic, gravity, Sub Audio Magnetics, electro magnetics, and down hole transient electromagnetic surveys. ○ Geochemistry - nickel and gold soil geochemistry datasets across the KNP and rock chip sampling in areas of outcrop. • Select historical production data recording metallurgical performance of the mines located on the KNP and the nickel metal delivered to the Kambalda Concentrator is also available in aggregated format. • Metallurgical test work on drill core from the KNP is carried out by external consultants, currently Independent Metallurgical Operations Pty Ltd using methodologies consistent with the type of mineralisation encountered and the likely future processing route. • The Company has developed a testwork program that best approximates the treatment conditions at the Kambalda Concentrator. • Metallurgical testwork specific to Foster South has been completed and reported to the ASX (see announcement dated 8 December 2023). Foster South is a type example for which the Kambalda nickel district has a long history of successful processing of this style of mineralisation at the proximal Kambalda Concentrator, since the field was discovered in 1966. • The process covering the ongoing collection and handling of the metallurgical samples and the supervision of the testwork that aligns with Nickel West’s process flow is being managed by Mr Barry Cloutt, an external independent metallurgical consultant who previously worked for WMC in Kambalda in the 1990s and directly managed the Kambalda Concentrator. This was a period in time when the plant was receiving nickel ore from between 10 and 15 separate underground sources across the Kambalda and Widgiemooltha districts from various ore suppliers. • Geotechnical test work on this drill core is carried out by independent consultants MGT involving on-site geotechnical logging of the DD core and off-site rock property testing of selected DD core samples. • Downhole Transient Electro-magnetic (DHTEM) surveys, when conducted, use the DigiAtlantis system and DRTX transmitter. The readings are typically recorded at 2.5m to 10m intervals. The survey used loops ranging from 300m x 200m to 690m x 290m in orientations designed relative to the target and stratigraphic setting. • If required, the Company generally retains ABIM Solutions Pty Ltd (ABIMS) to use the latest generation QL40 OBI Optical Televiwer (OTV) and a customized logging vehicle, to conduct OTV wireline surveys in the project area in select holes. • The OTV survey generates an oriented 360-degree image of the borehole wall by way of a CCD camera recording the image reflected from a prism. The OTV wireline surveys in RC holes, if applicable, are particularly useful in defining geological and structural orientation data, data that is otherwise unobtainable from RC drill chips.

Criteria	JORC Code explanation	Commentary
Other substantive exploration data (continued)		<ul style="list-style-type: none"> Where completed, these OTV surveys identified the downhole extents of the sulphide mineralisation, the down hole depths of other key contacts, and enabled the visual reconciliation of the 1m Ni assay results received with the apparent styles of nickel sulphide mineralisation imaged downhole, and provided the orientation of important shear structures within the selected RC holes. If required, ABIMS are also used to collect down-hole imaging data using the latest generation ABI40 Acoustic Televiewer (ATV) and a customised logging vehicle. The ATV wireline survey in DD holes provides down-hole geological definition, geotechnical rock mass characterisation, determination of fracture frequency and orientation, and primary stress orientation. The ABI40 ATV generates an image of the drillhole wall by transmitting ultrasound pulses from a rotating sensor and recording the amplitude and travel time of the signals reflected from the drillhole wall. Data is transferred back to the surface via a wireline in real time. Such data collected is used by the Company's geologists in support of deposit geological and structural modelling and by geotechnical consultants for geotechnical assessment purposes. If required, Southern Geoscience Consultants Pty Ltd (SGC) provide an ultrasonic velocity meter for the collection of velocity data measurements on DD. Data from this coupled with density measurements will provide acoustic impedance information, enabling the reflectivity in the seismic section to be tied to the geology in the borehole.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none"> Since the Company's IPO, over 85,000m of either diamond or RC drilling has now been completed at FBA and SLF. Over 20,500m of historical core has also been reprocessed in the Company's Historical Core Program (HCP). All Company work programs are continuously assessed against, and in comparison to, ongoing high priority programmes elsewhere at the KNP. Where activity or drilling relates to early-stage exploration, it is an iterative process with assay, geological, geochemical, geophysical and litho-structural observations and results all contributing to a continuous assessment of the merits of any particular target, and how, or whether, to continue to pursue further data and further definition, potentially by continuing to drill. Where drilling relates to an MRE, subject to further drilling results and success, the outcome of future metallurgical and geotechnical assessment, that MRE may be upgraded, in whole or in part. Thereafter, subject to positive ongoing results and external market and price variables, updates and future additions to the Company's MRE may then form the basis for development studies that may lead to the future declaration of a Probable Ore Reserve from those portions of the MRE at the Indicated (or higher) classification. Any such Ore Reserves then in turn may form the basis of technical and economic studies to investigate the potential to exploit those nickel deposits in the future.

SECTION 3 ESTIMATION AND REPORTING OF MINERAL RESOURCE ESTIMATE

Criteria	JORC Code explanation	Commentary
<p>Database integrity</p>	<p><i>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</i></p> <p><i>Data validation procedures used.</i></p>	<ul style="list-style-type: none"> • The Database is now hosted and maintained in-house by a Lunnon Metals Database Administrator. No data is transcribed manually between its initial collection, be it logging or assay data, and its use in the MRE. All data is exported directly from the Database and imported into the Leapfrog Geo® software where the MRE geological and mineralisation solid modelling is undertaken. • The Database, and that portion pertaining directly to the MRE area, was originally sourced from the historical database transferred from SIGM, as per the provisions of either the Option and Joint Venture Agreement or the SLF MRA (as applicable) and as such has been deemed in a general sense to be suitable for use in MRE for the KNP. This database was validated and improved by Lunnon Metals staff based on the local knowledge identifying obvious gaps in the data as it was originally handed over to Lunnon Metals. • The local knowledge and experience of the relevant Lunnon Metals geoscientific staff with respect to the history of data collected at St Ives by SIGM is also a very effective verification tool. During 2017, an updated Database extract was received from MaxGeo which incorporated feedback from Lunnon Metals regarding errors and omissions identified in the previous database extracts (remediation and additional data loading). • Lunnon Metals has significantly added to this Database at both the FBA and SLF through the completion of its extensive RC and DD program. As such, in regard to this MRE exercise, the data is a combination of data generated by Lunnon Metals activities post the Company's IPO in June 2021 and the original WMC data. • During the MRE process, a more thorough validation of those portions of the database pertaining to the MRE area directly was undertaken. This included cross checking representative amounts of historical hard copy assays, downhole surveys, collar surveys, and lithological logging data against the digital database. • WMC historical cross-sections and underground level plan mapping containing detailed lithological, structural, and assay data, were georeferenced and considered during the interpretation and estimation work.
<p>Site visits</p>	<p><i>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</i></p> <hr/> <p><i>If no site visits have been undertaken indicate why this is the case</i></p>	<ul style="list-style-type: none"> • The relevant Competent Persons have visited the KNP and MRE deposit locale on numerous occasions for the purposes of conducting surface exploration activities, desktop and hardcopy data retrieval, and review. • The principal Competent Person is Mr Aaron Wehrle, the Company's Exploration and Geology Manager. • Mr Wehrle has been the principal Competent Person since the Company's IPO and has directly managed or overseen all logging and sampling of historical WMC drill core and more recently, logging and sampling of the Company's own drill programs. • Mr Wehrle previously worked at St Ives for WMC and Gold Fields in the period 1996 to 2005.

Criteria	JORC Code explanation	Commentary
Geological interpretation	<i>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</i>	<ul style="list-style-type: none"> • The deposit types in Kambalda generally are well understood through decades of nickel mining within the KNP area and immediate surrounds. The MRE deposit has direct mineralisation analogues previously mined in the district including many surfaces at Foster and Silver Lake mines. • No new detailed studies or re-interpretation of the deposit styles were undertaken as part of the MRE, nor are deemed to be required. • Accordingly, the understanding of the general deposit styles is taken directly from previous experts and authors in the field and supported by direct observations of the relevant Competent Person during logging and sampling exercises of the current RC chips and DD core (as applicable). • WMC historical cross-sections and underground level plan mapping containing detailed lithological and structural data, were georeferenced and considered during the interpretation and estimation work where relevant. • The Company's exploration program has allowed for an improved geological model and understanding of the controls to mineralisation through collecting drill sample and related data. • The majority of the mineralisation is interpreted to be hosted at the base of the main komatiitic flow, the more traditionally prospective basal komatiite flow in contact with the Lunnon basalt footwall(main contact mineralisation). • Lunnon Metals completed eight new DD holes, including wedge holes, (4,262m) that informed the geological model at Foster South with three of these holes used directly in the MRE grade estimation. In addition to the three new holes, six historical WMC DD holes were re-sampled and re-assayed (all except for one 0.58m sample) for direct use in the MRE grade estimation. • The additional data has continued to support the previous interpretation of base of main komatiite flow mineralisation and on a local scale, remobilised nickel sulphides controlled by later discrete structures.
	<i>Nature of the data used and of any assumptions made.</i>	
	<i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i>	
	<i>The use of geology in guiding and controlling Mineral Resource estimation.</i>	
	<i>The factors affecting continuity both of grade and geology.</i>	
Dimensions	<i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</i>	<ul style="list-style-type: none"> • The modelled MRE deposit is defined a plunging nickel shoot hosted on the contact with the footwall Lunnon basalt, The modelled deposit displays an overall average strike and dip of approximately 125°/60south-west. • The outline of the deposit has a long axis plunge of approximately 48° towards 150° currently extending for approximately 260 metres. • The across plunge dimension approaches 100 metres. The vertical extent of the deposit is approximately 300 metres ranging from -340 metres ASL (680 metres below ground level) to -560 metres ASL (900 metres below ground level). • The modelled MRE is below the weathered regolith zone, thus the entire MRE is in fresh rock. • The mineralised surface has an average true thickness of 4.7m with maximum thickness in parts of up 8.5m.
Estimation and modelling techniques	<i>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation</i>	<ul style="list-style-type: none"> • The MRE wireframe volumes were modelled via a process of drillhole interval selection and 3D implicit "vein" modelling within the Leapfrog Geo® software. • Interval selection is a manual process performed by the geologist (and relevant Competent Person) in the Leapfrog Geo® 3D software environment whereby drillhole

Criteria	JORC Code explanation	Commentary
Estimation and modelling techniques (continued)	<i>from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i>	<p>sample/logging intervals are tagged and coded with the relevant nickel sub-domain ID.</p> <ul style="list-style-type: none"> The general rule of thumb used for the mineralised interval selection was to select contiguous samples within individual drillholes at the position of the MRE mineralised surfaces with assays $\geq 1.0\%$ Ni. Occasional single sample intervals of $< 1.0\%$ Ni were selected to continue the mineralised volume when supported by the position relative to the footwall contact and surrounding drillholes. Internal dilution (Ni $< 1.0\%$) was considered on a hole-by-hole basis, rarely involving assays $< 0.5\%$ Ni while the overall averaged intercept grade typically remained above the 1.0% Ni cut-off. Occasionally hanging wall samples $< 1.0\%$ Ni were included if supported by the geological logging as containing noteworthy sulphides, however, samples with grades of less than 0.5% Ni in this hanging wall position were not included. The Leapfrog Geo® implicit “vein” modelling function was used to construct the deposit wireframes by using mathematical algorithms to derive best fit 3D model volumes from the interval selection data. The geometry, thickness and extent of the deposit wireframes are defined primarily by the footwall and hanging wall depth positions down the drillholes denoted by the selected interval. The relevant Competent Person has further refined the geometries to honour the geological interpretation by manually creating 3D polylines and points which help shape the 3D model particularly where there is insufficient drilling data to define the interpreted location, thickness and geometry of the deposit. A Resource Geologist employed by Lunnon Metals produced a mineral resource grade and tonnage estimate (the MRE) for the nickel deposit. Validated drillhole data and geological interpretation wireframes were supplied by Lunnon Metals, and the MRE was developed using standard processes and procedures including data selection, compositing, variography, estimation into geological domains, using Ordinary Kriging (OK). The estimation work and resource classification is to a standard consistent with the JORC (2012) guidelines, and the resulting Mineral Resource classification was established by Lunnon Metals. The Resource Geologist holds current Chartered Professional (Geology) status with the AusIMM and is the Competent Person for the MRE and geostatistics, methodology and estimation. <p>Estimation Input Data</p> <p>Lunnon Metals produced wireframe solids in Leapfrog software. The final interpretation was completed on 2 May 2024. The MRE was completed using Leapfrog Edge – the integrated resource modelling module of Leapfrog Geo. This negates any requirement to export input drilling files. Basic data validation for historical holes (pre-2023) was conducted and all lab QAQC data for the 2023 drillholes and 2023 re-assaying of historical holes was reviewed prior to loading to the Geobank database.</p> <p>There were 77 individual samples from 9 drill intercepts identified for the main contact mineralised. Nickel, copper, and</p>
	<i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i>	
	<i>The assumptions made regarding recovery of by-products.</i>	
	<i>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).</i>	
	<i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i>	
	<i>Any assumptions behind modelling of selective mining units.</i>	
	<i>Any assumptions about correlation between variables.</i>	
	<i>Description of how the geological interpretation was used to control the resource estimates.</i>	
	<i>Discussion of basis for using or not using grade cutting or capping.</i>	
<i>The process of validation, the checking process used, the comparison of model data to drillhole data, and use of reconciliation data if available.</i>		

Criteria	JORC Code explanation	Commentary
Estimation and modelling techniques (continued)		<p>cobalt, estimates are reported.</p> <p>Visual validation of the coded drillhole intervals against the wireframes was completed and no issues were identified.</p> <p>Compositing</p> <p>Raw sample interval lengths in the mineralised domains varied between 0.06m and 1.05m. The mean sample length for the MRE deposit was 0.71m. 1.00m was chosen as the composite length for the MRE deposit. A minimum composite size was set to 0.5m – any “residual” composites of less than 0.5m at the lower limit of a sub-domain were “added” back to the final downhole composite per sub-domain.</p> <p>Bulk Density</p> <p>There was sufficient new density data to derive an updated regression calculation This formula was used to apply density weighting to the composites.</p> <p>Exploratory Data Analysis</p> <p>Compositing and statistical and geostatistical analysis was completed using Leapfrog Edge.</p> <p>The mean nickel grade for the composited samples (weighted by SG) at the MRE deposit is 4.49% Ni (vs 4.43% unweighted by SG). The nickel distributions are positively skewed, with minor extreme values greater than 8% Ni.</p> <p>Grade Capping</p> <p>Grade capping was not used for nickel in the MRE. The grade distribution, even though positively skewed, is continuous and the higher-grade zones were relatively consistent spatially. However due to the sparse nature of the data around the extents of the mineralisation in the second and third estimation passes for Ni, Cu and Co a restricted search (clamp) was used (+25% search distance – clamped to 5% Ni, 1.5% Cu and 0.5% Co.</p> <p>Estimation</p> <p>Estimates for the MRE deposit were run using Standard OK within the ~1.0% Ni domain boundaries (a similar approach to previous estimates completed by Cube prior to and post the Company’s IPO at the KNP).</p> <p>Variography</p> <p>Given the tightly constrained geometry for the sub-domains, the data configuration essentially controlled the variography. Experimental variograms for nickel were produced in the plane of continuity for the MRE deposit (dip 58°, dip azimuth 217°, pitch 32°), with the minor direction perpendicular to the major directions, and the variograms were modelled with a nugget effect and two spherical structures.</p> <p>Block Model Definition</p> <p>The parent block size of 5mE x 10mN x 5mRL was chosen to be compatible with the geometry of the mineralisation. Minimum sub-block size of 1.25mE x 1.25mN x 0.625mRL was used to appropriately fill the mineralisation volumes. The block model volumes compared to the deposit wireframe volumes showed a very close result of 100%.</p>

Criteria	JORC Code explanation	Commentary
Estimation and modelling techniques (continued)		<p>Estimation Parameters</p> <p>Grade estimates for nickel above and below the threshold were into the 5mE x 10mN x 5mRL parent blocks and the block discretisation was set at 5 x 5 x 5.</p> <p>The search radius for the HGZ is 60m down plunge, 60m along strike, and 15m across thickness. A minimum number of samples required was set at 8, maximum number of samples was set at 14, and a limit of 4 samples per drill hole. If a block was not estimated with the first search pass, a second pass twice the size of the first is used, and minimum samples set to 8 with no sample per drill hole limit. A third pass was set at five times the first pass search with minimum 2 samples and no sample per drill hole limit.</p> <p>All blocks were estimated within the 3 passes, with approx. 80% on the first pass.</p> <p>Model Validation</p> <p>Model validation was conducted to check that the grade estimates within the model were an appropriate reflection of the underlying composite sample data, and to confirm that the interpolation parameters were applied as intended. Checks of the estimated block grade with the corresponding composite dataset were completed using several approaches involving both numerical and spatial aspects.</p> <p>It is Lunnon Metals opinion that the nickel, copper and cobalt estimates in the MRE deposit are valid and satisfactorily represent the informing data. The output for this estimate is a block model in csv format named "FS_MRE_2403".</p>
Moisture	<i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i>	<ul style="list-style-type: none"> Tonnage is estimated on a dry, in-situ basis.
Cut-off parameters	<i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i>	<ul style="list-style-type: none"> All material modifying factors have been considered and accommodated in the chosen reporting cut-off grade, which is > 1% Ni. This cut-off grade was calculated as the attributed breakeven grade that in aggregate covers assumed processing and mining benchmarked unit rates, taking into account an AUD:USD exchange rate of approx. 0.66¹⁵, an assumed processing recovery, concentrator payability and standard other associated costs reported publicly, by other third parties in the Kambalda District during the operational period of nearby similar nickel mines.
Mining factors or assumptions	<i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous.</i>	<ul style="list-style-type: none"> A Company employee, a mining engineer, has seven years' experience in the relevant commodity at Kambalda and has advised on appropriate access, development and stoping methodologies. Company analysis at the nearby Baker PFS coupled with benchmarking of current industry capital start-up, development and operating costs indicate that reasonable prospects for eventual economic extraction of the MRE exist. The assumptions made regarding possible mining methods and parameters have not yet been rigorously tested, however, the tonnage of mineralisation, the grade of mineralisation above the reporting cut-off and its location,

15 Correct at the time of lodgement.

Criteria	JORC Code explanation	Commentary
	<p><i>Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i></p>	<p>both geographically (at Kambalda) and locally proximal to existing development in the historical Foster mine, all support this assessment.</p> <ul style="list-style-type: none"> • Access to the mineralisation at the MRE deposit would be via development from the existing Foster decline. • Conventional selective underground stoping techniques would be employed as applied routinely and successfully in the immediate Kambalda District nickel operations.
<p>Metallurgical factors or assumptions</p>	<p><i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i></p>	<ul style="list-style-type: none"> • Primary nickel mineralisation predominantly consists of pyrrhotite-pentlandite-pyrite plus subordinate chalcopyrite and magnetite. • Specific metallurgical testwork for the MRE deposit has been completed based on the rigorous testwork program that has been developed to best approximate the treatment conditions at the Kambalda Concentrator (see ASX announcement dated 8 December 2023) The results show Foster South produces a clean, premium, high-grade nickel concentrate with excellent copper and cobalt recoveries and by-product credits, beneficial Fe:MgO ratios and low to zero deleterious elements such as arsenic • Rougher/Cleaner optimisation tests are typically conducted at a grind size of P80 53 µm, chosen in consultation with Nickel West technical personnel, to simulate the process flow at their Kambalda Concentrator. • Testwork results from programs completed for the Company's existing Mineral Resources have all shown high nickel recoveries whilst producing a very clean concentrate that is low in contaminants and high in saleable nickel, copper and cobalt. • The process covering the ongoing collection and handling of the metallurgical samples and the supervision of the testwork that aligns with Nickel West's process flow is being managed by Mr Barry Cloutt, an external independent metallurgical consultant who previously worked for WMC in Kambalda in the 1990s and directly managed the Kambalda Concentrator. This was a period in time when the plant was receiving nickel ore from between 10 and 15 separate underground sources across the Kambalda and Widgiemooltha districts from various ore suppliers. • Foster mine itself delivered 2.37 million tonnes of ore grading 2.57% Ni for 61,129 tonnes of nickel metal, to that same Kambalda Concentrator and there is no reason to believe that the nickel sulphide mineralisation the subject of this report would not behave in a similar fashion to the historically mined material. • Both the principal and relevant Competent Persons have concluded that there are reasonable prospects that the nickel sulphide mineralisation at the MRE deposit will be amenable to treatment at nickel concentrators proximal to the KNP.
<p>Environmental factors or assumptions</p>	<p><i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this</i></p>	<ul style="list-style-type: none"> • The MRE deposit is located in a mature mining area on granted Mining Leases with all significant supporting infrastructure already in place or able to be constructed on previously disturbed ground. • Any future mine workings will require dewatering to a permitted discharge point on tenements held by SIGM. • Ore treatment is yet to be finalised but can potentially be carried out offsite by third parties under a typical Ore Tolling

Criteria	JORC Code explanation	Commentary
Environmental factors or assumptions (continued)	<p><i>stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i></p>	<p>and Concentrate Purchase arrangement with nickel concentrating facilities in proximity to the KNP.</p> <ul style="list-style-type: none"> The Nickel West concentrator, which has been in operation for 50 years, by way of example, has previously received ore production from the Foster mine where the MRE deposit is located, nearby Silver Lake and also Jan Shoot mines as noted above and has adequate tailing storage facilities and is a possible route for processing any ore production, though no commercial agreement has been entered into at this point in time. The MRE deposit, when mined, may be a net consumer of waste material in regards that fill will be required to be supplied from surface into the underground mine to assist with cemented fill of the production stopes. All current surface disturbance is within areas already previously disturbed by mining or the previous and current exploration programs and it is envisaged that minimal new disturbance would be required to commence operations. The MRE project area has been the subject of several fauna and flora surveys over a number of years, none of which have identified any rare or priority flora species, and none of the floristic communities have been identified as being of National Environmental Significance. There are not expected to be any environmental hindrances that would prevent the eventual economic extraction of ore from a future development of the MRE deposit.
Bulk density	<p><i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i></p> <p><i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc.), moisture and differences between rock and alteration zones within the deposit.</i></p> <p><i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i></p>	<ul style="list-style-type: none"> During the Lunnon Metals exploration program, drill core bulk density measurements were routinely taken as determined by the standard gravimetric water immersion technique (Archimedes Principle). The drill core is generally competent and non-porous with negligible moisture content as a result. The results are consistent with similar rock types at nearby nickel mines and with Lunnon Metals' recent other diamond drilling at the KNP. In deposits where bulk density is correlated with grade, then length and density weighting during compositing is advised. This was the case at the MRE deposit. Bulk density measurements were collected by the Company for all the Lunnon Metals MRE mineralised drill core samples and select historical WMC drill core samples when re-logged and re-sampled by Lunnon Metals. A total of 429 individual sample measurements were used to calculate the updated regression formula ($0.1550 \cdot \text{Ni}\% + 2.80$). During the MRE, post-processing exercise blocks that were not within the mineralised sub-domains were given default values based on the global statistics per rock type as follows: <ul style="list-style-type: none"> 2.85 t/m³- 0.65% Ni – Kambalda Komatiite 2.78 t/m³- 0.04% Ni – Lunnon Basalt 2.65 t/m³- 0.11% Ni – Intermediate Dyke.
Classification	<p><i>The basis for the classification of the Mineral Resources into varying confidence categories.</i></p> <p><i>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade</i></p>	<ul style="list-style-type: none"> The estimation work and resource classification completed is to a standard consistent with the JORC (2012) guidelines, and the resulting Mineral Resource classification was established by discussions between the relevant Lunnon Metals Competent Persons. In general, classification of the Mineral Resources at the

Criteria	JORC Code explanation	Commentary
Classification (continued)	<p><i>estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i></p> <hr/> <p><i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i></p>	<p>MRE deposit uses criteria as follows:</p> <ul style="list-style-type: none"> - Confidence in the volume, location and orientation of the geological solids which is influenced by drill spacing; - Confidence in the nickel estimate; and - Reasonable prospects for eventual economic extraction. <ul style="list-style-type: none"> • Assessment of confidence in the estimate of nickel included guidelines as outlined in JORC (2012): <ul style="list-style-type: none"> - Drill data quality and quantity; - Geological interpretation (particularly aspects that impact on nickel mineralisation); - Geological domaining (for mineralised sub-domains specific to the estimation of nickel); - The spatial continuity of nickel mineralisation; and - Geostatistical measures of nickel estimate quality. • In summary, the more quantitative criteria relating to these guidelines include the data density as follows: <ul style="list-style-type: none"> - Mineralised blocks for the MRE deposit where the average distance to 3 drillholes is $\leq 50\text{m}$ and where the confidence in the interpretation is good have been classified as Indicated; - The resource outside the Indicated area is classified as Inferred, where the general drill hole is up to $>50\text{m}$ and there is a reasonable expectation of plus 1% Ni.; There is sufficient drilling beyond the down plunge extent to define the limits of mineralisation. • Data quality and quantity is generally considered adequate with no areas known to be defectively sampled or assayed. The Competent Persons have analysed QAQC data and reports, and responsibility for the data quality rests with the Lunnon Metals Competent Person who attests to its appropriateness. • The following observations regarding "Reasonable prospects for eventual economic extraction" remain valid for the reported MRE and the Company's MRE portfolio in general: <ul style="list-style-type: none"> - There is extensive infrastructure already in place, with future access to the deposits readily able to be established from nearby open pits or existing, albeit it flooded, historical workings in the future. - The deposits are all located on granted Mining Leases. - The average nickel grades and geometry of all deposits are amenable to small-scale underground mining, like many "Kambalda-style" nickel deposits successfully mined in the past. - Ore would likely be sent to one of the nearby nickel concentrators under a commercial OTCPA arrangement. - Forecasts of potential future nickel prices and AUD:USD exchange rates generate average revenue per tonne at the average reported MRE Ni % grade (assuming typical metallurgical recoveries) that exceed the potential future operating cost. Publicly available data for feasibility studies for similar projects (e.g. Mincor Resources Kambalda Nickel Project, 25 March 2020¹⁶)

16 Reference ASX: MCR announcement dated 25/03/2020.

Criteria	JORC Code explanation	Commentary
Classification (continued)		<p>together with the Company's own detailed PFS analysis¹⁷ for the Baker deposit record operating and sustaining capital costs in a range of between \$250/t (for Mincor's estimates applying quoted A\$/lb Ni AISC on a 100% recovered basis over the stated ore tonnage to be mined) and \$340/t ore for Baker.</p> <ul style="list-style-type: none"> - Capital costs to access and develop are considered to be modest due to the proximity of existing historical capital underground development. - Therefore, there is no apparent reason the reported MRE nickel deposit could not be mined economically in the future. The classification results reflect the Lunnon Metals Competent Person's view of the deposit.
Audits or reviews	<p><i>The results of any audits or reviews of Mineral Resource estimates.</i></p>	<ul style="list-style-type: none"> • Internal reviews have been completed by senior Lunnon Metals personnel which verified the technical inputs, methodology, parameters and results of the geological interpretation and mineralisation modelling exercise (solid wireframe models) to the satisfaction of the relevant Competent Persons. • As part of the ITAR to the Prospectus (22 April 2021), Optiro reviewed the then Mineral Resources and confirmed the tonnage and nickel grades reported from the block models. The quality of input data, QAQC, interpretation and sample spacing was considered suitable and this information has been considered in applying the Mineral Resource classification. In Optiro's opinion the Mineral Resource models developed by Lunnon Metals and Cube for the KNP were appropriate and provided a realistic estimation and classification of the global Mineral Resources. • Whilst not reviewed directly by Optiro or others in this case, the same procedure and processes as reviewed by Optiro have been employed in the current MRE by Lunnon Metals.
Discussion of relative accuracy/ confidence	<p><i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i></p> <p><i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i></p>	<ul style="list-style-type: none"> • Resource confidence is reflected in its classification into Inferred Resource and Indicated Resource, and is primarily based on the quality, quantity and distribution of data which supports the continuity of geology and grade distribution of the deposit. • The MRE nickel grades are comparable with the historical WMC mined head grades at similar local nickel deposits, carried out under a wide range of historical nickel prices. • Likewise, the style of mineralisation and tonnages associated with the MRE are comparable with previous mineralisation styles and tonnages mined at Silver Lake, Fisher, Foster and Jan by WMC. • The MRE is deemed sufficient both as a global estimate of MRE deposit but also as a local estimate for the purposes of economic evaluation and subsequent mine design.

¹⁷ See ASX announcement dated 22 May 2023 for full details of the PFS, including input assumptions and parameters and physical and financial results.



Criteria	JORC Code explanation	Commentary
	<i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i>	