

### PRE-DRILL TRENCHING COMMENCES AT KAMEELBURG

#### **Highlights**

- Magnetic survey over the Kameelburg carbonatite complete.
- Pre-drill trench sampling over possible drill locations has commenced.
- Trenching assays will enhance drill location targeting and improve the understanding around the correlation between the Kameelburg carbonatite magnetic signature and associated content of REE and Niobium derived from the rock chip and soil surveys that have been conducted.
- 7 trenches will be tested over the next fortnight.

Aldoro Resources Ltd ("Aldoro", "The Company") (ASX: ARN) is pleased to advise that a ground magnetic survey has been completed and that the pre-drill trench sampling of 7 trenches has commenced at the Kameelburg Project.

#### **Magnetic Survey**

A detailed ground magnetic survey with the 50 x 10 m grid density has been completed. The total survey area is about 2.6 square KM and covers the entire carbonatite intrusive. The ground magnetic survey with the overlapping >1% REE (ASX: ARN 20/06/24 and 15/07/24) in soil is illustrated in figure 1.

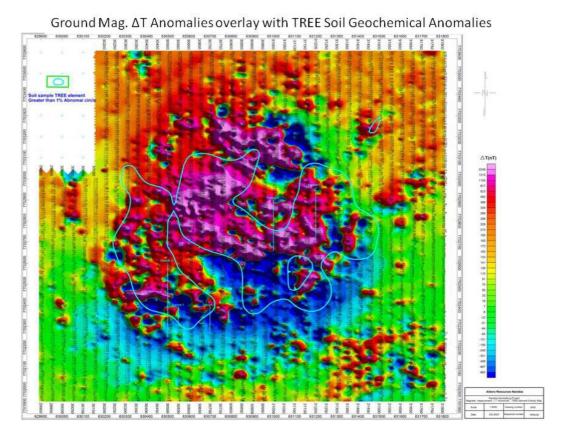


Figure 1. Ground Magnetic anomalies overlapping with >1% REE in soil





## **Pre-Drill Trenching Program**

The Company has commenced a trenching program with the aim of evaluating the geochemical anomalies in addition to providing more reliable information for our forthcoming drilling program. It is expected the trenching program will encompass 7 trenches and be completed within the next fortnight with REE and Nb assay data to follow shortly thereafter. The location of the trench sampling is illustrated in Figure 2 below.

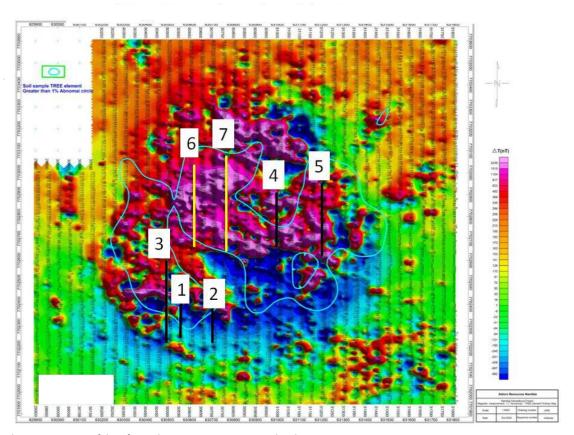


Figure 2. Trenching locations versus magnetic signature

Authorised for and on behalf of the Board,

Sarah Smith Company Secretary

#### **About Aldoro Resources**

Aldoro Resources Ltd is an ASX-listed (*ASX: ARN*) mineral exploration and development company. Aldoro has a portfolio of critical minerals including rare earth, lithium, rubidium and base metal projects. The Company's suite of projects include the Kameelburg REE & Niobium Project in Namibia, the Wyemandoo lithium-rubidium-tungsten project, the Niobe lithium-rubidium-tantalum project and the Narndee Igneous Comples project in Western Australia.





#### Disclaimer

Some of the statements appearing in this announcement may be in the nature of forward-looking statements. You should be aware that such statements are only predictions and are subject to inherent risks and uncertainties. Those risks and uncertainties include factors and risks specific to the industries in which Aldoro operates and proposes to operate as well as general economic conditions, prevailing exchange rates and interest rates and conditions in the financial markets, among other things. Actual events or results may differ materially from the events or results expressed or implied in any forward-looking statement. No forward-looking statement is a guarantee or representation as to future performance or any other future matters, which will be influenced by a number of factors and subject to various uncertainties and contingencies, many of which will be outside Aldoro's control.

Aldoro does not undertake any obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions or conclusions contained in this announcement. To the maximum extent permitted by law, none of Aldoro, its Directors, employees, advisors or agents, nor any other person, accepts any liability for any loss arising from the use of the information contained in this announcement. You are cautioned not to place undue reliance on any forward-looking statement. The forward-looking statements in this announcement reflect views held only as of the date of this announcement.

This announcement is not an offer, invitation or recommendation to subscribe for or purchase securities by Aldoro. Nor does this announcement constitute investment or financial product advice (nor tax, accounting or legal advice) and is not intended to be used for the basis of making an investment decision. Investors should obtain their own advice before making any investment decision.

In relying on the above mentioned ASX announcements and pursuant to ASX Listing Rule 5.23.2, the Company confirms that it is not aware of any new information or data that materially affects the information included in the above-mentioned announcements.

#### **Competent Person Statement**

The information in this announcement that relates to Exploration Results and other technical information complies with the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code). It has been reviewed by Mr. Yuanjian Zhu who is a Member of the Australasian Institute of Mining and Metallurgy (AusIMM). Mr Zhu is Principal Consultant (Resource Geology) at SRK Consulting (Australasia) Pty Ltd and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC Code. Mr Zhu consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.





# JORC Code, 2012 Edition - Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

| Criteria                 | JORC Code explanation   | Commentary   |
|--------------------------|---|--|
| Sampling<br>techniques   | <ul> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done, this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul> | <ul> <li>The magnetic geophysical sampling was conducted using two GEM-19T proton precession. The instrument has a sensitivity of 0.05 nT, a resolution of 0.01 nT, and an absolute accuracy of ±0.2 nT.</li> <li>the noise test was conducted with readings every 20 seconds.</li> <li>A diurnal variation station was established in the survey area, serving as a base point for diurnal corrections. Observations are conducted every 20 seconds, both before and after mobile station calibrations each day.</li> </ul> |
| Drilling techniques      | Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).   | Not applicable.  |
| Drill sample<br>recovery | <ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>  | Not applicable.  |
| Logging                  | Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.   | Not applicable.  |





| Criteria   | JORC Code explanation  | Commentary  |
|--|--|---|
|  | <ul> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>   |   |
| Sub-sampling<br>techniques and<br>sample preparation | <ul> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/secondhalf sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul> | Not applicable.   |
| Quality of assay<br>data and laboratory<br>tests     | <ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul>  | Not applicable.   |
| Verification of sampling and assaying                | <ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>  | Not applicable.   |
| Location of data points                              | <ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> </ul>   | <ul> <li>Garmin eTrex 201x handheld GPS was used for point location surveys.</li> <li>The coordinate system used is WGS 84 UTM Zone 33S.</li> </ul> |





| Criteria  | JORC Code explanation  | Commentary   |
|---|--|--|
|   | Quality and adequacy of topographic control.   |  |
| Data spacing and distribution                           | <ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>                                 | Survey points were arranged on a nominally 50 m x 10 m grid. |
| Orientation of data in relation to geological structure | <ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul> | Not applicable.  |
| Sample security   | The measures taken to ensure sample security.  | Not applicable.  |
| Audits or reviews                                       | The results of any audits or reviews of sampling techniques and data.  | Not applicable.  |





# Section 2 Reporting of Exploration Results

(Criteria listed in section 1 also apply to this section.)

| Criteria                                | JORC Code explanation  | Commentary   |
|---|--|--|
| Mineral tenement and land tenure status | <ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul> | <ul> <li>Exclusive Prospecting Licences EPL 7372. 7373 and 7895 are under JV agreement. No native title, wilderness or National Parks impacted. Licences are on local pastoral licences, sub surface minerals owned by the state.</li> <li>All three licences have successful renewal in August 2024.</li> <li>Recently, the transfer of the Kameelburg Prospecting Licenses EPL 7372, 7373 &amp; 7895 to the Aldoro JV operating company "Kameelburg Exploration Mining (Pty) Ltd" was completed successfully.</li> </ul>   |
| Exploration done by other parties       | Acknowledgment and appraisal of exploration by other parties.  | <ul> <li>Previous relevant exploration includes:</li> <li>AMCOR (1960s-1970s): Surface rock sampling, drilling 11 holes, and collecting bulk samples.</li> <li>Kinloch Resources Limited (2012-2016): Detailed grid rock chip and regolith sampling, hyperspectral surveying, spectral scanning, geological mapping, and metallurgical tests for P<sub>2</sub>O<sub>5</sub>.</li> </ul>  |
| Geology                                 | Deposit type, geological setting and style of mineralisation.  | The Kameelburg Project is located in the northern Central Damara Orogenic Belt in Namibia and covers the Cretaceous Kameelburg Carbonatite plug and associated radial dykes intruding precursor syenites in the older host Neoproterozoic marbles and schists. The plug is approximately 1.4km in diameter and rises up to 275m above the surrounding peneplain. The intrusion consists of an initial pre-curser phase of nepheline syenite/syenite followed by two sovite and three beforsite phases with remanent rafts of volcanic breccia and syenite, the vestiges of earlier intrusive phases. The country rock consists of marbles, quartzite's, mica schists of the Damara Supergroup. Rare earth metals are known to occur in all five phases with higher concentrations in the more magnesium and iron rich beforesites. The REE |





| Criteria   | JORC Code explanation   | Commentary  |
|--|---|---|
|  |   | mineralisation style is consistent with fractionated carbonatite intrusive plugs. |
| Drill hole Information   | <ul> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</li> <li>easting and northing of the drillhole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar</li> <li>dip and azimuth of the hole</li> <li>downhole length and interception depth</li> <li>hole length.</li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul> | Not applicable.   |
| Data aggregation methods   | <ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>   | Not applicable.   |
| Relationship between<br>mineralisation widths and<br>intercept lengths | <ul> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</li> <li>If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>   | Not applicable.   |
| Diagrams   | Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being  | Not applicable.   |





| Criteria                           | JORC Code explanation   | Commentary   |
|------------------------------------|---|--|
|                                    | reported These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.   |  |
| Balanced reporting                 | Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.   | Not applicable.  |
| Other substantive exploration data | Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. | No other meaningful or material results to report.                                   |
| Further work                       | The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).  | A pre-drill trenching program has been designed to verify<br>the magnetic anomalies. |
|                                    | Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.   | Subsequent drilling will be conducted based on the trenching results.                |

