

ASX OB1

ASX Announcement | 6th February 2025

Significant new drill targets defined at the Bronze Fox Copper-Gold Project, Southern Mongolia

Highlights

- Sampling of an historic trench (Figure 1) at the Company's Bronze Fox Project in Mongolia has returned high-grade copper-gold results on the western margin of the West Kasulu resource¹. Better intersects include:
 - o 17m of 0.5% Cu and 0.34g/t Au including 6m of 1.0 % Cu and 0.6g/t Au
 - 4m @ 0.6% Cu and 0.2g/t Au
- The trench remains largely unsampled (Table 1) with only visible mineralisation sampled to date
- The West Kasulu resource is open to the west, beneath shallow cover, where a review of an Induced Polaristion (IP) survey completed in 2018 has defined a number of strong, untested chargeability anomalies²
- Further IP surveying and geological mapping will be completed across the interpreted western extension of the West Kasulu resource to prioritise targets for drilling in Q2 2025
- Rock chip sampling also indicates that mineralisation extends to the northwest with numerous >0.5% Cu values recorded (Figure 1).
- IP surveys will also be completed at the Shuteen North target (Figure 2) ahead of a proposed maiden drilling program in Q2 2025 seeking to confirm the discovery of a new, and third, intrusive complex at the Bronze Fox project, which is interpreted to be related to the extensive Shuteen lithocap

Orbminco Limited (ASX: OB1) ("Orbminco", "the Company"), is pleased to announce results of recent trench sampling at its Bronze Fox Project located in the Southern Gobi Copper-Gold belt of Mongolia.

https://kincoracopper.com/kincora-announces-new-high-grade-targets-at-bronze-fox-2/

Orbminco Limited



¹ Refer Kincora Copper (ASX KCC):" Mineral resource and exploration target for Bronze Fox" dated 26 July 2022. Available online from: https://cdn-api.markitdigital.com/apiman-gateway/ASX/asx-research/1.0/file/2924-02545267-6A1101028

² Refer Kincora Copper (ASX KCC): Kincora announces new high-grade targets at Bronze Fox - Kincora Copper dated 27th August 2018 Available online from:



ASX OBI

Managing Director, Ralf Kriege, commented:

"The new trench results, coupled with drilling results from the 2024 drilling program, including 26m at 0.91% CuEq from 14 in hole F111, and review of existing chargeability anomalies supports an extension of existing geophysical coverage and a proposed high priority drilling program to better understand the higher-grade potential of the open western strike of the Bronze Fox Intrusive Complex.

The Shuteen North target has the potential to be the third intrusive complex at Bronze Fox and is a compelling, near surface and new large-scale target interpreted to be associated with the Shuteen lithocap, the largest lithocap in the Southern Gobi. The importance of this conceptual geological setting is significant given the lithocap at the Oyu Tolgoi project was an important early-stage exploration marker.

Preparations are taking place to undertake geophysical surveys and surface field activities early in the next quarter, to refine existing and generate new targets ahead of drilling at both the western extension of the Bronze Fox Intrusive Complex and at the Shuteen North Intrusive Complex."

Exploration Update

The trench sampling took place in November 2024 during Orbminco's maiden drill campaign and provides strong encouragement that the West Kasulu resource continues westward beneath shallow cover (Figure 1) with potentially higher copper and gold grades. This interpretation is further supported by 2024 drill hole F111, which returned 26m at 0.91% CuEq from 14m, including 2m at 8.29% CuEq from 24m (see OB1 ASX announcement from 14 January 2025 for further details 3).

A subsequent review of an IP geophysical survey completed by Joint Venture partner Kincora Copper Limited (Kincora) at West Kasulu in 2018², has also identified a number of significant and untested chargeable IP anomalies which will be targeted by drilling in 2025. The IP surveying along with geological mapping will be extended to the west prior to the drilling to determine the potential for further extensions to the resource, higher grade zones and open pit potential.

Orbminco Limited



³ Refer Orbminco (ASX OB1):" Significant copper and gold intersected in Orbminco's maiden drilling program at the Bronze Fox Copper-Gold Porphyry Project (Southern Mongolia)" dated 14 January 2025.



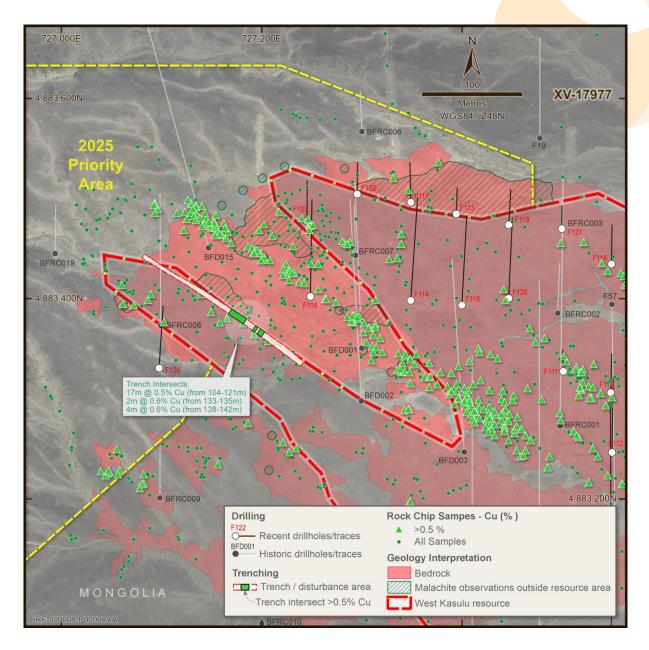


Figure 1: Bronze Fox Project – overview of the southwestern extension of West Kasulu, with recent trench sampling

Shuteen North target

The Shuteen North target is located 10km southwest of West Kasulu (Figure 2), has never been drilled and has the potential to be a new globally significant intrusive system discovery.

Orbminco Limited





ASX OB1

Limited previous capital constrained exploration by Kincora has rec<mark>orded extensive sub-cropping copper mineralisation and multiple phase intrusive systems associated with strong mineral alteration across a 15 x 6 km target zone named the Shuteen North Intrusive Complex.</mark>

Geophysical surveying, including IP, will be completed to define possible subsurface sulphide mineralisation for drill testing and assist refine three existing multiple phase porphyry targets, one intermediate sulfidation target and identify further potential shallow targets for maiden drill testing. This work will be completed at the same time as the planned exploration for the West Kasulu resource.

Further mapping, soil and rock chip sampling, trenching and geophysical surveying field work will commence in March to assist refine high priority and near surface targets with follow up drilling scheduled for July 2025.

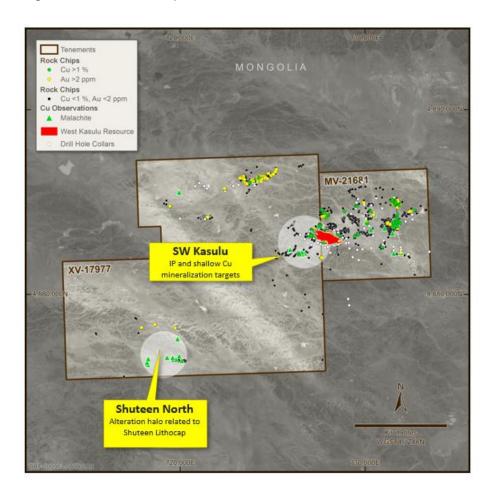


Figure 2: 2025 priority target exploration areas

Orbminco Limited





ASX OB1

Summary Cu/Au Intersection	To (m)	From (m)	Mo (ppm)	Cu (ppm)	Au (g/t)	Sample ID
	44	42	-1	2230	0.01	61420
	46	44	-1	1010	0.02	61421
	48	46	-1	722	0.01	61422
13.7m @ 0.2% Cu and 0.04g/t Au	50	48	-1	1240	0.02	61423
	52	50	-1	1400	0.11	61424
	54	52	-1	2530	0.07	61425
	55.7	54	-1	1510	0.04	61426
4m @ 0.20/ Ou and 0.04g/+ Au	64	62	1	3330	0.04	61427
4m @ 0.2% Cu and 0.04g/t Au	66	64	-1	731	0.01	61428
	106	104	1	1500	0.06	61429
	108	106	-1	1060	0.05	61430
	110	108	-1	2930	0.06	61431
17m @ 0.5% Cu and 0.3g/t Au including	112	110	2	1620	0.06	61433
6m @ 1.0% Cu and 0.6g/t Au	114	112	5	11400	0.29	61434
	116	114	6	5320	0.15	61435
	118	116	24	12000	1.42	61436
	121	118	2	3080	0.06	61437
2m @ 0.6% Cu and 0.2g/t Au	135	133	10	6410	0.16	61438
Am @ 0.6% Cu and 0.26/t A	140	138	20	7920	0.17	61439
4m @ 0.6% Cu and 0.2g/t Au	142	140	7	4670	0.3	61440
4m @ 0.30/. Cu and 0.3a/+ A	149	147	5	2550	0.14	61441
4m @ 0.3% Cu and 0.2g/t Au	151	149	10	2730	0.2	61442

Table 1: Trench sample results

This ASX announcement has been approved and authorised for release by the board of Orbminco Limited.

For further information please contact:

Ralf Kriege

Managing Director Orbminco Limited +61 458 022 509

Ian Gordon

Chairman Orbminco Limited + 61 477 306 669

Orbminco Limited







About Orbminco Limited

Orbminco Limited is exploring for copper and gold in Mongolia and battery metals (lithium nickel, copper + PGE's) and gold in the Yilgarn Craton of Western Australia.

Competent Persons Statement

The exploration results reported herein, as far as they relate to mineralisation, are based on information compiled by Mr Ralf Kriege. Mr Kriege is Managing Director of Orbminco Limited and is a Member of the Australasian Institute of Mining and Metallurgy with over 20 years of experience in the field of activity being reported. Mr Kriege has sufficient experience which is relevant to the styles of mineralisation and types of deposit under consideration and to the activity that he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' relating to the reporting of Exploration Results. Mr Kriege consents to the inclusion in the report of matters based on his information in the form and context in which it appears.

Forward Looking Statements

Certain statements in this document are or maybe "forward-looking statements" and represent Woomera's intentions, projections, expectations or beliefs concerning among other things, future exploration activities. The projections, estimates and beliefs contained in such forward-looking statements necessarily involve known and unknown risks, uncertainties and other factors, many of which are beyond the control of Woomera, and which may cause Woomera's actual performance in future periods to differ materially from any express or implied estimates or projections. Nothing in this document is a promise or representation as to the future. Statements or assumptions in this document as to future matters may prove to be incorrect and differences may be material. Orbminco does not make any representation or warranty as to the accuracy of such statements or assumptions.

Previously Reported Information

For the purposes of ASX Listing Rule 5.23 the Company confirms that it is not aware of any new information or data that materially affects the information included in the original ASX announcement and that all material assumptions and technical parameters underpinning the estimates in the original ASX announcements continue to apply and have not materially changed.

Appendix 1: JORC Table





ANNEXURE 1.

JORC Code, 2012 Edition –Bronze Fox Copper-Gold Project / West Kasulu Porphyry Copper-Gold Prospect

[Note – The contents of this table are partly based on material that Orbminco's Competent Person has been able to access from the following announcements:

- Kincora Copper ASX Announcement: Mineral resource and updated exploration target for Bronze Fox, 26th July 2022 (KCC Announcement)
- <u>Kincora Copper (ASX KCC)</u>: Kincora announces new high-grade targets at Bronze Fox Kincora Copper dated 27th August 2018 Available online from: https://kincoracopper.com/kincora-announces-new-high-grade-targets-at-bronze-fox-2/

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling technique s	 Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be 	 Orbminco geologists completed channel sampling at a historic trench. Interval samples were collected, logged for lithology, alteration, structural and geotechnical attributes Intervals weighed an average 4kg.

Criteria	JORC Code explanation	Commentary
	required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	
Drilling technique s	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	No new drilling was undertaken.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	No new drilling was undertaken.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 No new drilling was undertaken. Channel samples are considered representative of the interval sampled. No new drilling was undertaken. The geological logging of the samples was done using a standardized logging system with lithologies, mineralization, alteration, oxidation and grain size recorded.
Sub- sampling technique s and sample preparatio n	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all subsampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second- 	 Channel sampling was conducted by hammer with samples placed in calico bags by hand. The samples were dry. Standard QAQC protocols were employed including the use of standards, duplicates and blanks, with one standard, duplicate and blank each inserted every 30 samples. The QAQC protocols and results show acceptable levels of accuracy and precision. Sample sizes are considered appropriate for the generally fine to medium grain disseminated and vein hosted mineralisation being targeted.

Criteria	JORC Code explanation	Commentary
	 half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 Gold was determined by Fire Assay and Atomic Absorption Spectrometry (FA-AAS). Copper, molybdenum and all other elements were prepared with a 4-acid digest and ICP-MS finish. Both methods are appropriate for the style of mineralisation and for potential use in resource estimation. All assays are to be undertaken at internationally recognized laboratories in Ulaanbaatar (SGS) Standard QAQC protocols were employed including the use of standards, duplicates and blanks, with one standard, duplicate and blank each inserted every 30 samples. The QAQC protocols and results show acceptable levels of accuracy and precision.
Verificatio n of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 Electronic data entry was performed by company and contract geologists and checked by OB1 geologists. CP was able to complete a personal inspection of the sampling on site. No adjustments to assay data were made. No new drilling was undertaken.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 No new drilling was undertaken. The grid system used to compile data is UTM zone 48N, WGS 84 datum. Samples were collected using handheld GPS (=/- 5m) along the historic trenches.
Data spacing and distributio n	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 Data spacing and distribution are sufficient to establish geological and grade continuity appropriate to be used to support the calculation of a JORC compliant resource. No compositing has been applied.

Criteria	JORC Code explanation	Commentary
Orientatio n of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	The trench sampling was conducted along the NW trending trench, no relationship between the orientation of the mineralized structures was therefore considered.
Sample security	The measures taken to ensure sample security.	 Sample security was supervised by OB1 geologists and controlled by a chain of custody involving paper and digital copies of collected samples. Samples were delivered from the site directly to the SGS laboratory by Orbminco personnel.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 No audits or reviews of sampling techniques and data has occurred; however, sampling techniques are consistent with industry standards.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria		Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 The Bronze Fox Project consist of two licenses for an approximate total of 175km2: 1. Bronze Fox Mining Licence (MV-021681) 2. Tourmaline Hills Exploration Licence (XV-017977). All licences are in good standing and there are no known impediments to operations. Orbminco has the right to earn an 80% interest, by spending US\$4 million over 5 years with the ability to secure 100% of the Bronze Fox project The West Kasulu deposit straddles the boundary between MV-021681 and XV-017977
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 The Bronze Fox and Tourmaline Hills licence areas (together the Bronze Fox Project) were initially explored by joint Mongolian-Soviet government exploration teams. Shallow diamond drilling (to 200m) was undertaken over the Bronze Fox – Tourmaline Hills area in 1976, including 4 holes in the

Criteria		Commentary
		 West Kasulu prospect area. Ivanhoe Mines Mongolia held tenure from 2004 to 2006 and undertook detailed geological mapping, stream sediment sampling, rock chip sampling, trenching, ground magnetics (1,029 km) and gradient array IP (1,076 km). Ivanhoe drilled 24 diamond holes (6,770 m) across the tenements in 2005. Ivanhoe failed to gain a mining license for the tenure, which reverted back to the State. In 2009 the area was split in two following the government issuing new exploration licenses. The eastern half (now Bronze Fox) was granted to Nadmin LLC. The western half (now Tourmaline Hills) was granted to Golden Grouse LLC, who drilled 23 RC holes for 2,854 m (two with diamond tails) in 2011, predominantly in the West Kasulu area. Origo Partners PLC purchased Nadmin in 2010 from a private Mongolian group, which lead to the formation of Kincora in 2011, and Kincora acquired the Tourmaline Hills area from a private Canadian Group, Temujin Mining, in 2012. Kincora completed 128 Diamond and RC drill holes of which 63 were included in the West Kasulu resource estimation. The drilling data has been reviewed and was considered to be suitable for use in the resource estimate by Mr David Larsen, of DG & JG Larsen Consulting Pty Ltd, a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves
Geology	Deposit type, geological setting and style of mineralisation.	The Bronze Fox project is prospective for porphyry-style copper-gold and high sulphidation epithermal styles of mineralisation related to intermediate/felsic intrusive complexes of Upper Carboniferous age within the Southern Gobi Desert copper-gold porphyry belt.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth 	See Table 1 in body of report relevant statistics.

Criteria		Commentary
	 hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 No aggregation methods were used. Trench sample intervals were reported in element quantities.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	 Mineralised structures are variable in orientation, however trench samples were collected along the NW trending trend, not considering potential structural settings, angles as close as possible to true widths. Orbminco estimates that the true thickness of the intercepts is around 80-100% of most intercept widths. Exploration results have been reported as an interval with 'from' and 'to' stated in tables of significant economic intercepts.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should	Refer to Maps, Tables and Diagrams in the document.

Criteria		Commentary
	include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All relevant exploration results have been reported.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	 The West Kasulu area has been the subject of geological mapping, extensive soil and rock chip sampling, and surface geophysical surveys including ground magnetics and induced polarization (IP). Geological mapping, soil and rock chip sampling results have provided key controls on definition of geological domains for resource estimation. Detailed petrographic, lithogeochemical and handheld (SWIR) spectrometer studies were undertaken. Historic IP and ground magnetic surveys are being used to assist with definition of new and extensional drill targets. An airborne gravity survey undertaken for the Ivanhoe-BHP regional JV provided strong support for the total extent and connection of the intrusive complexes.
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale stepout drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Re-processing of historic IP data. Extension of IP surveys to the west at West Kasulu and over the Shuteen North prospect. Detailed geological mapping. Drill testing of targets defined by above work.

Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
Database integrity	 Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	 The historic drillhole data was initially supplied by Kincora as an Access database, which had previously been compiled and verified by independent consultants Mining Associates. Drillhole collar coordinates were loaded into GIS software and compared with existing plans. A subset of the drillhole data covering only the West Kasulu project area was then compiled, incorporating collar surveys, downhole surveys, lithological logging and multi-element assay data. Further validation was undertaken once the data was loaded into Datamine software, including checks for missing intervals, duplicate and overlapping intervals. Section and plan plots were generated, and the hole locations, traces and assays were visually checked during the 3D modelling process. No raw data files have been reviewed. The historic drillhole database is considered satisfactory for resource estimation at West Kasulu, however responsibility for data quality resided solely with Kincora/Resilience. The assay and drill hole data has been added and QA / QC-ed by an independent Database provider and merged with the existing database with concurrent reconciliation conducted.
Site visits	 Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	The Competent Person for exploration results, Ralf Kriege, was on site several times during the drill program.
Geological interpretation	 Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology. 	 The geological interpretation utilized surface mapping, geological logging, downhole geophysics and drillhole assay data. The resulting interpretation is similar to previous interpretations by Kincora and Mining Associates. Detailed relogging of pre-2019 drillholes by Kincora personnel was reviewed. The key lithological controls at the current broad drill spacing are the pre-cursor intrusives (monzonite and granodiorite) together with two crosscutting faults which define the contacts between the monzonite and granodiorite and the distribution of anomalous copper and gold observed in surface rock chip samples. There is a strong spatial relationship between mapped and logged quartz vein density and the modelled mineralization. Statistical analysis of assay data for the historic West Kasulu dataset (74 drillholes) suggested a 0.1% Cu cutoff is appropriate to define anomalous mineralization. Grade shells were subsequently

Criteria	JORC Code explanation	Commentary
		 constructed for 0.1% Cu only by Mining Associates. A higher-grade core has not been defined due to the relatively sparse drilling to date. The geological controls on the copper-gold mineralization at West Kasulu are typical of a porphyry copper-gold system. The mineralisation and associated alteration exist across the contacts between the genetically related intrusive bodies and the surrounding host rocks. The geological interpretation associated with the historic Mineral Resource estimate is considered by the author to have a reasonable level of confidence, but the broad drill spacing and relatively low grades result in a lower level of confidence in the shapes of and grade distribution within the mineralized bodies. However alternative interpretations are unlikely to significantly alter the total historic Inferred Mineral Resource. Geological logging, core and RC chip photographs and geochemical data (principally total sulphur) were used to construct wireframe surfaces representing the base of complete oxidation and the top of fresh rock. The new drilling data results will be including into a potentially planned resource update.
Dimensions	The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.	 The historic Mineral Resource at West Kasulu has a strike length of approximately 1.75 km and extends from the surface (average of about 1125m RL) to 800m RL (approximately 325m below surface). The plan width ranges from 12.5m (minimum block size) to over 400m. No changes to the resource have been implemented to date.
Estimation and modelling techniques	 The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data. The assumptions made regarding 	No new estimation of resource modelling has been conducted to date, based on the new assay data from the 2024 drilling.

Criteria	JORC Code explanation	Commentary
	 recovery of by-products. Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation). In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. Any assumptions behind modelling of selective mining units. Any assumptions about correlation between variables. Description of how the geological interpretation was used to control the resource estimates. Discussion of basis for using or not using grade cutting or capping. The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available. 	
Moisture	 Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content. 	 Historically average insitu density assignments in the resource block model are based on density measurements of dry drill core samples. Historic resource tonnages therefore represent in dry tonnes.
Cut-off parameters	The basis of the adopted cut-off grade(s) or quality parameters applied.	 Previously Resilience Mining Mongolia Pty Ltd (RMM) advised that a cut-off of 0.2% CuEq was appropriate for the intended bulk mining approach, which is consistent with industry standards and in-line with the cut-off used for the Xanadu Mines Kharmagtai copper-gold porphyry deposit, located approximately 130km west from the Bronze Fox copper-gold porphyry deposit. No changes were implemented to date as no recent data has not been used to update the historic resource.
Mining factors or	Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or,	 Previously it was assumed by Kincora that mining would be by conventional open pit mining methods. To date no open pit optimisation study has been completed. Preliminary studies by Xanadu Mines Ltd for the Kharmagtai deposit have indicated that large scale open pit mining to depths in excess of

Criteria	JORC Code explanation	Commentary
assumption s	if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.	 300m at a cut-off grade of 0.2% CuEq is feasible. No dilution or ore loss factors have been applied to the historic estimates. Previously the parent block size was designed as significantly larger than the likely minimum mining dimensions.
Metallurgical factors or assumptions	• The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.	 Limited metallurgical studies at the West Kasulu prospect have only been carried out on partially oxidized samples which show that oxide Cu may be economically recoverable by a heap leach process. Preliminary metallurgical recovery analysis at Xanadu Mines Ltd geologically similar Kharmagtai deposit has indicated recoveries of 90% Cu and 78% Au. These assumed recoveries, together with conservative metal prices (Cu at USD\$3.40/pound and Au at USD\$1400/ounce), were used to calculated copper equivalents (CuEq) for each resource model block from the estimated Cu and Au grades. The Mineral Resource is reported above a 0.2% CuEq cut-off.
Environmen- tal factors or assumptions	 Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual 	 No environmental factors or assumptions (eg sulphur estimates nor acid mine drainage considerations) have been incorporated into the historic resource estimate. However, most drill hole samples have been analysed for sulphur enabling estimation of sulphur grades if and when required in future resource estimates. The deposit occurs in a very sparsely populated, arid environment with no known impediments to

Criteria	JORC Code explanation	Commentary
	economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	large scale open pit mining.
Bulk density	 Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. Discuss assumptions for bulk density estimates used in the evaluation process of the different materials. 	 In 2019 Kincora measured bulk density using the water displacement (Archimedes) method on 381 core samples from 36 drillholes. Detailed QAQC, including standards duplicates and external laboratory checks, was undertaken. Previously those results have been analysed by plots of density against downhole depth for each lithology and domain. Density for key lithologies show very tight distribution about the mean for all depths from surface, though near surface samples (oxide zone) show a wider spread of results. Previously all core was air dried. No moisture content data is available however the rocks were described all extremely competent with no obvious porosity as is expected in similar intrusive granitoids. Historic and present core photographs show that voids (open fractures, faults etc are very limited). Mean density values were therefore previously assigned to each domain within the block model.
Classification	 The basis for the classification of the Mineral Resources into varying confidence categories. 	The historic Mineral Resource has been classified as Inferred. The classification level is based upon an assessment by the author of the understanding of the mineralisation and its continuity, and the quality of the drilling undertaken and analysis of the resulting data.

Criteria	JORC Code explanation	Commentary
	 Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). Whether the result appropriately reflects the Competent Person's view of the deposit. 	 The Mineral Resource has been constrained to a maximum depth at 800mRL (approximately 325m below the surface), which is considered to be an acceptable depth for large scale open pit mining. The spatial distribution of the Mineral Resource suggests most if not all could be incorporated into a single open pit with a low strip ratio, however the Mineral Resource has been further constrained by a simple open pit shell (not optimised) to exclude isolated low grade blocks at depth. The historic Mineral Resource classification and results appropriately reflect the Competent Person's view of the deposit and the current level of risk associated with the project to date. No additional data has been included in the historic resource evaluation to date.
Audits or reviews	The results of any audits or reviews of Mineral Resource estimates.	No peer review or audit of the historic resource estimation has been undertaken.
Discussion of relative accuracy/confidence	 Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include 	 The relative accuracy of the resource estimate is reflected in the JORC resource category (Inferred). Inferred Resources are considered global in nature and are not suitable for detailed mining studies. There is high confidence in the data quality, drilling methods and analytical results. The available geology and assay data correlate well, and the geological continuity has been demonstrated. Further drilling will continue to improve geological and grade understanding of the deposit. No production data is available for comparison.

Criteria	JORC Code explanation	Commentary
	 assumptions made and the procedures used. These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. 	