

Van Uden Gold Project stockpiles and surface Resource enhance near-term mining opportunities

Highlights

- Tonnages for an early mining operation at the Van Uden Gold Project continue to be defined
- Drilling results of four (4) historical stockpiles confirm overall ~60kt with average grade of 0.84 g/t gold
- High grade surface laterite mineralisation defined with grades of up to 2.55g/t Au
- Drilling of exposed remnant in-pit mineralisation to commence – preparations underway
- Discussions with third parties for treatment advancing

TG Metals Limited (**TG Metals** or the **Company**) (ASX:TG6) is pleased to provide an update on progress made towards the definition of near-term cash flow opportunities and exploration activities at the Van Uden Gold Project (**Van Uden Gold** or the **Project**).

The Company's Van Uden Gold Project is an historical mining centre hosting an inferred and indicated mineral resource estimate of 227,000 oz gold (ASX release 5 June 2025) on four granted mining leases. A current core focus for the Company is identifying tonnages that can generate near-term cash flow through processing at third-party facilities.

Final drilling assay results have been returned from the drilling of historical stockpiles and identified **60,232 tonnes at 0.84g/t Au** (Table 1).

In addition, a high grade surface laterite mineralisation has been identified within the existing resource, totaling **12,496 tonnes at 2.55g/t Au**. This material provides an additional near term opportunity for third party mill feed. See Figure 2.

The resource model also identifies exposed tonnages at the base of the historical Tasman open pit (Figures 3 and 4). A program of works (POW) has been approved for grade control drilling to better define this mineralisation. Preparation works for drill rig access has begun and drilling will commence as soon as practicable.

With approvals in place for the removal of the stockpiles (ASX announcement 30 July 2025), works can begin as soon as toll treatment agreements are secured. Discussions are ongoing with relevant parties.



TG Metals CEO, Mr. David Selfe stated;

“We are making accelerated progress at Van Uden with the evaluation of historical stockpiles for third party treatment and interrogation of the resource model showing low to no waste removal required for in-ground opportunities, such as the high-grade laterite and base of the Tasman pit.

The approval for the Tasman in-pit drilling enhances the opportunities for higher-grade, near-term cash flow opportunities. We are also advanced with resource infill and extensional drill planning, with further POWs to be lodged shortly for these campaigns.”

Final Drill Results

Table 1 below summarises the results from all assays. To account for voids and variable material types within the stockpiles, the average weighted grade for each stockpile is calculated from the sample weights of each core sample. Densities are calculated using bulking factors of 15% and 20% depending on apparent compaction with the densities used in the June 2025 MRE. In total the stockpiles comprise **60,232 tonnes at 0.84g/t Au**.

Stockpile	Sum Weight of Sonic Drilling	Sum Interval Assay x Interval Weight	Ave Grade (Mass Weighted)	Volume	Density With Bulking Factor	Tonnes
	kg	g/t*kg	g/t Au	m3		t
Tasman Sediments	1177.3	945.91	0.80	16,495	1.44	23,753
Tasman Mafics	653.9	609.03	0.93	9,402	2.04	19,179
Dieman Oxide*	416.9	320.54	0.77	3,334*	1.79	5,968
Dieman Laterite	672.3	553.35	0.82	5,332	2.13	11,331
					Total	60,232

Table 1 – Grade and Tonnes results. * Barren holes excluded from grade and volume calculations.

Full results are tabled in Appendix A.

Drilling

Drilling on the Dieman stockpiles was conducted on a nominal 10m x 10m pattern modified to fit the dimensions of the stockpile surfaces and test backfilled leach ponds as shown in Figure 1. The drilling method used was 4" Sonic Core drilling in order to maximise sample recovery. Core samples were recovered every metre or part thereof until the base of the stockpile was reached. Whole of core samples were delivered to IMO Labs for splitting and metallurgical testing.

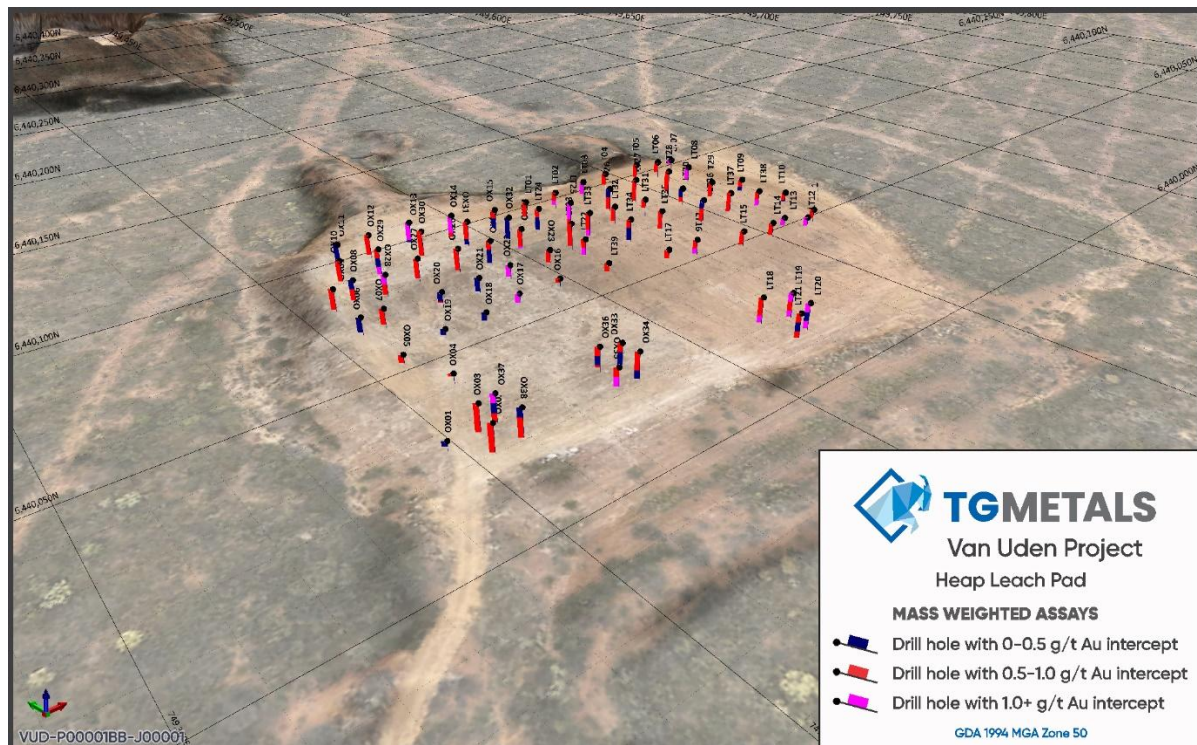


Figure 1 – Dieman Oxide and Laterite Stockpiles

Laterite High Grade

Interrogation of the resource model has identified high grade (+2g/t Au) surface zones (see Figure 2) within the larger laterite mineralisation envelope (laterite resource inferred and indicated 759,000 tonnes at 0.7g/t Au for 18,740oz Au, refer to ASX release 5 June 2025).

The high-grade laterite zones identified are within historically disturbed ground known as the Laterite Pit Outline. Bulk samples for metallurgical testing were taken from this area in the 1990's and early 2000's. There is a close spaced historical drill pattern over the northern +2g/t Au zone which presents as a near term opportunity to exploit for adding to oxide material sources to enhance physical milling characteristics as well as boosting grade.

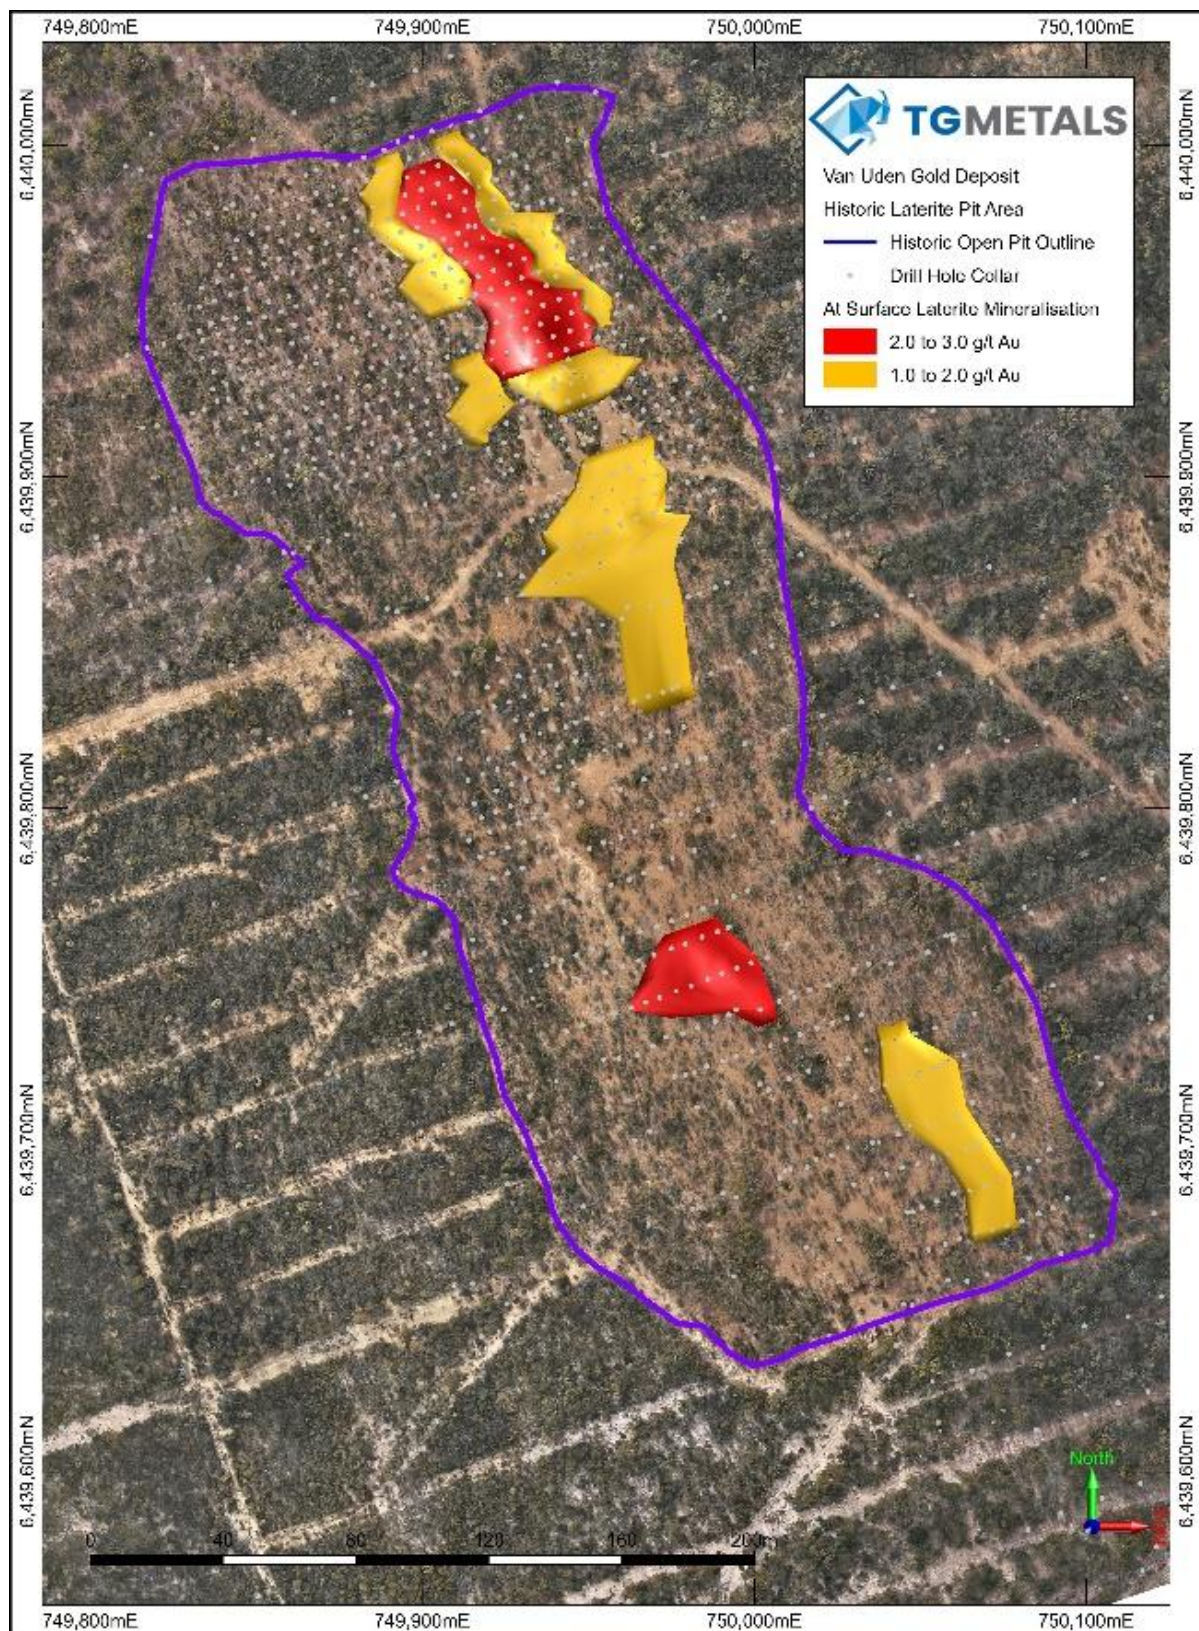


Figure 2 – Laterite Pit area showing resource areas of high grade laterite at +1g/t Au and +2g/t Au.

Tasman In-Pit Drilling

A POW has been approved for close spaced drilling of the historic Tasman open pit. The resource model interrogation shows potential for up to **26,675 tonnes at 1.6 g/t Au** remaining within the existing open pit boundary and accessible with depth extensions. Figures 3 and 4 below show the existing Tasman Open pit and natural surface in green and the potential extensions for more accessible tonnes in red.

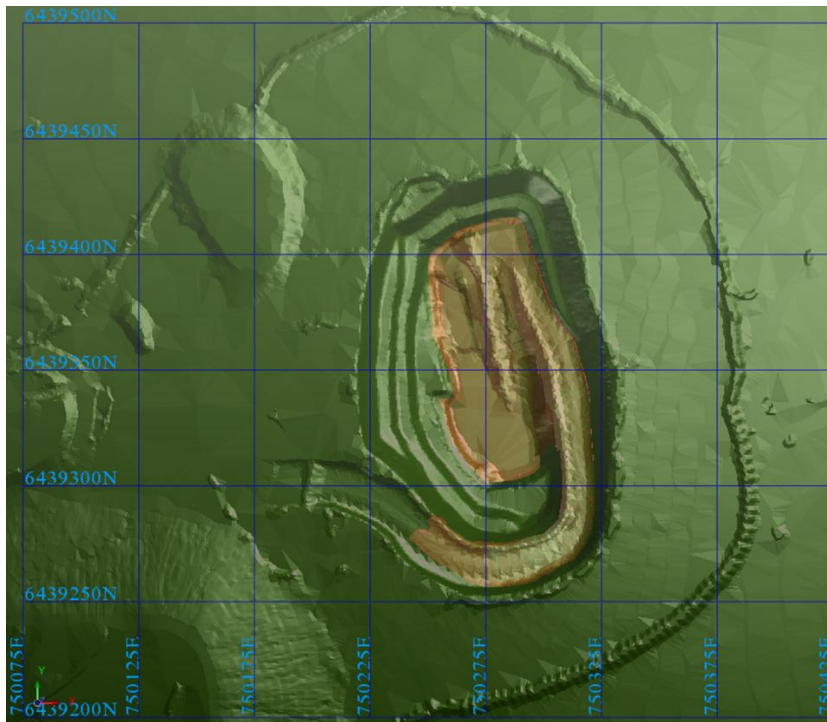


Figure 3 – Tasman Open Pit plan view showing existing pit lidar surveyed shell in green and proposed red extensions

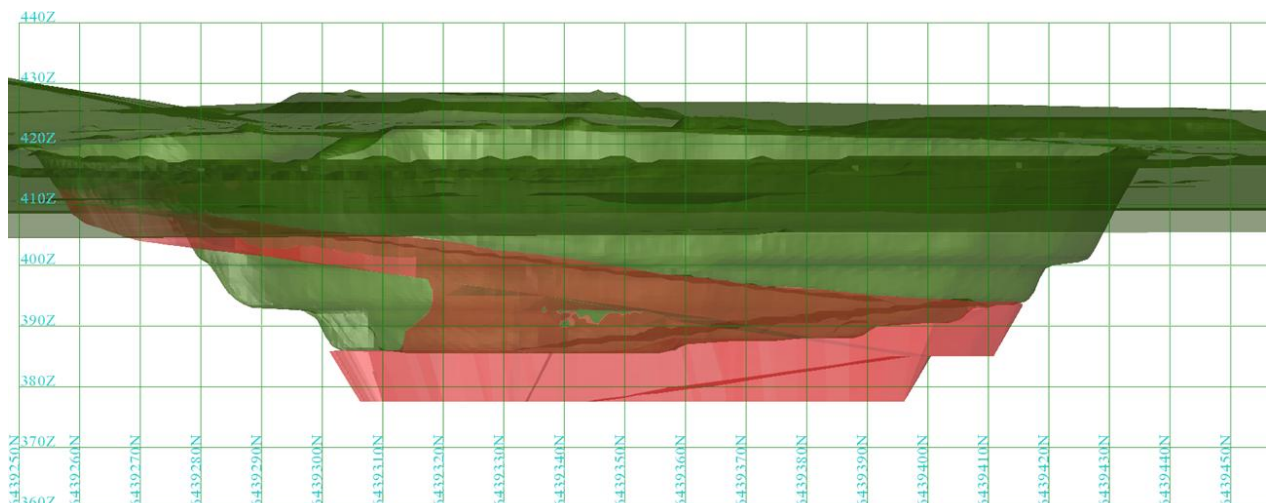


Figure 4 – Tasman Open Pit long section showing existing pit surveyed shell in green and proposed red extensions.

Van Uden Gold Project Description

The Project is located on the Forrestania Greenstone Belt, Figure 5, 90km east-northeast of Hyden and 120km south of Southern Cross. It is close to the Marvel Loch (producing) and Westonia - Edna May (care & maintenance) gold processing plants and is just 130km from the Company's established Burmeister lithium deposit at the Lake Johnston Project.

Van Uden Gold consists of an inferred and indicated 227,000 oz gold resource (ASX release 5 June 2025) on four granted mining leases, four granted exploration licences, one exploration licence application and two miscellaneous licences (for haul roads). The Project lies to the west of the Mt Holland lithium mine, south of the operating Marvel Loch gold Plant, and southeast of the Edna May gold Plant.

About TG Metals

TG Metals is an ASX listed company focused on exploring and developing gold and lithium assets at its wholly owned Lake Johnston Project and 80% owned Van Uden Gold Project in the stable jurisdiction of Western Australia. The Lake Johnston Project hosts the Burmeister high grade lithium deposit, Jaegermeister lithium pegmatites and several surrounding lithium prospects. Burmeister is in proximity to four lithium processing plants and undeveloped deposits. The Van Uden Gold Project contains past producing gold mines and is in proximity to operating gold processing Plants.

Authorised for release by TG Metals Board of Directors.

Contact

Mr David Selfe
Chief Executive Officer
Email: info@tgmets.com.au

Investor Relations

Evy Litopoulous
ResolveIR
Email: evy@resolveir.com

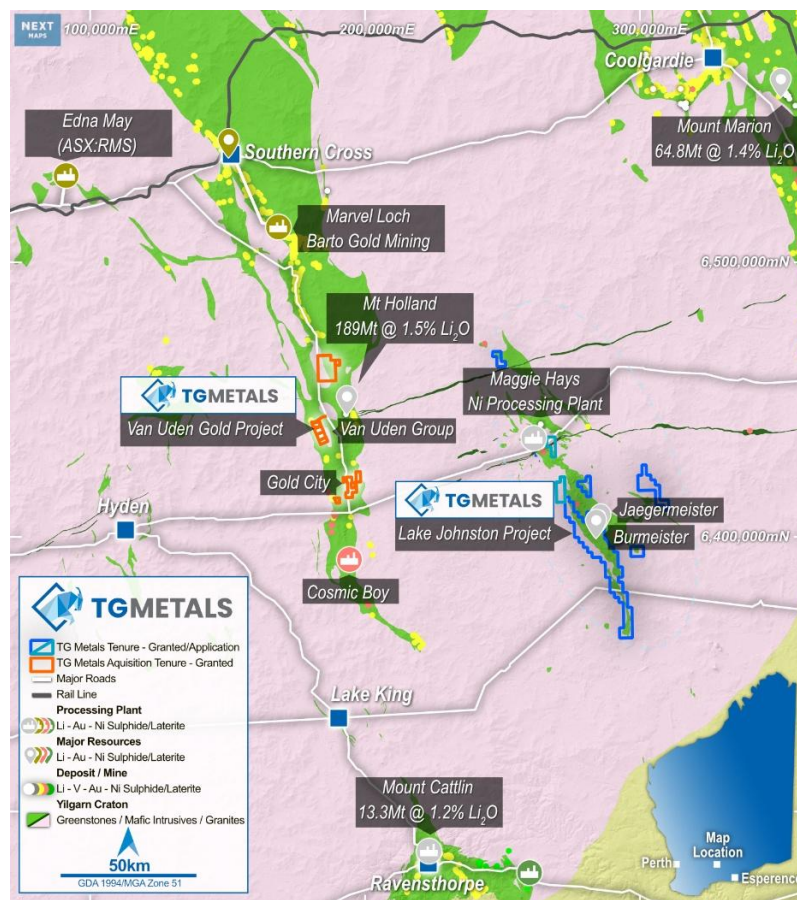


Figure 5 – Location Map showing the TG Metals Projects



Competent Person Statement

Information in this announcement that relates to exploration results, exploration strategy, exploration targets, geology, drilling and mineralisation is based on information compiled by Mr David Selfe who is a Fellow of the Australasian Institute of Mining and Metallurgy and an employee of TG Metals Limited. Mr Selfe has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activities that he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Selfe has consented to the inclusion in this report of matters based on their information in the form and context in which it appears. Mr Selfe considers that the information in this announcement is an accurate representation of the available data and studies for the Van Uden Gold Project.

Forward Looking Statements

This announcement may contain certain statements that may constitute “forward looking statements”. Such statements are only predictions and are subject to inherent risks and uncertainties, which could cause actual values, results, performance achievements to differ materially from those expressed, implied or projected in any forward looking statements.

Forward-looking statements are statements that are not historical facts. Words such as “expect(s)”, “feel(s)”, “believe(s)”, “will”, “may”, “anticipate(s)” and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company’s prospects, properties and business strategy. Our audience is cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and we do not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events.

The Company believes that it has a reasonable basis for making the forward-looking Statements in the presentation based on the information contained in this and previous ASX announcements.

The Company is not aware of any new information or data that materially affects the information included in this ASX release, and the Company confirms that, to the best of its knowledge, all material assumptions and technical parameters underpinning the exploration results in this release continue to apply and have not materially changed.

Appendix A – Drilling Table – Drill Collars

Hole ID	Total Depth	Easting	Easting	RL	Dip	Hole ID	Total Depth	Easting	Easting	RL	Dip
HGTS01	4.0	750184	6439401	424.2	-90	LGVU45	1.0	750098	6439319	424.0	-90
HGTS02	4.0	750185	6439411	424.4	-90	LGVU46	1.0	750094	6439350	423.7	-90
HGTS03	4.0	750186	6439425	424.3	-90	LGVU47	1.0	750084	6439356	423.7	-90
HGTS04	5.0	750183	6439435	424.5	-90	LGVU48	1.0	750075	6439357	423.9	-90
HGTS05	5.0	750175	6439446	424.4	-90	LGVU49	1.0	750063	6439356	424.7	-90
HGTS06	5.0	750167	6439447	424.5	-90	LGVU50	1.0	750052	6439355	425.3	-90
HGTS07	5.0	750158	6439448	424.1	-90	LGVU51	1.0	750037	6439351	426.0	-90
HGTS08	5.0	750149	6439444	424.0	-90	LT01	2.0	749462	6440092	426.4	-90
HGTS09	5.0	750146	6439437	424.4	-90	LT02	2.0	749471	6440092	426.4	-90
HGTS10	5.0	750149	6439430	424.6	-90	LT03	2.5	749480	6440092	426.7	-90
HGTS11	4.0	750153	6439419	424.5	-90	LT04	2.0	749487	6440092	427.0	-90
HGTS12	4.0	750158	6439411	424.2	-90	LT05	2.0	749497	6440091	427.2	-90
HGTS13	4.0	750166	6439407	424.3	-90	LT06	2.0	749504	6440091	426.7	-90
HGTS14	3.0	750170	6439397	424.2	-90	LT07	1.5	749510	6440092	426.2	-90
HGTS15	3.0	750177	6439398	424.4	-90	LT08	1.9	749508	6440083	426.7	-90
HGTS16	3.0	750177	6439405	424.5	-90	LT09	1.5	749514	6440071	425.9	-90
HGTS17	3.0	750173	6439415	424.5	-90	LT10	1.4	749518	6440059	425.3	-90
HGTS18	5.0	750178	6439425	424.5	-90	LT11	1.5	749514	6440048	425.2	-90
HGTS19	5.0	750168	6439426	424.5	-90	LT12	1.0	749509	6440045	425.3	-90
HGTS20	5.0	750172	6439435	424.7	-90	LT13	1.0	749504	6440048	425.5	-90
HGTS21	5.0	750162	6439436	424.6	-90	LT14	1.5	749499	6440047	425.6	-90
HGTS22	5.0	750153	6439437	424.5	-90	LT15	1.7	749490	6440048	425.7	-90
HGTS23	4.0	750158	6439426	424.7	-90	LT16	1.7	749478	6440051	425.8	-90
HGTS24	4.0	750163	6439417	424.4	-90	LT17	1.0	749470	6440052	425.8	-90
LGVU01	4.5	750082	6439347	427.0	-90	LT18	3.0	749474	6440028	423.9	-90
LGVU02	3.8	750072	6439347	427.4	-90	LT19	2.9	749480	6440026	423.8	-90
LGVU03	3.6	750062	6439347	427.8	-90	LT20	3.0	749479	6440021	423.7	-90
LGVU04	3.9	750055	6439345	428.1	-90	LT21	2.7	749475	6440019	423.7	-90
LGVU05	5.0	750075	6439341	427.5	-90	LT22	2.0	749459	6440066	426.2	-90
LGVU06	4.0	750065	6439339	427.9	-90	LT23	3.0	749460	6440072	426.8	-90
LGVU07	4.0	750057	6439341	428.1	-90	LT24	2.7	749459	6440083	427.1	-90
LGVU08	4.0	750047	6439341	428.2	-90	LT25	3.0	749467	6440081	427.1	-90
LGVU09	5.0	750036	6439341	428.4	-90	LT26	2.7	749479	6440081	427.4	-90
LGVU10	4.5	750028	6439341	428.3	-90	LT27	2.8	749488	6440081	427.5	-90
LGVU11	6.0	750018	6439339	428.2	-90	LT28	3.0	749498	6440081	427.5	-90
LGVU12	4.9	750013	6439333	428.2	-90	LT29	2.0	749503	6440070	426.9	-90
LGVU13	3.0	750022	6439332	428.5	-90	LT30	2.0	749493	6440070	427.3	-90
LGVU14	3.9	750033	6439332	428.5	-90	LT31	2.0	749481	6440071	427.3	-90
LGVU15	4.0	750060	6439331	428.1	-90	LT32	2.0	749473	6440072	427.3	-90
LGVU16	3.8	750042	6439330	428.5	-90	LT33	2.8	749466	6440073	427.2	-90
LGVU17	4.5	750052	6439331	428.3	-90	LT34	2.6	749472	6440066	426.8	-90
LGVU18	4.0	750071	6439328	427.8	-90	LT35	2.2	749480	6440065	426.9	-90
LGVU19	5.5	750081	6439328	427.6	-90	LT36	3.0	749492	6440063	427.0	-90
LGVU20	6.0	750091	6439329	427.1	-90	LT37	2.7	749501	6440063	426.8	-90
LGVU21	5.0	750085	6439320	427.3	-90	LT38	2.2	749510	6440061	426.2	-90
LGVU22	5.2	750077	6439319	427.5	-90	LT39	0.9	749457	6440056	425.4	-90
LGVU23	5.0	750067	6439319	427.8	-90	OX01	1.0	749401	6440029	423.1	-90
LGVU24	5.0	750056	6439319	428.3	-90	OX02	3.0	749408	6440028	423.4	-90
LGVU25	5.0	750048	6439321	428.4	-90	OX03	3.0	749410	6440035	423.4	-90
LGVU26	5.0	750036	6439321	428.5	-90	OX04	1.0	749412	6440045	423.5	-90
LGVU27	5.0	750028	6439322	428.6	-90	OX05	1.0	749408	6440055	424.0	-90
LGVU28	5.0	750018	6439322	428.3	-90	OX06	1.9	749407	6440068	425.3	-90
LGVU29	4.0	750011	6439325	428.0	-90	OX07	2.0	749412	6440068	425.2	-90
LGVU30	4.0	750013	6439314	428.5	-90	OX08	2.5	749411	6440079	426.3	-90
LGVU31	4.0	750021	6439313	428.5	-90	OX09	2.5	749407	6440079	426.2	-90
LGVU32	4.0	750032	6439313	428.6	-90	OX10	2.5	749413	6440088	426.7	-90
LGVU33	4.0	750041	6439308	428.4	-90	OX11	2.5	749416	6440096	426.6	-90
LGVU34	4.0	750050	6439308	428.2	-90	OX12	3.0	749423	6440095	426.9	-90
LGVU35	4.0	750060	6439308	427.8	-90	OX13	3.0	749433	6440095	427.1	-90
LGVU36	3.0	750071	6439311	427.4	-90	OX14	3.0	749443	6440093	426.9	-90
LGVU37	4.0	750046	6439302	428.1	-90	OX15	2.5	749453	6440092	426.5	-90
LGVU38	4.0	750036	6439302	428.2	-90	OX16	0.9	749446	6440059	424.8	-90
LGVU39	4.0	750026	6439302	428.3	-90	OX17	1.0	749436	6440058	424.9	-90
LGVU40	3.0	750019	6439305	428.3	-90	OX18	1.0	749427	6440057	424.7	-90
LGVU41	4.0	750054	6439326	428.3	-90	OX19	0.9	749418	6440057	424.3	-90
LGVU42	5.0	750022	6439331	428.5	-90	OX20	1.7	749424	6440067	425.3	-90
LGVU43	1.0	750100	6439338	423.9	-90	OX21	1.6	749432	6440067	425.6	-90
LGVU44	1.0	750100	6439330	423.8	-90	OX22	1.6	749440	6440068	425.6	-90
						OX23	1.5	749450	6440067	425.9	-90
						OX24	2.3	749450	6440077	426.7	-90
						OX25	2.8	749442	6440077	426.6	-90
						OX26	2.6	749434	6440077	426.7	-90
						OX27	2.6	749425	6440079	426.6	-90
						OX28	2.4	749417	6440078	426.2	-90
						OX29	3.0	749421	6440087	427.0	-90
						OX30	2.8	749432	6440088	427.2	-90

Hole ID	Total Depth	Easting	Easting	RL	Dip
OX31	2.8	749442	6440087	427.2	-90
OX32	2.7	749452	6440084	426.9	-90
OX33	2.5	749441	6440034	423.6	-90
OX34	3.0	749441	6440029	423.6	-90
OX35	2.0	749435	6440028	423.5	-90
OX36	2.7	749437	6440035	423.6	-90
OX37	3.0	749414	6440035	423.4	-90
OX38	3.0	749415	6440029	423.4	-90



Appendix A – Drilling Table – Drill Assays

Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
HGTS01	0.00	1.00	1.00	5.30	1.21	1.21	1.21
HGTS01	1.00	2.00	1.00	7.45	0.81	0.77	0.79
HGTS01	2.00	3.00	1.00	7.30	0.54	0.56	0.55
HGTS01	3.00	3.70	0.70	5.45	1.11	0.91	1.01
HGTS02	0.00	1.00	1.00	4.80	0.88	1.32	1.10
HGTS02	1.00	2.00	1.00	6.75	0.74	0.80	0.77
HGTS02	2.00	3.00	1.00	5.25	1.78	1.88	1.83
HGTS02	3.00	3.70	0.70	3.75	1.25	1.34	1.30
HGTS03	0.00	1.00	1.00	4.60	0.77	0.73	0.75
HGTS03	1.00	2.00	1.00	7.15	0.58	0.58	0.58
HGTS03	2.00	3.00	1.00	6.55	0.44	0.47	0.46
HGTS03	3.00	4.00	1.00	5.20	0.90	0.86	0.88
HGTS04	0.00	1.00	1.00	4.25	1.75	1.88	1.82
HGTS04	1.00	2.00	1.00	6.75	0.90	1.01	0.96
HGTS04	2.00	3.00	1.00	6.50	0.86	0.69	0.78
HGTS04	3.00	4.00	1.00	7.50	2.41	2.43	2.42
HGTS04	4.00	4.40	0.40	3.35	1.37	1.33	1.35
HGTS05	0.00	1.00	1.00	5.15	1.81	1.84	1.83
HGTS05	1.00	2.00	1.00	7.55	0.80	0.86	0.83
HGTS05	2.00	3.00	1.00	6.25	0.48	0.53	0.51
HGTS05	3.00	4.00	1.00	6.15	2.53	2.53	2.53
HGTS05	4.00	4.50	0.50	2.45	0.44	0.38	0.41
HGTS06	0.00	1.00	1.00	7.85	0.86	0.78	0.82
HGTS06	1.00	2.00	1.00	5.55	0.58	0.62	0.60
HGTS06	2.00	3.00	1.00	8.75	0.52	0.41	0.47
HGTS06	3.00	4.00	1.00	5.50	0.73	0.71	0.72
HGTS06	4.00	4.95	0.95	7.55	0.63	0.66	0.65
HGTS07	0.00	1.00	1.00	6.75	1.63	1.42	1.53
HGTS07	1.00	2.00	1.00	6.05	1.18	1.11	1.15
HGTS07	2.00	3.00	1.00	5.45	0.75	0.84	0.80
HGTS07	3.00	3.90	0.90	4.45	0.41	0.36	0.39
HGTS08	0.00	1.00	1.00	5.00	2.87	2.85	2.86
HGTS08	1.00	2.00	1.00	7.15	1.19	1.11	1.15
HGTS08	2.00	3.00	1.00	6.40	1.15	1.11	1.13
HGTS08	3.00	4.00	1.00	6.05	0.57	0.58	0.58
HGTS08	4.00	4.20	0.20	1.45	0.32	0.35	0.34
HGTS09	0.00	1.00	1.00	5.65	0.79	0.79	0.79
HGTS09	1.00	2.00	1.00	7.85	0.73	0.68	0.71
HGTS09	2.00	3.00	1.00	6.05	0.80	0.83	0.82
HGTS09	3.00	4.00	1.00	7.80	0.30	0.31	0.31
HGTS09	4.00	4.35	0.35	3.90	0.64	0.55	0.60
HGTS10	0.00	1.00	1.00	6.90	1.59	1.70	1.65
HGTS10	1.00	2.00	1.00	5.60	0.53	0.50	0.52
HGTS10	2.00	3.00	1.00	4.60	0.65	0.66	0.66
HGTS10	3.00	4.00	1.00	5.10	2.88	2.71	2.80
HGTS10	4.00	4.50	0.50	3.80	1.56	1.64	1.60
HGTS11	0.00	1.00	1.00	3.65	0.33	0.41	0.37
HGTS11	1.00	2.00	1.00	6.20	0.97	1.08	1.03
HGTS11	2.00	3.00	1.00	4.60	2.23	2.28	2.26
HGTS11	3.00	3.95	0.95	4.35	0.49	0.56	0.53
HGTS12	0.00	1.00	1.00	4.89	0.41	0.43	0.42
HGTS12	1.00	2.00	1.00	6.05	1.14	1.15	1.15
HGTS12	2.00	3.00	1.00	5.06	0.58	0.59	0.59
HGTS12	3.00	3.40	0.40	2.34	0.30	0.28	0.29
HGTS13	0.00	1.00	1.00	7.88	0.65	0.66	0.66
HGTS13	1.00	1.80	0.80	9.26	0.23	0.21	0.22
HGTS13	2.00	2.80	0.80	8.64	0.70	0.46	0.58
HGTS13	2.80	3.70	0.90	4.91	0.49	0.51	0.50
HGTS14	0.00	1.00	1.00	8.52	0.56	0.54	0.55
HGTS14	1.00	2.00	1.00	13.60	0.25	0.25	0.25
HGTS14	2.00	2.60	0.60	4.36	0.62	0.61	0.62
HGTS15	0.00	1.00	1.00	8.95	0.69	0.61	0.65
HGTS15	1.00	2.00	1.00	6.28	1.01	0.99	1.00
HGTS15	2.00	2.30	0.30	2.38	0.45	0.44	0.45
HGTS16	0.00	1.00	1.00	8.20	1.11	1.05	1.08
HGTS16	1.00	2.00	1.00	5.71	0.85	0.80	0.83
HGTS16	2.00	2.60	0.60	4.64	0.49	0.51	0.50



Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
HGTS17	0.00	1.00	1.00	8.61	0.34	0.37	0.36
HGTS17	1.00	2.00	1.00	10.02	0.29	0.30	0.30
HGTS17	2.00	3.00	1.00	9.42	0.28	0.24	0.26
HGTS18	0.00	1.00	1.00	7.60	5.73	5.50	5.62
HGTS18	1.00	2.00	1.00	7.46	0.18	0.19	0.19
HGTS18	2.00	3.00	1.00	7.89	0.72	0.75	0.74
HGTS18	3.00	4.00	1.00	5.06	0.29	0.21	0.25
HGTS18	4.00	4.50	0.50	2.70	0.46	0.45	0.46
HGTS19	0.00	1.00	1.00	8.26	3.66	3.60	3.63
HGTS19	1.00	2.00	1.00	8.30	0.31	0.37	0.34
HGTS19	2.00	3.00	1.00	7.53	0.63	0.63	0.63
HGTS19	3.00	4.00	1.00	8.16	0.31	0.32	0.32
HGTS19	4.00	4.50	0.50	4.92	0.30	0.28	0.29
HGTS20	0.00	1.00	1.00	6.53	0.88	0.96	0.92
HGTS20	1.00	2.00	1.00	6.63	0.27	0.27	0.27
HGTS20	2.00	3.00	1.00	7.59	0.11	0.10	0.11
HGTS20	3.00	4.00	1.00	7.74	1.33	2.22	1.78
HGTS20	4.00	4.90	0.90	6.80	0.92	0.96	0.94
HGTS21	0.00	1.00	1.00	6.26	0.49	0.50	0.50
HGTS21	1.00	2.00	1.00	6.18	0.46	0.46	0.46
HGTS21	2.00	3.00	1.00	5.72	0.39	0.40	0.40
HGTS21	3.00	4.00	1.00	5.96	0.26	0.23	0.25
HGTS21	4.00	4.75	0.75	6.06	0.10	0.09	0.10
HGTS22	0.00	1.00	1.00	6.45	0.31	0.36	0.34
HGTS22	1.00	2.00	1.00	6.10	0.45	0.50	0.48
HGTS22	2.00	3.00	1.00	6.65	0.28	0.35	0.32
HGTS22	3.00	4.00	1.00	7.40	0.17	0.13	0.15
HGTS22	4.00	5.00	1.00	3.95	0.20	0.26	0.23
HGTS23	0.00	1.00	1.00	6.85	5.15	5.23	5.19
HGTS23	1.00	2.00	1.00	8.10	0.28	0.30	0.29
HGTS23	2.00	3.00	1.00	11.45	2.38	2.33	2.36
HGTS23	3.00	4.00	1.00	6.20	0.92	1.09	1.01
HGTS24	0.00	1.00	1.00	8.05	1.58	1.61	1.60
HGTS24	1.00	2.00	1.00	9.90	0.28	0.31	0.30
HGTS24	2.00	3.00	1.00	7.15	0.85	0.89	0.87
HGTS24	3.00	4.00	1.00	7.15	0.43	0.43	0.43
LGVU01	0.00	1.00	1.00	5.26	0.40	0.41	0.41
LGVU01	1.00	2.00	1.00	5.67	0.91	0.82	0.87
LGVU01	2.00	3.00	1.00	7.31	0.47	0.45	0.46
LGVU01	3.00	4.00	1.00	7.72	0.35	0.41	0.38
LGVU01	4.00	4.20	0.20	2.82	0.12	0.13	0.13
LGVU02	0.00	1.00	1.00	5.43	0.47	0.51	0.49
LGVU02	1.00	2.00	1.00	6.28	3.15	3.29	3.22
LGVU02	2.00	3.00	1.00	6.58	0.88	0.83	0.86
LGVU02	3.00	3.70	0.70	7.08	0.52	0.47	0.50
LGVU03	0.00	1.00	1.00	5.26	0.62	0.61	0.62
LGVU03	1.00	2.00	1.00	5.70	3.17	2.86	3.02
LGVU03	2.00	3.00	1.00	7.54	0.30	0.29	0.30
LGVU03	3.00	3.43	0.43	3.88	0.61	0.57	0.59
LGVU04	0.00	1.00	1.00	5.72	0.47	0.57	0.52
LGVU04	1.00	2.00	1.00	5.84	2.02	2.23	2.13
LGVU04	2.00	3.00	1.00	10.08	0.38	0.44	0.41
LGVU04	3.00	3.60	0.60	5.38	2.03	1.94	1.99
LGVU05	0.00	1.00	1.00	7.36	0.97	0.95	0.96
LGVU05	1.00	2.00	1.00	5.04	1.77	2.20	1.99
LGVU05	2.00	3.00	1.00	8.54	1.38	1.89	1.64
LGVU05	3.00	4.00	1.00	8.66	0.58	0.54	0.56
LGVU05	4.00	4.50	0.50	5.64	1.97	1.93	1.95
LGVU06	0.00	1.00	1.00	7.34	0.30	0.27	0.29
LGVU06	1.00	2.00	1.00	8.66	0.30	0.32	0.31
LGVU06	2.00	3.00	1.00	10.14	0.41	0.38	0.40
LGVU06	3.00	3.50	0.50	5.31	0.43	0.44	0.44
LGVU07	0.00	1.00	1.00	6.88	1.21	1.22	1.22
LGVU07	1.00	2.00	1.00	9.43	0.38	0.34	0.36
LGVU07	2.00	3.00	1.00	11.07	2.45	2.24	2.35
LGVU07	3.00	3.76	0.76	6.08	0.51	0.51	0.51
LGVU08	0.00	1.00	1.00	6.44	1.68	1.69	1.69
LGVU08	1.00	2.00	1.00	7.22	0.24	0.22	0.23
LGVU08	2.00	3.00	1.00	9.54	0.71	0.69	0.70
LGVU08	3.00	3.79	0.79	9.82	0.98	0.98	0.98
LGVU09	0.00	1.00	1.00	6.76	0.64	0.61	0.63
LGVU09	1.00	2.00	1.00	8.40	0.66	0.71	0.69
LGVU09	2.00	3.00	1.00	9.44	0.47	0.55	0.51
LGVU09	3.00	4.00	1.00	11.20	0.52	0.53	0.53
LGVU09	4.00	4.39	0.39	3.56	0.41	0.43	0.42



Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
LGVU10	0.00	1.00	1.00	6.14	0.76	0.72	0.74
LGVU10	1.00	2.00	1.00	9.84	0.56	0.55	0.56
LGVU10	2.00	3.00	1.00	7.56	0.69	0.66	0.68
LGVU10	3.00	3.80	0.80	8.86	0.60	0.59	0.60
LGVU11	0.00	1.00	1.00	7.27	0.40	0.43	0.42
LGVU11	1.00	2.00	1.00	5.37	0.61	0.60	0.61
LGVU11	2.00	3.00	1.00	4.57	0.80	0.85	0.83
LGVU11	3.00	4.00	1.00	4.76	1.10	1.11	1.11
LGVU11	4.00	4.20	0.20	3.09	0.16	0.17	0.17
LGVU12	0.00	1.00	1.00	7.24	0.96	0.85	0.91
LGVU12	1.00	2.00	1.00	6.07	0.79	0.76	0.78
LGVU12	2.00	3.00	1.00	5.00	1.23	1.36	1.30
LGVU12	3.00	4.00	1.00	5.05	1.06	1.01	1.04
LGVU12	4.00	4.70	0.70	4.44	0.38	0.40	0.39
LGVU13	0.00	1.00	1.00	5.04	0.35	0.35	0.35
LGVU13	1.00	2.00	1.00	4.94	0.42	0.42	0.42
LGVU13	2.00	2.85	0.85	3.98	0.24	0.28	0.26
LGVU14	0.00	1.00	1.00	6.04	0.68	0.62	0.65
LGVU14	1.00	2.00	1.00	7.86	0.74	0.66	0.70
LGVU14	2.00	3.00	1.00	7.10	0.70	0.77	0.74
LGVU14	3.00	3.90	0.90	9.48	0.83	0.80	0.82
LGVU15	0.00	1.00	1.00	6.48	0.16	0.14	0.15
LGVU15	1.00	2.00	1.00	5.52	0.43	0.41	0.42
LGVU15	2.00	3.00	1.00	8.20	1.28	1.28	1.28
LGVU15	3.00	3.90	0.90	5.52	0.58	0.56	0.57
LGVU16	0.00	1.00	1.00	7.56	1.39	1.41	1.40
LGVU16	1.00	2.00	1.00	8.64	0.57	0.63	0.60
LGVU16	2.00	3.00	1.00	6.33	0.57	0.54	0.56
LGVU16	3.00	3.80	0.80	4.94	0.33	0.33	0.33
LGVU17	0.00	1.00	1.00	8.98	0.92	0.93	0.93
LGVU17	1.00	2.00	1.00	5.00	0.38	0.41	0.40
LGVU17	2.00	3.00	1.00	5.36	0.84	0.81	0.83
LGVU17	3.00	4.00	1.00	9.78	0.67	0.61	0.64
LGVU17	4.00	4.42	0.42	5.88	1.03	1.01	1.02
LGVU18	0.00	1.00	1.00	6.14	1.05	1.10	1.08
LGVU18	1.00	2.00	1.00	10.14	1.15	1.20	1.18
LGVU18	2.00	3.00	1.00	5.56	1.02	1.04	1.03
LGVU18	3.00	3.90	0.90	9.20	1.15	1.20	1.18
LGVU19	0.00	1.00	1.00	5.28	0.76	0.83	0.80
LGVU19	1.00	2.00	1.00	4.52	2.64	2.89	2.77
LGVU19	2.00	3.00	1.00	4.74	1.05	1.05	1.05
LGVU19	3.00	4.00	1.00	5.06	2.19	2.11	2.15
LGVU19	4.00	4.95	0.95	4.21	1.17	1.19	1.18
LGVU20	0.00	1.00	1.00	4.70	1.60	1.68	1.64
LGVU20	1.00	2.00	1.00	6.42	2.00	1.99	2.00
LGVU20	2.00	3.00	1.00	5.16	0.40	0.43	0.42
LGVU20	3.00	4.00	1.00	4.00	0.55	0.50	0.53
LGVU20	4.00	4.80	0.80	3.58	0.74	0.85	0.80
LGVU21	0.00	1.00	1.00	5.80	0.37	0.39	0.38
LGVU21	1.00	2.00	1.00	5.58	0.37	0.42	0.40
LGVU21	2.00	3.00	1.00	4.74	0.48	0.47	0.48
LGVU21	3.00	4.00	1.00	5.20	0.35	0.36	0.36
LGVU21	4.00	4.87	0.87	3.68	0.43	0.43	0.43
LGVU22	0.00	1.00	1.00	5.77	0.59	0.58	0.59
LGVU22	1.00	2.00	1.00	6.00	0.67	0.62	0.65
LGVU22	2.00	3.00	1.00	5.15	0.95	0.93	0.94
LGVU22	3.00	4.00	1.00	5.86	0.88	0.94	0.91
LGVU22	4.00	4.75	0.75	3.68	0.61	0.54	0.58
LGVU23	0.00	1.00	1.00	6.12	0.46	0.44	0.45
LGVU23	1.00	2.00	1.00	7.62	0.36	0.38	0.37
LGVU23	2.00	3.00	1.00	6.08	0.79	0.78	0.79
LGVU23	3.00	4.00	1.00	10.22	0.55	0.59	0.57
LGVU23	4.00	4.85	0.85	5.84	0.53	0.53	0.53
LGVU24	0.00	1.00	1.00	6.48	0.53	0.63	0.58
LGVU24	1.00	2.00	1.00	8.10	0.52	0.51	0.52
LGVU24	2.00	3.00	1.00	7.77	1.58	1.50	1.54
LGVU24	3.00	4.00	1.00	10.82	0.74	0.76	0.75
LGVU24	4.00	4.77	0.77	2.74	0.81	0.86	0.84



Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
LGVU25	0.00	1.00	1.00	9.20	0.80	0.79	0.80
LGVU25	1.00	2.00	1.00	9.20	0.68	0.73	0.71
LGVU25	2.00	3.00	1.00	8.70	0.46	0.46	0.46
LGVU25	3.00	4.00	1.00	6.70	0.91	0.97	0.94
LGVU25	4.00	5.00	1.00	8.26	0.34	0.33	0.34
LGVU26	0.00	1.00	1.00	8.72	0.17	0.18	0.18
LGVU26	1.00	2.00	1.00	7.58	0.33	0.34	0.34
LGVU26	2.00	3.00	1.00	7.14	0.67	0.73	0.70
LGVU26	3.00	3.85	0.85	5.96	0.93	0.95	0.94
LGVU27	0.00	1.00	1.00	8.87	0.40	0.38	0.39
LGVU27	1.00	2.00	1.00	8.38	0.34	0.33	0.34
LGVU27	2.00	3.00	1.00	7.76	0.99	1.00	1.00
LGVU27	3.00	4.00	1.00	6.32	0.48	0.50	0.49
LGVU27	4.00	4.35	0.35	1.68	0.58	0.60	0.59
LGVU28	0.00	1.00	1.00	7.12	0.33	0.29	0.31
LGVU28	1.00	2.00	1.00	4.68	0.72	0.73	0.73
LGVU28	2.00	3.00	1.00	5.80	0.89	0.93	0.91
LGVU28	3.00	3.70	0.70	4.20	1.78	1.75	1.77
LGVU29	0.00	1.00	1.00	6.40	2.49	2.51	2.50
LGVU29	1.00	2.00	1.00	6.98	0.46	0.49	0.48
LGVU29	2.00	2.90	0.90	4.74	0.76	0.79	0.78
LGVU30	0.00	1.00	1.00	4.28	0.29	0.28	0.29
LGVU30	1.00	2.00	1.00	8.48	0.95	1.01	0.98
LGVU30	2.00	3.00	1.00	6.84	1.16	0.98	1.07
LGVU30	3.00	3.70	0.70	4.92	0.34	0.34	0.34
LGVU31	0.00	1.00	1.00	7.52	1.46	1.34	1.40
LGVU31	1.00	2.00	1.00	5.24	0.83	0.86	0.85
LGVU31	2.00	3.00	1.00	3.80	0.74	0.86	0.80
LGVU31	3.00	3.30	0.30	1.16	0.68	0.60	0.64
LGVU32	0.00	1.00	1.00	8.26	0.83	0.78	0.81
LGVU32	1.00	2.00	1.00	8.02	0.42	0.46	0.44
LGVU32	2.00	3.00	1.00	9.26	0.66	0.67	0.67
LGVU32	3.00	3.30	0.30	1.52	0.73	0.74	0.74
LGVU33	0.00	1.00	1.00	6.68	0.32	0.30	0.31
LGVU33	1.00	2.00	1.00	6.28	0.58	0.60	0.59
LGVU33	2.00	3.00	1.00	9.22	1.59	1.53	1.56
LGVU34	0.00	1.00	1.00	6.40	0.28	0.22	0.25
LGVU34	1.00	2.00	1.00	7.28	0.43	0.37	0.40
LGVU34	2.00	3.00	1.00	10.02	0.59	0.52	0.56
LGVU34	3.00	3.40	0.40	5.34	0.38	0.35	0.37
LGVU35	0.00	1.00	1.00	7.20	0.71	0.77	0.74
LGVU35	1.00	2.00	1.00	6.12	0.52	0.50	0.51
LGVU35	2.00	2.90	0.90	6.04	0.48	0.53	0.51
LGVU36	0.00	1.00	1.00	7.00	1.32	1.27	1.30
LGVU36	1.00	2.00	1.00	6.10	0.51	0.50	0.51
LGVU36	2.00	2.90	0.90	4.60	0.53	0.61	0.57
LGVU37	0.00	1.00	1.00	6.74	0.63	0.58	0.61
LGVU37	1.00	2.00	1.00	8.04	0.48	0.48	0.48
LGVU37	2.00	3.00	1.00	3.84	1.37	1.44	1.41
LGVU38	0.00	1.00	1.00	6.30	0.56	0.52	0.54
LGVU38	1.00	2.00	1.00	5.68	0.84	0.91	0.88
LGVU38	2.00	2.40	0.40	3.82	1.47	1.56	1.52
LGVU39	0.00	1.00	1.00	7.28	0.64	0.62	0.63
LGVU39	1.00	2.00	1.00	7.64	0.50	0.54	0.52
LGVU39	2.00	3.00	1.00	6.04	0.77	0.78	0.78
LGVU40	0.00	1.00	1.00	7.18	0.55	0.51	0.53
LGVU40	1.00	2.00	1.00	6.24	0.47	0.52	0.50
LGVU40	2.00	3.00	1.00	4.32	1.04	0.98	1.01
LGVU41	0.00	1.00	1.00	7.56	0.36	0.40	0.38
LGVU41	1.00	2.00	1.00	6.94	0.17	0.17	0.17
LGVU41	2.00	3.00	1.00	7.84	0.66	0.68	0.67
LGVU41	3.00	4.00	1.00	10.14	0.88	0.92	0.90
LGVU42	0.00	1.00	1.00	6.84	0.09	0.11	0.10
LGVU42	1.00	2.00	1.00	6.68	0.36	0.38	0.37
LGVU42	2.00	3.00	1.00	5.92	0.74	0.78	0.76
LGVU42	3.00	4.00	1.00	5.60	0.57	0.60	0.59
LGVU42	4.00	4.40	0.40	3.68	0.50	0.49	0.50
LGVU43	0.00	1.00	1.00	7.18	0.86	0.76	0.81
LGVU44	0.00	1.00	1.00	7.16	0.46	0.49	0.48
LGVU45	0.00	1.00	1.00	5.94	0.49	0.49	0.49
LGVU46	0.00	1.00	1.00	6.96	1.46	1.50	1.48
LGVU47	0.00	1.00	1.00	8.60	1.69	1.62	1.66
LGVU48	0.00	1.00	1.00	7.84	0.89	0.98	0.94
LGVU49	0.00	1.00	1.00	5.02	4.79	4.38	4.59
LGVU50	0.00	1.00	1.00	5.58	0.49	NR	0.49
LGVU51	0.00	1.00	1.00	4.72	0.28	0.32	0.30



Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
LT01	0.00	1.00	1.00	7.06	0.60	0.68	0.64
LT01	1.00	1.80	0.80	8.71	0.57	0.63	0.60
LT02	0.00	1.00	1.00	7.19	0.68	0.68	0.68
LT02	1.00	1.50	0.50	5.10	1.27	1.28	1.28
LT03	0.00	1.00	1.00	7.93	1.25	1.31	1.28
LT03	1.00	1.50	0.50	6.94	1.20	1.31	1.26
LT04	0.00	1.00	1.00	7.20	0.72	0.71	0.72
LT04	1.00	1.40	0.40	5.88	0.87	0.91	0.89
LT05	0.00	1.00	1.00	7.95	0.55	0.59	0.57
LT05	1.00	1.60	0.60	6.26	0.61	0.68	0.65
LT06	0.00	1.00	1.00	7.37	0.92	0.86	0.89
LT06	1.00	1.30	0.30	2.00	0.90	0.95	0.93
LT07	0.00	0.50	0.50	5.09	0.97	1.03	1.00
LT08	0.00	1.00	1.00	3.40	1.23	1.22	1.23
LT08	1.00	1.60	0.60	3.85	1.43	1.46	1.45
LT09	0.00	1.00	1.00	7.94	0.81	0.80	0.81
LT09	1.00	1.40	0.40	4.98	0.33	0.34	0.34
LT10	0.00	1.00	1.00	6.48	0.69	0.72	0.71
LT10	1.00	1.10	0.10	2.67	0.26	0.29	0.28
LT11	0.00	1.00	1.00	7.57	0.58	0.56	0.57
LT12	0.00	1.00	1.00	8.14	1.25	1.35	1.30
LT13	0.00	0.90	0.90	10.91	1.03	1.10	1.07
LT14	0.00	1.00	1.00	5.63	0.87	0.95	0.91
LT14	1.00	1.50	0.50	7.66	0.63	0.62	0.63
LT15	0.00	1.00	1.00	5.84	0.65	0.66	0.66
LT15	1.00	1.60	0.60	3.47	0.51	0.52	0.52
LT16	0.00	1.00	1.00	5.00	0.76	0.76	0.76
LT16	1.00	1.60	0.60	3.62	1.46	1.49	1.48
LT17	0.00	1.00	1.00	6.72	0.74	0.70	0.72
LT18	0.00	1.00	1.00	6.57	0.91	0.92	0.92
LT18	1.00	2.00	1.00	8.81	0.93	0.91	0.92
LT18	2.00	2.80	0.80	10.66	1.05	1.00	1.03
LT19	0.00	1.00	1.00	10.00	0.97	1.02	1.00
LT19	1.00	2.00	1.00	8.75	0.88	0.98	0.93
LT19	2.00	2.70	0.70	5.80	1.37	1.25	1.31
LT20	0.00	1.00	1.00	9.05	4.76	5.18	4.97
LT20	1.00	2.00	1.00	7.50	0.42	0.40	0.41
LT20	2.00	2.80	0.80	6.65	1.44	1.35	1.40
LT21	0.00	1.00	1.00	7.85	0.95	0.84	0.90
LT21	1.00	2.00	1.00	8.11	0.30	0.33	0.32
LT21	2.00	2.70	0.70	6.24	0.60	0.66	0.63
LT22	0.00	1.00	1.00	8.80	0.83	0.82	0.83
LT22	1.00	1.80	0.80	10.10	1.25	1.30	1.28
LT23	0.00	1.00	1.00	8.98	0.53	0.48	0.51
LT23	1.00	2.00	1.00	8.35	0.76	0.75	0.76
LT23	2.00	2.60	0.60	5.83	0.89	0.90	0.90
LT24	0.00	1.00	1.00	9.11	0.55	0.54	0.55
LT24	1.00	2.00	1.00	9.29	0.42	0.39	0.41
LT24	2.00	2.50	0.50	8.03	0.46	0.43	0.45
LT25	0.00	1.00	1.00	8.47	1.53	1.52	1.53
LT25	1.00	2.00	1.00	7.53	1.24	1.18	1.21
LT25	2.00	2.80	0.80	7.39	0.65	0.61	0.63
LT26	0.00	1.00	1.00	7.84	0.39	0.39	0.39
LT26	1.00	2.00	1.00	9.34	0.59	0.54	0.57
LT26	2.00	2.50	0.50	8.36	0.73	0.73	0.73
LT27	0.00	1.00	1.00	10.04	0.68	0.61	0.65
LT27	1.00	2.00	1.00	11.54	0.76	0.79	0.78
LT27	2.00	2.60	0.60	7.17	0.68	0.75	0.72
LT28	0.00	1.00	1.00	10.05	0.59	0.59	0.59
LT28	1.00	2.00	1.00	12.80	0.65	0.64	0.65
LT28	2.00	2.40	0.40	5.35	0.72	0.74	0.73
LT29	0.00	1.00	1.00	8.81	0.61	0.57	0.59
LT29	1.00	1.80	0.80	7.85	0.50	0.52	0.51
LT30	0.00	1.00	1.00	7.55	0.36	0.34	0.35
LT30	1.00	1.60	0.60	9.20	0.79	0.76	0.78
LT31	0.00	0.95	0.95	11.18	0.66	0.64	0.65
LT32	0.00	1.00	1.00	9.43	0.56	0.59	0.58
LT32	1.00	1.70	0.70	8.97	0.62	0.55	0.59
LT33	0.00	1.00	1.00	8.59	0.56	0.54	0.55
LT33	1.00	2.00	1.00	6.35	0.58	0.57	0.58
LT33	2.00	2.70	0.70	6.67	1.35	1.40	1.38
LT34	0.00	1.00	1.00	6.28	0.53	0.47	0.50
LT34	1.00	2.00	1.00	4.80	0.40	0.44	0.42
LT34	2.00	2.40	0.40	6.85	0.33	0.31	0.32



Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
LT35	0.00	1.00	1.00	7.05	0.84	0.80	0.82
LT35	1.00	2.00	1.00	11.27	0.80	0.73	0.77
LT35	2.00	2.10	0.10	7.51	0.99	0.91	0.95
LT36	0.00	1.00	1.00	20.07	0.43	0.47	0.45
LT36	1.00	2.00	1.00	17.97	0.59	0.59	0.59
LT36	2.00	2.50	0.50	4.13	0.86	0.76	0.81
LT37	0.00	2.25	2.25	30.83	0.57	0.64	0.61
LT38	0.00	1.00	1.00	8.97	0.69	0.64	0.67
LT38	1.00	1.80	0.80	9.07	1.86	1.84	1.85
LT39	0.00	0.90	0.90	10.69	0.85	0.83	0.84
OX01	0.00	0.50	0.50	4.36	0.39	0.38	0.39
OX02	0.00	1.00	1.00	6.20	0.69	0.64	0.67
OX02	1.00	2.00	1.00	5.76	0.48	0.53	0.51
OX02	2.00	2.90	0.90	6.04	0.49	0.57	0.53
OX03	0.00	1.00	1.00	5.92	0.62	0.66	0.64
OX03	1.00	2.00	1.00	6.44	0.55	0.49	0.52
OX03	2.00	2.90	0.90	6.16	0.54	0.43	0.49
OX04	0.00	0.30	0.30	3.07	1.06	0.88	0.97
OX05	0.00	0.80	0.80	6.04	0.69	0.70	0.70
OX06	0.00	1.00	1.00	6.22	0.28	0.23	0.26
OX06	1.00	1.60	0.60	3.96	0.38	0.37	0.38
OX07	0.00	1.00	1.00	6.38	0.53	0.54	0.54
OX07	1.00	1.70	0.70	6.40	0.62	0.63	0.63
OX08	0.00	1.00	1.00	4.62	0.40	0.48	0.44
OX08	1.00	2.00	1.00	8.26	0.51	0.53	0.52
OX08	2.00	2.20	0.20	4.02	0.50	0.52	0.51
OX09	0.00	1.00	1.00	6.27	0.77	0.74	0.76
OX09	1.00	2.00	1.00	6.68	0.57	0.53	0.55
OX09	2.00	2.20	0.20	1.99	0.82	0.80	0.81
OX10	0.00	1.00	1.00	6.29	0.60	0.53	0.57
OX10	1.00	2.00	1.00	8.27	0.83	0.89	0.86
OX10	2.00	2.20	0.20	3.14	0.58	0.51	0.55
OX11	0.00	1.00	1.00	4.77	0.44	0.50	0.47
OX11	1.00	2.00	1.00	4.99	0.44	0.40	0.42
OX11	2.00	2.20	0.20	1.90	1.02	0.86	0.94
OX12	0.00	1.00	1.00	5.49	0.52	0.55	0.54
OX12	1.00	2.00	1.00	5.09	0.59	0.52	0.56
OX12	2.00	2.20	0.20	3.98	0.77	0.71	0.74
OX13	0.00	1.00	1.00	6.19	5.06	5.10	5.08
OX13	1.00	2.00	1.00	6.95	1.18	1.15	1.17
OX13	2.00	2.30	0.30	3.10	0.32	0.31	0.32
OX14	0.00	1.00	1.00	4.35	1.31	1.05	1.18
OX14	1.00	2.00	1.00	2.71	1.12	1.05	1.09
OX14	2.00	2.50	0.50	6.43	0.90	0.95	0.93
OX15	0.00	1.00	1.00	6.07	0.47	0.55	0.51
OX15	1.00	2.00	1.00	7.44	0.43	0.43	0.43
OX15	2.00	2.20	0.20	5.46	0.34	0.36	0.35
OX16	0.00	0.45	0.45	4.72	0.73	0.69	0.71
OX17	0.00	1.00	1.00	5.16	1.66	1.48	1.57
OX18	0.00	0.90	0.90	5.67	0.29	0.32	0.31
OX19	0.00	0.60	0.60	5.19	0.44	0.39	0.42
OX20	0.00	1.00	1.00	6.88	0.35	0.36	0.36
OX20	1.00	1.20	0.20	3.56	0.80	0.77	0.79
OX21	0.00	1.00	1.00	7.37	0.42	0.36	0.39
OX21	1.00	1.50	0.50	5.33	0.45	0.43	0.44
OX22	0.00	1.00	1.00	5.14	1.15	1.19	1.17
OX22	1.00	1.30	0.30	5.36	1.31	1.38	1.35
OX23	0.00	1.00	1.00	8.28	0.59	0.56	0.58
OX23	1.00	1.45	0.45	7.79	0.61	0.63	0.62
OX24	0.00	1.00	1.00	7.05	0.91	1.01	0.96
OX24	1.00	2.00	1.00	7.71	0.81	0.72	0.77
OX24	2.00	2.25	0.25	5.60	1.35	1.33	1.34
OX25	0.00	1.00	1.00	7.43	0.47	0.53	0.50
OX25	1.00	2.00	1.00	7.48	0.27	0.27	0.27
OX25	2.00	2.50	0.50	5.28	0.37	0.43	0.40
OX26	0.00	1.00	1.00	5.54	0.45	0.73	0.59
OX26	1.00	1.80	0.80	4.66	0.58	0.52	0.55
OX26	1.80	2.40	0.60	5.12	0.86	0.87	0.87
OX27	0.00	1.00	1.00	5.80	0.79	0.70	0.75
OX27	1.00	2.00	1.00	5.83	0.52	0.47	0.50
OX27	2.00	2.20	0.20	3.26	0.57	0.50	0.54
OX28	0.00	1.00	1.00	5.98	2.05	2.01	2.03
OX28	1.00	2.00	1.00	7.43	0.93	0.45	0.69
OX28	2.00	2.20	0.20	3.97	0.81	0.84	0.83



Hole ID	From	To	Interval	Dry Sample Mass	Au Assay	Dup Au Assay	Average Assay
	m	m	m	kg	g/t	g/t	g/t
OX29	0.00	1.00	1.00	7.09	0.61	0.62	0.62
OX29	1.00	2.00	1.00	5.97	0.44	0.46	0.45
OX29	2.00	2.80	0.80	6.57	1.47	1.44	1.46
OX30	0.00	1.00	1.00	6.17	0.61	0.61	0.61
OX30	1.00	2.00	1.00	6.65	0.51	0.50	0.51
OX30	2.00	2.80	0.80	8.07	0.61	0.67	0.64
OX31	0.00	1.00	1.00	6.28	0.80	0.88	0.84
OX31	1.00	2.00	1.00	7.43	0.57	0.51	0.54
OX31	2.00	2.70	0.70	5.77	0.46	0.41	0.44
OX32	0.00	1.00	1.00	8.74	0.43	0.46	0.45
OX32	1.00	2.00	1.00	6.94	0.43	0.44	0.44
OX32	2.00	2.50	0.50	4.88	0.36	0.25	0.31
OX33	0.00	1.00	1.00	9.26	0.47	0.55	0.51
OX33	1.00	2.00	1.00	7.54	0.45	0.46	0.46
OX33	2.00	2.40	0.40	5.08	0.44	0.42	0.43
OX34	0.00	1.00	1.00	6.94	0.60	0.48	0.54
OX34	1.00	2.00	1.00	7.20	0.72	0.69	0.71
OX34	2.00	2.90	0.90	6.54	0.41	0.32	0.37
OX35	0.00	1.00	1.00	7.10	0.66	0.62	0.64
OX35	1.00	2.00	1.00	7.80	1.19	1.18	1.19
OX36	0.00	1.00	1.00	8.00	0.49	0.52	0.51
OX36	1.00	2.00	1.00	9.46	0.42	0.38	0.40
OX36	2.00	2.20	0.20	3.34	0.53	0.50	0.52
OX37	0.00	1.00	1.00	7.24	1.42	1.38	1.40
OX37	1.00	2.00	1.00	8.72	0.45	0.46	0.46
OX37	2.00	2.90	0.90	7.04	0.80	0.79	0.80
OX38	0.00	1.00	1.00	5.94	0.47	0.48	0.48
OX38	1.00	2.00	1.00	7.26	0.93	1.02	0.98
OX38	2.00	3.00	1.00	7.44	0.77	0.74	0.76

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	Sonic drilling was used to obtain continuous 4" diameter core from surface stockpiles. Samples were collected into sealed plastic sleeves to preserve in-situ moisture and laid into PQ trays. All samples were transported to Independent Metallurgical Operations (IMO) in Welshpool, Perth. Samples were weighed "as received," then dried and reweighed. Split sub-samples were created for duplicate gold assay using 30g fire assay.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Sonic drilling was conducted using a GeoSonic EP26 66Hz rig with 4" tooling. All holes were vertical and drilled until base or near base of stockpiles.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Considered very high due to sonic sampling performance. All recovery was assessed through dry and as-received mass comparison at IMO. - Stock material has variations in compaction/settling as well as being recently moved during earthworks to make the area suitable for drilling.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	No formal geological logging was performed. Each hole was categorised based on visual identification of stockpile material, soil, or saprolite to identify the transition from dump to in-situ ground.

Criteria	JORC Code explanation	Commentary
	- Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	Samples were dried, weighed, and split at IMO to produce original and duplicate sub-samples. Sonic run length dictated the sampling interval, which was typically 1m where possible.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	All assays were conducted at SGS Laboratories using 30g Fire Assay for gold. Duplicates were generated by physical splitting, and both original and duplicate samples were analysed. No field standards or blanks were inserted due to metallurgical scope and internal QAQC at the lab.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	Sample data was verified by TG Metals personnel. LGVU42 was drilled to replace LGVU13, which failed to penetrate sufficiently. Variability between some intervals suggests a moderate nugget effect, which has been mitigated through increased sampling volume and mass-based averaging.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	All collar positions were collected using handheld GPS. Stockpiles are surface landforms, Post drilling a LiDAR survey was undertaken allowing RL's to be determined accurately.

Criteria	JORC Code explanation	Commentary
<i>Data spacing and distribution</i>	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i>	• Drilling was conducted in a 5–20m grid pattern across each dump. 464 sample intervals were generated. Mass-weighted averaging was used to reduce bias caused by compaction variability.
<i>Orientation of data in relation to geological structure</i>	• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	• Not applicable. All stockpiles are anthropogenic with sub-horizontal geometry. All holes were vertical.
<i>Sample security</i>	• <i>The measures taken to ensure sample security.</i>	• Samples were bagged, steel-strapped to pallets on-site, and trucked directly to IMO in Welshpool. Chain of custody was maintained by TG Metals personnel.
<i>Audits or reviews</i>	• <i>The results of any audits or reviews of sampling techniques and data.</i>	• No independent audits have been conducted at this stage. Results and procedures are under internal review.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	• Tenements M77/478, M77/477 are located in Western Australia. • Ownership: TG Metals acquiring 80% ownership of the Mining and Exploration tenements from Montague Resources Australia Pty Ltd. TG Metals acquiring 100% Ownership of Miscellaneous licences. • The tenements are granted and in good standing.
<i>Exploration done by other parties</i>	• <i>Acknowledgment and appraisal of exploration by other parties.</i>	• Historical exploration by Reynolds Australia, PacMin Mining Corporation, Convergent Minerals, Viceroy Australia Pty Ltd, Forrestania Gold NL, Sons of Gwalia Limited, St Barbara Mines Limited, Montague Resources Australia Pty Ltd, Kidman Resources Limited, Tianye SXO Gold Mining Pty Ltd, and MH Gold Ltd.

Criteria	JORC Code explanation	Commentary
		Data has been obtained from WAMEX Open File reports.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	- Hosted within the Southern Cross Greenstone Belt. - Gold mineralisation is structurally controlled, occurring along shear zones and in quartz veins. - The geological structure had previously been interpreted as a shallowly eastward dipping system associated with a generally NNW striking contact zone. - Previously mined material concentrated on Oxide and Lateritic ore.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	- Relevant tables have been included in appendices of the release - Total of 152 vertical holes for 464 m drilling. Intercepts dictated by sonic run (~1 m intervals).
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Duplicate assay averages used. Domain-level grades calculated using mass-weighted averaging to reduce bias from compaction variability; no top-cutting.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg ‘down hole length, true</i>	Drill holes vertical into sub-horizontal dumps—intercepts represent true thickness.

Criteria	JORC Code explanation	Commentary
	<i>width not known').</i>	
Diagrams	• <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	• Maps, diagrams and sections included in the body text.
Balanced reporting	• <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	• All assay data released as received;
Other substantive exploration data	• <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	• Specific gravity values have been taken from TG Metals' 5 June 2025 resource report. Due to the variable nature of stockpile compaction and recent rehandling of some dumps, different bulking factors have been applied. The LG stockpile was recently reworked extensively, and a 20% bulking factor has been applied to its base SG of 1.80 (yielding 1.44). The HG, OX, and LT dumps have remained largely undisturbed for ~30 years and have undergone natural compaction. A 15% bulking factor has been applied to their respective base SGs (HGTS: 2.40 → 2.04, OX: 2.10 → 1.79, LT: 2.50 → 2.13). These adjustments reflect the physical state of the dumps and are appropriate for preliminary tonnage assessments. • Volumes were estimated using a DGPS surface survey of the stockpiles conducted by Navais Australia Pty Ltd. Surveyed RLs were used to generate a digital terrain model (DTM) of each dump surface. A flat base was assumed at the approximate toe elevation along the dump edges to define the base of the material. This approach provides a practical and conservative volume estimate appropriate for unconsolidated stockpiles.
Further work	• <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	• QAQC validation, stockpile volume reconciliation, integration with IMO metallurgical report. No Mineral Resource estimation planned at this stage.