

Crusader extends Juruena Project with new discovery at Tatu NE (Tomate)

Highlights

- New mineralised zone drilled at Tatu NE (within the Juruena Gold Project) intercepts broad new zone of shallow mineralisation;
 - **37¹m @ 3.71 g/t Au** from 132m in hole TD-06, including **2m @ 47.67 g/t Au** from 138m and **2m @ 15.44 g/t Au** from 166m downhole
- Drilling at Tatu (renamed from Tomate) returns new high-grade results, including;
 - **0.5m @ 14.00 g/t Au** from 92m in hole TD-01
 - **1.16m @ 14.99g/t Au** from 94m in hole TD-02
 - **0.5m @ 31.12 g/t Au** from 117m in hole TD-04
- Mineralisation is open at depth and along strike
- Tatu is favourably located between the existing JORC Resources at Dona Maria and Querosene and provides potential additional high-grade feed to Juruena mining scenario (Scoping Study underway)
- **Existing Juruena Gold Project JORC Resource upgrade due this Quarter**

Drilling at the Juruena project has intersected multiple zones of mineralisation at the Tatu and Tatu NE prospects (formerly known as the Tomate prospect). Seven holes have been completed into the Tatu and Tatu NE zones as part of Crusader's ongoing development of the Juruena Gold Project, which is expected to host multiple ore bodies. Crusader is currently updating the existing mineral resource estimate over the Dona Maria and Querosene prospects and expects Juruena to continue to grow into multiple prospects feeding into a central processing facility.

Seven holes (for 947m) were completed in and around the Tatu and Tatu NE garimpo which has been previously mined as both an open pit and underground operation. Four holes (for 507m) were also completed at the Mauro prospect, where very broad, lower grade gold was intercepted in most of the holes.

Crusader is completing a Scoping Study for the Juruena Project, based around high-grade resources (currently inferred at **180koz @ 12.1 g/t Au** - mineral resource update pending) for the Dona Maria and Querosene prospects. Tatu and Tatu NE are located close to the proposed plant location and with additional successful drilling may provide valuable feed over time, adding significantly to overall project economics.

Crusader's exploration strategy of increasing the resource base through drilling at known and new targets is designed to create a series of mineable resources that are high grade, close to surface and amenable to treatment in a central processing facility.

¹ Not true width. Tatu NE mineralisation is interpreted to be dipping sub-parallel to the drill hole TD-06. True width is estimated at ~15m.

Commenting on the latest results, Crusader Resources' Managing Director Rob Smakman said:

"Drilling at Tatu was surprising as the mineralisation we were targeting wasn't the only potentially economic grades we hit. Tatu itself returned some excellent grades in the zone we were targeting, but what we are seeing at Tatu NE is a broader mineralised zone that is close to surface and associated with a west dipping porphyry dyke."

"We will be undertaking additional ground exploration work before the end of 2016, including trenching and mapping to help us better target additional drilling in 2017. We are working towards exploration funded by production at Juruena and these results confirm our model of multiple prospects within the main Juruena gold district."

The Tatu NE Prospect

The Tatu NE prospect is located along strike to the northeast of Tatu and is also associated with a porphyry dyke system (see Figures 1 & 2). This dyke is different in that it has been interpreted as dipping to the west (as opposed to vertically or steeply to the east at Tatu). The implication of this broader zone dipping to the west is that the drill orientation applied to the Tatu program was not perpendicular to the mineralised body (not true width) and therefore the historic and recent drilling programs could have easily missed the main Tatu NE mineralised zone. Additional mapping and trenching will be completed in the current year in anticipation of more aggressive drilling planned for 2017.

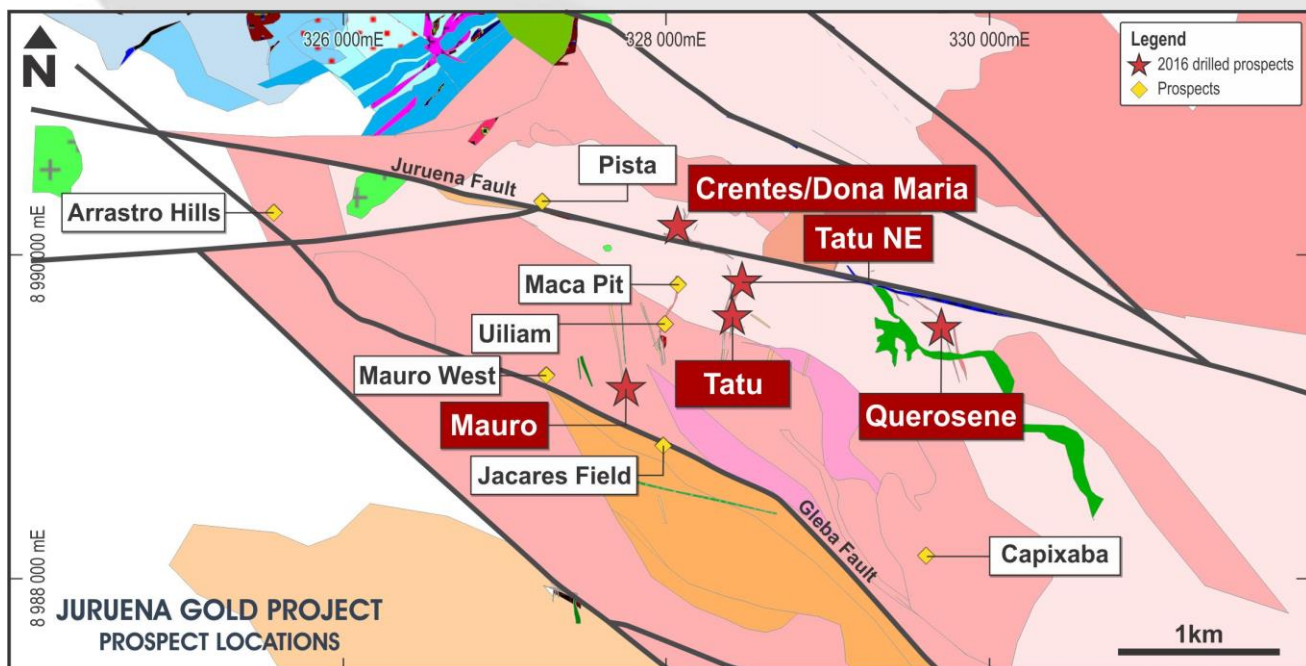


Figure 1: Juruena Gold District, with prospects drilled in 2016

Tatu Prospect

The Tatu prospect is located approximately 400m to the south of Dona Maria and 700m to the west of Querosene (see Figure 1). A small open pit garimpo with a shallow shaft is present, however garimpeiro activities in this area are suspended. Geological mapping and sampling has returned numerous high-grade results, co-incident with the contact of the porphyry dyke, which is clearly evident in the workings. Historical drilling in the area, whilst restricted to only a few holes, returned sufficient high grade results to encourage additional drilling by Crusader (see Figures 2-4).

Mineralisation appears to be associated with an intermediate porphyry dyke system, which strikes north-south and dips vertically or steeply to the east. Mineralisation appears to be located near or on the contact with these dykes and within the granite wall rocks. The granites are moderately to strongly altered near the contact zones.

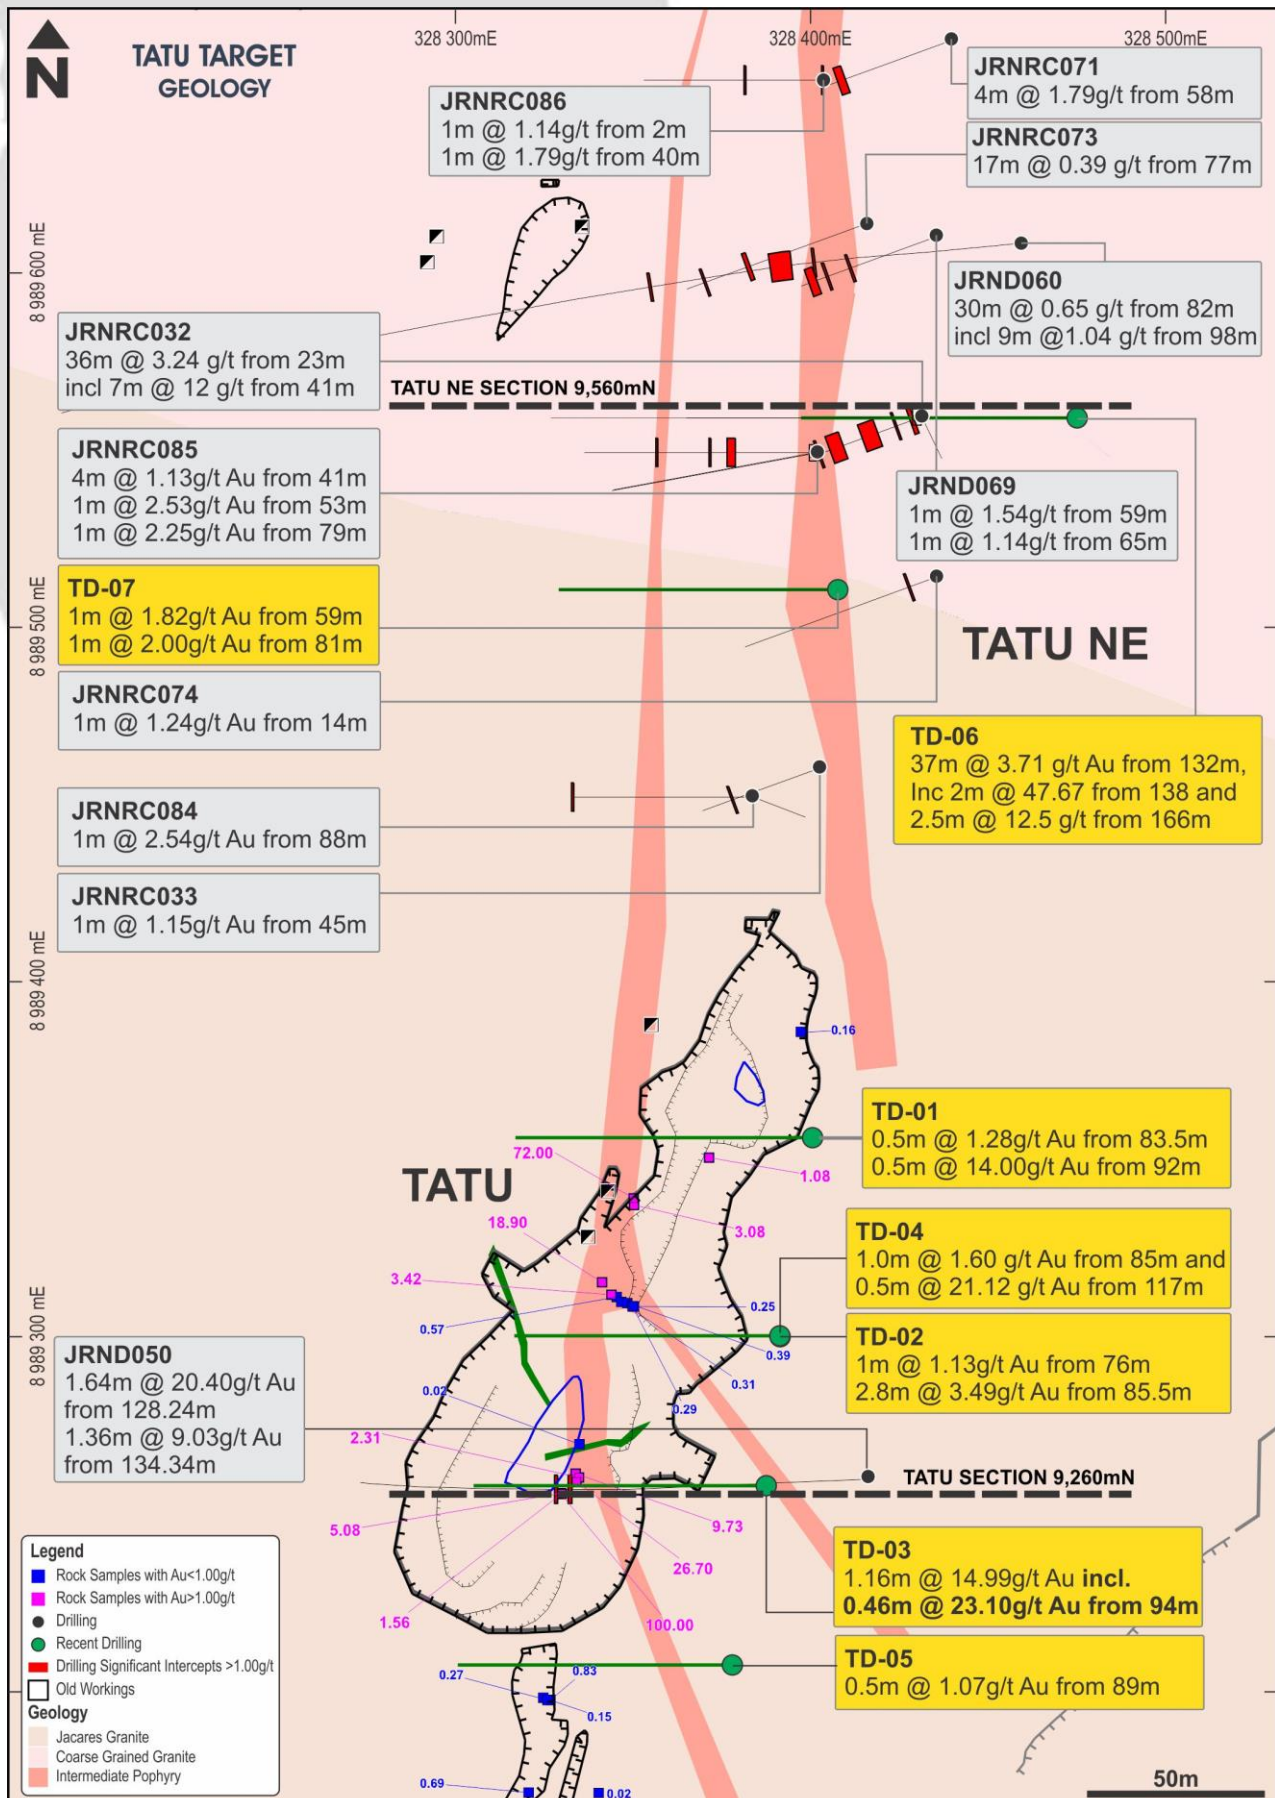


Figure 2: Prospect plan of Tatu and Tatu NE

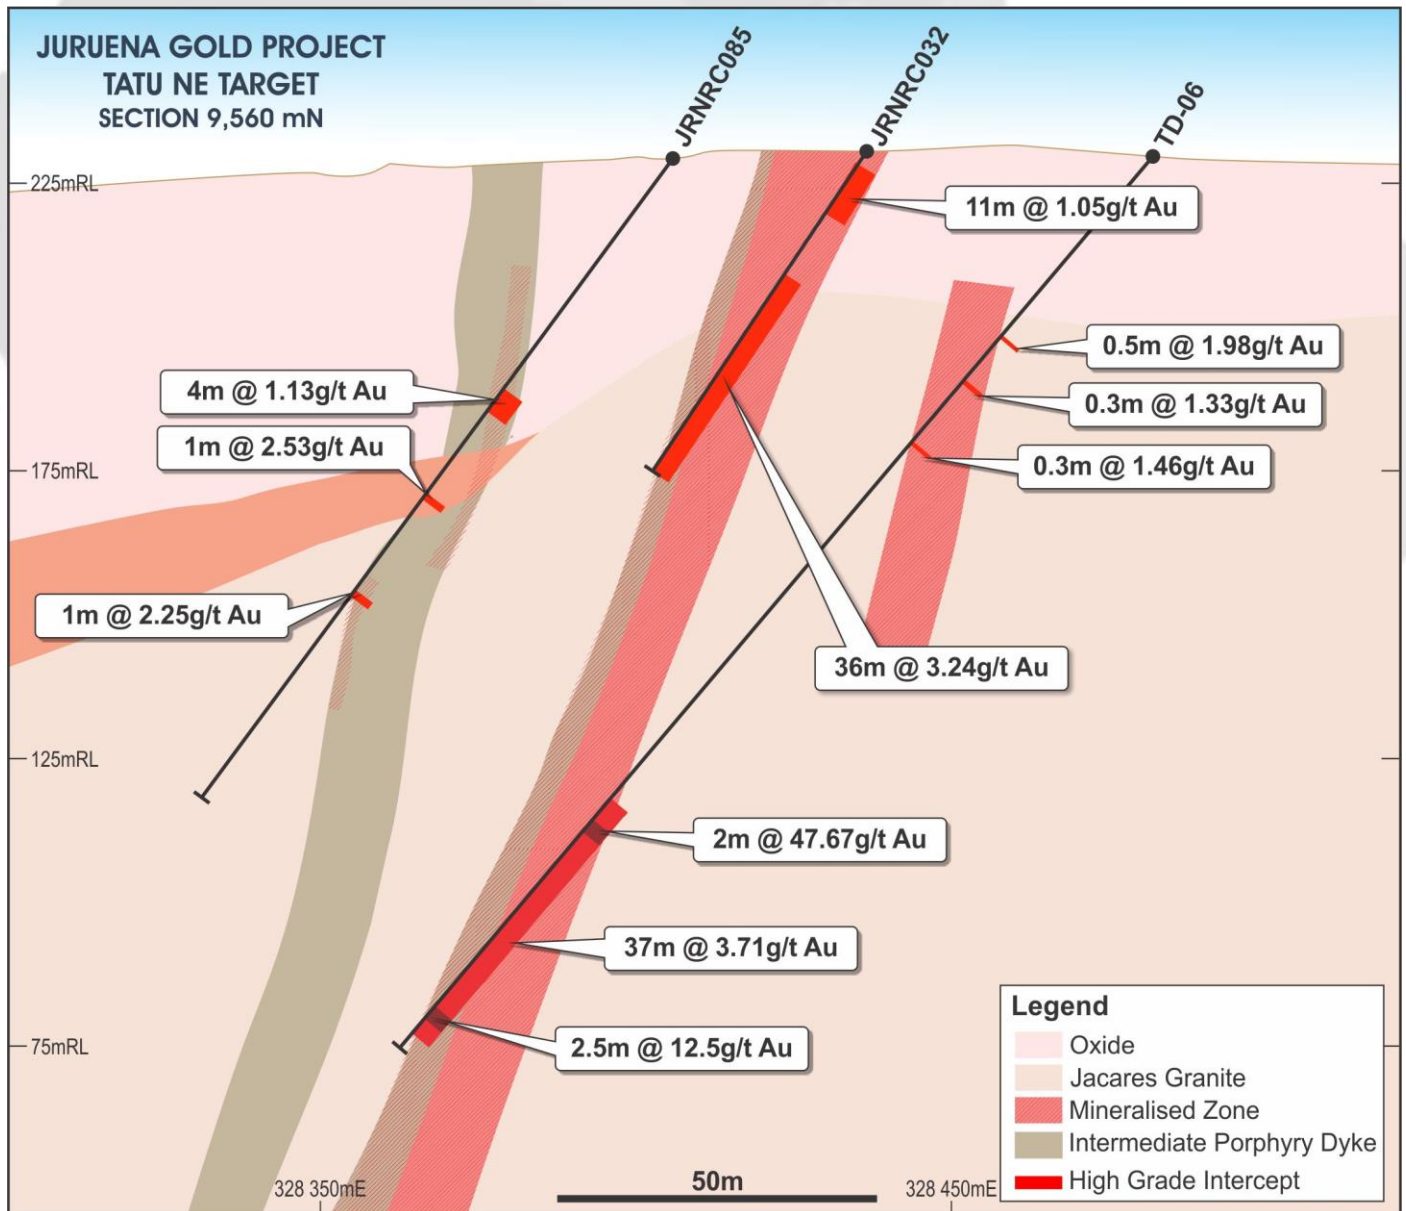


Figure 3: Tatu NE Cross section 9,560mN

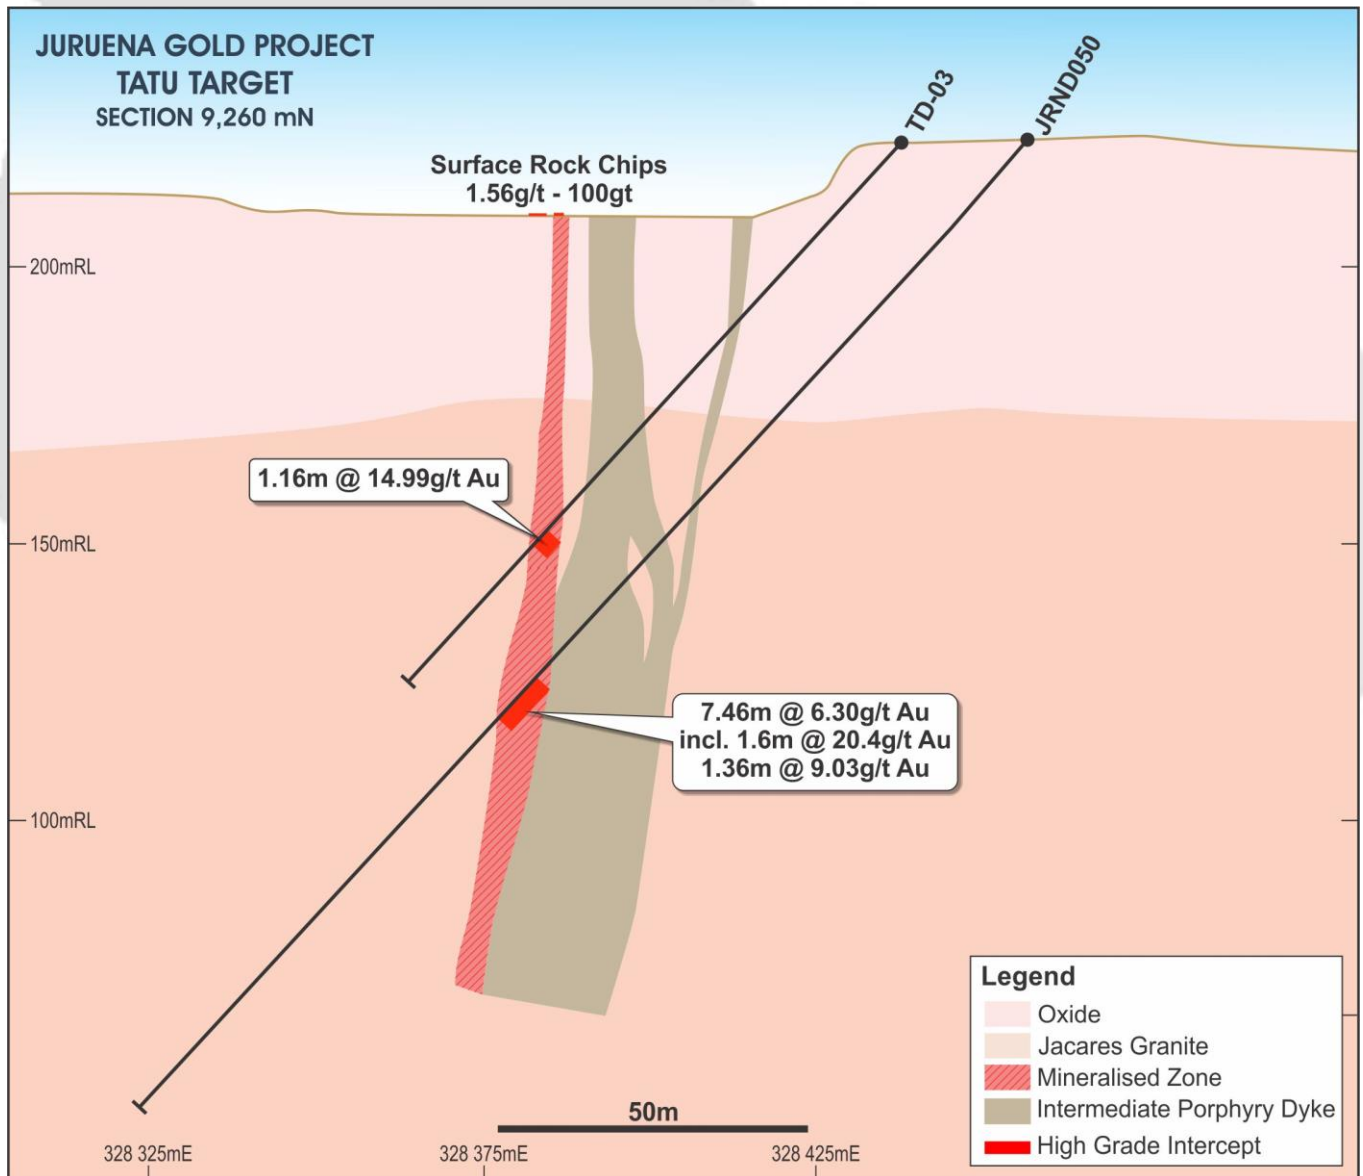


Figure 4: Tatu cross section 9,260mN

Mauro Prospect

Drilling at the Mauro prospect (see Figure 1) comprised four holes for 507m and targeted an auger anomaly with some deeper intercepts from historical drilling. Drilling intercepted broad to very broad, low-grade gold intercepts, associated with altered granites and some minor intermediate porphyry dykes. Significant intercepts are summarised in Table 1, but included better results of;

- 20m @ 0.48 g/t Au from 88m in hole MAD-02
- 54m @ 0.24 g/t Au from 39m in hole MAD-04

Drilling by previous explorers in the area around the Mauro prospect was primarily targeted considering a copper/gold porphyry model, based on information gathered from combined ground and surface geophysics and advanced multi element geochemistry. Some of these deeper holes (up to 580m deep in some cases) intercepted very broad low-grade gold intercepts (216m @ 0.55g/t in JRND046 and 158m @ 0.59g/t Au in JRND059) that were associated with moderate to strongly altered granite zones.

Following receipt of the current round of holes, it is evident that this same geological mineralisation setting is located nearer surface as well. This would indicate a very large, low-grade system present where very high levels of fluid have passed through and altered the host rocks. The challenge at Mauro will be to find the zones where gold is more concentrated.

Additional mapping and auger drilling will be performed over the Mauro area in order to further refine additional exploration and drilling in 2017.

Development Update

Crusader is currently completing a Scoping Study with a respected international engineering consultancy Global Resource Engineering (GRE) who are envisaging two mining operations with processing through a central CIL beneficiation plant to produce gold doré bars.

Both Querosene and Dona Maria are suitable for narrow vein mining (the current preferred option is the cut and fill method) and both deposits have similar metallurgical properties allowing them to be mined and treated concurrently.

The opportunity to commence operations via open pit mining on both Dona Maria and Querosene is under review.

Crusader and GRE are working together to complete trade-offs (such as contract vs owner operated, process route options etc.) during the scoping study process, which may have the result of further optimising the project economics.

Results of the Juruena Scoping Study are expected in Q1 CY2017.

Juruena Project

The Juruena Project (~400 km² of contiguous tenements) is located in Central Brazil on the southern fringe of the Amazon Basin. Situated on the western end of the prospective Juruena-Alta Floresta gold belt (estimated to have produced ~7Moz Au), Juruena has been explored extensively by artisanal miners since the 1980's, producing an estimated 500koz of gold.

For further information, please contact:

Mr. Rob Smakman

Managing Director, Brazil

Office (Brazil): +55 31 2515 0740

Email: rob@crusaderdobrasil.com

Mr. Paul Stephen

Executive Director, Australia

Office (Aus): +61 8 9320 7500

Email: paul@crusaderresources.com

Mr. David Tasker

National Director, Investor Relations

Professional Public Relations

Tel: +61 433 112 936

Email: David.tasker@ppr.com.au

Table 1: Significant Intercepts – Juruena Gold Project –Tatu, Tatu NE and Mauro

Prospect	Hole ID	Easting (m)	Northing (m)	RL	Azimuth	Dip	Cut Off - 0.5 Au g/t		Interval (m)	Au g/t	Comments
							From (m)	To (m)			
TATU	TD-01/2016	328406	8989354	228	270.00	-50	45.63	47.00	1.37	0.55	
							54.84	55.27	0.43	0.68	
							83.50	84.00	0.50	1.28	
							90.00	93.75	3.75	2.22	inc. 92-92.5, 0.5m, 14 Au ppm
	TD-02/2016	328397	8989298	226	270.00	-50	76.00	77.00	1.00	1.13	
							85.50	90.00	4.50	2.46	
	TD-03/2016	328394	8989256	224	270.00	-50	94.00	96.00	2.00	8.91	inc. 94.7-95.16, 0.46m, 23.10 Au ppm
TATU NE	TD-06/2016	328475	8989559	230	270.00	-50	83.00	91.00	8.00	0.61	
							117.00	117.50	0.50	31.12	
							89.00	90.00	1.00	0.88	
							37.50	38.00	0.50	1.98	
							46.00	46.30	0.30	1.33	
							57.70	58.00	0.30	1.46	
							60.70	61.00	0.30	0.83	
							125.81	126.20	0.39	1.97	
	TD-07/2016	328413	8989508	230	270.00	-50	132.00	133.00	1.00	0.92	
							138.00	140.00	2.00	47.67	inc. 139-140, 1m, 89.85 Au ppm
							151.00	157.00	6.00	0.78	
							166.00	168.50	2.50	12.50	inc. 167.48-168, 0.52m, 51.30 Au ppm
							58.00	60.00	2.00	1.17	
							66.54	67.00	0.46	0.60	
							78.00	82.00	4.00	0.84	
MAURO	MAD-01/2016	327806	8989173	221	250.00	-50	99.00	100.00	1.00	0.67	
	MAD-02/2016	327783	8989222	221	270.00	-50	102.00	103.00	1.00	0.65	
							108.00	110.00	2.00	0.71	
							0.00	0.00	0.00	0.00	NSR (1m @ 0.46 g/t from 112m)
							41.00	44.00	3.00	0.63	
							46.00	58.00	5.00	0.53	
							80.00	81.00	1.00	0.77	
							88.00	89.00	1.00	0.55	
							91.00	92.00	1.00	0.66	
							95.00	97.00	2.00	0.60	Forms an intercept of 20m @ 0.48 g/t Au
							99.00	102.00	3.00	0.95	
	MAD-03/2016	327786	8989119	223	270.00	-50	104.00	107.00	3.00	0.80	
							116.00	117.00	1.00	0.59	
							119.00	120.00	1.00	2.14	Forms an intercept of 13m @ 0.49 g/t Au
							126.00	129.00	3.00	0.70	
							144.00	145.00	1.00	0.88	
	MAD-04/2016	327782	8989263	220	270.00	-50	87.00	89.00	2.00	0.71	
							102.00	103.00	1.00	0.62	Forms an intercept of 32.5m @ 0.34 g/t Au
							105.00	106.00	1.00	1.06	
							114.00	119.50	5.50	0.87	
							39.00	41.00	2.00	0.99	
							78.50	79.50	1.00	0.88	Forms an intercept of 54m @ 0.24 g/t Au
							85.50	86.00	0.50	0.73	

Intervals reported are downhole widths, which are approximately true widths for Tatu and Mauro, but not true widths for Tatu NE, where true widths are interpreted as 30% of the downhole widths. Significant intercepts for Tatu and Tatu NE are calculated using weighted averages of the intervals, a 0.5g/t lower cut, no upper cut and up to 3m of consecutive internal dilution. Significant intercepts for Mauro are calculated using weighted averages of the intervals, a 0.1g/t lower cut, no upper cut and up to 3m of consecutive internal dilution.

About Crusader

Crusader Resources Limited (ASX:CAS) is a minerals exploration and mining company listed on the Australian Securities Exchange. Its major focus is Brazil; a country Crusader believes is vastly underexplored and which offers high potential for the discovery of world class mineral deposits.

Crusader has three key assets:

Juruena Gold

The Juruena Gold Project is located in the highly prospective Juruena-Alta Floresta Gold Belt, which stretches east-west for >400km and has historically produced more than 7Moz of gold from 40 known gold deposits.

The Juruena Project has been worked extensively by artisanal miners (garimpeiros) since the 1980s, producing ~500koz in that time. Historically there is a database of more than 30,000 meters of drilling and extensive geological data.

Posse Iron Ore

The Posse Iron Ore Mine is located 30km from Belo Horizonte, a city acknowledged as the mining capital of Brazil and the capital of Minas Gerais state. The project had an indicated and inferred Mineral Resource estimate of 36Mt @ 43.5% Fe when mining began in March 2013. Posse is currently selling DSO into the domestic market. With an experienced mining workforce amongst a population of over 2.5 million people, the infrastructure and access to the domestic steel market around the Posse Project is excellent.

Borborema Gold

The Borborema Gold Project is in the Seridó area of the Borborema province in north-eastern Brazil. It is 100% owned by Crusader and consists of three mining leases covering a total area of 29 km² including freehold title over the main prospect area.

The Borborema Gold Project benefits from a favourable taxation regime, existing on-site facilities and excellent infrastructure such as buildings, grid power, water, sealed roads and is close to major cities and regional centres. The project's Ore Reserve includes Proven and Probable Ore Reserves of 1.61Moz of mineable gold from 42.4Mt @ 1.18g/t (0.4 & 0.5g/t cut-offs for oxide & fresh). The measured, indicated and inferred Mineral Resource Estimate of 2.43Moz @ 1.10g/t gold, remains open in all directions.

Competent Person Statement

The information in this report that relates to Juruena Gold Project exploration results, Posse Iron Ore Project exploration results and Borborema Gold Project exploration results released after 1 December 2013, is based on information compiled or reviewed by Mr. Robert Smakman who is a full time employee of the company and is a Fellow of the Australasian Institute of Mining and Metallurgy. The information in this report that relates to Mineral Resources at the Juruena Gold Project is based on information compiled or reviewed by Mr. Lauritz Barnes and Mr. Aidan Platel who are independent consultants to the company and Members of the Australasian Institute of Mining and Metallurgy. Each of Mr. Smakman, Mr. Barnes and Mr. Platel have sufficient experience that is relevant to the type of mineralisation and type of deposits under consideration to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Smakman, Mr. Barnes and Mr. Platel consent to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to:

- a) Borborema Gold Project and Posse Iron Ore Project Exploration Results released prior to 1 December 2013 is based on information compiled or reviewed by Mr. Robert Smakman who is a full time employee of the company;
- b) Borborema Gold Mineral Resources is based on information compiled by Mr. Lauritz Barnes and Mr. Brett Gossage, independent consultants to the company;
- c) Borborema Gold Ore Reserves is based on information compiled by Mr. Linton Kirk, independent consultant to the company;
- d) Posse Fe Mineral Resources is based on and accurately reflects, information compiled by Mr. Bernardo Viana who was a full time employee of Coffey Mining Pty Ltd,

and who are all Members of the Australasian Institute of Mining and Metallurgy (Rob Smakman and Linton Kirk being Fellows), and who all have sufficient experience that is relevant to the type of mineralisation and type of deposit under consideration, and to the activity which they are undertaking to qualify as a Competent Person as defined in the 2004 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Each of Mr. Smakman, Mr. Barnes, Mr. Kirk, Mr. Viana, and Mr. Brett Gossage consent to the inclusion in the report of the matters based on their information in the form and context in which it appears. The information was prepared and disclosed under the JORC Code 2004. It has not been updated since to comply with JORC Code 2012 on the basis that the information has not materially changed since it was last reported.

Juruena Gold Project JORC Code, 2012 Edition

Section 1. Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code Explanation	Commentary
Sampling Techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Diamond drill samples: Diamond drilling of gold prospects using an industry standard wireline drill rig. Core size was typically HQ, although some areas were drilled at NQ size. Diamond drill sample: diamond core was split in half lengthways and sampled typically at 1m intervals, although sampling was to geological boundaries and hence sample length ranged from 0.3 - 1.4m. Samples were placed in high density plastic sample bags and immediately sealed shut with cable ties. Half core was retained on site in Juruena for future reference. Sample mass varied according to the sample length, typically mass varied between 1-6kg. Samples were sent for analysis at an independent lab and gold was determined via 50g fire assay. All efforts were made to ensure sample contamination was minimised and that all samples could be deemed representative of the interval that they originated from. Based on statistical analysis of field duplicates, there is no evidence to suggest samples are not representative. Crusader's current procedures are in line with industry standards, however samples in excess of 100g/t gold were re-assayed using a different lower detection limit (10ppb vs 5ppb). No samples in this round of drilling exceeded 100g/t.

Section 1 continued

Criteria	JORC Code Explanation	Commentary
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.). 	<ul style="list-style-type: none"> Diamond drill-holes of HQ and NQ diameter. Down-hole surveys were routinely completed for the diamond drill-holes, with approximately half of the drill core oriented using a modern core orienting apparatus. Drilling was standard tube (not triple tube)
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Drill-hole inclinations ranged from -50 degrees to -80 degrees and oriented on various azimuths depending on the geological formation. Dip and Azimuth information is in the significant intercepts table Diamond core recovery by measuring the length of core recovered compared to the length drill run. Drill recoveries were considered as good with over 90% of the drill runs > 90% recovery. Care when drilling broken ground, dispensing with the core into the trays and working closely with the contractors to ensure sample recoveries remained consistent. Gold mineralisation does not apparently correlate to zones of low sample recovery; sample bias due to poor sample recovery is therefore not believed to be an issue.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All drill-holes have been geologically and geotechnically logged in detail, and the data stored in a digital database. Information collected in logging is considered appropriate for future studies. Logging of diamond drill-core is a combination of qualitative and quantitative and recorded lithology, mineralogy, mineralisation, structure, weathering and colour. Core photographs also exist for all drill-holes. Interesting sections during the logging were often photographed and commented on in summary logs made available to the geological management team. Logged data exists for 100% of the holes drilled.

Section 1 - continued

Criteria	JORC Code Explanation	Commentary
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second- half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> Diamond drill-core was cut in half lengthways on site using a diamond saw; for duplicate samples quarter-core was used. Sampling was performed on dry core, after washing and cutting. Sample preparation was undertaken by SGS-Geosol Laboratories ("SGS") in Brazil. SGS used industry standard methods (dry – crush – split – pulverise) which are considered appropriate for the style of mineralisation intersected in the drill-holes. The sample preparation method used by SGS-Geosol laboratories is presented in the following section. Standards (certified reference material), blanks and duplicates were inserted into the sample stream at the rate of 1:25, 1:25 and 1:40 samples, respectively for the sample batches of generally 50 samples. The same side from each sample cut were routinely sampled. Field duplicates were completed using quarter core. Sample lengths varied as determined by geological factors- this is considered appropriate for the grain size of the mineralisation.
<i>Quality of assay data and laboratory tests</i>	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> 	<ul style="list-style-type: none"> SGS were used by Crusader for all analyses. The samples were assayed for Au by Fire Assay of 50g aliquots followed by Atomic Absorption Spectroscopy (AAS), a technique designed to report total gold. This technique has a lower detection limit of 5ppb.

Section 1 continued

Criteria	JORC Code Explanation	Commentary
Quality of assay data and laboratory tests (continued)	<ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<p>NA</p> <ul style="list-style-type: none"> The coarse and pulp sample rejects from the preparation and analytical laboratories were retained and stored at the laboratory, allowing for re-assaying in the future if required. All pulps and coarse rejects will be returned to Crusader and stored indefinitely. Standard Quality Control procedures were adopted by Crusader including field duplicates (1 every 40 samples), blanks (1 every 25 samples) and standards (1 every 25 samples). Field duplicates are defined as quarter core samples for the diamond core. Routine analysis of the results of the Blanks, Standards and Duplicates are carried out and any variation away from pre-determined limits are discussed with the lab. Any issues not resolved to Crusaders satisfaction are re-analysed on a batch basis. No external check laboratory assays have yet been completed on these samples.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Significant intercepts were generated by Crusader personnel and verified by Rob Smakman, the qualified person for this release. No twin holes were drilled in this campaign All drill-hole data are recorded in Microsoft Excel spreadsheets and then stored in a digital database (Microsoft Access). Only Crusader's database administrator has the capacity to enter or change data. Standardised geological codes and checks have been employed to ensure standardised geological logging and required observations performed. The database is stored on a central server which is backed up weekly. Work procedures exist for all actions concerning data management. No adjustments or calibrations were made to any assay data.

Section 1 continued

Criteria	JORC Code Explanation	Commentary
<i>Location of data points</i>	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> Collar surveys were by a licensed surveyor using a total station, referenced to a government survey point. All drill-holes have been checked spatially in 3D and all obvious errors addressed. The grid system used for all data types, was in a UTM projection, Zone 21 Southern Hemisphere and datum South American 1969. No local grids are used. Topographic control was made by a licensed surveyor using a total station, referenced to a government survey point.
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> The drilling carried out is on a variable grid, depending on the targeting stage of the drilling. Sample spacing is considered insufficient for resource estimation at Mauro and at best inferred resource classification for Tatu. No sample compositing has been applied
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> Mineralised structures were targeted, assuming a vertical or steeply east dipping main structure at Tatu and Mauro, so that intersections would minimal sample bias would occur. All structures were planned to be intersected as perpendicular as possible and to pass through the entire structure. Mineralised structures had relatively sharp contacts and samples respected these boundaries as far as practical. Mineralisation at tatu NE has since been interpreted to be dipping steeply west and therefore sample bias did occur on holes TD-06 and TD-07. Where ever possible all drill holes were oriented to intersect the intended structure perpendicular to the strike and approximately 40 degrees to the dip of the mineralised zone. The mineralised structures are visible from within the artisanal miners' workings which allowed drill holes to be oriented to minimise introducing a sample bias. Holes TD-06 and TD-07 was drilled sub-parallel to the mineralised structure and is therefore not considered to be true width. True width is estimated at 30% for the reported intercept.

Section 1 continued

Criteria	JORC Code Explanation	Commentary
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> No sample security issues were raised or noted by Crusader during the transportation of the samples from the project site to the preparatory laboratory. All samples were sealed with double cable ties in strong high density plastic bags, two sample ID tags were placed in different locations inside the sample bags, all sample bags were clearly marked on the outside with permanent marker pen. All sample bags were checked off the dispatch list before being placed into a heavy duty and highly durable sacks for transportation to the laboratory. A packing list (confirming the number of sacks for transport) was received from the freight company transporting the sample bags to their destination. Upon receipt at the laboratory, samples were checked in and the list of received samples immediately sent back to the company's database administrator as a security check that all samples were received and all were fully intact and not opened.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> No external audits were commissioned by Crusader. The sampling techniques and data were reviewed by the Competent Persons as part of previous Mineral Resource estimation processes and were found to be of industry standard. Crusader routinely check the veracity of the results using standard QAQC checks.

Section 2. Reporting of Exploration Results

Criteria	JORC Code Explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> 	<ul style="list-style-type: none"> Results reported are from an exploration tenement, 806.080/2009, 100% owned by a wholly owned subsidiary of Crusader, Lago Dourado Mineração Ltda. There is an existing 1% net smelter return payable to a previous owner. There are two garimpo mining licences within the tenement package, allowing the garimpeiros to legally work under certain restrictions. Neither tenement is not subject to any native title interests, no known historical sites, wilderness or national park, but is located within the border zone around a national park. Within this border zone further conditions may be required to gain an operating licence. Cattle grazing and legal timber felling are the two primary industries and land uses for the area.

Section 2 - continued

Criteria	JORC Code Explanation	Commentary
<i>Mineral tenement and land tenure status (continued)</i>	<ul style="list-style-type: none"> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> The tenement is in good standing and there are no material impediments to operating in the area.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> Garimpeiros first discovered the mineralised areas around Juruená in the 1970's. Garimpeiros have been active in the region since, recovering gold from alluvial, colluvial and some oxidised rock. The area has been explored on and off from the mid 1990's through to the present, with the majority of drilling taking place over the last four to five years. Madison Minerals Ltd first explored and carried out some drilling evaluation of the Juruená core area in 1995/1996. Crusader considers Madison's information relevant from an exploration perspective and will use these results to guide future exploration work. Lago Dourado Minerals drill tested several anomalies and zones from 2010 to 2013. All work undertaken by Lago Dourado Minerals was performed to a JORC compliant standard and the data generated is considered sufficient to be used for a JORC compliant mineral resource estimate, should further results confirm continuity, grade and geological interpretation in the future.
<i>Geology</i>	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> The Juruená mineralisation is considered to have resulted from magmatic activity (intrusions and fluids) which could be sourced from a gold rich source rock and concentrated along structural zones. The mineralisation is hosted by Paleoproterozoic volcanic and granitoid rocks of varying composition. The host rocks are found within the Juruená-Rondonia block of the Amazon Craton.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> 	<ul style="list-style-type: none"> All information is included in the Table of Significant intercepts where all drill holes are recorded.

Section 2 - continued

Criteria	JORC Code Explanation	Commentary
<i>Drill hole Information (continued)</i>	<ul style="list-style-type: none"> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> All information is included.
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and / or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> Significant intercepts were calculated using a variable lower cut-off (see table for specifics), no upper cut, and up to 3m of consecutive dilution. Sample intervals which were not equal to 1m were weight averaged. Weighted averages were applied when considering intervals with different intercept lengths- regardless of the grades intercepted. No upper or lower cut were applied No metal equivalent values considered.
<i>Relationship between Mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g. 'downhole length, true width not known').</i> 	<ul style="list-style-type: none"> As far as practically possible and with the geological interpretation available, the drill targets were tested with the aim of intersecting the interpreted mineralised structure as perpendicular as possible to the strike. All positive holes to date intersected the mineralisation at approximately 40 degrees to the dip, which will cause a slight overstatement of the actual intercept width. All results are reported as downhole widths. Results are reported as downhole widths, in most cases, true width is approximately 80% of down-hole length. At Tatu NE, results are reported as downhole widths, true width is approximately 30% of down-hole length noted in table

Section 2 - continued

Criteria	JORC Code Explanation	Commentary
<i>Diagrams</i>	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> See included Figure(s)
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> Results from all holes in the current program for which assays have been received are reported. Holes without significant intercepts are also included in the report tables and recorded as NSR.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> Historical exploration data has been presented previously and includes soil sampling, auger drilling, geophysical surveys, geological mapping and interpretation. No metallurgical testing has been performed at this stage
<i>Further work</i>	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Future exploration will continue to target the already identified mineralised areas. See attached figures