

STRONG MAIDEN CASSINI RESOURCE PROPELS MINCOR TO 118,000 NICKEL TONNES AT KAMBALDA

HIGHLIGHTS

- Significant increase in Mincor's global JORC 2012 nickel Mineral Resource at Kambalda to:
 - **3.3 million tonnes @ 3.6% nickel for 118,000 contained nickel tonnes¹.**
- One of the largest and highest-grade Mineral Resource inventories in the district.
- Initial Mineral Resource for the Cassini channel of **550,000 tonnes @ 3.4% Ni for 18,700 nickel tonnes**, with 93% classified as Indicated².
- The maiden Cassini Mineral Resource has laid the foundations for a potential new mine, with the consistent widths, grades and tenor of the mineralisation – highlighting the potential for high-quality Ore Reserves.
- Mining study underway to establish economic viability and help direct ongoing nickel work programs.
- Outstanding potential Resource upside on several fronts, including immediately down-plunge of the new Cassini Mineral Resource and in adjacent trends – priority follow-up diamond drilling scheduled to start this month (Figure 1).

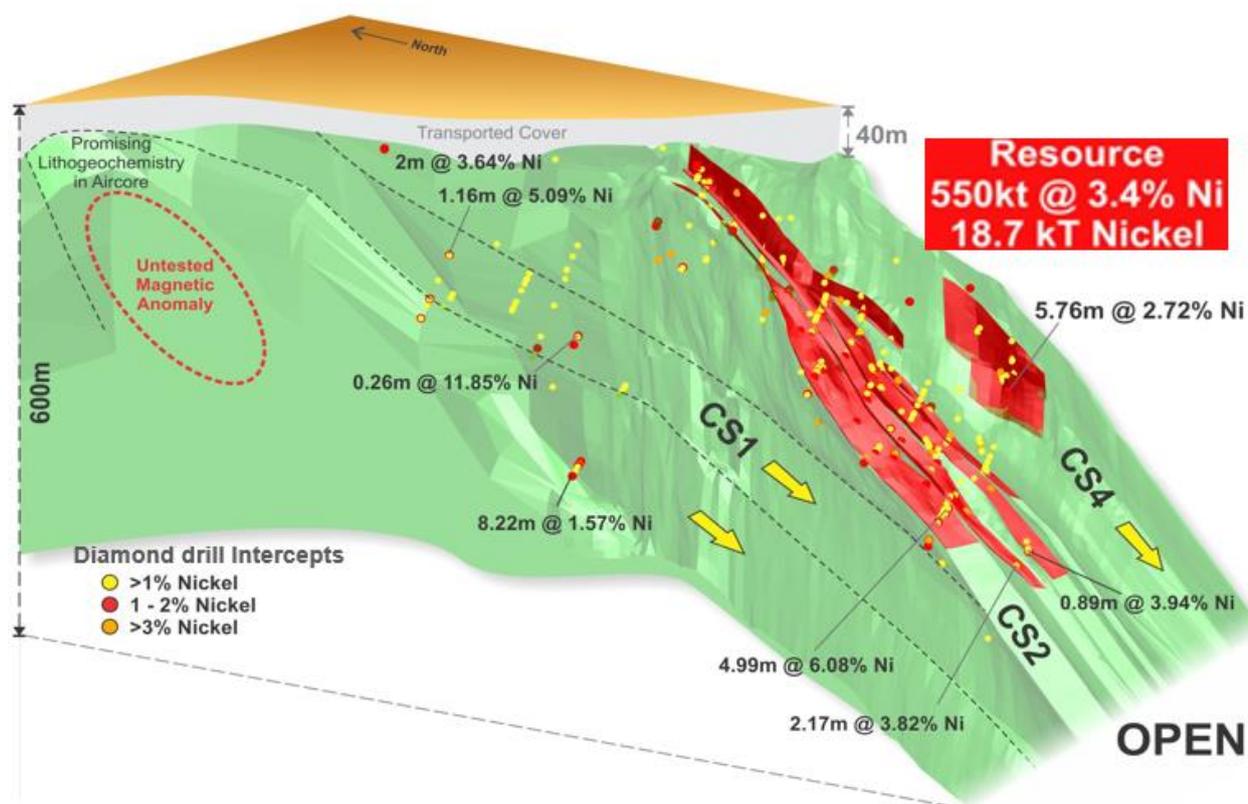


Figure 1: Growing Resource potential of the Cassini mineralised system. 3D representation of the Cassini basal contact shown in green. The CS2/ CS4 channel trends remain open and have returned high grade intersections in the last line of drilling demonstrating the strong likelihood for Resource extensions. In parallel, highly promising open-ended drilling results in adjacent channel trends points to excellent opportunities to pursue separate Resource additions².

¹ For full details, see Appendix.

² For further details on Cassini exploration results, please refer to ASX releases dated 23 May 2018, 18 April 2018, 8 March 2018, 5 March 2015 and 9 April 2015.

Mincor Resources NL (ASX: MCR) is pleased to advise that it continues to make rapid progress with its Kambalda nickel growth strategy, with the completion of a maiden Mineral Resource for the 100%-owned Cassini prospect, underpinning an approximate 20% increase in its global nickel Mineral Resource inventory.

The maiden Indicated and Inferred Cassini Resource, comprising **550,000 tonnes @ 3.4% Ni for 18,700 nickel tonnes**, increases its global Measured, Indicated and Inferred Resource across its Kambalda landholdings (Figure 2A) to **3.3 million tonnes at 3.6% Ni for 118,000 tonnes of contained nickel**. The revised numbers are to be used for the annual nickel Mineral Resource and Ore Reserve estimates for the Company's 2018 Annual Report (Appendix 1).

The Cassini Mineral Resource comes less than six months after infill drilling commenced at Cassini in February 2018. Importantly, 93% of the Resource is classified as Indicated and available for conversion to Ore Reserves.

Cassini is one of several Resource-level growth opportunities which Mincor has assembled in the Kambalda region and represents a priority focus for the potential future restart of mining operations along with Durkin North, Ken/McMahon and Miitel.

The Cassini deposit shares many key geological characteristics with some of the larger nickel mine camps seen elsewhere in the Kambalda District (Figure 2A). These features are known to generate long-lived and adjacent mineralised trends.

With the completion of the maiden Mineral Resource estimate for Cassini, Mincor's exploration team has now identified outstanding potential Resource upside both in and around the Cassini prospect.

Both the CS2 and CS4 Resource trends remain open with economic intersections on the last line of drilling. There are also highly prospective trends that sit alongside the Mineral Resource which have already returned promising high-grade intersections. Other channel trends are postulated within close proximity to the Cassini Mineral Resource and remain undrilled (see Figures 2A and 2B).

A highly anticipated follow-up diamond drilling program is scheduled to begin at Cassini this month, in parallel with ongoing regional exploration programs.

Preliminary mining studies have commenced at Cassini to identify the mining approach, possible capital designs, and potential start-up production schedules and cost estimates for the project. Mining studies will also be undertaken at North Kambalda to evaluate potential mining methodologies to improve the reserve grade at Durkin North and the viability of including available resources at Ken/McMahon in an enhanced restart scenario. These mining studies are scheduled for completion within four months.

Mincor will also carry out programs to progress long-lead items such as environmental surveys to fast-track potential mining licence applications and permitting activities for the Cassini Project.

The Cassini Mineral Resource estimate was completed by Cube Consulting Pty Ltd in consultation with Mincor geological staff.

Mincor's Managing Director, Mr Peter Muccilli, said the delivery of a high-quality maiden Mineral Resource at Cassini within less than six months has demonstrated that the Company's organic nickel growth strategy at Kambalda is firmly on track.

"We are delighted with the initial size and quality of the Cassini Resource, which represents a big step forward for our nickel growth strategy. Our exploration team has done a fantastic job in unravelling the geology at Cassini and their work clearly demonstrates the significant Resource upside that we see both in and around the Cassini prospect," he said.

"The emerging mining and production opportunity at Cassini is one of several nickel work programs underway at Kambalda which we believe will result in a new era of nickel production in the district – positioning Mincor to take advantage of the forecast growth in nickel markets in the coming years," he said.

"These programs include ongoing regional exploration to discover and build quality Resources and recently commenced mining studies at both Cassini and North Kambalda, to establish timely restart paths for both these potential production centres.

"With regional exploration gathering momentum and a follow-up extensional drilling program commencing at Cassini this month, this is an exciting time for Mincor, which should see us deliver plenty of news-flow on a number of fronts in the second half of this year."

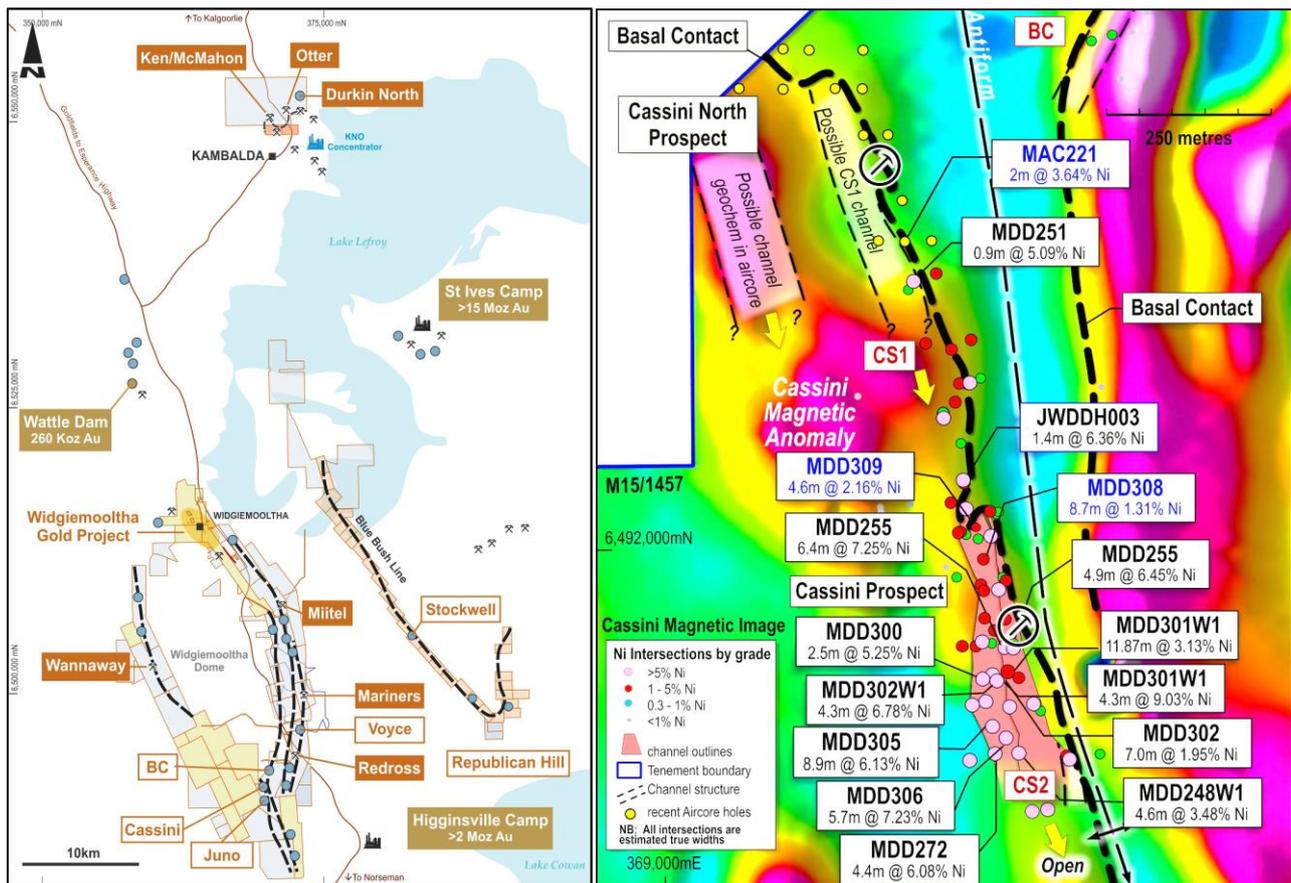


FIGURE 2: A) Mincor landholdings centred around Kambalda; B) Cassini high-resolution magnetic image showing the CS1 and CS2 channels, magnetic anomalies and numerous quality drill intersections (estimated true width)²

Technical Summary – Mineral Resource Estimation Methodology and Data

Cassini Mineral Resources were estimated by independent consultants from Cube Consulting Pty Ltd in conjunction with Mincor Technical staff.

Geology and Geological Interpretation

The Cassini Nickel Project area lies on the southern end of the Widgiemooltha Granitic Dome in the southern part of the Archaean Norseman–Wiluna Greenstone Belt.

The geology of the area consists of a recent cover sequence of sands and muds linked to lake systems in the north. Sediments of the Black Flag group are intersected in the upper parts of drilling on the eastern side of the project. Underlying this is a basaltic unit which appears to be similar in characteristics to the Devons Consul basalt in Kambalda but not seen in other areas of the Widgiemooltha Dome.

Thick ultramafic sequences underlie this basalt, which have thin sedimentary units within it. High MgO ultramafic occurs immediately above the underlying basalt (equivalent to the Mount Edwards Basalt). This ultramafic unit has consistent >30% MgO and whilst spinifex textures are not preserved several flows can be inferred from geochemistry.

The nickel mineralisation occurs within a structurally modified channel in a synclinal fold with mineralisation extending to the west to the apex of the anticline and to the east associated with sediments up the eastern limb. The mineralisation is also stoped out by two subparallel to plunge porphyry dykes associated with small-scale step faults.

Drilling Techniques

Drill holes are all NQ or HQ diamond drill-holes usually all orientated and with density measurements taken with every sample interval.

Sampling and Subsampling Techniques

Diamond core is marked in 1m or to geological contacts and half sawn, half is sampled the rest retain in core trays.

All the samples collected for assaying weighed 1–3kg, which is considered appropriate for grain sizes of the material expected.

Sample Analysis Method

Mincor samples were sent to either ALS in the 2015 campaign or Bureau Veritas for the recent campaign. The samples were oven dried and pulverised. A small subsample is then dissolved in a four-acid digest and analysed via Inductively Coupled Plasma – Mass Spectrometry (ICP-MS). Ore grade results are reread with a higher dilution to achieve accuracy above the upper limits of the routine method. This method is considered a near total measure of nickel.

Estimation Methodology

- Ordinary kriging (OK) estimation method was used to estimate nickel, cobalt, copper arsenic and density into the 3D block model.
- Variogram calculations were carried out on the 1m composites from three main domains (shoots 2, 3 and 5), the other domains had too few samples for variography. The variogram parameters for the three well informed domains were therefore used to represent the poorly informed domains.
- Samples were composited to 1m within each estimation domain, using fixed length option and a threshold inclusion of samples at sample length 50% of the targeted composite length.
- The influence of extreme grade values was reduced by top-cutting where required. The top-cut levels were determined using a combination of top-cut analysis tools (grade histograms, log probability plots and coefficients of variation (CVs)). Top-cuts were reviewed and applied on a domain basis.
- Kriging neighbourhood analysis (KNA) was used to determine the most appropriate block size and other estimation parameters such as minimum and maximum samples, discretisation, to be used for the estimation.
- Parent block size of 10m x 10m x 4m in the X, Y, Z directions respectively was used, and they were sub-blocked to 2.5m x 1.25m x 0.5m. This was deemed to be appropriate for block estimation and modelling the selectivity for an underground operation.
- Elements were estimated in three passes with the first pass using optimum search distance of 120m to 50m as determined through the KNA process and the second run was set at double the first pass and a third at four times the primary search distance in order to populate all blocks.

Cut-off Grade

Cut-off grade for reporting is 1% nickel, in line with recommendations from Mincor. Resources would likely be mined via underground methods. Thus, a 1% nickel lower cut-off was deemed appropriate.

Resource Classification Criteria

Blocks have been classified as Indicated or Inferred essentially based on data spacing and using a combination of search volume and number of data used for the estimation. Indicated Mineral Resources are defined nominally on 25mE x 40mN spaced drilling or less. Inferred Mineral Resources are defined by data density greater than 25mE x 40mN spaced drilling and confidence that the continuity of geology and mineralisation can be extended along strike and at depth.

Classification limits may vary where grade and geology are extremely continuous, even though drill spacing extends passed the nominal limits specified.

The resource classifications are based on the quality of information for the geological domaining, as well as the drill spacing and geostatistical measures to provide confidence in the tonnage and grade estimates.

The Mineral Resource estimate appropriately reflects the Competent Person's view of the deposit.

About Mincor Resources

Mincor Resources NL (ASX: MCR) is a proven explorer and miner in the Eastern Goldfields of Western Australia. The Company holds both nickel and gold assets with estimated Mineral Resources and Ore Reserves for each commodity, in the Kambalda District of Western Australia, a major nickel and gold producing area with a rich mineral endowment and developed mining infrastructure. Kambalda is Western Australia's largest nickel sulphide district and our ground holdings have produced half all the historic nickel production.

Mincor's strategy is to rapidly progress the exploration and development of its nickel assets to take advantage of the forecast growth in the nickel market over the next few years. Mincor believes it has consolidated nearly all the prospective ground in the Kambalda district for shallow nickel sulphide mineralisation. Together with its existing nickel Mineral Resources inventory, Mincor has an exciting opportunity to grow a quality nickel Ore Reserve inventory in the district.

A major exploration push is underway within in the Company's Kambalda landholdings. The 2018 nickel exploration program will progress multiple targets, with an initial focus on shallow regional targets.

In addition, the development of the 100% owned Widgiemooltha Gold Project allows Mincor to generate cash flows from its gold assets, supported by a processing agreement with a highly-respected operator. The gold development will include the mining of a series of shallow pits with an opportunity for growth with further exploration.

Forward-Looking Statement

This ASX Release may include certain forward-looking statements and opinions. Forward-looking statements, including projections, forecasts and estimates, are provided as a general guide only and should not be relied on as an indication or guarantee of future performance and involve known and unknown risks, uncertainties, assumptions, contingencies and other important factors, many of which are outside the control of Mincor and which are subject to change without notice and could cause the actual results, performance or achievements of Mincor to be materially different from the future results, performance or achievements expressed or implied by such statements. Past performance is not necessarily a guide to future performance and no representation or warranty is made as to the likelihood of achievement or reasonableness of any forward-looking statements or other forecast. Nothing contained in this ASX Release is, or and shall be relied upon as, a promise, representation, warranty or guarantee as to the past, present or the future performance of Mincor.

The information in this Public Report that relates to Exploration Results is based on information compiled by Mr Hartley, who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Hartley is a full-time employee of Mincor Resources NL. Mr Hartley has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that he is undertaking to qualify as Competent Person as defined in the 20012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Hartley consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

- ENDS -

Released by:
Nicholas Read
Read Corporate
Tel: (08) 9388 1474

On behalf of:
Peter Muccilli, Managing Director
Mincor Resources NL
Tel: (08) 9476 7200 www.mincor.com.au

APPENDIX 1: Nickel Resources and Reserves

Nickel Mineral Resources as at 30 June 2018

RESOURCE		MEASURED		INDICATED		INFERRED		TOTAL		
		Tonnes	Ni (%)	Tonnes	Ni (%)	Tonnes	Ni (%)	Tonnes	Ni (%)	Ni tonnes
Cassini	2018			499,000	3.5	51,000	2.6	550,000	3.4	18,700
Redross	2018	39,000	4.9	138,000	2.9	67,000	2.9	244,000	3.2	7,900
	2017	39,000	4.9	138,000	2.9	67,000	2.9	244,000	3.2	7,900
Burnett	2018	-	-	241,000	4.0	-	-	241,000	4.0	9,700
	2017	-	-	241,000	4.0	-	-	241,000	4.0	9,700
Miitel	2018	156,000	3.5	408,000	2.8	27,000	4.1	591,000	3.1	18,100
	2017	156,000	3.5	408,000	2.8	27,000	4.1	591,000	3.1	18,100
Wannaway	2018	-	-	110,000	2.6	16,000	6.6	126,000	3.1	3,900
	2017	-	-	110,000	2.6	16,000	6.6	126,000	3.1	3,900
Carnilya*	2018	33,000	3.6	40,000	2.2	-	-	73,000	2.8	2,100
	2017	33,000	3.6	40,000	2.2	-	-	73,000	2.8	2,100
Otter Juan	2018	2,000	6.9	51,000	4.1	-	-	53,000	4.3	2,300
	2017	2,000	6.9	51,000	4.1	-	-	53,000	4.3	2,300
McMahon/Ken**	2018	25,000	2.7	103,000	3.1	105,000	4.6	234,000	3.7	8,700
	2017	25,000	2.7	103,000	3.1	105,000	4.6	234,000	3.7	8,700
Durkin North	2018	-	-	417,000	5.3	10,000	3.8	427,000	5.2	22,400
	2017	-	-	417,000	5.3	10,000	3.8	427,000	5.2	22,400
Gellatly	2018	-	-	29,000	3.4	-	-	29,000	3.4	1,000
	2017	-	-	29,000	3.4	-	-	29,000	3.4	1,000
Voyce	2018	-	-	50,000	5.3	14,000	5.0	64,000	5.2	3,400
	2017	-	-	50,000	5.3	14,000	5.0	64,000	5.2	3,400
Cameron	2018	-	-	96,000	3.3	-	-	96,000	3.3	3,200
	2017	-	-	96,000	3.3	-	-	96,000	3.3	3,200
Stockwell	2018	-	-	554,000	3.0	-	-	554,000	3.0	16,700
	2017	-	-	554,000	3.0	-	-	554,000	3.0	16,700
TOTAL	2018	256,000	3.7	2,736,000	3.6	290,000	3.9	3,282,000	3.6	117,900
	2017	256,000	3.7	2,237,000	3.6	239,000	4.2	2,732,000	3.6	99,200

Note: Figures have been rounded and hence may not add up exactly to the given totals. Note that nickel Mineral Resources are inclusive of nickel Ore Reserves.

*Nickel Mineral Resource shown for Carnilya Hill are those attributable to Mincor – that is, 70% of the total Carnilya Hill nickel Mineral Resource.

**McMahon/Ken also includes Coronet (in the 2010/11 Annual Report it was included in Otter Juan).

The information in this report that relates to nickel Mineral Resources is based on information compiled by Rob Hartley, who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Hartley is a full-time employee of Mincor Resources NL and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration, and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Hartley consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Nickel Ore Reserves as at 30 June 2018

RESERVE		PROVED		PROBABLE		TOTAL		
		Tonnes	Ni (%)	Tonnes	Ni (%)	Tonnes	Ni (%)	Ni tonnes
Burnett	2018	-	-	271,000	2.6	271,000	2.6	6,900
	2017	-	-	271,000	2.6	271,000	2.6	6,900
Miitel	2018	28,000	2.6	129,000	2.2	157,000	2.3	3,600
	2017	28,000	2.6	129,000	2.2	157,000	2.3	3,600
Durkin North	2018	-	-	708,000	2.5	708,000	2.5	17,700
	2017	-	-	708,000	2.5	708,000	2.5	17,700
TOTAL	2018	28,000	2.6	1,108,000	2.5	1,136,000	2.5	28,200
	2017	28,000	2.6	1,108,000	2.5	1,136,000	2.5	28,200

Note: Figures have been rounded and hence may not add up exactly to the given totals. Note that nickel Mineral Resources are inclusive of nickel Ore Reserves.

The information in this report that relates to nickel Ore Reserves is based on information compiled by Paul Darcey, who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Darcey is a full-time employee of Mincor Resources NL and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration, and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Darcey consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

APPENDIX 2: JORC Code, 2012 Edition – Table 1

Section 1: Sampling Techniques and Data (criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Mineralisation is visible so only a few metres before and after intersection are sampled. For diamond drill core, representivity is ensured by sampling to geological contacts. Diamond samples are usually 1.5m or less.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.). 	<ul style="list-style-type: none"> Diamond drill core is NQ or HQ sizes. All surface core is orientated.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> For diamond core, recoveries are measured for each drill run. Recoveries generally 100%. Only in areas of core loss are recoveries recorded and adjustments made to metre marks. There is no relationship to grade and core loss.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All drilling is geologically logged and stored in database. For diamond core, basic geotechnical information is also recorded.
Subsampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all subsampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Half cut diamond sawn core sampled, marked up by Mincor geologists while logging and cut by Mincor field assistants. Sample lengths to geological boundaries or no greater than 1.5m per individual sample. As nickel mineralisation is in the 1% to 15% volume range, the sample weights are not an issue vs grain size.

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Drill core assayed by four-acid digest with ICP finish and is considered a total digest. Reference standards and blanks are routinely added to every batch of samples. Total QAQC samples make up approx. 10% of all samples. Monthly QAQC reports are compiled by database consultant and distributed to Mincor personnel.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> As nickel mineralisation is highly visible and can be relatively accurately estimated even as to grade, no other verification processes are in place or required. Holes are logged on Microsoft Excel templates and uploaded by consultant into Dashed format SQL databases; these have their own in-built libraries and validation routines.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Surface holes surveyed in by differential GPS in MGA coordinates by registered surveyor both at set out and final pick up. Downhole surveys are routinely done using single shot magnetic instruments. Surface holes or more rarely long underground holes are also gyroscopic surveyed.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Current drill-hole spacing is 40–80m between sections and 10–25m between intercepts on sections. This program in infilling to a nominal 20–40m strike spacing to allow for a possible Inferred/Indicated Resource classification.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Surface drill-holes usually intersect at various angles to contact due to the complex folding in the Cassini area. Mineralised bodies at this prospect are irregular which will involve drilling from other directions to properly determine overall geometries and thicknesses.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Core is delivered to logging yard by drilling contractor but is in the custody of Mincor employees up until it is sampled. Samples are either couriered to a commercial lab or dropped off directly by Mincor staff.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> In-house audits of data are undertaken on a periodic basis.

Section 2: Reporting of Exploration Results (criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> All resources lie within owned 100% by Mincor Resources NL. Listed below are tenement numbers and expiry dates: <ul style="list-style-type: none"> M15/1457 – Cassini (01/10/2033)
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Jupiter Mines and WMC have previously explored this area, but Mincor has subsequently done most of the drilling work.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Typical “Kambalda” style nickel sulphide deposits.

Criteria	JORC Code explanation	Commentary
Drill-hole information	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill-holes: <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill-hole collar ○ dip and azimuth of the hole ○ downhole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • See attached tables in previous releases.
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • Composites are calculated as the length and density weighted average to a 1% Ni cut-off. They may contain internal waste; however, the 1% composite must carry in both directions. • The nature of nickel sulphides is that these composites include massive sulphides (8–14% Ni), matrix sulphides (4–8% Ni) and disseminated sulphides (1–4% Ni). The relative contributions can vary markedly within a single orebody.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill-hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’). 	<ul style="list-style-type: none"> • The general strike and dip of the basalt contact is well understood so estimating likely true widths is relatively simple, although low angle holes can be problematic.
Diagrams	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> • See plan.
Balanced reporting	<ul style="list-style-type: none"> • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> • All holes are represented on the plan and characterised by m% Ni to show distribution of metal.
Other substantive exploration data	<ul style="list-style-type: none"> • Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> • Downhole electromagnetic modelling has been used to support geological interpretation where available.
Further work	<ul style="list-style-type: none"> • The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> • Resources at the extremities are usually still open down plunge (see plan).

Section 3: Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section)

Criteria	JORC Code explanation	Commentary
Database integrity	<ul style="list-style-type: none"> Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	<ul style="list-style-type: none"> All assay data is sent electronically from the assay lab to Maxwell Geoservices, Mincor's database consultant for upload into the SQL database. All other data is filled in on Microsoft Excel templates which then imported into the SQL database. Validation occurs when the geologist uses updated access extracts to both plot and visually inspect drill-hole data.
Site visits	<ul style="list-style-type: none"> Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken, indicate why this is the case. 	<ul style="list-style-type: none"> The Competent Person has visited the site and inspected the drill core on numerous occasions over the last 12 months.
Geological interpretation	<ul style="list-style-type: none"> Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology. 	<ul style="list-style-type: none"> Geological domaining and mineralised shoot interpretation is considered appropriate. The geometry and location of the mineralised shoots (seven separate shoots are currently defined) and ultramafic/basalt contact is well drilled and understood – as existing drilling was added, the interpretation stood up well to the new data, and wholesale changes to the geological interpretation were not required. This indicates a sound understanding of the geological framework of the deposit. Of the 39 drill holes that intercept the mineralised shoots, 38 are very good quality recent diamond core holes. The single RC hole is also of good quality. There is little scope for alternative interpretation beyond extending the limits of the mineralisation away from drilling. The mineralised shoots are comprised of massive sulphide and matrix disseminated nickel sulphides and are defined by geological logging and with Ni grade >1%.
Dimensions	<ul style="list-style-type: none"> The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource. 	<ul style="list-style-type: none"> The shoots plunge to the south at about 40° to 45° and extend for ~700m down plunge. The shoots vary in width (east-west) from 2m up to 50m wide and vary in vertical thickness from 1m to more than 10m with an average of 3–5m. The upper limit of mineralisation is 60m below surface, extending to at least 500m vertically below surface.
Estimation and modelling techniques	<ul style="list-style-type: none"> The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data. The assumptions made regarding recovery of by-products. Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation). In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. Any assumptions behind modelling of selective mining units. Any assumptions about correlation between variables. 	<ul style="list-style-type: none"> Estimation of nickel, cobalt, copper, arsenic and bulk density was by Ordinary Kriging within the mineralised shoots, using Datamine's 'dynamic anisotropy' process. This allows the search ellipse and variogram directions to rotate locally to reflect local variations in dip and strike of the mineralised shoots. Drill-hole samples were length and density weight composited to 1m downhole, which was the most frequent sample size. Variography was done in Isatis software for the five variables to be estimated. Quantitative kriging neighbourhood analysis (QKNA) was used to determine the search neighbourhood. The minimum number of samples required was six, with a maximum of 18. First pass search ellipse radii were similar to the variogram ranges, with the same anisotropy as the variogram models. For the major shoots, this was 100m down plunge, 40m across strike and 5m perpendicular to plunge. For the smaller shoots, the search was 50m x 20m x 5m.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Description of how the geological interpretation was used to control the resource estimates. Discussion of basis for using or not using grade cutting or capping. The process of validation, the checking process used, the comparison of model data to drill-hole data and use of reconciliation data if available. 	<ul style="list-style-type: none"> If a block was not estimated with this first search pass, a second pass twice the size of the first was used, and a third pass four times the original search was used if required. For the main shoots, >90% of the blocks were informed on the first or second pass. The third pass was only required for some of the smaller, less well-informed shoots. For a very small percentage of blocks that did not receive a grade estimate (<2%), default shoot grades were assigned. Grade caps were not used for nickel, as there were no extreme outlier values. Grade capping was used for cobalt and copper, with one or two samples per shoot capped. For arsenic, there more extreme high values. In this case, an estimate was run for capped and uncapped samples, with the uncapped estimate retained in the block that contained the extreme grade, but the capped estimate used for blocks distant to the extreme arsenic sample locations. Parent block size was 10mE x 10mN x 4mRL. Drill spacing is ~20mE x 40mN. QKNA showed significantly better results for the 10x10x4m blocks compared to larger block sizes (e.g., 10mE x 20mN x 4mRL). Sub-blocks (minimum of 1.25mE x 2.5mN x 0.5mRL) were used to represent the mineralised shoot geometry, but grade estimation was into parent blocks. The block model volumes per shoot were compared to the wireframe volumes and were very close. The block model was not rotated. Hard boundaries were used for grade estimation, with each mineralised shoot estimated separately (i.e. no data sharing between shoots or with non-mineralised areas). The block model was validated for all variables by checking tonnage-weighted grade estimates against input sample data per shoot, semi-local comparisons of model and sample grades by using swath plots, and by extensive visual inspection of the block grades and input data on screen. All these methods show that the grade estimates honour the input data satisfactorily. This is a maiden Mineral Resource estimate, and therefore there are no previous estimates or production data to compare with.
Moisture	<ul style="list-style-type: none"> Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content. 	<ul style="list-style-type: none"> Tonnages are estimated on a dry basis.
Cut-off parameters	<ul style="list-style-type: none"> The basis of the adopted cut-off grade(s) or quality parameters applied. 	<ul style="list-style-type: none"> The mineralised shoots have been defined stratigraphically and >1% Ni. No cut-off grade has been used for reporting, but is essentially 1% Ni.
Mining factors or assumptions	<ul style="list-style-type: none"> Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made. 	<ul style="list-style-type: none"> Mining would be by underground methods, such as those used at the nearby Redross, Mariners and Miitel nickel mines. There is existing infrastructure in place. Minimum mining widths would be in the order of 2m. Ore would be transported by road train to BHP Nickel West's nearby Kambalda nickel processing operation.
Metallurgical factors or assumptions	<ul style="list-style-type: none"> The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. 	<ul style="list-style-type: none"> No metallurgical testwork has been undertaken on the Cassini material to date however given it is unoxidised nickel sulphides, there is no reason not to presume that it should be able to be treated as per other Kambalda nickel ore. Testwork will be undertaken during scoping prefeasibility studies.

Criteria	JORC Code explanation	Commentary
Environmental factors or assumptions	<ul style="list-style-type: none"> Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made. Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made. 	<ul style="list-style-type: none"> Ore treatment would be at BHP Nickel West's Kambalda nickel processing operation, which has been in operation for 50 years and has adequate tailing facilities. Haulage of waste rock to surface would be minimal, and any potentially acid forming material would be encapsulated in the waste rock dump. Surface disturbance would be minimal, as existing infrastructure would be used. Hypersaline ground water from the overlying sediments would be discharged to lakes to the north.
Bulk density	<ul style="list-style-type: none"> Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. Discuss assumptions for bulk density estimates used in the evaluation process of the different materials. 	<ul style="list-style-type: none"> Bulk density has been determined by water immersion techniques for drill core for every sampled interval. The drill core is solid, and is not porous, and thus negligible moisture content. The results are consistent with similar rock types at nearby nickel deposits. Bulk density was estimated into the block model, and as such local variation is available in the mineralised shoots. Densities for the non-mineralised material were applied per rock type and oxidation state.
Classification	<ul style="list-style-type: none"> The basis for the classification of the Mineral Resources into varying confidence categories. Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). Whether the result appropriately reflects the Competent Person's view of the deposit. 	<ul style="list-style-type: none"> Indicated Mineral Resource has a nominal drill spacing of 40mN x 20 to 30mE, and used search passes 1 and 2, and Inferred Mineral Resource has a nominal drill spacing of 80mN x 40 to 80mE, and search pass 3 or assigned default value. There is high confidence in the geological interpretation, and the input data has been thoroughly checked and is reliable. The geometry and consistency of the mineralised shoots is similar to nearby 'Kambalda-style' nickel deposits. The results reflect the Competent Person's view of the deposit.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of Mineral Resource estimates. 	<ul style="list-style-type: none"> No independent external audits have occurred, but the work has been internally peer reviewed by Cube Consulting.
Discussion of relative accuracy/ confidence	<ul style="list-style-type: none"> Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. 	<ul style="list-style-type: none"> Confidence in the estimate is reflected in the Mineral Resource classification. Geostatistical metrics (e.g. slope of regression) have been used to assist with classification but are not the only measure of confidence. The Mineral Resource relates to global tonnage and grade estimates. This is a maiden Mineral Resource estimate, and no mining production has occurred at the Cassini nickel deposit.