

ASX ANNOUNCEMENT

By e-lodgement

21st September 2018

Strong Diamond Drilling Results at Lake Rebecca Project



Diamond drilling into the northern end of the Jennifer Lode Area at the Lake Rebecca Gold Project in Western Australia returns significant new gold intercepts:

HIGHLIGHTS

- **6.3m @ 11.45g/t Au (including 2m @ 23.10g/t Au)**
- **14m @ 2.84g/t Au (including 1m @ 21.12g/t Au)**
- **16m @ 2.58g/t Au**
- **Results confirm wide mineralised zone at northern extensions of the Jennifer Lode**
- **Drilling continues at Jennifer Lode and exploration targets along the 1km mineralised system**

Apollo Consolidated Limited (ASX: AOP, the Company) is pleased to report the results of recent diamond drilling carried out as part of continued drill-out of the **Jennifer Lode** discovery. A total of five NQ diamond 'tails' extended Reverse Circulation (RC) drill holes in the northern part of the defined Jennifer Lode surface (Figure 1) to obtain structural information and confirm the geometry of gold mineralisation.

The diamond drilling is part of an ongoing program at the company's 100% owned **Lake Rebecca Gold Project** in Western Australia

Diamond hole RCDLR0255 on Section 6641410N intersected a zone of strong sulphide alteration extending from the base of the RC pre-collar, delivering a total intercept of **6.3m @ 11.45g/t Au** from 236m including **2m @ 23.10g/t Au**. This hole deviated southward, intersecting the Lode surface at a higher RL than planned and between sections. The location of this intercept is shown projected to section view in Figure 2 and in long section view in Figure 3.

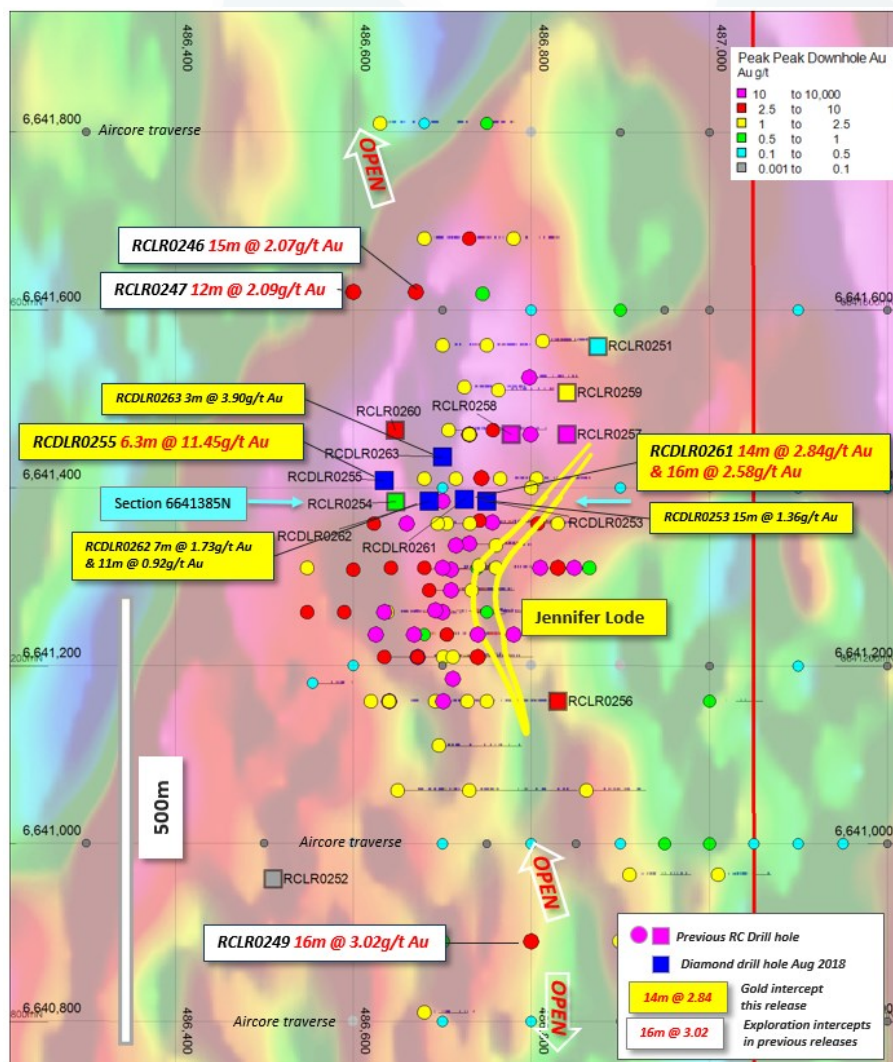


Figure 1. Rebecca Prospect and Jennifer Lode projected to surface on aeromagnetic image, showing collar locations of all drill holes colour coded for peak downhole gold assay². Collars of holes reported this release are blue squares & significant intercepts this release in yellow. Exploration intercepts released 13th August 2018 in white.

Three diamond tails were completed on Section 6641385N to follow-up an intercept of **59m @ 3.22g/t Au** (including **28m @ 5.06g/t Au**) in RCLR0236¹. All holes intersected disseminated pyrrhotite +/- chalcopyrite sulphides typical of Jennifer Lode and additional wide zones of unmineralized pyrite-dominant material in the footwall of the expected Lode position.

RCDLR0261, in an up-dip position from RCLR0236 returned multiple broad mineralised zones, separated by late-stage dykes and pegmatite, including **14m @ 2.84g/t Au** from 128m (with 1m @ 21.12g/t Au from 141m) and **16m @ 2.58g/t Au** from 161m (Figure 2).

RCDLR0262 in a down-dip position returned zones including 7m @ 1.73g/t Au from 162m and 11m @ 0.92g/t Au from 176m.

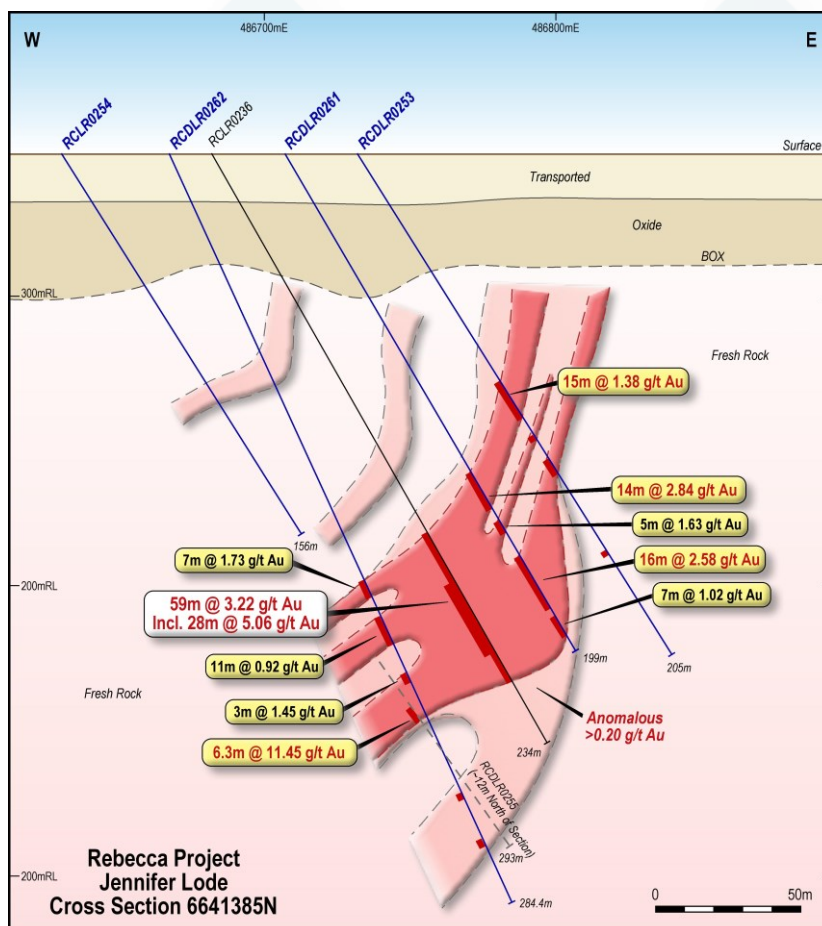


Figure 2. Cross-section 6641385N looking north. Intercepts this release in yellow.

Drilling on the 6641385N section has confirmed that a significant body of mineralised material is present at this location, and that the RCLR0236 intercept appears close to true width. The Lode here has a moderate westward dip that flattens to become shallowly-dipping at depth (Figure 2). Higher gold grades appear to be located where there is a change in dip.

All hole details and significant mineralised intervals are shown in Table 1.

This latest set of results continue to build the geological understanding of the northern part of the Jennifer Lode discovery. The relationship between the currently defined Lode surface and a series of shallowly-dipping mineralised surfaces on Section 6641460N is still to be determined. Note section 6641460N included **29m @ 3.10g/t, 30m @ 2.42g/t Au** and **6m @ 6.20g/t Au** (see ASX-AOP 13th and 30th August 2018).

The eastern surface on 6641460N appears to be a possible NE strike continuation of Jennifer Lode, and those pierce points are now included on the long-section view (Figure 3). Additional RC drilling is underway in this area and the interpretation may change as more information is received.

The incorporation of Section 6641460N intercepts extends the strike of the Jennifer Lode surface to over 300m.

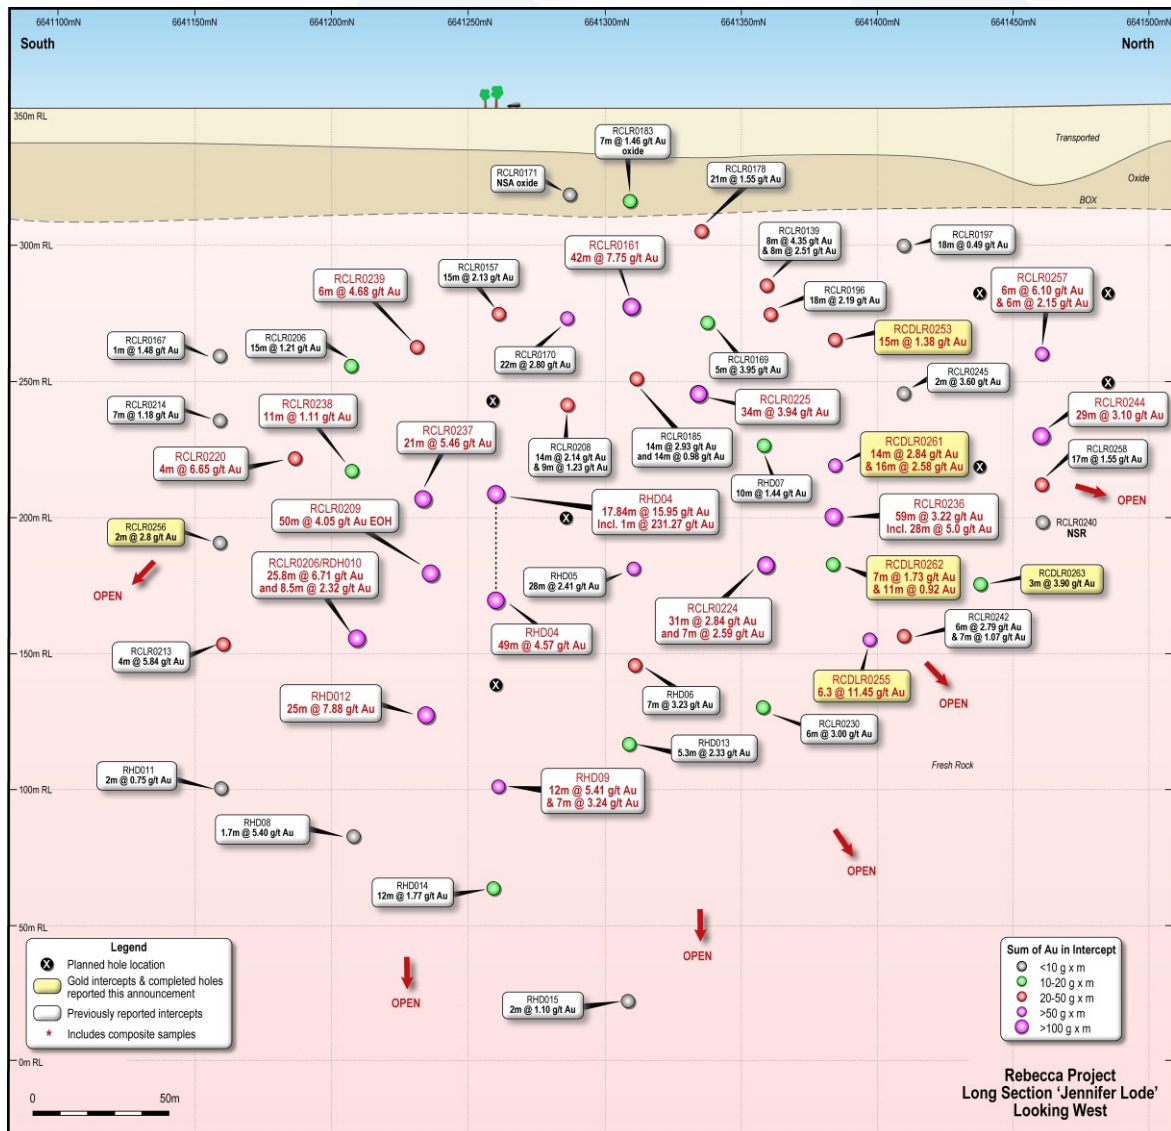


Figure 3. Long-section view Jennifer Lode looking west showing pierce-point of all drill holes that penetrate the Lode surface². Holes are colour-coded for sum of gold in the reported intercept.

Current Work

Drilling continues at the Project, with current activity directed at the following targets:

1. Continued drill-out of the mineralisation identified to the north of Jennifer, including RC pre-collars for further diamond drilling to test deeper targets.
2. Ongoing infill drilling of Jennifer Lode to build geological confidence in preparation for a Mineral Resource estimation at a later date.

3. Follow-up exploration around an intercept of **16m @ 3.02g/t Au** in RCLR0244 (ASX-AOP 13th August 2018) located approximately 400m to the south of Jennifer Lode (Figure 1). Gold mineralisation in this hole sits in altered gneiss to the west of a contact against a granodiorite intrusion, a geological setting very similar to that seen at Jennifer Lode.
4. Further exploration drilling on sections around 6641620N where **15m @ 2.07g/t Au** and **12m @ 2.09g/t Au** (ASX-AOP 13th August 2018) were returned from consecutive holes RCLR0246 and RCLR0247 (Figure 1). This mineralised surface is approximately 250m north of Jennifer Lode and is supported by gold intercepts on existing drill sections to the north and south.
5. Reconnaissance exploration drilling at the northern and southern limits of the Rebecca gold system.

The Company continues to progress its geological understanding of what is shaping to be a significant mineralised system at the Rebecca Gold Project and will update shareholders as further results are received and interpreted.

Hole	Prospect	AMG E	AMG N	Dip	Azimuth	EOH Depth	Intercept	From
RCDLR0253	Jennifer Lode North	486750	6641385	-58	90	205	4m @ 0.74g/t Au	80
							15m @ 1.36g/t Au	93
							2m @ 1.06g/t Au	115
							6m @ 0.71g/t Au	125
							1m @ 1.35g/t Au	154
RCDLR0255	Jennifer Lode North	486635	6641408	-53	90	293	11m @ 0.81g/t Au	103
							5m @ 1.11g/t Au	150
							6m @ 0.91g/t Au	176
							5m @ 1.98g/t Au	222
							6.3m @ 11.45g/t Au	236
							<i>incl.</i> 2m @ 23.10g/t Au	237
							1m @ 1.29g/t Au	252
1m @ 1.83g/t Au	289							
RCDLR0261	Jennifer Lode North	486725	6641387	-60	90	199	14m @ 2.84g/t Au	128
							<i>incl.</i> 1m @ 21.12g/t Au	141
							5m @ 1.63g/t Au	147
							2m @ 0.91g/t Au	154
							16m @ 2.57g/t Au	161
							3m @ 0.86g/t Au	179
							7m @ 1.02g/t Au	185
2m @ 1.00g/t Au	194							
RCDLR0262	Jennifer Lode North	486685	6641385	-65	90	284	7m @ 1.73g/t Au	162
							11m @ 0.92g/t Au	176
							3m @ 1.45g/t Au	197
							2m @ 0.60g/t Au	242
							2m @ 0.87g/t Au	259
RCDLR0263	Jennifer Lode North	486700	6641435	-62	90	295	9m @ 0.97g/t Au	65
							4m @ 1.35g/t Au	104
							2m @ 1.14g/t Au	150
							1m @ 1.30g/t Au	160
							3m @ 3.90g/t Au	189

Table 1. Drill hole details and significant gold intercepts in current release.



Image: Example of strong pyrrhotite-chalcopyrite mineralisation in gneiss RCDLR0263 191-192m. This interval assayed 6.17g/t Au and is part of an intercept of 3m @ 3.90g/t Au from 189m downhole.

Notes:

1. Refer to ASX-AOP 17th July 2018.
2. For details of past drilling and results please refer to ASX-AOP 26 August 2012, 28 September 2012, 8 October 2015, 1 September 2016, 9, 13, 20 & 24 October 2017, 15 January 2018, 12 April 2018, 7 May 2018, 17th July 2018, 13th & 30th August 2018.

About Apollo:

Apollo Consolidated Ltd (ASX: AOP) is a gold exploration company based in Perth, Western Australia. Its exploration focus is Western Australia, where the Company has the wholly owned advanced gold project at Lake Rebecca, greenfield gold projects at Yindi and Larkin, as well the Louisa nickel-copper sulphide project located in the Kimberley.

Lake Rebecca is emerging as a new Goldfields discovery, with compelling gold intercepts reported during 2017-2018, including 49m @ 4.57g/t Au, 59m @ 3.22g/t Au, 42m @ 7.75g/t Au and 25m @ 7.88g/t Au. The Company continues to explore this deposit.

At the conclusion of a sale agreement with Novo Lítio Ltd (ASX: NLI) the Company will retain a 20% project interest in the Boundiali and Korhogo Projects (free carried to Decision to Mine) all in the West African gold destination of Cote d'Ivoire and hold a 19.4% equity position in that company. Subject to suitable tax advice, regulatory and shareholder approval the Company intends to distribute its Novo Lítio shares *in-specie* to Apollo shareholders. The Company also retains a 1.2% royalty over the Seguela Project in central Cote d'Ivoire.

As at 30th June 2018 the Company held A\$7.18m in cash to fund ongoing drilling work.

ENDS.



The information in this release that relates to Exploration Results, Minerals Resources or Ore Reserves, as those terms are defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserve", is based on information compiled by Mr. Nick Castleden, who is a director of the Company and a Member of the Australian Institute of Geoscientists. Mr. Castleden has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which they are undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserve". Mr. Castleden consents to the inclusion of the matters based on his information in the form and context in which it appears.

APPENDIX 1 JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Each drill hole location was collected with a hand-held GPS unit with ~3m tolerance. Geological logging was completed on all core, ahead of selection of intervals for cutting and analysis. Logging codes are consistent with past RC drilling Reverse circulation drilling (RC), angled drill holes from surface Mostly 1m samples of 2-3kg in weight Industry-standard diameter reverse circulation drilling rods and conventional face-sampling hammer bit One metre samples collected from the cyclone and passed through a cone-splitter to collect a 2-3kg split, bulk remainder collected in plastic RC sample bags and placed in 20m lines on site Composite samples are compiled by obliquely spearing through 2-5 x 1m samples, to make a 3kg sample Wet samples are spear-sampled obliquely through bulk 1m sample to collect a representative 2-3kg sample, lab sample is dried on site. NQ2 sized diamond core collected from angled drill holes Core was drilled starting from the final depth of earlier RC pre-collars Certified Reference Standards inserted every ~40samples, duplicate sample of a split 1m interval, collected at 1 x per RC drill hole All samples were analysed by 50g Fire Assay (Genalysis code FA50) and reported at a 0.01ppm threshold
Drilling	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air 	<ul style="list-style-type: none"> Diamond drill rig supplied by contractor Westralian Diamond Drilling

Criteria	JORC Code explanation	Commentary
<i>techniques</i>	<i>blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>of Kalgoorlie</p> <ul style="list-style-type: none"> • RC Rig supplied by Raglan Drilling • Standard tube NQ2 oriented core collected • Reverse Circulation drilling, 4.5 inch rods & face-sampling hammer
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Core was measured, and any core loss recorded. Very high-quality core was obtained, with close to 100% recovery • RC samples sieved and logged at 1m intervals by supervising geologist, sample quality, moisture and any contamination also logged. • >95% of RC samples were dry and of good quality • RC Booster and auxiliary air pack used to control groundwater inflow • Sample recovery optimized by hammer pull back and air blow-through at the end of each metre. • Where composite samples are taken, the sample spear is inserted diagonally through the bulk sample bag from top to bottom to ensure a full cross-section of the sample is collected. • To minimize contamination and ensure an even split, the cone splitter is cleaned with compressed air at the end of each rod, and the cyclone is cleaned every 50m and at the end of hole, and more often when wet samples are encountered. • Most drill samples were dry in fresh rock profile • Sample quality and recovery was generally good using the techniques above, no material bias is expected in high-recovery samples obtained
<i>Logging</i>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> 	<ul style="list-style-type: none"> • Recording of rock type, oxidation, veining, alteration and sample quality carried out for all core collected • Logging is mostly qualitative • Each entire drillhole was logged • While drill core samples are being geologically logged, they will not be at a level of detail to support appropriate Mineral Resource

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <i>The total length and percentage of the relevant intersections logged.</i> 	<p>estimation, mining studies and metallurgical studies.</p> <ul style="list-style-type: none"> RC samples representing the lithology of each 2m section of the drillhole were collected and stored into chip trays for future geological reference
<p><i>Sub-sampling techniques and sample preparation</i></p>	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> RC composite sampling was carried out where site geologist decided material was less likely to be mineralised. In these intervals samples were spear-sampled directly from the split bulk sample, to make up a 2-3kg 2-5m composite sample Where composite samples are taken, the sample spear is inserted diagonally through the bulk sample bag from top to bottom to ensure a full cross-section of the sample is collected. This technique is considered an industry standard and effective assay cost-control measure Bulk bags for each metre are stored for future assay if required. All samples were dry and representative of drilled material Certified Reference Standards inserted every ~40 samples, 1 x duplicate sample submitted per drillhole Sample sizes in the 2-3kg range are considered sufficient to accurately represent the gold content in the drilled metre at this project Diamond core was cut in half lengthways and half-core lengths up to 1.5m in length were submitted for assay Remaining half core is retained in core trays for future study
<p><i>Quality of assay data and laboratory tests</i></p>	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> 	<ul style="list-style-type: none"> Samples collected from the Project area by staff, and delivered to Genalysis Kalgoorlie (WA) where they were crushed to -2mm, subset, riffle split and pulverised to -75um before being sent to Genalysis Perth for 50g charge assayed by fire assay with AAS finish Quality control procedures adopted consist in the insertion of standards approx every 40m and one duplicate sample per hole and

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<p>also internal Genalysis laboratory checks. The results demonstrated an acceptable level of accuracy and precision</p> <ul style="list-style-type: none"> Company standard results show acceptable correlation with expected grades of standards A good correlation was observed between visible gold logged and/or percentage of sulphide and gold grades
<i>Verification of sampling and assaying</i>	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> The sample register is checked in the field while sampling is ongoing and double checked while entering the data on the computer. The sample register is used to process raw results from the lab and the processed results are then validated by software (.xls, MapInfo/Discover). A hardcopy of each file is stored and an electronic copy saved in two separate hard disk drives As this is an early-stage program there were no pre-existing drill intercepts requiring twinned holes
<i>Location of data points</i>	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> Collar located using a Garmin GPS with an accuracy ~3m Data are recorded in AMG 1984, Zone 51 projection. Topographic control using the same GPS with an accuracy <10m Drillhole details supplied in body of announcement
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> Diamond drillholes were completed 25-40m apart to test around existing mineralised RC intercepts, and on sections 25m to 50m apart. RC drilling was completed at 25m & 50m line spacing to infill and extend interpreted mineralisation The drill program was designed to follow-up existing nearby mineralisation and the spacing of the program is considered suitable to provide bedrock information and geometry of the lode structures targeted. Further infill drilling may be required to establish continuity and grade variation around the holes Assays are reported as 1m samples, unless otherwise indicated in

Criteria	JORC Code explanation	Commentary
		tables in the attaching text
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • Drillholes were oriented along AMGZ51 east-west. • Drill sections intend to cut geology close to right-angles of interpreted strikes. Completed drillholes intersected target mineralisation in the expected down-hole positions. • Rock contacts and fabrics are interpreted to mostly dip west at close to right angles to the drillhole. Mineralised intervals reported vary from almost 100% true width to ~40% true width, depending on local changes in the orientation of mineralised lodes
<i>Sample security</i>	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • RC samples collected on the field brought back to the company camp area, bagged and sealed into 20kg polyweave bags • Diamond core was processed at a secure cutting site in Kalgoorlie bagged and sealed into 20kg polyweave bags and delivered to the laboratory at the end of each day. • All samples are delivered directly from site to the laboratory by company representatives and remain under laboratory control to the delivery of results
<i>Audits or reviews</i>	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • No external audit or review completed

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • Rebecca is a collection of granted exploration licences located 150km east of Kalgoorlie. The Company owns 100% of the tenements. • A 1.5% NSR is owned by private company Maincoast Holdings Pty Ltd • There are no impediments to exploration on the property • Tenure is in good standing and has more than 3 years to expiry
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> • <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> • Previous exploration was carried out on a similar permit area by Placer Ltd, Aberfoyle Ltd, and Newcrest Ltd during the early to late 1990's. Aberfoyle carried out systematic RAB and aircore drilling on

Criteria	JORC Code explanation	Commentary
		<p>oblique and east-west drill lines, and progressed to RC and diamond drilling over mineralised bedrock at the Redskin and Duke prospects. Minor RC drilling was carried out at Bombora.</p> <ul style="list-style-type: none"> No resource calculations have been carried out in the past but there is sufficient drilling to demonstrate the prospects have considerable zones of gold anomalism associated with disseminated sulphides. Regional mapping and airborne geophysical surveys were completed at the time, and parts of the tenement were IP surveyed. The project has a good digital database of previous drilling, and all past work is captured to GIS. The quality of the earlier work appears to be good.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> Dominantly granite and gneiss with minor zones of amphibolite and metamorphosed ultramafic rocks. Mineralisation is associated with zones of disseminated pyrite and pyrrhotite associated with increased deformation and silicification. There is a positive relationship between sulphide and gold and limited relationship between quartz veining and gold.
Drill hole Information	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> Refer to Table in body of announcement

Criteria	JORC Code explanation	Commentary
Data aggregation methods	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> No grade cuts applied Drill hole intercepts are reported as length-weighted averages, >1m width above a 0.50g/t cut-off, and calculated allowing a maximum 2m contiguous internal dilution. Anomalous intercepts are reported at 0.10g/t Au cut off and calculated using a maximum 2m contiguous internal dilution. Anomalous intercepts reported may include results also reported at a 0.50g/t cut-off, are only provided to demonstrate particularly wide mineralised zones.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> Lithologies and fabrics are interpreted to be close to right angles to the drillholes, dipping at 40-50 degrees west. The arrangement of main sulphide shoots is interpreted to change along strike, and down-dip such that reported mineralised intervals can vary from almost 100% true width to ~40% true width, depending on local changes in the orientation of mineralised lodes Plunge of mineralisation is considered to be steeply southwest, additional structural mapping is required to confirm this
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> Appropriate diagrams are in body of this report
Balanced reporting	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> Refer to Table showing all down-hole mineralised intercepts >0.50g/t Au in the current drill program
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> Preliminary bottle-roll metallurgical test-work reported 5th Jan 2018 showed an average 94.5% gold recovery in 5 composite samples of fresh mineralised sulphidic material in RHD004.

Criteria	JORC Code explanation	Commentary
<i>Further work</i>	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Next stage of exploration work will consist of follow-up RC/diamond drilling to continue to scope lateral and plunge extensions of structures and to test new targets Additional surface geophysical surveys may be commissioned