



The Redcliffe Gold Project Leonora, WA

2018 AGM



November 2018

The information in this document has been prepared as of February 2018. The document is for information purposes only and has been extracted entirely from documents prior materials publicly filed with the Australian Securities Exchange and/or the Australian Securities and Investments Commission. This presentation is not an offer or invitation to subscribe for or purchase securities in the Company. The release, publication or distribution of this presentation in certain jurisdictions, may be restricted by law and therefore persons in such jurisdictions into which this presentation is released, published or distributed should inform themselves about and observe such restrictions. Certain statements contained in this document constitute “forward-looking statements” within the meaning of the United States Private Securities Litigation Reform Act of 1995 and forward looking information under the provisions of Canadian provincial securities law. When used in this document, the words “anticipate”, “expect”, “estimate”, “will”, “planned”, and similar expressions are intended to identify forward-looking statements or information.

Such statements include without limitation: statements regarding timing and amounts of capital expenditures and other assumptions; estimates of future reserves, resources, mineral production, optimization efforts and sales; estimates of mine life; estimates of future external rates of return, mining costs, cash costs, mine site costs and other expenses; estimates of future capital expenditures and other cash needs, and expectations as to the funding thereof; statements and information as to the projected development of certain ore deposits, including estimates of exploration, development and production and other capital costs, and estimates of the timing of such exploration, development and production or decisions with respect to such exploration, development and production; estimates of reserves and resources, and statements and information regarding anticipated future exploration; the anticipated timing of events with respect to the Company’s mine sites and statements and information regarding the sufficiency of the Company’s cash resources. Such statements and information reflect the Company’s views as at the date of this document and are subject to certain risks, uncertainties and assumptions, and undue reliance should not be placed on such statements and information. Many factors, known and unknown could cause the actual results to be materially different from expressed or implied by such forward looking statements and information. Such risks include, but are not limited to: the volatility of prices of gold and other metals; uncertainty of mineral reserves, mineral resources, mineral grades and mineral recovery estimates; uncertainty of future production, capital expenditures and other costs; currency fluctuations; financing or additional capital requirements; costs of exploration and development programmes; mining risks; community protests; governmental and environmental regulation and the volatility of the Company’s stock price. For a more detailed discussion of such risks and other factors that may affect the Company’s ability to achieve the expectations set forth in the forward-looking statements contained in this document, see the Company’s Annual Report for the year ended 30 June 2017, as well as the Company’s other filings with the Australian Securities Exchange. The Company does not intend, and does not assume any obligation, to update these forward looking statements and information.

Competent Persons Statement

The information in this presentation relates to Exploration Results is based on the information reviewed by Lyle Thorne who is a member of the Australasian Institute of Mining and Metallurgy, Mr Thorne is a full time employee of the Company. He has sufficient experience which is relevant to the mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a competent Person as defined in the 2012 Edition of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves’. Mr Thorne consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

FY18 Drillout

- Detailed drillout of the key deposits.
- Excellent grades and widths highlighting the quality and potential viability.
- Demonstrated upside, with all deposits remaining open at depth.

Updated Resource

- 538koz¹ resource, up 94%.
- Underpins value.
- EV/oz of \$23/oz.
- Significant resource upside.


Commenced Exploration

- +170km² of tenements with large areas untested.
- 18,000m aircore finished.
- Targeting a step-change in resource base.

New Management & Board Renewal

- Technical and financial background.
- Increase in communication and marketing.
- Updated exploration strategy.


Share Price Performance

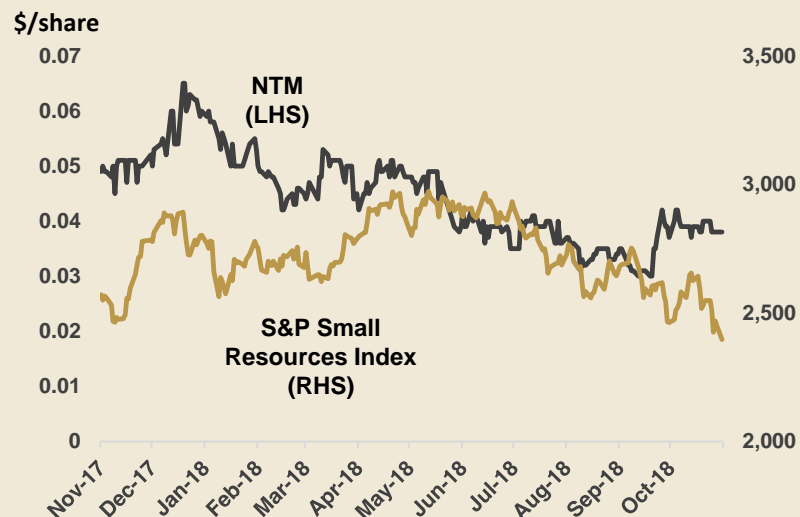

Board & Management

Paul Price	Chairman, Non-Executive Director
Andrew Muir	Managing Director
Rodney Foster	Non-Executive Director
Edward Van Heemst	Non-Executive Director

Shareholders

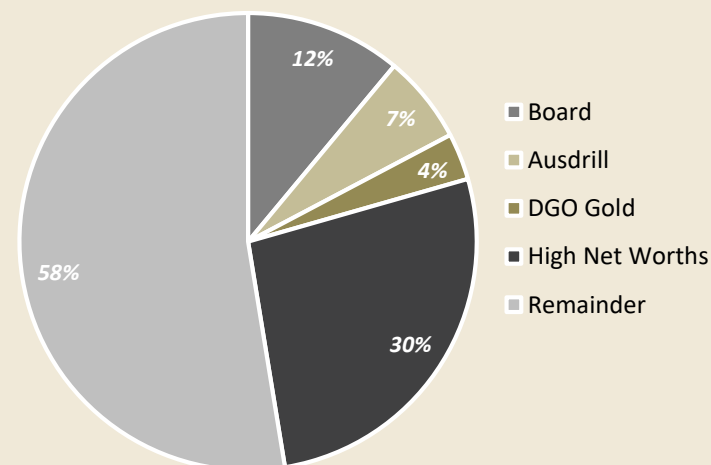

Capital Structure

Share Price	\$	0.038
No. of Shares Outstanding	m	342.4
Market Capitalisation	\$m	13.0
Cash ^(27/11/18)	\$m	0.80
Enterprise Value	\$m	12.2


Resource ¹	538koz
EV/oz	A\$23/oz

Top 20 Holders	53.5%
Directors' Holdings	12.2%

1: See Appendix 1 for Resource Statement

Leonora - An Emerging Area that is over 120 years old

- Strategic Location
- Existing Mines
 - Gwalia - St Barbara (ASX: SBM)
 - Thunderbox - Saracen (ASX: SAR)
 - Mt Morgans - Dacian (ASX: DCN)
 - Darlot - Red 5 (ASX: RED)
- Multiple Emerging Stories
 - Bellevue (ASX: BGL)
 - Genesis Minerals (ASX: GMD)
 - Echo (ASX: EAR)
 - KIN (ASX: KIN)
 - New floats

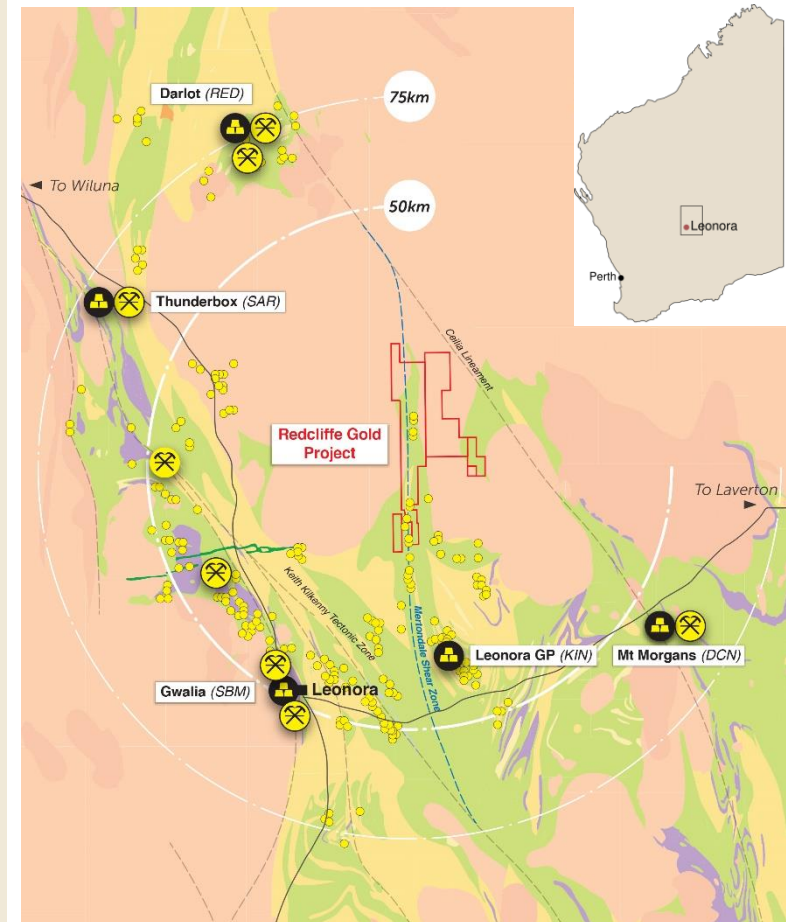


Busy Year Drilling

FY 18

- Focussed on resource build drilling:
 - 17,097m RC
 - 851m diamond
- Extended Nambi, GTS at depth
- Drilled out Bindy for maiden resource

FY 19 to date

- Focussing on exploration and looking for new deposits
- Testing new targets including Hub, Infinity, Aliso and a number of others.
 - 17,998m aircore
 - 3,130m RC

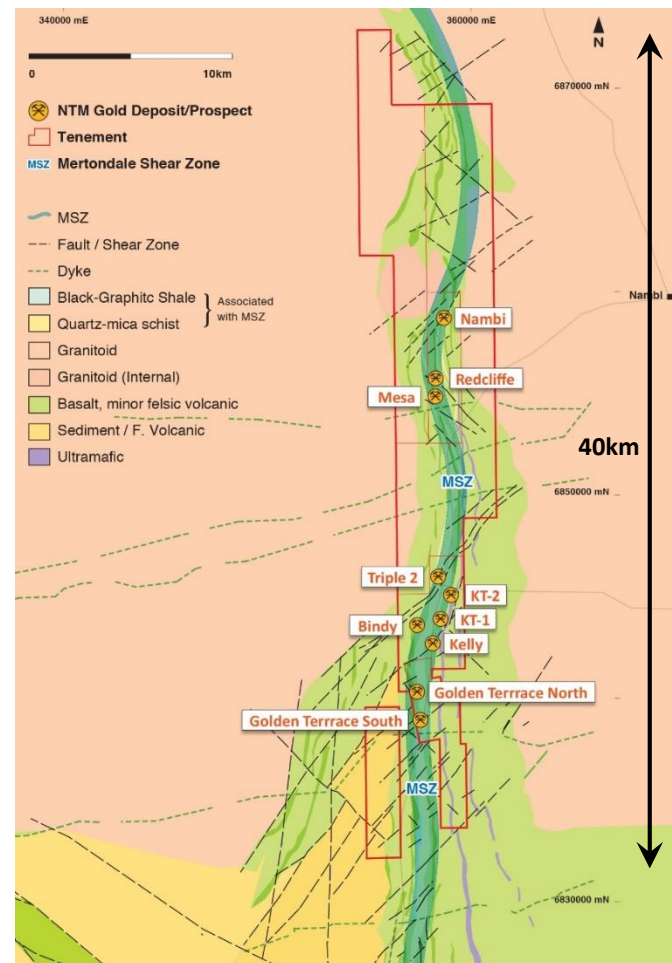

Nambi

- 0.5m @ 166.0 g/t Au
- 0.5m @ 66.8 g/t Au
- 4m @ 7.2g/t Au *incl* 1m @ 20.2g/t Au
- 5m @ 7.0g/t Au *incl* 1m @ 17.1 g/t Au

GTS

- 11m @ 4.5g/t Au *incl* 1m @ 10.7g/t Au
- 14m @ 3.5g/t Au *incl* 4m @ 6.4g/t Au
- 12m @ 2.7g/t Au *incl* 3m @ 5.9g/t Au
- 6m @ 3.20 g/t

Bindy

- 28m @ 2.6g/t Au *incl* 13m @ 4.1g/t Au
- 16m @ 4.7g/t Au *incl* 8m @ 7.3g/t Au
- 13m @ 3.2g/t Au *incl* 5m @ 6.4g/t Au
- 13m @ 2.8g/t Au *incl* 2m @ 12.7g/t Au


Other Areas

- 3m @ 5.2 g/t Au – Bindy North.
- 5m @ 3.1 g/t Au – Redcliffe South.
- 5m @ 2.1 g/t Au – Westlode South.

Nambi

- Mineralisation from surface.
- Three separate sub-parallel lodes 2 - 5m true thickness.
- Highest-grade Redcliffe Project deposit:
 - **1.7Mt @ 2.73g/t for 138koz¹**
- *But*
 - Resource estimate limited by drilling.
 - Mineralisation plunges to the south.
 - Open at depth.


Nambi Main Lode - Open at Depth

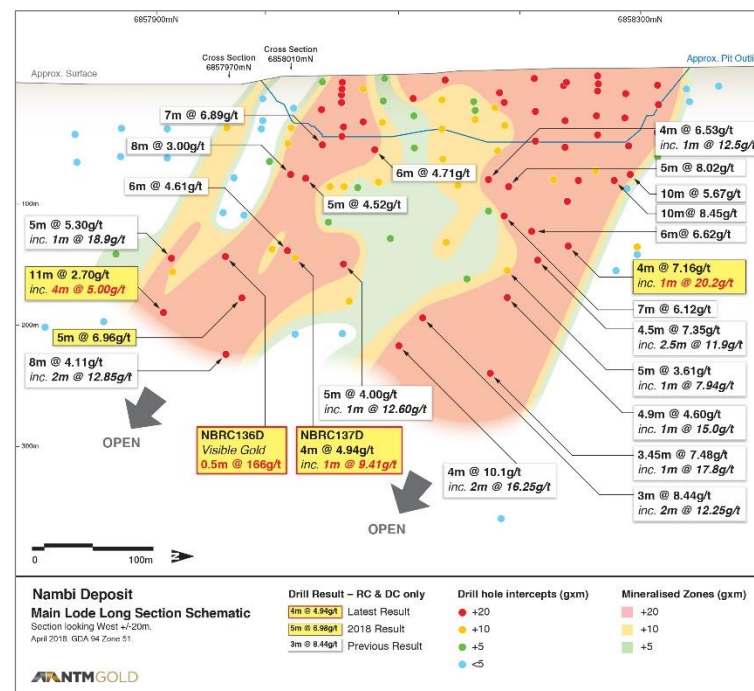

Golden Terrace South (GTS)

- Large system with oxide.
- +1km strike and +150m vertical.
- Open at strike and depth.
- Oxide comes to surface.
- Largest Redcliffe Project deposit:
 - **2.8Mt @ 1.52g/t for 138koz¹**
- *But*
 - Resource estimate limited by drilling.
 - Mineralisation plunges to the south.
 - Open at depth.

GTS Plan and Long Section

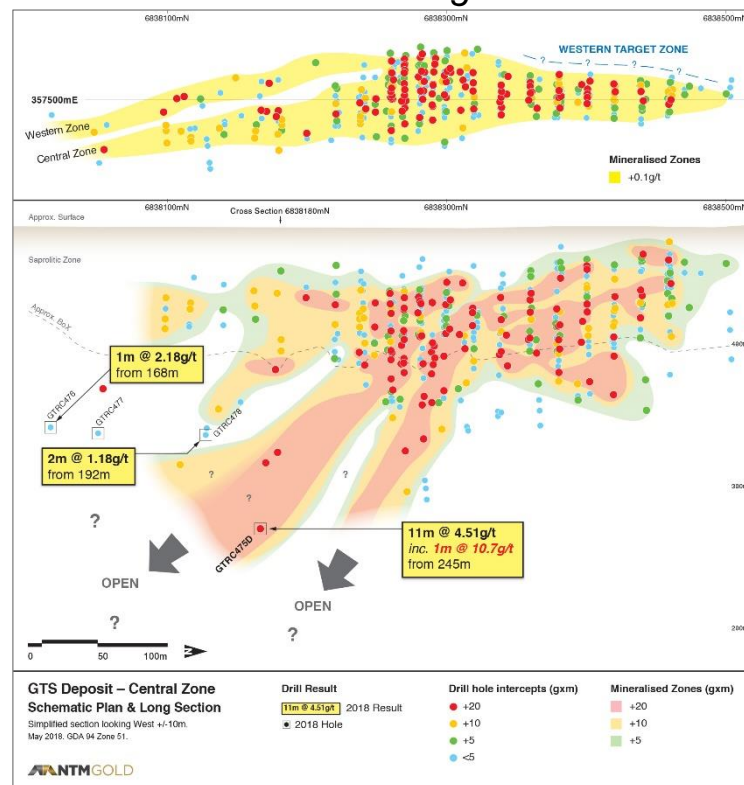

Redcliffe Resource Base

Up 94% on previous resource, but still with significant upside

JORC Resource at 0.5g/t lower cut off¹

Deposit	Indicated			Inferred			Total		
	Tonnes	g/t	Ounces	Tonnes	g/t	Ounces	Tonnes	g/t	Ounces
Nambi	702,617	2.68	60,456	866,592	2.77	77,240	1,569,209	2.73	137,696
GTS	1,050,663	1.93	65,250	1,785,613	1.27	73,141	2,836,276	1.52	138,391
Bindy				2,739,715	1.13	99,467	2,739,715	1.13	99,467
Kelly				3,065,919	0.84	82,766	3,065,919	0.84	82,766
Redcliffe				1,255,579	1.09	44,143	1,255,579	1.09	44,143
Mesa/Westlode				1,058,705	1.04	35,400	1,058,705	1.04	35,400
TOTAL	1,753,280	2.23	125,706	10,772,123	1.19	412,157	12,525,403	1.34	537,862


JORC Resource at 1.0g/t lower cut off

Deposit	Indicated			Inferred			Total		
	Tonnes	g/t	Ounces	Tonnes	g/t	Ounces	Tonnes	g/t	Ounces
Nambi	642,229	2.86	58,953	676,035	3.34	72,680	1,318,264	3.11	131,634
GTS	815,468	2.27	59,627	1,093,974	1.62	57,136	1,909,442	1.90	116,763
Bindy				1,097,839	1.74	61,504	1,097,839	1.74	61,504
Kelly				598,893	1.50	28,869	598,893	1.50	28,869
Redcliffe				555,723	1.46	26,030	555,723	1.46	26,030
Mesa/Westlode				342,737	1.78	19,655	342,737	1.78	19,655
TOTAL	1,457,697	2.53	118,581	4,365,201	1.89	265,874	5,822,898	2.05	384,455

NTM confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcement, dated 13 June 2018, and that all material assumptions and technical parameters underpinning the estimates in the respective market announcements continue to apply and have not materially changed.


Focus Now on Discoveries


- Required for a step change in the resource base.
- In house analysis identified over 30 targets.
- Recent aircore program tested approximately 1/3rd of them.
- Many were new targets with no drilling.
- Initial exploration completed with c.18,000m aircore program.
- Outstanding first pass results at:
 - Hub
 - Aliso
 - Infinity
- Multiple other targets to follow up

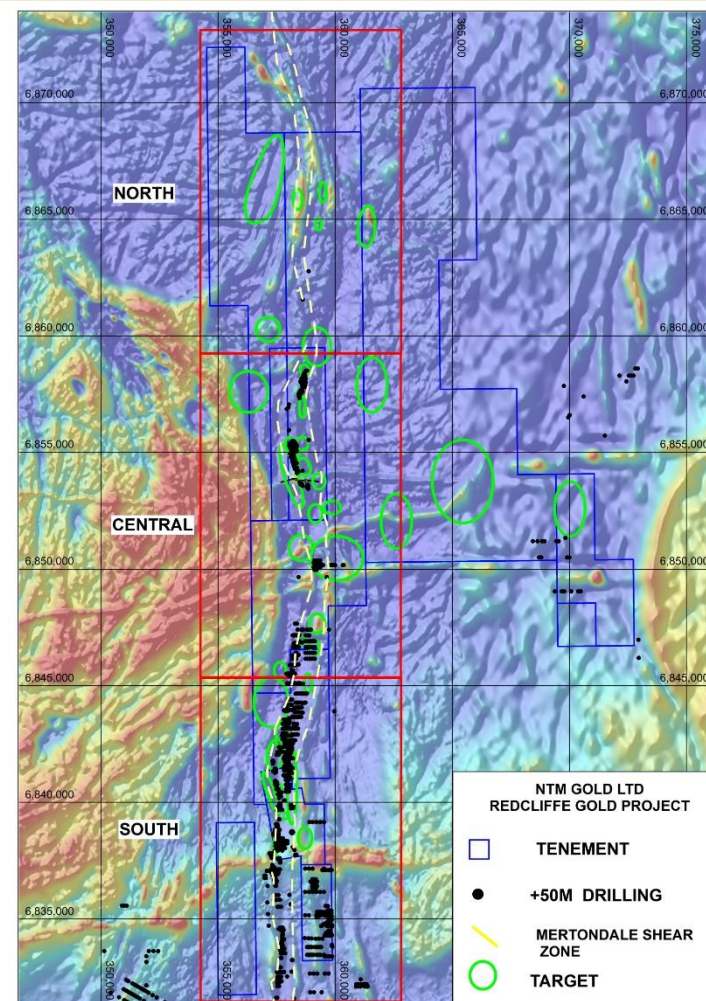

Outstanding First Pass Aircore Results

- Mineralisation over +300m with +1 g/t hits on 4 consecutive lines
- Better results:
 - **7m @ 4.7g/t incl. 2m @ 8.7g/t EOH**
 - **10m @ 2.7g/t incl. 5m @ 4.4g/t**
 - **10m @ 3.2g/t incl. 5m @ 5.1g/t**
- Mineralisation on Mafic-Felsic contact
- Cut off by a cross cutting dyke to the north
- No drilling north of the dyke for 800m, where there is a +1g/t intercept in historic drilling
- Structurally complex
- RC planned for early December

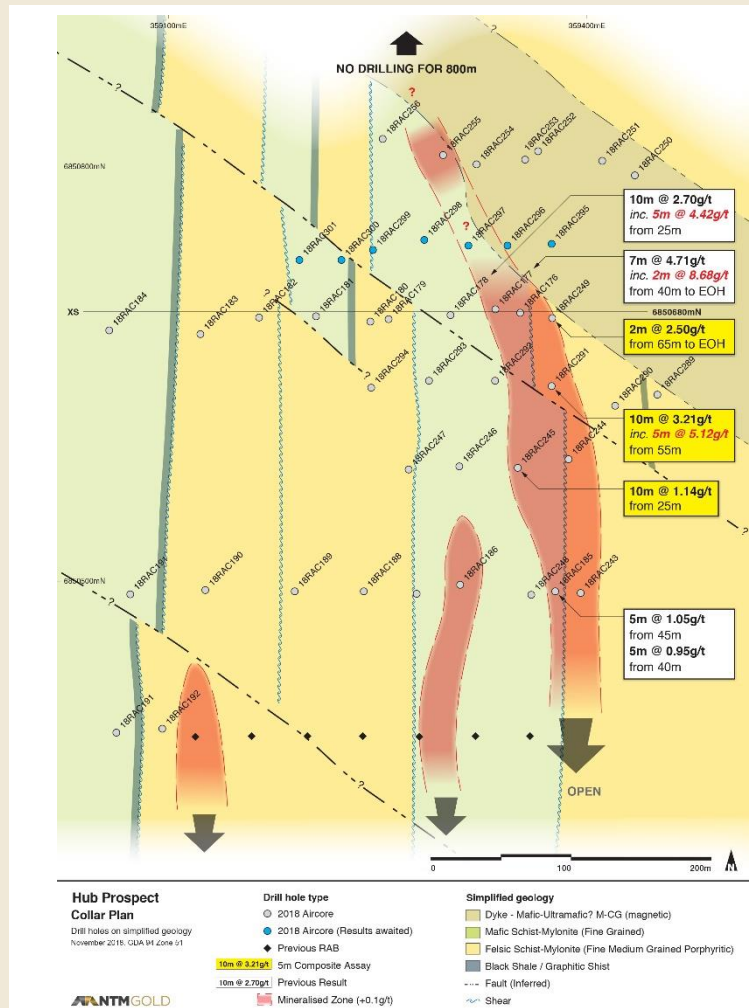

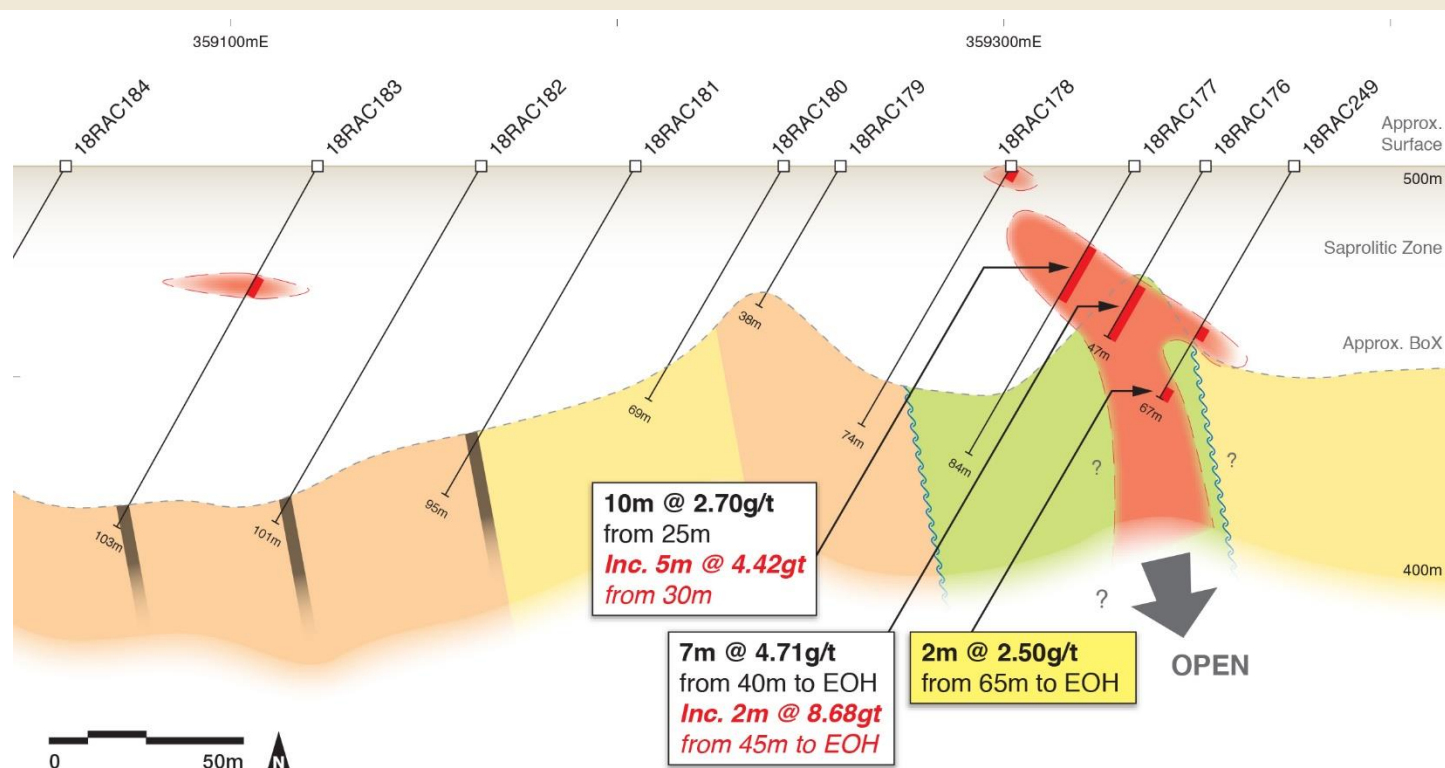

Hub Prospect

Cross Section Schematic

6850680mN

Section looking North +/- 20m.
November 2018. GDA 94 Zone 51

ANTMGOLD

AC Drill Result


2m @ 2.50g/t 5m composite
10m @ 2.70g/t Previous Results
 Mineralised Zones (+0.1g/t)

Simplified geology

Mafic Schist - Mafic Mylonite
 Felsic Schist to Felsic Mylonite
 Felsic (Sheared - Porphyritic)
 Black Shale (Graphitic in part)
--- Base Of Oxidation (BoX)
~ Shear

Brand New Area

- Northern most prospect, located 7km north of Nambi.
- Never been drilled.
- High-quality first pass results :
 - 5m @ 3.6g/t
 - 5m @ 1.2g/t
 - 5m @ 1.1g/t
- 3 drill traverses 100m apart with mineralisation on each.
- Possible porphyry host.
- Highly sheared.
- RC planned for early December.

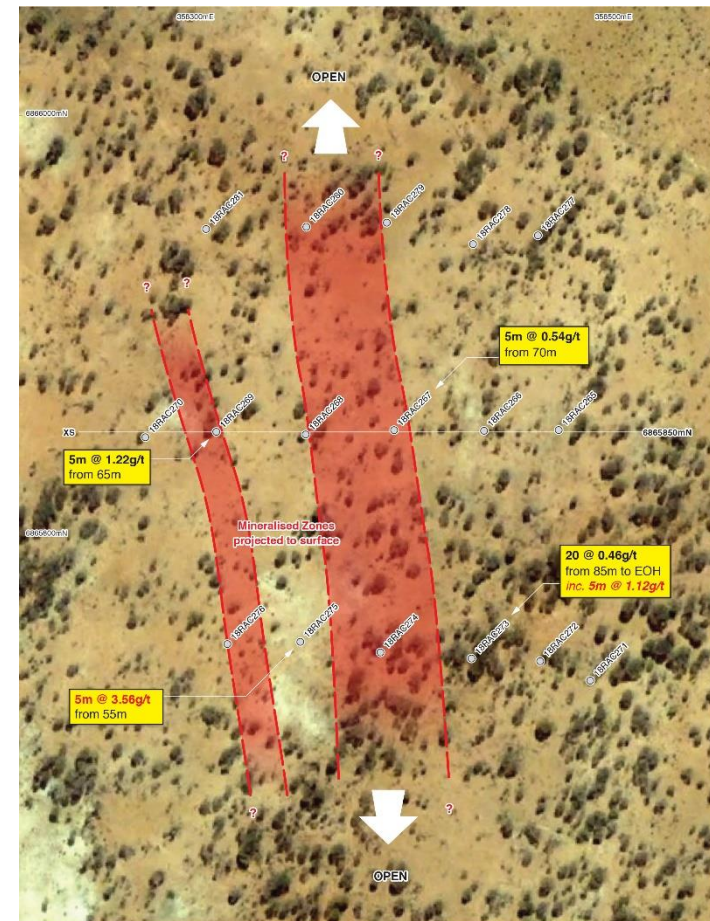

Aliso Prospect
Collar plan

Drill holes over satellite
November 2018, GDA 94 Zone 61

Drill hole
5m @ 3.56g/t 5m Composite Assay
Mineralised Zone (+0.25g/t) projected to surface

0 50 100m

ANTMGOLD

- Infinity – large gaps between drilling
 - **5m @ 1.4g/t**
 - **5m @ 1.3g/t**
- Bindy North – extends Bindy trend to +2km
 - **5m @ 1.6g/t**
- Redcliffe East
 - **2m @ 3.5g/t**
 - **5m @ 4.7g/t**
- Redcliffe South
 - **5m @ 1.2g/t**
 - **5m @ 1.1g/t**



Finish 2018 Strong

- Outstanding 2018
- Drilling success on multiple fronts
- RC program planned for early December to follow up:
 - Hub
 - Infinity
 - Redcliffe Area
 - Nambi



Continue Momentum in 2019

- Aggressively explore for new mineralisation and extend existing deposits
- Restart drilling in early 2019
- Aim to have RC and aircore drilling for the majority of the year
- Engage external consultants for structural and targeting review
- Leveraging off strategic alignment with DGO Gold Limited

Great Location

- Strategic
 - 4 large gold operations nearby.
- Prospective
 - Multiple +1Moz gold deposits.

Significant Resource Upside

- 538koz¹ of gold in resource.
- Key deposits remain open.
- High-grade plunging shoots at depth.
- Multiple new targets.

Exploration & News Flow

- <20% of the Redcliffe Project effectively explored.
- Outstanding first pass aircore results to date – validation of conceptual targets – program ongoing.
- Many targets to test with RC drilling to follow.
- Aggressive exploration to continue in 2019.



List Of All ASX Announcements Relating To Drill Results

Date	Title
17/10/2018	First Pass Exploration Delivers Outstanding Results
11/09/2018	Highly Promising RC Exploration
24/05/2018	GTS Continues at Depth
9/05/2018	Bindy High Grades Continue at Depth
7/05/2018	Exceptional Grades from Nambi
2/05/2018	Bindy Re-samples Confirm High Grades
4/04/2018	RC Drilling Success at Bindy, Visible Gold in Nambi Core
8/03/2018	High Grades Continue at Nambi
13/02/2018	Bindy Results Confirm Higher Grade Shoots
12/01/2018	Exploration Update-Redcliffe Gold Project
13/12/2017	High-Grade Gold Intercepts Shine Spotlight on Nambi Deposit
5/12/2017	Redcliffe Gold Project - Drilling Update
22/11/2017	Single Metre Gold Assay Results Confirm and Upgrade
24/10/2017	High Grade Gold from RC Drilling at Redcliffe Project
19/09/2017	Drilling Expands High Grade Gold Potential at Nambi

Appendix 2

2018 Significant Aircore Drill Results¹ (18RAC296 to 301 Outstanding)

PROSPECT	HOLE	FROM	TO	RESULT +0.5 g/t Au
Redcliffe East	18_AC001	15	20	5m @ 0.61
	18_AC002	35	37	2m @ 3.45
	18_AC003	10	30	20m @ 1.63
	Incl.	10	15	5m @ 4.66
	18_AC066	25	30	5m @ 0.53
Redcliffe South	18_AC073	60	65	5m @ 1.15
	18_AC074	25	30	5m @ 1.21
Mesa West	18_AC079	50	54	4m @ 0.54
Infinity	18RAC114	30	35	5m @ 0.57
	18RAC118	75	80	5m @ 0.91
	18RAC119	25	45	20m @ 0.82
	Incl.	25	30	5m @ 1.32
	And	40	45	5m @ 1.38
	18RAC141	55	57	2m @ 0.87
	18RAC176	40	47	7m @ 4.71
Hub	Incl.	45	47	2m @ 8.68
	18RAC177	25	35	10m @ 2.7
	Incl.	30	35	5m @ 4.42
	18RAC185	25	30	5m @ 1.05
	18RAC185	40	45	5m @ 0.95
	18RAC193	25	30	5m @ 0.82
	18RAC239	90	95	5m @ 1.95
Triple 2 Nth	18RAC241	90	95	5m @ 0.54
	18RAC245	25	35	10m @ 1.14
Hub	Inc	25	30	5m @ 1.96
	18RAC249	65	67	2m @ 2.5
	18RAC255	20	30	10m @ 0.28
	18RAC261	50	55	10m @ 0.91
Bindy Nth	Inc.	55	60	5m @ 1.57
		65	75	10m @ 0.56
	18RAC267	70	75	5m @ 0.54
Aliso	18RAC269	60	65	5m @ 1.22
	18RAC273	90	95	5m @ 1.12
	18RAC275	60	65	5m @ 3.56
	18RAC291	50	60	10m @ 3.21
	Inc.	55	60	5m @ 5.12

1: 5m composite assays. Calculated at +0.1 g/t Au, one sample maximum internal dilution. EOH = End of Hole

Appendix 2

2018 Aircore Drillholes

HOLE	TYPE	DEPTH (M)	EASTING	NORTHING	HOLE	TYPE	DEPTH (M)	EASTING	NORTHING
18RAC001	AC	37	358168	6855885	18RAC044	AC	13	358493	6854615
18RAC002	AC	37	358191	6855888	18RAC045	AC	27	358502	6854616
18RAC003	AC	33	358210	6855892	18RAC046	AC	41	358513	6854621
18RAC004	AC	25	358230	6855901	18RAC047	AC	74	358531	6854623
18RAC005	AC	24	358246	6855905	18RAC048	AC	21	358566	6854641
18RAC006	AC	18	358260	6855905	18RAC049	AC	21	358579	6854645
18RAC007	AC	23	358275	6855913	18RAC050	AC	63	358586	6854652
18RAC008	AC	27	358290	6855917	18RAC051	AC	54	358614	6854660
18RAC009	AC	31	358307	6855923	18RAC052	AC	66	358642	6854678
18RAC010	AC	42	358326	6855921	18RAC053	AC	66	358667	6854682
18RAC011	AC	52	358347	6855925	18RAC054	AC	36	358703	6854702
18RAC012	AC	64	358370	6855938	18RAC055	AC	69	358724	6854713
18RAC013	AC	49	358387	6855958	18RAC056	AC	47	358752	6854733
18RAC014	AC	41	358418	6855957	18RAC057	AC	45	358774	6854733
18RAC015	AC	91	358349	6854899	18RAC058	AC	36	358789	6854752
18RAC016	AC	17	358385	6854904	18RAC059	AC	28	358811	6854757
18RAC017	AC	74	358397	6854920	18RAC060	AC	31	358823	6854763
18RAC018	AC	68	358431	6854932	18RAC061	AC	35	358836	6854770
18RAC019	AC	48	358465	6854947	18RAC062	AC	6	358853	6854765
18RAC020	AC	53	358482	6854971	18RAC063	AC	43	358868	6854775
18RAC021	AC	76	358523	6854946	18RAC064	AC	79	358715	6854369
18RAC022	AC	57	358734	6854929	18RAC065	AC	61	358747	6854385
18RAC023	AC	29	358750	6854941	18RAC066	AC	89	358774	6854398
18RAC024	AC	24	358764	6854951	18RAC067	AC	56	358818	6854410
18RAC025	AC	29	358776	6854957	18RAC068	AC	65	358844	6854419
18RAC026	AC	27	358796	6854959	18RAC069	AC	50	358870	6854430
18RAC027	AC	29	358814	6854969	18RAC070	AC	59	358893	6854450
18RAC028	AC	31	358828	6854973	18RAC071	AC	40	358920	6854457
18RAC029	AC	35	358841	6854981	18RAC072	AC	60	358548	6854262
18RAC030	AC	54	358855	6854993	18RAC073	AC	70	358574	6854274
18RAC031	AC	45	358887	6855002	18RAC074	AC	108	358608	6854288
18RAC032	AC	42	358907	6855014	18RAC075	AC	76	358662	6854298
18RAC033	AC	46	358934	6855023	18RAC076	AC	44	358184	6853122
18RAC034	AC	62	358535	6854951	18RAC077	AC	34	358209	6853132
18RAC035	AC	45	358388	6854752	18RAC078	AC	36	358231	6853133
18RAC036	AC	75	358409	6854771	18RAC079	AC	54	358240	6853141
18RAC037	AC	33	358437	6854791	18RAC080	AC	51	358267	6853160
18RAC038	AC	25	358455	6854792	18RAC081	AC	25	358292	6853170
18RAC039	AC	58	358470	6854797	18RAC082	AC	33	358312	6853175
18RAC040	AC	35	358493	6854800	18RAC083	AC	56	358324	6853182
18RAC041	AC	26	358513	6854805	18RAC084	AC	54	358349	6853188
18RAC042	AC	19	358522	6854813	18RAC085	AC	46	358297	6852980
18RAC043	AC	33	358477	6854601	18RAC086	AC	24	358245	6852875

Appendix 2

2018 Aircore Drillholes

HOLE	TYPE	DEPTH (M)	EASTING	NORTHING	HOLE	TYPE	DEPTH (M)	EASTING	NORTHING
18RAC087	AC	31	358249	6852877	18RAC130	AC	36	359723	6851568
18RAC088	AC	19	358260	6852886	18RAC131	AC	42	359704	6851573
18RAC089	AC	30	358271	6852892	18RAC132	AC	45	359688	6851565
18RAC090	AC	38	358279	6852900	18RAC133	AC	31	359664	6851567
18RAC091	AC	44	358303	6852903	18RAC134	AC	24	359646	6851565
18RAC092	AC	47	358330	6852912	18RAC135	AC	30	359624	6851565
18RAC093	AC	12	358352	6852919	18RAC136	AC	98	359598	6851567
18RAC094	AC	23	358359	6852920	18RAC137	AC	88	359561	6851570
18RAC095	AC	32	358368	6852922	18RAC138	AC	51	359525	6851562
18RAC096	AC	7	358386	6852927	18RAC139	AC	131	359490	6851574
18RAC097	AC	15	358390	6852928	18RAC140	AC	64	359424	6851560
18RAC098	AC	12	358398	6852932	18RAC141	AC	57	359387	6851563
18RAC099	AC	37	358403	6852934	18RAC142	AC	93	359345	6851565
18RAC100	AC	22	358420	6852940	18RAC143	AC	120	359274	6851583
18RAC101	AC	46	358432	6852945	18RAC144	AC	45	359209	6851542
18RAC102	AC	46	358454	6852965	18RAC145	AC	85	359188	6851543
18RAC103	AC	50	358478	6852971	18RAC146	AC	89	359136	6851538
18RAC104	AC	39	358500	6852979	18RAC147	AC	66	359078	6851545
18RAC105	AC	32	358524	6852979	18RAC148	AC	41	359050	6851551
18RAC106	AC	33	358536	6852984	18RAC149	AC	32	359026	6851551
18RAC107	AC	38	358555	6852992	18RAC150	AC	70	359008	6851551
18RAC108	AC	32	358571	6853011	18RAC151	AC	106	358978	6851553
18RAC109	AC	50	358589	6853016	18RAC152	AC	76	358917	6851545
18RAC110	AC	52	358629	6853028	18RAC153	AC	90	358889	6851549
18RAC111	AC	42	358906	6852743	18RAC154	AC	68	358845	6851547
18RAC112	AC	38	358923	6852749	18RAC155	AC	50	358808	6851547
18RAC113	AC	37	358939	6852749	18RAC156	AC	32	358785	6851546
18RAC114	AC	70	358958	6852752	18RAC157	AC	38	358768	6851546
18RAC115	AC	98	358987	6852774	18RAC158	AC	36	358748	6851546
18RAC116	AC	90	359028	6852802	18RAC159	AC	33	358734	6851549
18RAC117	AC	104	359069	6852824	18RAC160	AC	31	358710	6851541
18RAC118	AC	95	358900	6852407	18RAC161	AC	33	358696	6851534
18RAC119	AC	65	358939	6852416	18RAC162	AC	36	358679	6851548
18RAC120	AC	107	358970	6852423	18RAC163	AC	24	358657	6851543
18RAC121	AC	99	359018	6852436	18RAC164	AC	31	358653	6851547
18RAC122	AC	86	359067	6852456	18RAC165	AC	42	358633	6851541
18RAC123	AC	111	359110	6852469	18RAC166	AC	27	358612	6851545
18RAC124	AC	117	359158	6852496	18RAC167	AC	24	358595	6851539
18RAC125	AC	104	359212	6852518	18RAC168	AC	10	358582	6851541
18RAC126	AC	19	359777	6851569	18RAC169	AC	8	358576	6851540
18RAC127	AC	11	359765	6851571	18RAC170	AC	6	358539	6851539
18RAC128	AC	26	359759	6851569	18RAC171	AC	4	358511	6851542
18RAC129	AC	41	359747	6851566	18RAC172	AC	3	358472	6851545

Appendix 2

2018 Aircore Drillholes

HOLE	TYPE	DEPTH (M)	EASTING	NORTHING	HOLE	TYPE	DEPTH (M)	EASTING	NORTHING
18RAC173	AC	18	358436	6851551	18_RAC216	AC	20	359326	6847407
18RAC174	AC	9	358428	6851549	18_RAC217	AC	24	359311	6847406
18RAC175	AC	9	358405	6851543	18_RAC218	AC	53	359297	6847405
18RAC176	AC	47	359352	6850676	18_RAC219	AC	61	359267	6847411
18RAC177	AC	84	359335	6850678	18_RAC220	AC	58	359236	6847409
18RAC178	AC	74	359302	6850674	18_RAC221	AC	54	359210	6847412
18RAC179	AC	38	359258	6850671	18_RAC222	AC	33	359181	6847422
18RAC180	AC	69	359245	6850669	18_RAC223	AC	44	359166	6847421
18RAC181	AC	95	359206	6850673	18_RAC224	AC	31	359145	6847416
18RAC182	AC	101	359165	6850672	18_RAC225	AC	70	359127	6847413
18RAC183	AC	103	359123	6850660	18_RAC226	AC	90	359093	6847415
18RAC184	AC	82	359058	6850662	18_RAC227	AC	59	359042	6847419
18RAC185	AC	139	359378	6850475	18_RAC228	AC	144	359010	6847420
18_RAC186	AC	93	359310	6850479	18_RAC229	AC	144	358720	6846916
18_RAC187	AC	57	359287	6850430	18_RAC230	AC	150	358668	6846916
18_RAC188	AC	97	359241	6850474	18_RAC231	AC	150	358609	6846917
18_RAC189	AC	126	359191	6850474	18_RAC232	AC	102	358546	6846912
18_RAC190	AC	108	359127	6850475	18_RAC233	AC	150	358696	6846665
18_RAC191	AC	87	359073	6850472	18_RAC234	AC	116	358648	6846668
18_RAC192	AC	73	359096	6850376	18_RAC235	AC	108	358614	6846658
18_RAC193	AC	68	359063	6850373	18_RAC236	AC	114	358569	6846668
18_RAC194	AC	30	359504	6847670	18_RAC237	AC	102	358508	6846666
18_RAC195	AC	53	359490	6847669	18_RAC238	AC	132	358572	6846417
18_RAC196	AC	20	359461	6847668	18_RAC239	AC	120	358522	6846415
18_RAC197	AC	65	359445	6847670	18_RAC240	AC	117	358465	6846413
18_RAC198	AC	54	359419	6847670	18_RAC241	AC	107	358425	6846414
18_RAC199	AC	58	359385	6847682	18_RAC242	AC	67	358392	6846417
18_RAC200	AC	31	359364	6847668	18_RAC243	AC	115	359397	6850457
18_RAC201	AC	35	359346	6847668	18_RAC244	AC	74	359387	6850569
18_RAC202	AC	43	359330	6847669	18_RAC245	AC	126	359351	6850563
18_RAC203	AC	20	359306	6847676	18_RAC246	AC	112	359309	6850564
18_RAC204	AC	19	359293	6847669	18_RAC247	AC	117	359273	6850562
18_RAC205	AC	31	359284	6847668	18_RAC248	AC	123	359361	6850471
18_RAC206	AC	24	359268	6847668	18_RAC249	AC	67	359375	6850672
18_RAC207	AC	53	359255	6847670	18_RAC250	AC	62	359435	6850775
18_RAC208	AC	26	359233	6847666	18_RAC251	AC	66	359411	6850785
18_RAC209	AC	54	359210	6847667	18_RAC252	AC	63	359365	6850792
18_RAC210	AC	57	359186	6847666	18_RAC253	AC	56	359356	6850786
18_RAC211	AC	68	359154	6847666	18_RAC254	AC	63	359321	6850783
18_RAC212	AC	87	359118	6847664	18_RAC255	AC	87	359297	6850789
18_RAC213	AC	83	359071	6847664	18_RAC256	AC	96	359254	6850801
18_RAC214	AC	35	359359	6847404	18_RAC257	AC	129	358163	6844535
18_RAC215	AC	39	359344	6847405	18_RAC258	AC	120	358119	6844536

Appendix 2

2018 Aircore Drillholes

HOLE	TYPE	DEPTH (M)	EASTING	NORTHING
18_RAC259	AC	112	358087	6844537
18_RAC260	AC	96	358032	6844541
18_RAC261	AC	99	357988	6844516
18_RAC262	AC	84	357960	6844530
18_RAC263	AC	118	358166	6844664
18_RAC264	AC	96	357932	6844522
18_RAC265	AC	85	358474	6865850
18_RAC266	AC	105	358438	6865850
18_RAC267	AC	105	358395	6865850
18_RAC268	AC	105	358353	6865848
18_RAC269	AC	81	358310	6865849
18_RAC270	AC	81	358276	6865847
18_RAC271	AC	49	358489	6865731
18_RAC272	AC	99	358465	6865740
18_RAC273	AC	105	358432	6865741
18_RAC274	AC	84	358389	6865744
18_RAC275	AC	86	358350	6865749
18_RAC276	AC	99	358315	6865748
18_RAC277	AC	82	358464	6865943
18_RAC278	AC	87	358433	6865939
18_RAC279	AC	77	358392	6865949
18_RAC280	AC	99	358353	6865947
18_RAC281	AC	78	358305	6865946
18_RAC282	AC	42	356653	6860454
18_RAC283	AC	31	356752	6860447
18_RAC284	AC	25	356860	6860448
18_RAC285	AC	30	356951	6860442
18_RAC286	AC	33	357052	6860445
18_RAC287	AC	36	357149	6860448
18_RAC288	AC	40	357256	6860452
18_RAC289	AC	84	359450	6850616
18_RAC290	AC	103	359421	6850608
18_RAC291	AC	92	359375	6850622
18_RAC292	AC	90	359334	6850626
18_RAC293	AC	103	359287	6850626
18_RAC294	AC	109	359244	6850636
18_RAC295	AC	67	359375	6850725
18_RAC296	AC	57	359343	6850724
18_RAC297	AC	40	359315	6850724
18_RAC298	AC	66	359284	6850728
18_RAC299	AC	43	359247	6850721
18_RAC300	AC	37	359224	6850714
18_RAC301	AC	129	359196	6850719

JORC Code, 2012 Edition – Table 1 Report – Aircore Drilling

Section 1 - Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</p> <p>Include reference to measures taken to ensure sample representation and the appropriate calibration of any measurement tools or systems used.</p> <p>Aspects of the determination of mineralisation that are Material to the Public Report.</p> <p>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</p>	<p>The sampling has been carried out using Aircore drilling (AC) . A total of 301 holes (18RAC01-301) were drilled in the reported program for a total of ~18,000m of AC at depths ranging from of 3 to 150m. Holes were drilled at - 60 degrees at approximately 067° (Redcliffe) or to 270° (Other areas). Sample quality was high with only minimal sample loss around the annulus in the top 53m of each hole. Some samples were damp to wet as noted but overall dry sample was produced to the depths drilled</p> <p>The drill holes were located by handheld GPS. Sampling was carried out under Company protocols and QAQC procedures as per current industry practice. See further details below.</p> <p>AC holes were drilled with a 3.5-inch face-sampling bit, 1m samples collected through a cyclone into buckets and placed on the ground as 1m samples, generally in rows of 10. Samples are collected with a scoop to generate 5m composite samples, or variable samples at EOH. The 2-3 kg composite samples were dispatched to SGS in Kalgoorlie. These samples were sorted and dried by the assay laboratory, pulverised to form a 30gm charge for Fire Assay/AAS.</p>
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Inclined aircore drilling was completed by Ausdrill based in Kalgoorlie.
Drill sample recovery	<p>Method of recording and assessing core and chip sample recoveries and results assessed.</p> <p>Measures taken to maximise sample recovery and ensure representative nature of the samples.</p> <p>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</p>	<p>The majority of samples were dry. Ground water was encountered in some holes. Sample recoveries were visually estimated and any low recoveries recorded in the drill logs. Sample quality was noted on the drill logs.</p> <p>Drill cyclone and sample buckets were cleaned between rod changes and after each hole to minimize contamination.</p> <p>There is no observed relationship between recovery and grade in the AC drilling.</p>
Logging	<p>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p> <p>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</p> <p>The total length and percentage of the relevant intersections logged.</p>	<p>All holes were geologically logged by NTM geologists, using the Companies logging scheme.</p> <p>Logging of AC samples records lithology, mineralogy, mineralisation, weathering, colour and other features of the samples. All samples are wet-sieved and EOH samples stored in chip trays. These trays were stored off site for future reference.</p> <p>All holes were logged in full.</p>

JORC Code, 2012 Edition – Table 1 Report – Aircore Drilling

Section 1 - Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	N/A.
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	AC composite samples, 1m individual samples and EOH samples were collected using a scoop. Samples are recorded as dry, wet or damp. Results from the composite samples are used to identify which single meter samples will be submitted to laboratory. Composite samples are not used in resources calculations.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Samples were prepared at the SGS Laboratory in Kalgoorlie. Samples were dried, and the whole sample pulverised to 90% passing 75µm, and a reference sub-sample of approximately. 200g retained. A nominal 30g was used for the analysis (FA/AAS). The procedure is industry standard for this type of sample.
	Quality control procedures adopted for all sub-sampling stages to maximise representation of samples.	AC samples are collected at 1 m intervals and composited into 5 m samples using a scoop to sample individual metre samples. Certified Reference Materials (CRM's) and/or blanks are analysed with each batch of samples. These quality control results are reported along with the sample values in the final report. Selected samples are also re-analysed to confirm anomalous results.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.	Compositing of samples involves collection of representative scoops from within the single sample meter pile. Samples weigh 2-3kg prior to pulverisation. Sample sizes are considered appropriate to give an indication of mineralisation given the particle sizes and the practical requirement to maintain manageable sample weights.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Samples were analysed for Au to ppm levels via a 30-40gm fire assay / AAS finish which gives total digestion and is appropriate for high-level samples.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	No geophysical tools were used in this program. For 5m composite AC sampling, Field Standards (Certified Reference Materials) and Blanks are inserted regularly within the sample sequence. At the Assay Laboratory additional Repeats, Lab Standards, Checks and Blanks are analysed concurrently with the field samples. Results of the field and Lab QAQC samples were checked on assay receipt. All assays met QAQC protocols, showing no levels of contamination or sample bias. Analysis of field duplicate assay data suggests expected levels of sampling precision, with less than 10% pair difference.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes.	Significant results were checked by the MD and Exploration Manager. Twin holes were not employed during this part of the program.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	All field logging was carried out on hardcopy geological log sheet. Data is entered electronically at the Leonora Field office. Assay files are received electronically from the Laboratory. All data is stored in a Company database system, and maintained by the Database Manager.
	Discuss any adjustment to assay data.	No assay data was adjusted. The lab's primary Au field is the one used for analysis purposes. No averaging is employed.

JORC Code, 2012 Edition – Table 1 Report – Aircore Drilling

Section 1 - Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	RC locations were determined by hand-held GPS. The drill rig mast is set up using a clinometer and rig is orientated using hand held compass.
	Specification of the grid system used.	Grid projection is GDA94, Zone 51.
	Quality and adequacy of topographic control.	Relative Levels are allocated to the drill hole collars using current Digital Terrain Model's for the area. The accuracy of the DTM is estimated to be better than 5m.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	AC drilling was designed to intersect modelled oxide mineralisation within the known mineralized structures along the Mertondale Shear Zone One sample was collected for every 5 metres (maximum) drilled and selected samples submitted for assay.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	The drilling is part of a first pass wide spaced regional exploration programme, and is not suitable for Resource estimation purposes.
	Whether sample compositing has been applied.	No compositing has been employed in the reported results.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	The orientation of the drill hole (azimuth) is approximately perpendicular to the strike of the targeted mineralisation.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	The drill orientation is estimated to be approximately perpendicular to the main mineralised trend. It is unclear at present whether cross structures are mineralised, however it is considered unlikely that any sampling bias has been introduced.
Sample security	The measures taken to ensure sample security.	Composite samples were submitted in pre -numbered plastic bags (five calico bags per single plastic bag), sealed and transported to the Bureau Veritas Laboratory in Kalgoorlie for assaying.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Sampling and assaying techniques are industry-standard. No specific audits or reviews have been undertaken at this stage in the program.

JORC Code, 2012 Edition – Table 1 Report – Aircore Drilling

Section 2 – Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	<p>The AC drilling occurred within tenements M37/1286, M37/1295 & E37/1205 which are held 100% by NTM GOLD Pty Ltd. The Project is located 45km NE of Leonora in the Eastern Goldfields of Western Australia.</p> <p>The tenement subject to this report is in good standing with the Western Australian Department of Mines & Petroleum.</p>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Previous exploration has been completed on this prospect by Ashton Gold, Dominion and CRAE in the 1990's. This work broadly outlined mineralised trends in some areas of the Mertondale Shear Zone to shallow depths resulting in the open pit mining of the Redcliffe and Mesa pits. Where relevant, assay data from this earlier exploration has been incorporated into Company databases.
Geology	Deposit type, geological setting and style of mineralisation.	The gold mineralisation is hosted largely within Archaean-aged felsic, sediment (inc. black shale) and minor mafic rocks. A schistose fabric is observable in the lithologies. Gold mineralisation occurs in sub-vertical to steep dipping zones associated with quartz-carbonate-sulphide-mica veins and alteration. Alteration intensity and quartz- sulphide (pyrite) abundance are controls to mineralisation in the primary zone. Depth of oxidation varies from very shallow depths (<20m) away from sheared or mineralised zones to greater than 90m within sheared or mineralised zones.
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	Refer to table in the body of text.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>Grades are reported as down-hole length-weighted averages of grades. No top cuts have been applied to the reporting of the assay results.</p> <p>All higher-grade intervals are included in the reported grade intervals.</p> <p>No metal equivalent values are used.</p>

JORC Code, 2012 Edition – Table 1 Report – Aircore Drilling

Section 2 – Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p> <p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</p>	<p>Due to the wide spacing of the AC drilling, the geometry of the mineralization is not known, but inferred to be broadly similar to known mineralized zones within the Mertondale Shear Zone further south. The geometry of the mineralisation at depth is interpreted to vary from steeply west dipping to sub-vertical. (80 to 90 degrees). All assay results are based on down-hole lengths, and true width of mineralisation is not known.</p>
Diagrams	<p>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	<p>Refer to Figure in the body of text.</p>
Balanced reporting	<p>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</p>	<p>Refer to results reported in body of text and summary statistics for the elements reported. All samples over 0.1 g/t Au are reported.</p>
Other substantive exploration data	<p>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</p>	<p>Refer to body of text and this appendix.</p>
Further work	<p>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</p> <p>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</p>	<p>Further drill testing is planned, as described in this announcement. Location of drilling is still to be determined.</p>