ASX ANNOUNCEMENT

10 September 2019

CUE COPPER PROJECT PHASE 1 DRILLING PROGRAMME UPDATE

Highlights

- Phase 1 Hollandaire drilling Programme has been completed with 4,038 metres of Reverse Circulation drilling
- Hollandaire metallurgical drilling is progressing with Phase 1 diamond drilling programme increased to over 600 meters
- Reverse Circulation drilling assay results expected by October 2019

Cyprium Metals Limited ("CYM" or "the Company") is pleased to announce the completion of the Phase 1 Reverse Circulation extensional drilling programme totalling 4,038 metres at Hollandaire and Hollandaire West at the Cue Copper Project.

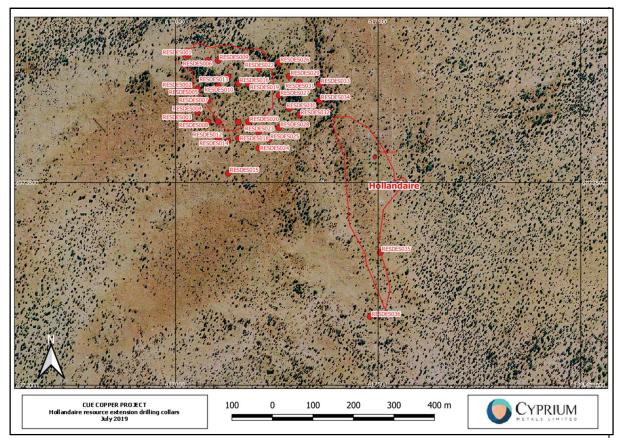


Figure 1 | Hollandaire Phase 1 Extensional Drill Hole Locations



The majority of the Phase 1 Hollandaire drilling programme has been focused on the Hollandaire West copper mineralisation to test for shallow extensions. The locations of the drill hole collars at the Hollandaire and Hollandaire West copper mineralisation are shown in Figure 1. The red outline is the current mineralisation outline projected to the surface against drill-hole collars for extensional drilling.

Several drill holes in this initial programme are being used for down-hole geophysics, to further assist in the planning of the subsequent phases of extensional drilling to expand the copper mineralisation, which remains open to the south, west and at depth.



Image 1 | Hollandaire Diamond Drilling

Diamond drilling to obtain metallurgical test samples has commenced at the project (refer to Image 1 and detailed in the collars table in Appendix 1 and Figure 2).



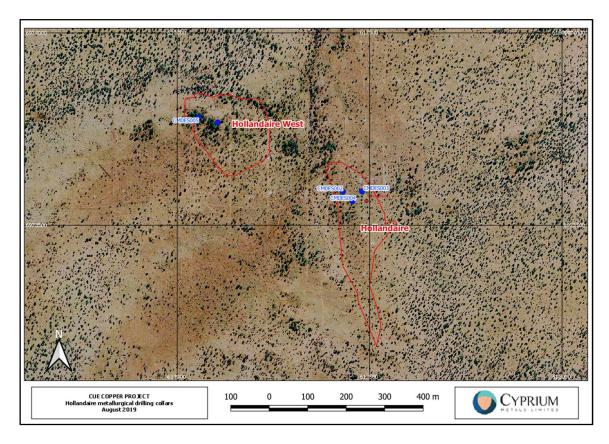


Figure 2 | Hollandaire Metallurgical Drill Hole Locations

The samples obtained from the diamond drilling will be used for initial column test-work to determine the optimal extraction method for copper mineralisation at the project. The mineralised intersections and samples returned to date are consistent with the drill programme designs.

Diamond drilling metallurgical core samples



Image 2 | Hollandaire Diamond Drill Core





Image 3 | Hollandaire Diamond Drill Core



Image 4 | Hollandaire Diamond Drill Core

The diamond drill core in Images 2 and 3 show consecutive drill core trays in 19HOMET003 from 86.5m to 93.1m depth below the surface.

The drill core in image 2 contains quartz veins with massive chalcocite and garnets, occurring with bands of massive pyrite, chalcocite and chalcopyrite.

Image 3 shows drill core containing massive chalcocite in a quartz vein, garnets in foliated quartz and a section of massive pyrite, chalcocite and chalcopyrite.

Image 4 is a detail view of the drill core from 90.5m to 90.8m and 91.4m to 91.7m showing the garnet foliated quartz and massive pyrite, chalcocite and chalcopyrite.



The diamond drill core samples are fit for their designed purpose of metallurgical test-work with results expected in early 2020.

We look forward to updating the market with assay and metallurgical results as they become available.

For further information:

Barry Cahill Executive Director

Wayne Apted Chief Financial Officer and Company Secretary

T +61 8 6169 3050
E info@cypriummetals.com

Competent Persons

The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources and/or Mineral Reserves is an accurate representation of the available data and is based on information compiled by Mr Peter van Luyt who is a member of the Australian Institute of Geoscientists. Mr Peter van Luyt is the Chief Geologist of Cyprium Australia Pty Ltd, in which he is also a shareholder. Mr van Luyt has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person (CP). Mr van Luyt consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.



Appendix 1: Cue Copper Project drillhole collar table

			М	GA 94 Zor	ne 50			
Hole ID	Hole Type	East	North	RL m	Dip°	Azimuth °	Depth	Comments
19HORC001	RC	617506	6973331	479	-60	000	249	
19HORC002	RC	617478	6973168	479	-60	000	320	
19HORC003	RC	617128	6973523	478	-60	000	50	Hole terminated due to lost rod string. Redrilled as 3A
19HORC03A	RC	617131	6973526	478	-60	000	211	Redrill of 19HORC003
19HORC004	RC	617153	6973610	476	-60	000	170	
19HORC005	RC	617152	6973650	476	-60	000	150	
19HORC006	RC	617156	6973743	475	-60	000	121	
19HORC007	RC	617129	6973760	476	-60	000	131	
19HORC008	RC	617130	6973603	477	-60	000	156	
19HORC009	RC	617104	6973611	477	-60	000	161	
19HORC010	RC	617102	6973650	477	-60	000	146	
19HORC11A	RC	617103	6973739	476	-60	000	31	Redrill of 19HORC011
19HORC011	RC	617104	6973737	476	-60	000	106	Hole terminated due to excessive deviation
19HORC012	RC	617103	6973800	476	-60	000	91	
19HORC013	RC	617077	6973802	476	-60	000	91	
19HORC014	RC	617080	6973704	477	-60	000	126	
19HORC015	RC	617079	6973650	477	-60	000	166	
19HORC016	RC	617052	6973731	477	-60	000	126	
19HORC017	RC	617055	6973673	477	-60	000	151	
19HORC018	RC	617030	6973733	477	-60	000	136	
19HORC019	RC	617179	6973744	475	-60	000	111	
19HORC020	RC	617180	6973650	476	-60	000	141	
19HORC021	RC	617173	6973611	476	-60	000	151	
19HORC022	RC	617207	6973780	474	-60	000	86	
19HORC023	RC	617202	6973624	476	-60	000	141	
19HORC024	RC	617253	6973714	474	-60	000	96	
19HORC025	RC	617252	6973635	475	-60	000	136	
19HORC026	RC	617300	6973748	474	-60	000	66	
19HORC027	RC	617303	6973669	474	-60	000	101	
19HORC028	RC	617153	6973693	476	-60	000	120	Twinned 13HORC085
19HOMET001	DD	617480	6973587	476	-90	-	100	
19HOMET002	DD	617430	6973587	476	-90	-	122	
19HOMET003	DD	617480	6973587	476	-90	-	100.7	

JORC Code, 2012 Edition – Table 1 report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (eg cut	Hollandaire Prospect
	channels, random chips, or specific specialised industry standard measurement	Cyprium Metals RC Drilling
	tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	Reverse Circulation (RC) percussion drilling was used to obtain 1m bulk and reference samples from a rig mounted cyclone and static cone splitter. The cyclone and splitter were cleaned at each 6m rod change and between each drill hole. Bulk samples were chosen for assay analysis on the basis of visible mineralisation and alteration in sieved RC chips. The bulk sample was then subsampled to 2-3 kg by PVC spear and submitted to Bureau Veritas Laboratories Canning Vale WA for assay analysis. 3kg reference samples have been retained and stored by Cyprium Metals at their field facility at Nallan Station, via Cue.
		Cyprium Metals Diamond Drilling
		Mineralised diamond core has been logged, photographed and submitted whole to the ALS metallurgical laboratory in Balcatta WA for metallurgical analysis. Unmineralised material has been retained and stored by Cyprium Metals at their field facility at Nallan Station, via Cue.
	Include reference to measures taken to	Hollandaire Prospect
	ensure sample representivity and the	Cyprium Metals RC and Diamond Drilling
	appropriate calibration of any measurement tools or systems used.	Sample representivity has been ensured by following company quality control (QC) sampling procedures. Quality Assurance has been addressed by inserting certified standards and blanks (CRMs) into the submitted assay batches. Excessive variance or inaccuracy of the CRMs will be investigated by Cyprium Metals staff for causes and corrective actions if required.
	Aspects of the determination of mineralisation that are Material to the Public Report.	Hollandaire Prospect
		Cyprium Metals RC Drilling
		Drill sampling techniques are considered to be industry standard for the Cyprium work programme. 3kg RC samples have been submitted to Bureau Veritas Canning Vale WA for gold and base metal analysis. Samples will be crushed and pulverised then 40g subsampled and fire assayed with AAS finish (FA001) for gold, mixed acid digest (MA200) with ICP-AES finish (MA201) for Cu, Pb, Zn and S and ICP-MS finish (MA202) for silver.



JORC Code explanation	Commentary
	Cyprium Metals Diamond Drilling Whole core diamond drilling samples have been submitted to ALS Balcatta WA for metallurgical analysis. The programme of works for this material was being designed at the time of this announcement and will be the subject of a future announcement by Cyprium Metals.
In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	
Drill type (eg core, reverse circulation, open-	Hollandaire Prospect
Bangka, sonic, etc) and details (eg core	Cyprium Metals RC Drilling
	RC drilling has been completed at Hollandaire by Challenge Drilling Pty Ltd using a KWL 350 drill rig. The drill rig has an onboard 350/1,100 compressor and an Atlas Copco 1,000 cfm auxiliary compressor. 4" RC drill rods were with 5.75" face sampling drill bits. Downhole surveys were completed at with a north seeking gyroscopic tool, not subject to downhole magnetic interference.
	Cyprium Metals Diamond Drilling
	Diamond drilling for metallurgical samples was completed by Westralian Diamond Drillers Pty Ltd using a KL900 drill rig. HQ drill rods and bits were used to obtain 63.5mm diameter core for use in the first phase of Hollandaire metallurgical testing. Drillholes were vertical and not oriented. Downhole surveys were completed at with a north seeking gyroscopic tool, not subject to downhole magnetic interference.
Method of recording and assessing core and	Hollandaire Prospect
chip sample recoveries and results assessed.	Cyprium Metals RC Drilling
	No problems regarding RC sample recovery were noted during the programme. Booster air pressure was used to keep samples dry below the water table which varied from 40 to 50m below the ground surface. RC sample recovery was visually checked during drilling for moisture or contamination and none was noted.
	In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. Drill type (eg core, reverse circulation, openhole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). Method of recording and assessing core and chip sample recoveries and results



Criteria	JORC Code explanation	Commentary
		Cyprium Metals Diamond Drilling
		Core recoveries detailed in the geotechnical logging of the drillholes in the mineralised zones of each diamond metallurgical sample hole were as follows;
		19HOMET001, 98.2%19HOMET002, 97.1%19HOMET003, 95.2%.
		The geotechnical logs include measuring recovered core against the drillers core block measurements to calculate the core recovered percentages.
	Measures taken to maximise sample	Hollandaire Prospect
	recovery and ensure representative nature of the samples.	Cyprium Metals RC Drilling
		The RC bulk samples are collected from the drill rig splitter 90% section in a 25l bucket and placed on the ground in rows of 10 for logging and if required sampling. The 3 to 5kg reference sample is collected directly from the drill rig cone splitter 10% section in a calico bag. No low sample return was observed by Cyprium geologists during the Hollandaire drilling campaign.
		The drill cyclone/splitter and sample buckets are cleaned between rod changes and after each drill hole has been completed to minimise down-hole and cross-hole contamination.
		Cyprium Metals Diamond Drilling
		Diamond core was checked for recovery and depth, noted inconsistencies were reconciled against the core blocks and/or driller's run sheets if required.
	Whether a relationship exists between	Hollandaire Prospect
	sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Cyprium Metals RC Drilling
		Given the noted good sample recovery it is not believed that preferential loss/gain of material is occurring in the samples however it is proposed to twin three to four RC drillholes with Diamond core holes to investigate any potential sample bias in the RC samples.
		Cyprium Metals Diamond Drilling
		Not relevant to diamond core samples in competent ground.
Logging	Whether core and chip samples have been	Hollandaire Prospect
	geologically and geotechnically logged to a level of detail to support appropriate Mineral	Cyprium Metals RC and Diamond Drilling
	Resource estimation, mining studies and metallurgical studies.	Logging to industry standards for resource, mining and metallurgical studies has been completed for lithology, mineralisation,



Criteria	JORC Code explanation	Commentary
		alteration, veining and weathering. Geotechnical logging has also been completed for the Diamond drilled metallurgical sample holes.
	Whether logging is qualitative or quantitative	Hollandaire Prospect
	in nature. Core (or costean, channel, etc) photography.	Cyprium Metals RC Drilling
	photography.	Qualitative lithology, mineralisation, alteration, veining and weathering logging has been completed. Chip trays with 1m representative samples have been collected, photographed and stored for future reference.
		Cyprium Metals Diamond Drilling
		Qualitative lithology, mineralisation, alteration, veining and weathering logging has been completed.
		Quantitative/qualitative geotechnical logging of metallurgical sample diamond core has been completed. All drillhole core has been photographed, non-mineralised zones have been retained at the Cyprium field facility for future reference.
	The total length and percentage of the relevant intersections logged.	Hollandaire Prospect
		Cyprium Metals RC Drilling
		All RC chip samples have been logged to 1m intervals by Cyprium geologists into excel spreadsheets or Ocris logging software.
		Cyprium Metals Diamond Drilling
		All diamond core has been logged in detail by Cyprium geologists at the Nallan Station field facility into excel spreadsheets or Ocris logging software.
Sub-sampling	If core, whether cut or sawn and whether	Hollandaire Prospect
techniques and sample preparation	quarter, half or all core taken.	Cyprium Metals Diamond Drilling
Campio proparation		Whole core of mineralised sections despatched to ALS Balcatta for metallurgical test-work.
	If non-core, whether riffled, tube sampled,	Hollandaire Prospect
	rotary split, etc and whether sampled wet or dry.	Cyprium Metals RC Drilling
		Dry or wet samples were split by the drill rigs' static cone splitter. Of the 4,038 samples taken 2 were noted to be wet, both in the mineralised zone of 19HORC003.
	For all sample types, the nature, quality and	Hollandaire Prospect
	appropriateness of the sample preparation technique.	Cyprium Metals RC Drilling
		Standard sampling procedures were followed to ensure sampling adequacy and consistency.



Criteria	JORC Code explanation	Commentary
	Quality control procedures adopted for all	Hollandaire Prospect
	sub-sampling stages to maximise representivity of samples.	Cyprium Metals RC and Diamond Drilling
	representivity of samples.	Certified Reference Materials and blanks are submitted with the samples to the laboratory and analysed for their performance. Cyprium undertakes remedial action including reassaying samples if required.
	Measures taken to ensure that the sampling	Hollandaire Prospect
	is representative of the in situ material collected, including for instance results for	Cyprium Metals RC Drilling
	field duplicate/second-half sampling.	Field duplicate sampling of the first RC programme is in progress.
	Whether sample sizes are appropriate to the	Hollandaire Prospect
	grain size of the material being sampled.	Cyprium Metals RC and Diamond Drilling
		The sample sizes are industry standard and considered by Cyprium to be appropriate to sample the Hollandaire mineralisation.
Quality of assay data	The nature, quality and appropriateness of	Hollandaire Prospect
and laboratory tests	the assaying and laboratory procedures used and whether the technique is	Cyprium Metals RC and Diamond Drilling
	considered partial or total.	The core and 1m RC samples will be analysed by mixed acid digest with ICP-AES finish for Cu, Pb, Zn and S and ICP-MS finish for silver which is an industry standard total analysis technique and is considered by Cyprium to be appropriate for the Hollandaire VMS/epigenetic structurally hosted mineralisation. Further partial assay techniques are being investigated to consider the proportion of non-extractable Zn/Pb/Cu content of silicates as garnets have been noted to occur in quantities of up to 15% in the Hollandaire mineralised zones. Gold will be analysed by lead collection fire assay with AAS finish which is an industry standard total analysis technique considered by Cyprium to be suitable for the Hollandaire VMS/epigenetic structurally hosted mineralisation.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Not applicable
	Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	Hollandaire Prospect
		Cyprium Metals RC and Diamond Drilling
		Certified Reference Materials (CRM) and blanks have been submitted with the laboratory samples at a rate of 1 CRM or blank in 20. The CRM/blank results when returned by the lab will be analysed by Cyprium metals for their performance and



Criteria	JORC Code explanation	Commentary
		remedial actions commenced should they be quired.
		Bureau Veritas also conducts their own quality control standards and blanks, the results of which will be provided to Cyprium Metals.
Verification of	The verification of significant intersections	Hollandaire Prospect
sampling and assaying	by either independent or alternative company personnel.	Cyprium Metals RC and Diamond Drilling
accaymig		The Cyprium Chief Geologist and Senior Project Geologist have visually verified significant mineralisation intersections in diamond core and RC chips at the Hollandaire Prospect.
	The use of twinned holes.	Hollandaire Prospect
		Cyprium Metals RC and Diamond Drilling
		5 twinned holes of previous operator's drilling have been proposed and partially completed. Analysis of these drillholes will be completed as the data becomes available to Cyprium staff.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Hollandaire Prospect
		Cyprium Metals RC and Diamond Drilling
		Data for the completed drillholes has been collected using spreadsheet templates prepared by WPData consultants and Ocris logging software on Panasonic Toughbook laptop computers utilising standardised library lookup tables. Data is being sent to WPData consultants for validation and compilation into an SQL database hosted by WPData
	Discuss any adjustment to assay data.	Not applicable – results not yet received
Location of data	Accuracy and quality of surveys used to	Hollandaire Prospect
points	locate drill holes (collar and down-hole surveys), trenches, mine workings and other	Cyprium Metals RC Drilling
	locations used in Mineral Resource estimation.	Actual drill hole collars have been picked up by Arvista Surveys on 21/8/2019 with a Hemisphere S321+ RTK GNSS equipment GPS system. Stated accuracies are 8mm horizontal and 15mm vertical and are rounded to the nearest 1m in the table above. Actual coordinates provided to 3 decimal places will be utilised in the Hollandaire SQL database.
		Downhole surveys were completed at with a north seeking gyroscopic tool, not subject to downhole magnetic interference.
		Cyprium Metals Diamond Drilling
		Drillhole collars were set out using a handheld Garmin GPS with an accuracy of



Criteria	JORC Code explanation	Commentary
		+/- 3m. The completed drillhole collars will be picked up with a differential GPS when a survey contractor is available to mobilise to site.
		Downhole surveys were completed at with a north seeking gyroscopic tool, not subject to downhole magnetic interference.
	Specification of the grid system used.	GDA94, zone 50.
	Quality and adequacy of topographic control.	The Hollandaire natural surface was aerial surveyed by Arvista Surveys on 21/8/2019. The survey was subsequently processed into a digital terrain model which was provided to Cyprium on which now comprises the topographical control at the prospect.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Drillhole spacing is considered by Cyprium to be appropriate for the VMS/epigenetic structural copper mineralisation being targeted at the Hollandaire prospect.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	No Mineral Resource or Ore Reserve estimation procedures apply to the exploration data being reported in this announcement.
	Whether sample compositing has been applied.	Hollandaire Prospect
		Cyprium Metals RC Drilling
		No sample compositing has been applied
		Cyprium Metals Diamond Drilling
		Metallurgical sample compositing to be completed within the mineralised zones of the following metallurgical sample drillholes:
		 19HOMET001: 52.70m to 85.48m. 19HOMET002: 85.50m to 108.00m 19HOMET003: 76.00m to 95.60m
		The master composite is yet to be determined and will form the basis of a separate announcement.
Orientation of data in	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is	Hollandaire Prospect
relation to geological structure		Cyprium Metals RC Drilling
	known, considering the deposit type.	The RC drillholes are designed to intersect the mineralisation envelope at 90°. Minor adjustments in the order of 2 to 8m to drillhole collar locations have been required to avoid vegetation at site however Cyprium does not believe that this would bias the sampling of the Hollandaire prospect.



Criteria	JORC Code explanation	Commentary
		Cyprium Metals Diamond Drilling
		The metallurgical sample drillholes were designed to provide first pass samples of the Hollandaire prospect and have been drilled through well mineralised sections of the deposit. The drillholes are oriented at 90° to maximise sample return for metallurgical testing and while the drilling is not perpendicular to the overall mineralisation envelope no deviation of the drillholes was noted and no bias is expected in their sample return.
	If the relationship between the drilling	Hollandaire Prospect
	orientation and the orientation of key mineralised structures is considered to have	Cyprium Metals RC and Diamond Drilling
	introduced a sampling bias, this should be assessed and reported if material.	Cyprium believes that the orientation of the RC and diamond drillholes on the phase 1 programme achieves unbiased sampling of the Hollandaire deposit.
Sample security	The measures taken to ensure sample	Hollandaire Prospect
	security.	Cyprium Metals RC Drilling
		Samples were delivered to the Cue depot of the McMahon Burnett Transport Company for delivery to Bureau Veritas Laboratories Canning Vale WA. The 3 kg calico lab samples were collected in groups of 6 to 10 in 600 mm x 900 mm green plastic bags and transported in 1.5t bulk bags on pallets. Bureau Veritas did not report any interference with the samples when they were delivered to the laboratory.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews of the sampling techniques or data have been conducted.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	Hollandaire Prospect The Hollandaire Prospect is located on exploration tenements E20/699 and E20/629 which form part of the Cue Copper Project, a joint venture with Musgrave Minerals the subject of the Musgrave ASX announcement dated 25 March 2019.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	Exploration tenements E20/699 and E20/629 are current and in good standing.



Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The Hollandaire, Colonel, Mt Eelya, Eelya South and Rapier prospects in the Cue Project were identified in the 1970's by their outcropping gossans (oxidised sulphide material) in field mapping campaigns by Western Mining Corporation.
		Some exploration and development work was undertaken on the prospects from the 1980's to 2007 by Westgold Resources NL and Tectonic Resources NL however this was generally focussed on potential gold resources.
		Silver Lake Resources acquired the Cue Project from Tectonic Resources in 2007 and commenced regional exploration which also focussed on gold but did include multi-element geochemical analytical work. This further defined the previously identified copper/gold/silver anomalism at Hollandaire.
		Silver Lake commenced aircore drilling at Hollandaire in 2011 and discovered the sulphide copper/gold mineralisation in the same year.
		Hollandaire was resource definition drilled in 2011 and 2012 with the first 2004 JORC mineral resource estimate completed by Silver Lake towards the end of 2012.
		Musgrave Minerals acquired the Cue project in November 2015 from Silver Lake Resources and commenced exploration planning that year with drilling and geophysical work on the Cue project beginning in 2016.
		Musgrave Minerals last completed field work in the Cue Project before signing the Joint Venture with Cyprium Metals was a surface geophysical moving loop transient electro-magnetic survey over 14 previously identified anomalies. Robust conductor models were generated for testing, which now forms part of Cyprium Metals proposed exploration programme in 2019 and 2020.
Geology	Deposit type, geological setting and	Hollandaire Prospect
	style of mineralisation.	Variously identified as VMS (Volcanigenic Massive Sulphide), VHMS (Volcanic Hosted Massive Sulphide) or epigenetic structurally hosted copper/gold mineralisation depending on the author.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:	Refer to table at Appendix 1.
	easting and northing of the drill hole collar	
	elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar	
	dip and azimuth of the hole	
	down hole length and interception depth	



Criteria	JORC Code explanation	Commentary
	hole length.	
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	No material drill hole information has been excluded.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.	Results are pending and will form the basis of a subsequent announcement when received by Cyprium Metals.
	Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Results are pending and will form the basis of a subsequent announcement when received by Cyprium Metals.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	Not applicable
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.	Hollandaire Prospect The RC drilling intercepts at Hollandaire are expected to be true width when reported. Metallurgical diamond sample drilling intercepts are expected to be greater than true mineralisation width
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	Hollandaire Prospect The RC drilling has been designed to intercept the known mineralisation at Hollandaire at 90°. The metallurgical diamond sample drilling has been designed to intercept the known mineralisation at Hollandaire at 60°.



Criteria	JORC Code explanation	Commentary
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	Not applicable – to be calculated when results are received.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Not applicable – to be generated when results are received.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Not applicable – to be reported when results are received.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples — size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All relevant exploration data is presented in the text, tables, figures and photographs of the announcement.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).	Hollandaire Prospect Planning for further extensional drilling and geophysical programmes to be completed when assay results and drillhole observations from the first phase of drilling have been analysed.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Hollandaire Prospect To be compiled when planning for further work has been completed.